

An actor-critic algorithm with deep double recurrent agents to solve the job shop scheduling problem

Marta Monaci^a, Valerio Agasucci^{a,b}, Giorgio Grani^{*,1c}

^a*Sapienza University of Rome, Dep. of Computer Science, Control and Management Engineering, Rome, Italy*

^b*OptRail, Rome, Italy*

^c*SINTEF Digital, Dep. of Mathematics and Cybernetics, Oslo, Norway*

Abstract

There is a growing interest in integrating machine learning techniques and optimization to solve challenging optimization problems. In this work, we propose a deep reinforcement learning methodology for the job shop scheduling problem (JSSP). The aim is to build up a greedy-like heuristic able to learn on some distribution of JSSP instances, different in the number of jobs and machines. The need for fast scheduling methods is well known, and it arises in many areas, from transportation to healthcare.

We model the JSSP as a Markov Decision Process and then we exploit the efficacy of reinforcement learning to solve the problem. We adopt an actor-critic scheme, where the action taken by the agent is influenced by policy considerations on the state-value function. The procedures are adapted to take into account the challenging nature of JSSP, where the state and the action space change not only for every instance but also after each decision.

To tackle the variability in the number of jobs and operations in the input, we modeled the agent using two incident LSTM models, a special type of deep neural network.

Experiments show the algorithm reaches good solutions in a short time, proving that is possible to generate new greedy heuristics just from learning-based methodologies. Benchmarks have been generated in comparison with the commercial solver CPLEX. As expected, the model can generalize, to some extent, to larger problems or instances originated by a different distribution from the one used in training.

Keywords: Scheduling; Machine learning; Reinforcement learning; Neural networks

1. Introduction

It is hard to think about operations research without scheduling. They are connected since the very beginning, and this has led to an impressive amount of research. Why so? Without the aim of completeness, we may suggest some of the reasons. First of all, the initial formulations proposed in the literature were suited for all the academics who wanted to find nice properties to compute bounds or approximate solutions. Some issues were indeed easy to solve, and, as often happens in research, this led to a gradual increase in complexity. Another reason for the success of scheduling in the operations research community is the direct industrial interest. Alongside routing, scheduling may be a game-changer when it comes to saving costs. As time goes by, companies grow in dimension gaining bigger plants, bigger warehouses, bigger clients networks, and the bigger their structure becomes, the larger the number of variables and constraints. The problem is so common we encounter its solutions on a daily basis, like when consulting the board to choose which train to take, or on a website deciding a flight for our next vacation, or maybe when we order some stuff online and it gets put together in one box and delivered to

^{1*} Corresponding author.

Email addresses: monaci@diag.uniroma1.it (Marta Monaci), agasucci@diag.uniroma1.it (Valerio Agasucci), giorgio.grani@sintef.no (Giorgio Grani^{*,*})

us. Basically, every processed good we buy is a result of a set of operations, scheduled somehow to get the final product.

Every respectful scheduling problem is characterized by a set of procedures, called tasks or operations, that has to be executed in order to complete a job. Depending on the structure of this set (e.g. ordered or not) and where the task has to be exploited, for instance on a fixed location or dislocated points, we have a different type of scheduling problem. Other than that, one may add conditions related to the release or due date of an order, or the time window for which a certain processing point is available, or set up times, or every other kind of business requirements. In this paper, we will address the well-known Job Shop Scheduling problem (JSSP), where we have a certain number of jobs needing to be completed, and each job is composed of a list of operations that can be exploited in specific processing points, also referred as machines.

Back in 1979, Lenstra and Rinnooy Kan showed in [32] that JSSP is NP-hard. Therefore, solving a JSSP instance can be, in general, quite complicated. Lots of researchers tried their best to build nice and performing algorithms, investigating tons of different optimization strategies. It would be impossible for us to cover even only the most important papers in this context, so we will just take a glimpse of the overall picture, redirecting to [46] and [11] for a couple of comprehensive surveys. In principle, we divide the class of algorithms between exact and heuristic methods. The first group concentrates on finding the optimal solution, the best schedule above all, according to the objective. They should be used when the size of the problem and the time required to find a solution are compatible with the application. The second group focuses on finding something good enough in a short time, respecting feasibility, but with no guarantee on finding the optimum.

Exact algorithms are mostly associated with mathematical integer programming. In literature a multitude of approaches has been applied, like column-generation in [18] and [31], or branch-and-cut in [27], and Lagrangian relaxations as in [23] and [12].

On the heuristic side of the palisade, we can go through all kinds of known methods: simulated annealing, genetic algorithms, local search, tabu search, and so on. A nice survey on swarm and genetic algorithms can be found in [16], another one on meta-heuristics in [34]. Also, dynamic programming plays a big role, but the complexity of the instances makes it useful only in an approximate way. A review of dynamic programming and JSSP is presented in [35].

If we are willing to wait, it is possible to find good solutions using one of these many exact and heuristic algorithms. Unfortunately, real-world applications are increasing their volumes and their rhythms, often requiring ridiculous computational times. Since the nature of nearby problems in an application may be somehow similar, machine learning-based techniques have found their place within the JSSP community. But let us jump back a second and talk about how machine learning is affecting the world of optimization. Before we start, we suggest [6] and [3] for a general overview of what machine learning and deep learning are.

Every time you encounter some kind of approximation or when you need to solve several instances of the same type sequentially, machine learning may play a role. The possible ways of the interconnection of the two fields are countless, with researchers bringing new ideas day by day. Sometimes, it is useful to approximate reality or complex systems by using surrogate functions and insert them directly into the formulation. The concept of a surrogate model has been used for a long time in optimization, in the form of linear or quadratic approximations, and it is now extended to more complex models. An example of using neural networks to ease the, otherwise unbearable, complexity of the involved physics in manufacturing can be found in [37], whereas in [24] there is a usage of autoencoders to detect useful embeddings for routing problems. On other occasions, we may use machine learning inside a complex algorithmic framework, improving some of the frequent decisions taken through the process. For instance, we may estimate a score suggesting the next variable to choose for branching, or which of the several local heuristics fits more in the current iteration, or the most promising cuts to add. As anticipated, a great deal has been achieved in the mixed-integer programming domain. Just to mention a few works, in [29] the authors make use of support vector machines to mimic strong branching, whereas in [21] they exploit a similar task but using deep neural networks. Authors in [42] chose the most promising Gomory's

cuts (see [44]) by means of long-short term memory networks and reinforcement learning. Recently, in [36], scientists from DeepMind and Google Research proposed a method combining deep branching and deep diving in a branch-and-cut algorithm, taking advantage of supervised learning, graph convolutional neural networks, and alternating descent method of multipliers. Another important aspect is to learn primal heuristics that return directly to near-optimal solutions. In [7] and [8], this is done opportunely studying some properties of the optimization problem (the so-called *voice of optimization*), then they train a neural network to directly produce a solution, and finally, they use a projection technique to make it feasible, leading to an extremely fast heuristic. For stochastic problems, in [2] the authors did something similar, whereas in [10] this methodology has been used to generate robust trajectories in planning robot agents. Finally, in [25], this concept is extended to approximate bounds and to insert them within a tree search for solving the container pre-marshaling problem.

In some cases, one may learn a new algorithm from scratch thanks to reinforcement learning (RL). We will also adopt RL through this paper, and it will be described in detail later on. For now, consider it to be a greedy-like method, where decisions are taken at each step by a learning-based operator. Just to cite a few papers, in [28], [17] and [15] the use of RL to solve directly optimization problem is exploited with remarkable results. The three works differ in the type of RL framework adopted (Q-learning, policy gradient, or actor-critic) and in the neural network structure. On the same page, in [1], we used Deep Q-learning to solve the train dispatching problem, comparing two approaches: a centralized one looking at the overall rail network, and another decomposing the problem by train with a limited view of the surroundings.

After this brief description of machine learning and optimization, we are ready to go back to business and discuss the intersection with JSSP. The problem has received interest from the machine learning community for a long time, as supported in [9]. This was before the deep learning era, so before efficient fast-computing libraries were established as a standard for neural networks. It is not more than ten years since people started realizing the great potential of deep learning to solve complex tasks. Just for completeness, deep learning is everything connected to neural networks with more than one hidden layer. Of course, the thing is more complicated than that, as it is explained in [19].

Most of the approaches linked to JSSP are also connected to RL. To check for works dated before 2018, we refer to [13]. More recently, in [33] the authors propose an actor-critic algorithm with convolutional neural networks as an approximate model, whereas in [22] dueling double Deep Q-network with prioritized replay has been adopted. Standard methods may also be re-thought in terms of learning agents, for instance in [45] the *priority dispatching rule* is learned with an end-to-end RL approach. Another important aspect is the way the environment is modeled, since different symmetrical choices often lead to different results, affecting the learning process. In [43], such environment is described in a way that is connected to what we have done here.

This paper describes our proposal to tackle the JSSP using RL. The algorithm adapts the Policy Proximal Optimization (PPO) algorithm to the JSSP, making use of a suitable representation of the environment as a Markov Decision Process (MDP). PPO belongs to the family of actor-critic RL algorithms, for which we implemented two special deep neural networks for both the actor and the critic, based on two concatenated Long Short-Term Memory networks (LSTMs). This architecture is proven to be effective and flexible to the number of jobs, operations, and machines. We compared our algorithm with the standard mixed-integer programming solver CPLEX from IBM ([26]), obtaining very good average results.

The paper is organized as follows: in Section 2 we formalize the JSSP and we give the basic elements and ideas behind the paradigm of reinforcement learning, with a special focus on actor-critic methods. In Section 3, we describe the JSSP as a Markov decision process, making the problem solvable by using RL. Then, in Section 4, we introduce the deep neural networks used as a learning model in our algorithm. Finally, in Section 5, we illustrates the experiment.

Our contribution

This work presents a policy proximal optimization algorithm with deep agents to tackle the JSSP. The major findings in this paper are:

- The way to describe the **JSSP as a Markov Decision Process**.
- The **novel model** both for the actor and the critic, using two concatenated Long Short-Term Memory networks (LSTMs).
- The method is **flexible** and not related to the single application. In particular, the Double LSTM structure allows to vary arbitrarily the number of jobs, operations and machines adopted.
- The models **generalize** to some extent for larger and more complex instances maintaining good solution quality.
- The computational experience is conducted both on time and solution quality **against a commercial solver**, CPLEX, showing good average results.

2. Preliminaries and notation

In this section, we describe the Job Shop Scheduling problem (JSSP) as an optimization problem and we enter the world of reinforcement learning (RL), actor-critic methods and the Proximal Policy optimization algorithm ([40]).

2.1. The Job Shop Scheduling Problem

Scheduling is a decision-making process finding a temporal allocation of shared and limited resources to activities to optimize some desired objective. In this project, we are tackling the $n \times m$ minimum makespan JSSP, which will be referred to as JSSP through the rest of the paper without loss of information.

In its standard form, we have a bunch of workers and a set of operating stations doing some service. Each worker has a good to process, and a list of ordered required operations to be performed to get the final product. The point of JSSP is determining the exact timing for which each worker should go to an operative station and perform some kind of process on the good, minimizing the overall time for all the workers. From now on the operating stations will be called *machines*, the processes *tasks* (or operations) and the list of ordered operations *jobs*.

Let $\mathcal{J} = \{j\}_{j=1}^n$ be the set of jobs, which has to be processed on the set $\mathcal{M} = \{k\}_{k=1}^m$ of machines. Each job j has a given processing sequence of n_j different machines, with $n_j \leq m$. A task (or operation) is the activity that job $j \in \mathcal{J}$ must execute on machine $k \in \mathcal{M}$, and it is denoted by the pair (j, k) .

Therefore, each job is a list of different tasks to be performed. We adopt the notation for which $(j, k) \prec (j, h)$, means that operation (j, k) , the i -th operation of job j , precedes operation (j, h) , the $(i + 1)$ -th operation of job j , $\forall i = 1, \dots, n_j - 1$. These rules define the precedence constraints for the problem. A processing time p_{jk} is associated to each operation (j, k) . The set of all the operations is denoted by \mathcal{O} . We assume to be in a no-preemption regime so that operations can not be interrupted. Moreover, each machine can not process more than one job at the same time, meaning there is no overlap.

We call t_{jk} the starting time of the operation (j, k) , and its completion time C_{jk} , which is the time interval elapsing from the start of the whole process to the execution of the operation itself, i.e. $C_{jk} = t_{jk} + p_{jk}$. The optimum is reached by minimizing the makespan, denoted by C_{max} , which is the maximum completion time of all the operations, i.e. $C_{max} = \max_{(j,k) \in \mathcal{O}} C_{jk}$.

2.2. Reinforcement Learning

Reinforcement learning (RL) is a paradigm of machine learning, alongside supervised and unsupervised learning. There are four elements in an RL framework: agent, action, state, and reward. They all operate imitating the decision process in a real-world setting. The agent is the decision-maker, the actions are the set of options it is allowed to do, the state is an encoding of the environment it operates into, and the reward is what it gets after making an action. At every step, the agent observes the state, it takes an action and waits for the environment to return its new form, the next state, alongside a reward for selecting that action. After that, the system is ready for a new iteration. In RL, the agent learns from its own choices, step by step, game by game, self-generating data. The goal of the agent is specified by an objective function, dependent on the collected rewards.

RL can be formalized as a Markov Decision process, see [41], and it can be seen as an approximate dynamic programming method, see [5] and [4]). Following the dynamic programming terminology, the goal of RL is to learn an optimal strategy, called policy, allowing the agent to solve the problem maximizing its total reward. Unfortunately, we are not able to inspect the full tree of possibilities and alternatives an agent may encounter, since the size of the decision tree would be, for NP-hard problems like JSSP, unbearable for standard computational resources. For this reason, we talk about policies maximizing the expected total reward, so that we infer optimality by just observing a portion of the decision space.

An episode is an instance to be solved by an RL algorithm while training the agent. To complete an episode, the RL method goes step by step until reaching the T -th state, where T is the last possible iteration. Steps within an episode are indexed by $t = 0, 1, \dots, T$, where $t = 0$ is the initial state. We use the notation s_t for states, a_t for actions and r_t for rewards, all depending on t . The set of all the possible states is \mathcal{S} , whereas \mathcal{A} is the set of all the possible actions and $R : \mathcal{S} \times \mathcal{A} \mapsto \mathbb{R}$ is a function associating states and actions to rewards. A policy is identified by the function $\pi(a_t|s_t)$, representing the probability to take the action a_t when the state s_t is observed.

The expected cumulative reward is the objective function to be maximized in the RL framework.

$$J = \mathbb{E}_\pi \left[\sum_{t=1}^T r_t \right] \quad (1)$$

Where \mathbb{E}_π is the expected value computed according to the policy distribution π .

Several RL methods make use of the state-value function, which is a measure of the expected cumulative reward from a certain step k (also called expected reward-to-go) when observing a state s_k .

$$V_\pi(s_k) = \mathbb{E}_\pi \left[\sum_{t=k+1}^T r_t \mid \mathcal{S}_k = s_k \right]$$

For similar purposes, it is handy to define the advantage function, which evaluates the expected improvement when selecting an action, taking as input an action a_k and the state s_k . This can be thought of as a sort of differential measure over the reward-to-go, see [39]. We present a version of the formula valid in the context of JSSP, where it is always possible to derive the reward r_k from the state and the taken action.

$$A_\pi(a_k, s_k) = r_k + V_\pi(s_{k+1}) - V_\pi(s_k) \quad (2)$$

Among the numerous classes of RL algorithms available in the literature, we are going to focus on actor-critic methods, which are characterized by having the agent separated into two decision entities: the actor and the critic. The reason underneath this separation is to allow a policy improvement through an estimation of the state-value function, combining both value-based and policy-improvement algorithms. The critic approximates the state-value function $\hat{V}(s)$, while the actor updates and improves a model of the stochastic policy $\hat{\pi}$ by taking into account the critic estimation, while maximizing the total expected reward. In the following, we will assume that both the actor and the critic models have as weights θ and

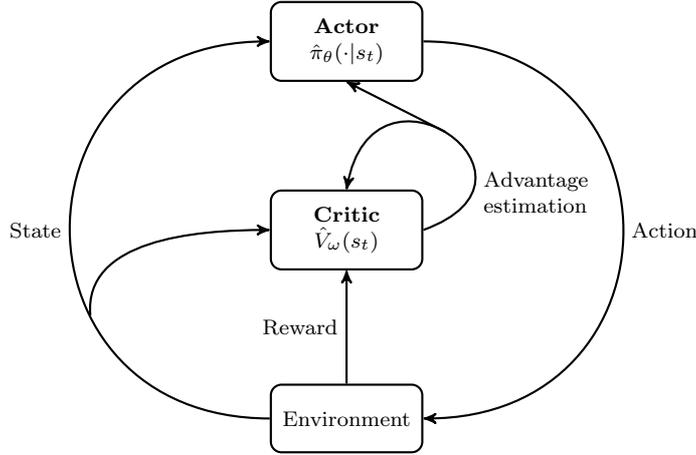


Figure 1: Actor-critic framework.

ω , respectively. For ease of explanation, we will keep this dependence clear when needed in our formulas. For instance, the total expected reward presented in (1) can be rewritten as $J_\theta = \mathbb{E}_{\pi_\theta} \left[\sum_{t=1}^T r_t \right]$, stressing the dependency of the actor weights in the objective function.

To optimize the total reward function (1), it is possible to derive an estimator for the gradient, and use it in gradient-based optimization methods. For computational efficiency reasons, we report the formula in terms of log probabilities.

$$\nabla_\theta J_\theta \propto \mathbb{E}_{\pi_\theta} \left(\sum_{a_t} \nabla \log \pi_\theta(a_t|s_t) A_\omega(s_t, a_t) \right) \quad (3)$$

The gradient depends on both the actor, π , and the critic, A , so that the log-probability associated with a state-action pair (s_t, a_t) is proportional to the advantage of this pair and thus, the gradient indicates the direction of greatest improvement (locally). Actor-critic algorithms differ in how they compute the estimators, on the version of the policy gradient they adopt, and finally, on the optimization algorithm to improve the expected total reward. The basic scheme of an actor-critic algorithm is illustrated in Figure 1.

The actor-critic approach used in this work is an adaptation of the Proximal Policy Optimization (PPO) algorithm presented in [40]. The policy improvement is pursued through a stochastic gradient ascent step over a surrogate function approximating the total expected reward (1). The loss, called KL-penalized objective, is composed of a surrogate advantage and a Kullback-Leibler divergence multiplied by a negative penalty term $-\beta$. The actor is trained to maximize this objective, refining the approximation from a step to the other as reported below.

$$\max_\theta \mathbb{E}_{\pi_\theta} \left[\frac{\pi_\theta(a_t|s_t)}{\pi_{\theta_{old}}(a_t|s_t)} A_\omega(s_t, a_t) - \beta D_{KL}(\pi_\theta(\cdot|s_t), \pi_{\theta_{old}}(\cdot|s_t)) \right] \quad (4)$$

Where $\pi_{\theta_{old}}$ indicates the policy parameters at the previous step, and the parameter β influences how much the new policy may diverge from the old one according to the following rule.

$$\beta = \begin{cases} 2\beta_{old}, & \text{if } \mathbb{E}_{\pi_\theta} [D_{KL}(\pi_\theta, \pi_{\theta_{old}})] > 1.5\delta \\ \beta_{old}/2, & \text{if } \mathbb{E}_{\pi_\theta} [D_{KL}(\pi_\theta, \pi_{\theta_{old}})] < 1.5/\delta \\ \beta_{old}, & \text{otherwise} \end{cases} \quad (5)$$

Where δ is a target value chosen heuristically. During the algorithm, the penalty coefficient β adapts rapidly, and, according to [40], its starting value does not affect significantly the training.

The critic is updated through the minimization of a mean square error loss function, using the data collected by the actor in several roll-outs.

$$\min_{\omega} \mathbb{E}_t \left[(V_{\omega}(s_t) - V_t^{target})^2 \right] = \min_{\omega} \mathbb{E}_t \left[(V_{\omega}(s_t) - R_t)^2 \right] \quad (6)$$

Where the rewards-to-go R_t is the sum of the rewards collected from t to T .

The algorithm works in the following way: at each episode k , it performs N roll-outs, running the policy for T steps, therefore generating $N \cdot T$ samples. For each episode k , the rewards-to-go R_t , $t = 1, \dots, T$, are computed and stored. Then, the policy is updated solving (4) with Adam, [30], using the $N \cdot T$ samples. Finally, the state-value function is updated according to (6), performing some iterations of Adam. Algorithm 1 reports the procedure.

Algorithm 1: Proximal Policy Optimization (PPO) with adaptive Kullback-Leibler penalty

Input: number of roll-outs per episode N , termination step T , stochastic gradient ascent iterations L_{actor} , Adam iterations L_{actor} , target KL divergence δ , $\theta = \theta_0$, $\omega = \omega_0$, $\beta = \beta_0$.

```

for episode  $k = 0, 1, \dots$  do
  for roll-out  $i = 1, \dots, N$  do
    Run policy  $\pi_{\theta}$  in the environment for  $T$  time-steps.
    Compute rewards-to-go  $R_1, \dots, R_T$  associated to the  $i$ -th roll-out and store them.
    Compute advantages associated to the  $i$ -th roll-out and store them.
  end
  Update the actor parameters  $\theta$  according to (4), performing  $L_{actor}$  iterations of Adam.
  Update  $\beta$  according to (5).
  Update the critic parameters  $\omega$  according to (6), performing  $L_{critic}$  iterations of Adam.
end

```

3. JSSP as a Markov Decision process

JSSP can be solved in several ways, depending on which element we are looking for to find a solution. Our idea is to choose one operation at a time, deciding whenever a machine is available. In other words, we have a set of jobs, each one being a list of operations to be addressed their specified machine, and we want to find a, possibly good, solution in a greedy fashion. Whenever a machine returns available to accept jobs, we select one (and only one) job that can proceed in the queue. In this way, the total number of decisions is equal to the total number of tasks.

It turns out this process can be formulated as a Markov Decision process (MDP). With a notation similar to the one used to describe RL in section 2, we characterize a finite MDP using the tuple $(\mathcal{S}, \mathcal{A}, \mathcal{R}, P)$, where \mathcal{S} is the set of states, \mathcal{A} the set of actions, $R : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$ a reward function and $P : \mathcal{S} \times \mathcal{A} \rightarrow \mathcal{S}$ the transition function.

The **state** $s_t \in \mathcal{S}$ captures all the relevant information regarding the current iteration, in order to respect the Markov Property and to have a fully observable system state. The data structure adopted is a list of jobs, with each job being a list of tasks (or operations) (j, k) , with $j \in \mathcal{J}$ being the job and $k \in \mathcal{M}$ the machine, as illustrated in Figure 2a. A processing time p_{jk} is associated with each operation (j, k) , representing the time spent by the job j to complete the task on the machine k .

If a task (j, k) is the first available operation for a job, then we take into account the *earliest possible starting time* s_{jk} , defined as $s_{jk} = \max(C_{jh}, C_{ik})$, where $(j, h) \prec (j, k)$, (i, k) is the last operation scheduled using the machine k , and C_{jh} and C_{ik} are the corresponding completion times. At each decision step t , an **action** a_t , representing the allocation of an operation at a certain starting time, is taken and the corresponding task is removed from the job and put into a list of scheduled operations. The set \mathcal{A}_{s_t} contains all the available actions at state s_t , i.e. the operations still to be scheduled, with no prior operations or whose prior operations have been already scheduled, as illustrated in Figures 2b and 2c.

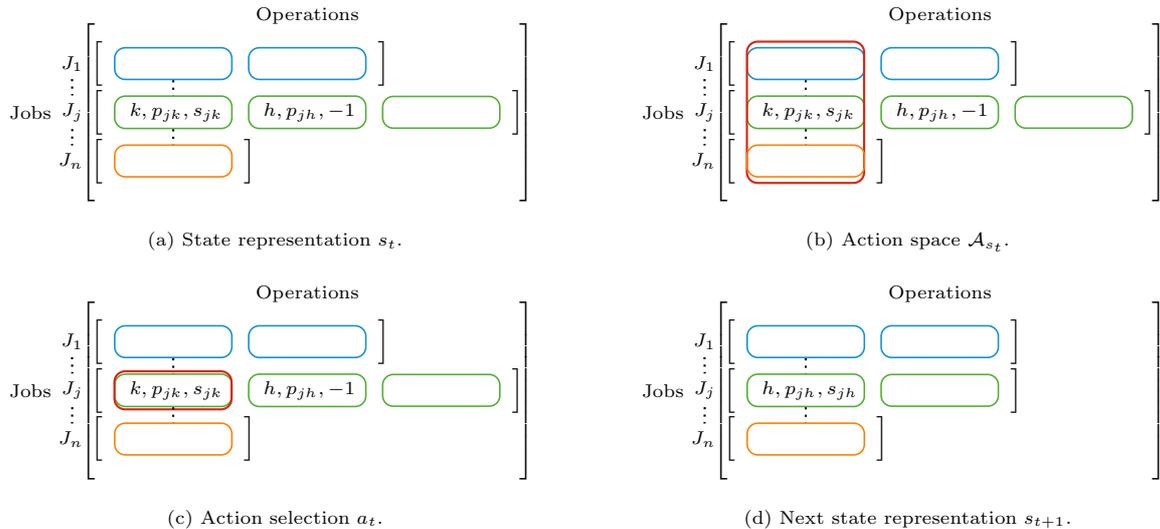


Figure 2: Graphical representation of the environment and its components.

The **next state** s_{t+1} is the state s_t without the operation scheduled at decision step t (see Figure 2d). Due to the deterministic nature of the problem, the state transition is deterministic and given a state-action pair (s_t, a_t) , the next state s_{t+1} is uniquely determined.

In order to be coherent with the RL classical notation, the **reward** r_{t+1} will be the negative contribution of the selected operation to the current makespan C_{\max_t} . If (j, k) is the operation scheduled at decision step t , then

$$r_{t+1} = \begin{cases} -(C_{jk} - C_{\max_t}), & \text{if } C_{jk} > C_{\max_t} \\ 0, & \text{otherwise} \end{cases}$$

In this way, it holds $C_{\max_k} = -\sum_{t=1}^k r_t$, and $C_{\max} = -\sum_{t=1}^T r_t$.

4. Agents deep models

In this section, we describe the neural network infrastructures behind our algorithm. In particular, since we are adopting an actor-critic method, we need to specify two networks: the first, referred as the actor, estimates the policy $\pi_\theta(\cdot, s_t)$, whether the second, the critic, provides an estimation of the state-value function $V_\omega(s_t)$. Our aim is to obtain a learned algorithm that is flexible concerning the size of the JSSP instance, both in the number of jobs and machines. According to the state defined in Section 3, the major difficulty of the data structure is being characterized by a list, variable in size, of lists, with different length the one to the other. For these reasons, the actor and the critic networks make use of long short-term memory networks (LSTMs), which are suitable for processing variable-length sequences. LSTMs belongs to the class of recurrent neural networks, but they deal with the problem of the vanishing gradient incorporating self-loops in the hidden layer, [20]. The self-loops are controlled by the network, which is able to adjust the information flow. They take sequences as input, returning same-length sequences of embeddings.

The actor model is composed by two concatenated LSTMs. The first takes as input the state, producing an embedding for each operation. We then consider only the embedding related to the last operation of each job, since operations in a job are chronologically connected and the last element can be seen as a compressed representation of the whole job. After that, a list with size $|\mathcal{J}|$ is obtained from the

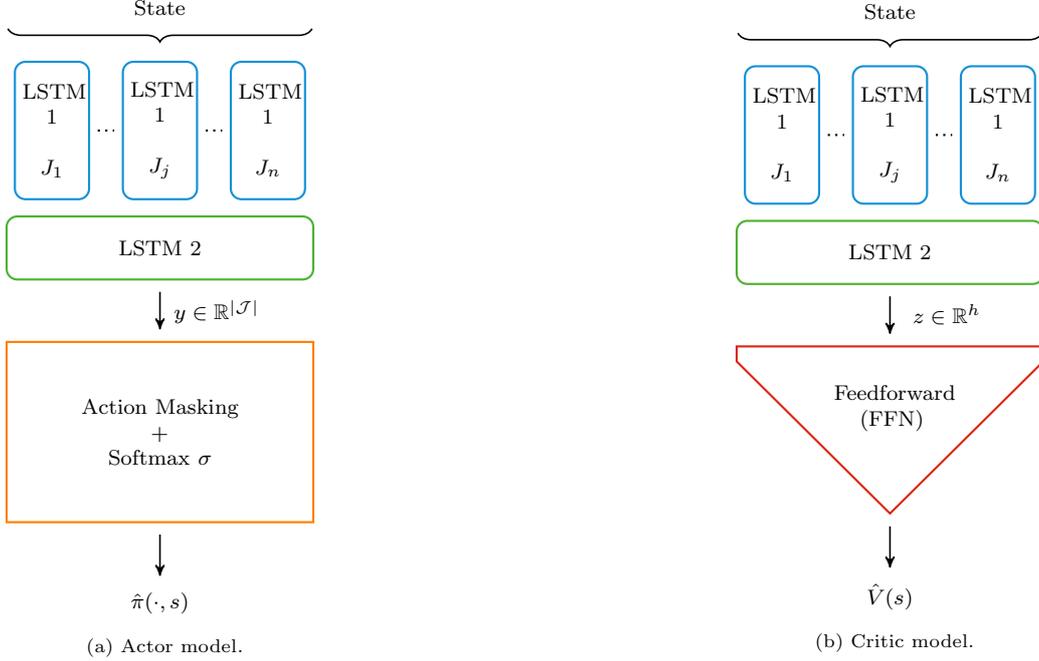


Figure 3: Deep neural infrastructures used.

embeddings and passed the second LSTM. This network combines the jobs information as a sequence of $|\mathcal{J}|$ embeddings. Each component is collapsed to a scalar, obtaining a vector $y \in \mathbb{R}^{|\mathcal{J}|}$. Finally, we use action masking and a softmax function, applying the mask vector M , whose components are Boolean values filtering out the invalid actions at each state. The softmax is used to transform the embedding y into a probability distribution through the formula

$$\sigma(y, M)_i = \frac{e^{y_i M_i}}{\sum_{j=1}^{|\mathcal{J}|} e^{y_j M_j}}, \quad i = 1, \dots, |\mathcal{J}|$$

The actor network is represented in Figure 3a.

The critic model is composed by a double LSTM as in the actor, followed by a deep feed forward neural network (FFN). After being fed with the output by the first LSTM, the second LSTM returns a sequence of embeddings with cardinality $|\mathcal{J}|$. Then, the vectors are summed up, obtaining the vector $z \in \mathbb{R}^h$, where h is the hidden size of the second LSTM. Finally, the FFN processes z , converging to a scalar. The FFN has three fully connected hidden layers with a decreasing number of neurons, applying the ReLU as activation function until the last layer, which is linear. The critic network is illustrated in Figure 3b. Before feeding the two neural models, the input sequences must be padded to level equally their lengths within a single mini-batch.

5. Computational Experience

The computational experience exploits both the training and the testing phase, where in the former, we give insights on the computational burden required for training, whereas in the latter, we evaluate our algorithm against the commercial solver CPLEX v12.10, [26]. The procedure uses PyTorch v1.8, [38], working on a Windows server with an Intel(R) Core(TM) i7-8565U CPU and a single Nvidia GeForce

(Jobs×Machines)	(8 × 6), (10 × 9), (15 × 10), (17 × 13), (20 × 15)
# Instances	200, 200, 200, 200, 200
Gaussian processing times dist.	$p_{jk} \sim \mathcal{N}(\mu = 100, \sigma = 10)$

Table 1: Training set.

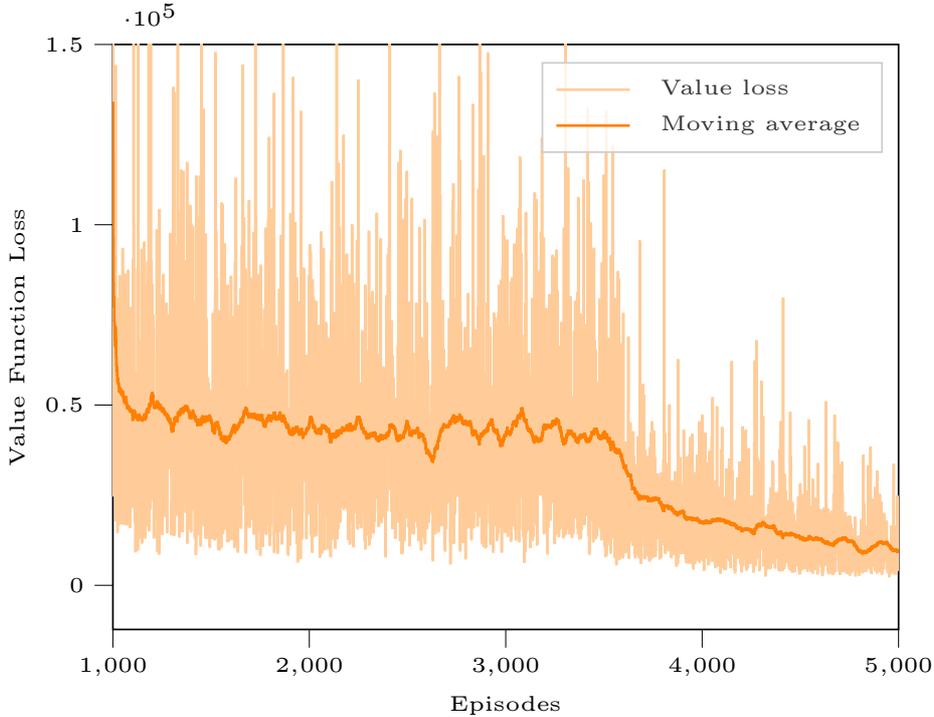


Figure 4: State-value function loss during Training process

MX150 GPU. In the following, we will use the notation (Jobs×Machines) to specify the dimension of the JSSPs used.

In the training process, we used a dataset composed by randomly generated JSSP instances, with various, yet small, sizes. We used five classes of JSSP problems, from (8×6) up to (20×15) . The processing times are drawn from a Gaussian distribution $\mathcal{N}(\mu = 100, \sigma = 10)$. There is a total of 1000 instances, having 200 elements per class. Table 1 summarizes the information regarding the training set.

During the learning process, the agent has to balance between exploration, i.e. trying new actions, and exploitation of the past experience. To prevent the agent from getting stuck in bad regions, we inject the state-space exploration introducing the probability ϵ to perform a random action. The value of ϵ is updated according to a step function starting from $\epsilon = 0.20$ and gradually decreases until, at around the 70% of the total number of episodes, goes down to $\epsilon = 0$.

We run the training over 5000 episodes, with $N = 10$ roll-outs per episode. The actor-critic network configurations and training settings are reported in the Appendix. The plot in Figure 4 reports the state-value function loss, showing both the single value and the moving average over 100 episodes. The image indicates a tendency in the reduction of the loss and the variability.

Since the total reward measure varies from instance to instance, we define a relative objective value gap, ϕ_k , which is the ratio between the total reward obtained in the k -th learning iteration for the instance $i(k)$, and the best solution found through the all training for the same instance $i(k)$.

(Jobs×Machines)	(30 × 25), (35 × 30), (40 × 35), (45 × 40), (50 × 45)
# Instances	100, 100, 100, 100, 100
Gaussian processing times dist.	$p_{jk} \sim \mathcal{N}(\mu = 100, \sigma = 10)$
Poisson processing times dist.	$p_{jk} \sim \mathcal{P}(\lambda = 100)$

Table 2: Test sets: Gaussian and Poisson sets.

J×M	#instances	Mean		Std dev		Max		Min		Avg τ
		RL	CPLEX	RL	CPLEX	RL	CPLEX	RL	CPLEX	
30 × 25	100	2.47	4.68	0.26	2.38	3.48	14.36	1.92	1.93	-36%
35 × 30	100	4.57	13.63	0.54	6.75	5.62	36.39	3.54	3.59	-58%
40 × 35	99	7.03	39.24	0.95	16.33	10.30	79.57	5.74	12.80	-78%
45 × 40	100	11.76	34.01	1.22	22.28	13.97	99.33	9.80	5.23	-36%
50 × 45	92	18.69	51.56	1.89	34.10	24.43	117.88	15.85	9.14	-37%

Table 3: Analysis on the Gaussian set: results for the computational time.

$$\phi_k = \frac{R_k}{\min \{R_h : h = 1, \dots, 5000 \wedge i(h) = i(k)\}},$$

The graphs in Figure 5 illustrate the moving average and the confidence interval for ϕ_k , divided by classes. There is a decreasing trend with a jump around the 70% of the iterations, in accordance with the random choice probability ϵ .

The test phase has been conducted to demonstrate the ability of our algorithm to generalize over larger instances, to generalize over different distributions, and to maintain computational efficiency. To this aim, we have tested the performances of our approach on two sets with five JSSP classes each, going from (30 × 25) to (50 × 45), with 100 instances per class. In the first dataset, the processing times are derived from a Gaussian distribution $\mathcal{N}(\mu = 100, \sigma = 10)$, while in the second they are drawn from a Poisson $\mathcal{P}(\lambda = 100)$. The test sets specifics are summarized in Table 2.


We tested out our algorithm against the known mixed-integer optimization solver CPLEX v12.10, [26], conducting two types of analyses:

- *Computational time analysis*, where we compare our timing with the one required for CPLEX to reach a solution as good as ours.
- *Quality of the solution analysis*, where we study the quality of the solution reached by CPLEX when its time limit is locked to be no more than our timing.


The results of the computational time analysis on the Gaussian and Poisson sets are summarized in Tables 3 and 4, respectively. These tables report the statistics on computational time for both algorithms. We used the statistic τ to express the percentage of average improvement of our algorithm.

$$\tau_i = \frac{time_{RL_i} - time_{CP_i}}{time_{CP_i}},$$


Our approach outperforms CPLEX in terms of quality of solution produced. For the (40 × 35) class in the Gaussian set, our approach returns a makespan on average 91% better than the CPLEX one, and 87% in the Poisson set for the same class. It is worth mentioning that, for no instance, CPLEX optimization has terminated before the time limit. The values of τ tend to improve for larger classes, since instances become more and more complex for the deterministic solver.

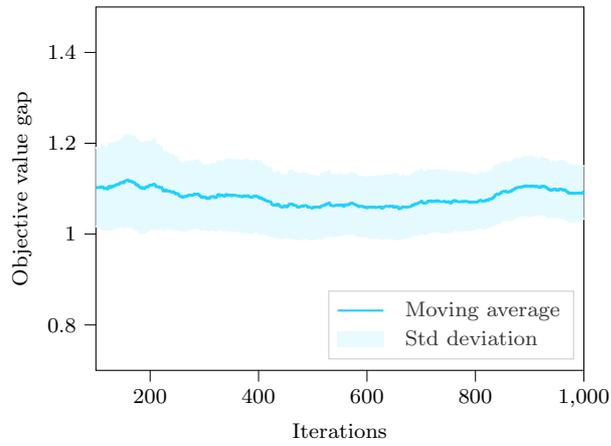


(a) Size 8×6 .

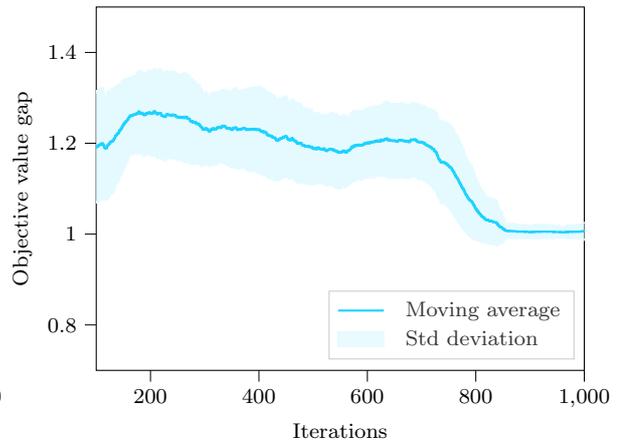


(b) Size 10×9 .

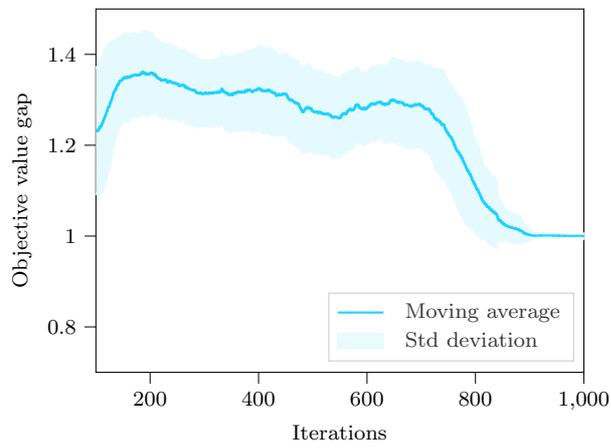

(c) Size 15×10 .

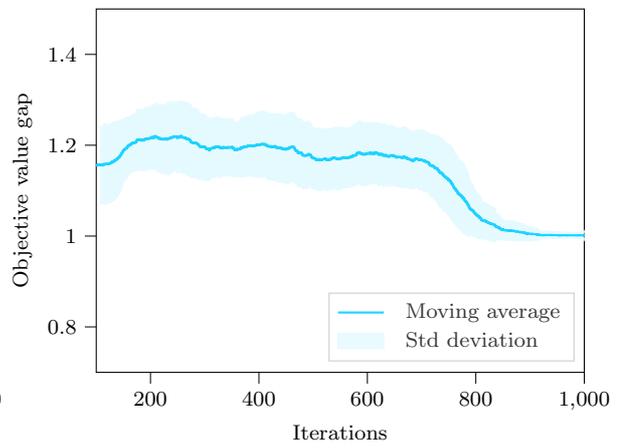

(d) Size 17×13 .

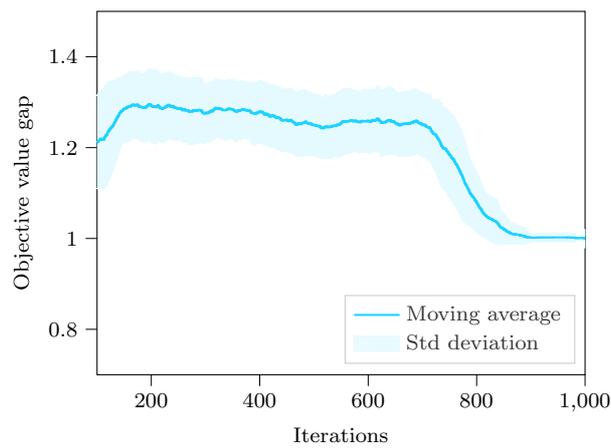

(e) Size 20×15 .

Figure 5: Objective value gap during the training process.

J×M	#instances	Mean		Std dev		Max		Min		Avg τ
		RL	CPLEX	RL	CPLEX	RL	CPLEX	RL	CPLEX	
30 × 25	100	2.36	5.63	0.41	2.66	4.69	13.24	1.81	1.91	-48%
35 × 30	100	4.38	8.65	0.52	4.27	6.12	27.23	3.43	3.32	-40%
40 × 35	100	7.19	28.37	0.92	15.08	10.67	91.82	5.95	6.85	-67%
45 × 40	100	11.30	30.81	1.20	19.99	14.06	79.39	9.71	5.41	-38%
50 × 45	98	17.10	57.22	1.24	34.10	20.18	106.01	14.98	11.82	-54%

Table 4: Analysis on the Poisson set: results for the computational time.

J×M	#instances	Mean		Std dev		Max		Min		Avg ρ
		RL	CPLEX	RL	CPLEX	RL	CPLEX	RL	CPLEX	
30 × 25	100	4785.2	29505.2	111.7	15261.5	5107.3	40408.4	4579.6	4307.1	-63%
35 × 30	100	5462.5	53883.9	115.1	11398.5	5701.9	60350.1	5180.4	5309.8	-86%
40 × 35	100	5989.4	68449.6	134.8	4592.1	6349.7	74838.7	5715.4	62320.4	-91%
45 × 40	100	6931.4	66026.5	163.8	38853.8	7304.9	99942.2	6599.7	6376.8	-64%
50 × 45	100	8663.5	93547.3	147.4	44467.5	9015.6	125757.1	8198.8	7827.4	-72%

Table 5: Analysis on the Gaussian set: results for the objective value.

The results of the quality of the solution analysis on the Gaussian and Poisson sets are presented in Tables 3 and 4, respectively. These show statistics on objective value, pruned from outliers. We used the statistic ρ to express the percentage of average improvement of our algorithm.

$$\rho_i = \frac{obj_value_{RL_i} - obj_value_{CP_i}}{obj_value_{CP_i}}.$$

For each class of both sets, our method is faster on average than the solver CPLEX, up to reach a 78% improvement for the (40 × 35) instances in the Gaussian set, and 67% for the Poisson set. For some classes, the number of instances is less than 100 since CPLEX exceeded the time limit of two minutes.

In Figure 6, we report the performance profiles for the Gaussian and the Poisson set, considering the computational time analysis first, and the quality of the solution afterwards. Performance profiles were initially introduced in [14] as an additional way to compare different methods. Given a set of algorithms \mathcal{A} and a set of problems \mathcal{P} , the performance of an algorithm $a \in \mathcal{A}$ on a problem $p \in \mathcal{P}$ is computed against the best performance obtained by any other method in \mathcal{A} on p . We considered the ratio $\eta_{p,a} = performance_{p,a} / \min\{performance_{p,a'} : a' \in \mathcal{A}\}$, where $performance_{p,a}$ is the performance obtained on the p -th problem by the a -th algorithm. In our case, the performance is the computational time at first,

J×M	#instances	Mean		Std dev		Max		Min		Avg ρ
		RL	CPLEX	RL	CPLEX	RL	CPLEX	RL	CPLEX	
30 × 25	100	4167.1	28079.9	93.7	12378.8	4404	36509	3939	4058	-70%
35 × 30	100	5249.3	43213.3	135.9	20358.0	5566	55073	4963	4609	-70%
40 × 35	100	5947.4	72325.4	111.9	16863.0	6194	78182	5735	5777	-87%
45 × 40	100	7815.5	71007.8	243.6	34066.1	8263	96754	7453	6702	-69%
50 × 45	100	8032.1	103049.2	181.9	40447.6	8410	129359	7697	7571	-79%

Table 6: Analysis on the Poisson set: results for the objective value.

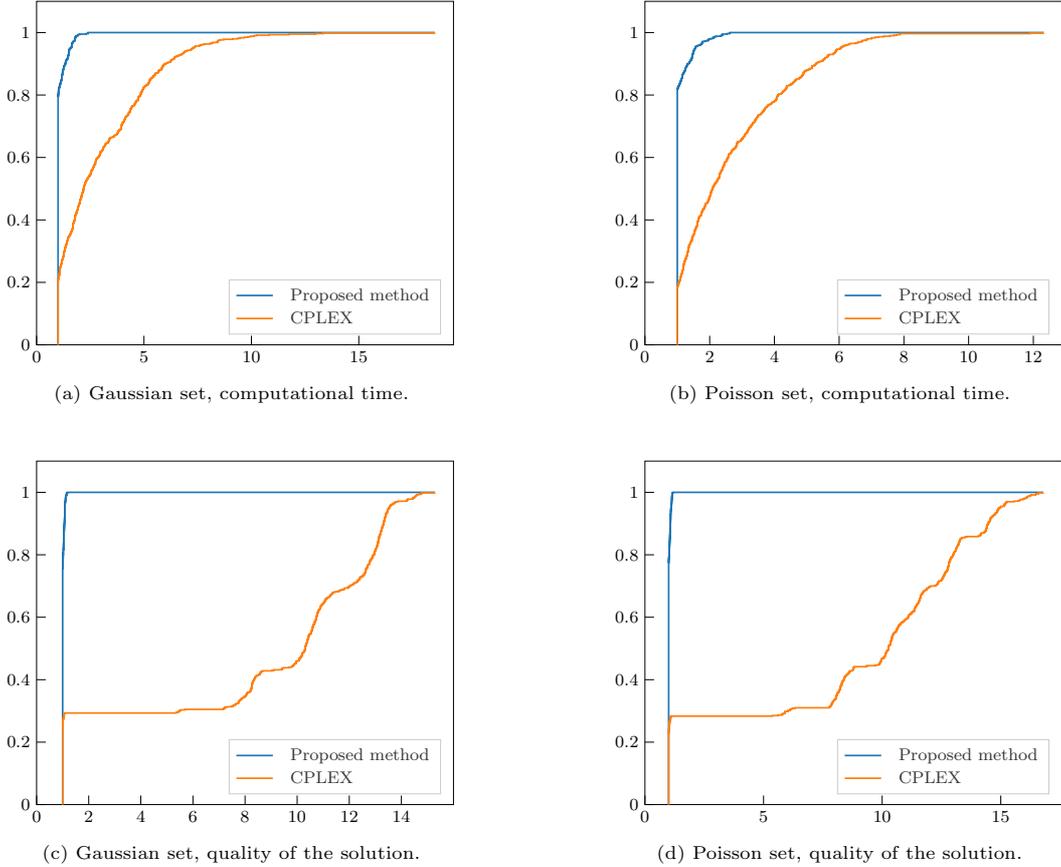


Figure 6: Performance profiles.

and then the quality of the solution. We now consider a cumulative function computing the number of times algorithm $a \in \mathcal{A}$ was successful against the others, specifically $\gamma_a(\tau) = |\{p \in \mathcal{P} : \eta_{p,a} \leq \tau\}|/|\mathcal{P}|$. The performance profile is the plot of the function $\gamma_a(\tau)$ for all $a \in \mathcal{A}$, varying with τ .

The plots in Figure 6 are self-explanatory, since our algorithm outperform CPLEX in every case. In particular, Figures 6a and Figure 6b show that our approach was faster than 80% of all the times produced by CPLEX, independently from the distribution. For Figure 6c and 6d, the situation is even more accentuated, with our approach beating all the instances almost immediately, whereas CPLEX requires a relatively high value of τ before stepping up.

6. Conclusions

In this paper, we investigated how to solve the Job Shop Scheduling problem (JSSP) through reinforcement learning, aiming to make the learning agent flexible for tackling instances with a variable number of jobs, tasks, and machines.

We firstly formulated the JSSP as a Markov Decision process, which was fundamental to inscribe the problem in an actor-critic scheme. The method adopted takes inspiration from the Proximal Policy Optimization, [40], using a dynamic adaptation of the penalty term to facilitate exploitation over exploration, and vice-versa, depending on the situation.

In a second phase, we studied several classes of deep models that could fit for the JSSP, eventually landing on a double incident LSTMs framework, where each LSTM works as a projection into a fixed space. The actor ends with an action masking to control feasibility, combined with a soft-max function

to recreate a discrete probability distribution, aka the policy estimator. At its bottom, the critic has an encoder network, collapsing the embeddings of the second LSTM into a scalar, representing the state-value function estimator.

Our algorithm can generalize to a certain extent to instances with larger sizes, and with different distributions, than the one used in the training phase. The approach shows a decisive improvement towards the deterministic mixed-integer solver CPLEX, finally proving it is possible to generate new efficient greedy heuristics just from learning-based methodologies.

References

- [1] Agasucci, V., Grani, G., and Lamorgese, L. (2020). Solving the single-track train scheduling problem via deep reinforcement learning. *arXiv preprint arXiv:2009.00433*.
- [2] Bengio, Y., Frejinger, E., Lodi, A., Patel, R., and Sankaranarayanan, S. (2020a). A learning-based algorithm to quickly compute good primal solutions for stochastic integer programs. In *International Conference on Integration of Constraint Programming, Artificial Intelligence, and Operations Research*, pages 99–111. Springer.
- [3] Bengio, Y., Lodi, A., and Prouvost, A. (2020b). Machine learning for combinatorial optimization: a methodological tour d’horizon. *European Journal of Operational Research*.
- [4] Bertsekas, D. P. (2019). *Reinforcement learning and optimal control*. Athena Scientific Belmont, MA.
- [5] Bertsekas, D. P., Bertsekas, D. P., Bertsekas, D. P., and Bertsekas, D. P. (1995). *Dynamic programming and optimal control*, volume 1-2. Athena scientific Belmont, MA.
- [6] Bertsimas, D. and Dunn, J. (2019). *Machine learning under a modern optimization lens*. Dynamic Ideas LLC.
- [7] Bertsimas, D. and Stellato, B. (2019). Online mixed-integer optimization in milliseconds. *arXiv preprint arXiv:1907.02206*.
- [8] Bertsimas, D. and Stellato, B. (2021). The voice of optimization. *Machine Learning*, 110(2):249–277.
- [9] Çaliş, B. and Bulkan, S. (2015). A research survey: review of ai solution strategies of job shop scheduling problem. *Journal of Intelligent Manufacturing*, 26(5):961–973.
- [10] Cauligi, A., Culbertson, P., Stellato, B., Bertsimas, D., Schwager, M., and Pavone, M. (2020). Learning mixed-integer convex optimization strategies for robot planning and control. In *2020 59th IEEE Conference on Decision and Control (CDC)*, pages 1698–1705. IEEE.
- [11] Chaudhry, I. A. and Khan, A. A. (2016). A research survey: review of flexible job shop scheduling techniques. *International Transactions in Operational Research*, 23(3):551–591.
- [12] Chen, H. and Luh, P. B. (2003). An alternative framework to lagrangian relaxation approach for job shop scheduling. *European Journal of Operational Research*, 149(3):499–512.
- [13] Cunha, B., Madureira, A. M., Fonseca, B., and Coelho, D. (2018). Deep reinforcement learning as a job shop scheduling solver: A literature review. In *International Conference on Hybrid Intelligent Systems*, pages 350–359. Springer.
- [14] Dolan, E. and J.Moré (2002). Benchmarking optimization software with performance profiles. *Mathematical Programming*, 91:201–213.
- [15] Drori, I., Kharkar, A., Sickinger, W. R., Kates, B., Ma, Q., Ge, S., Dolev, E., Dietrich, B., Williamson, D. P., and Udell, M. (2020). Learning to solve combinatorial optimization problems on real-world graphs in linear time. *arXiv preprint arXiv:2006.03750*.
- [16] Gao, K., Cao, Z., Zhang, L., Chen, Z., Han, Y., and Pan, Q. (2019). A review on swarm intelligence and evolutionary algorithms for solving flexible job shop scheduling problems. *IEEE/CAA Journal of Automatica Sinica*, 6(4):904–916.
- [17] Gasse, M., Chételat, D., Ferroni, N., Charlin, L., and Lodi, A. (2019). Exact combinatorial optimization with graph convolutional neural networks. *arXiv preprint arXiv:1906.01629*.
- [18] Gélinas, S. and Soumis, F. (2005). Dantzig-wolfe decomposition for job shop scheduling. In *Column generation*, pages 271–302. Springer.
- [19] Goodfellow, I., Bengio, Y., and Courville, A. (2016). *Deep learning*. MIT press.
- [20] Graves, A. (2012). Long short-term memory. In *Supervised sequence labelling with recurrent neural networks*, pages 37–45. Springer.
- [21] Gupta, P., Gasse, M., Khalil, E. B., Kumar, M. P., Lodi, A., and Bengio, Y. (2020). Hybrid models for learning to branch. *arXiv preprint arXiv:2006.15212*.
- [22] Han, B.-A. and Yang, J.-J. (2020). Research on adaptive job shop scheduling problems based on dueling double dqn. *IEEE Access*, 8:186474–186495.
- [23] Hoiomt, D. J., Luh, P. B., and Pattipati, K. R. (1990). A lagrangian relaxation approach to job shop scheduling problems. In *Proceedings., IEEE International Conference on Robotics and Automation*, pages 1944–1949. IEEE.
- [24] Hottung, A., Bhandari, B., and Tierney, K. (2020a). Learning a latent search space for routing problems using variational autoencoders. In *International Conference on Learning Representations*.
- [25] Hottung, A., Tanaka, S., and Tierney, K. (2020b). Deep learning assisted heuristic tree search for the container pre-marshalling problem. *Computers & Operations Research*, 113:104781.
- [26] IBM (2021). Cplex v12.10.01. www.ibm.com/analytics/cplex-optimizer.
- [27] Karimi-Nasab, M. and Modarres, M. (2015). Lot sizing and job shop scheduling with compressible process times: A cut and branch approach. *Computers & Industrial Engineering*, 85:196–205.

- [28] Khalil, E., Dai, H., Zhang, Y., Dilkina, B., and Song, L. (2017). Learning combinatorial optimization algorithms over graphs. In *Advances in Neural Information Processing Systems*, pages 6348–6358.
- [29] Khalil, E., Le Bodic, P., Song, L., Nemhauser, G., and Dilkina, B. (2016). Learning to branch in mixed integer programming. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 30.
- [30] Kingma, D. P. and Ba, J. (2014). Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*.
- [31] Lancia, G., Rinaldi, F., and Serafini, P. (2007). A compact optimization approach for job-shop problems. In *Proceedings of the 3rd Multidisciplinary International Conference on Scheduling: theory and applications (MISTA)*, pages 293–300.
- [32] Lenstra, J. K. and Kan, A. R. (1979). Computational complexity of discrete optimization problems. In *Annals of discrete mathematics*, volume 4, pages 121–140. Elsevier.
- [33] Liu, C.-L., Chang, C.-C., and Tseng, C.-J. (2020). Actor-critic deep reinforcement learning for solving job shop scheduling problems. *Ieee Access*, 8:71752–71762.
- [34] Mhasawade, S. and Bewoor, L. (2017). A survey of hybrid metaheuristics to minimize makespan of job shop scheduling problem. In *2017 International Conference on Energy, Communication, Data Analytics and Soft Computing (ICECDS)*, pages 1957–1960. IEEE.
- [35] Mohan, J., Lanka, K., and Rao, A. N. (2019). A review of dynamic job shop scheduling techniques. *Procedia Manufacturing*, 30:34–39.
- [36] Nair, V., Bartunov, S., Gimeno, F., von Glehn, I., Lichocki, P., Lobov, I., O’Donoghue, B., Sonnerat, N., Tjandraatmadja, C., Wang, P., et al. (2020). Solving mixed integer programs using neural networks. *arXiv preprint arXiv:2012.13349*.
- [37] Pfrommer, J., Zimmerling, C., Liu, J., Kärger, L., Henning, F., and Beyerer, J. (2018). Optimisation of manufacturing process parameters using deep neural networks as surrogate models. *Procedia CIRP*, 72:426–431.
- [38] Pytorch (2021). Pytorch v1.8. *pytorch.org*.
- [39] Schulman, J., Moritz, P., Levine, S., Jordan, M. I., and Abbeel, P. (2018). High-dimensional continuous control using generalized advantage estimation. *arXiv:1506.02438v6*.
- [40] Schulman, J., Wolski, F., Dhariwal, P., Radford, A., and Klimov, O. (2017). Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*.
- [41] Sutton, R. S. and Barto, A. G. (2018). *Reinforcement learning: An introduction*. MIT press.
- [42] Tang, Y., Agrawal, S., and Faenza, Y. (2020). Reinforcement learning for integer programming: Learning to cut. In *International Conference on Machine Learning*, pages 9367–9376. PMLR.
- [43] Tassel, P., Gebser, M., and Schekotihin, K. (2021). A reinforcement learning environment for job-shop scheduling. *arXiv preprint arXiv:2104.03760*.
- [44] Wolsey, L. A. and Nemhauser, G. L. (1999). *Integer and combinatorial optimization*, volume 55. John Wiley & Sons.
- [45] Zhang, C., Song, W., Cao, Z., Zhang, J., Tan, P. S., and Xu, C. (2020). Learning to dispatch for job shop scheduling via deep reinforcement learning. *arXiv preprint arXiv:2010.12367*.
- [46] Zhang, J., Ding, G., Zou, Y., Qin, S., and Fu, J. (2019). Review of job shop scheduling research and its new perspectives under industry 4.0. *Journal of Intelligent Manufacturing*, 30(4):1809–1830.

Appendix

Settings tables.

Parameter	Setting
<i>LSTM 1</i> hidden size	110
<i>LSTM 2</i> hidden size	110 · 2
<i>FFN</i> number of hidden layers	3
<i>FFN</i> input size	110 · 20
<i>FFN</i> 1st hidden layer size	110 · 10
<i>FFN</i> 2nd hidden layer size	110 · 5
<i>FFN</i> 3rd hidden layer size	110
<i>FFN</i> output layer size	1

Table 7: Actor-critic network configurations.

JSSP Mixed-integer formulation

We used the following mixed-integer linear program for the JSSP in CPLEX.

Parameter	Setting
Number of episodes	5000
Roll-outs per episode	10
Random choice prob.ty	From $\epsilon = 0.2$ down to $\epsilon = 0$
KL penalty coefficient β	15
Target KL divergence δ	0.05
Actor optimizer	Adam
Actor learning rate	10^{-4}
Actor optimization steps	1
Critic optimizer	Adam
Critic learning rate	10^{-4}
Critic optimization steps	3
Mini-batch size	$N \cdot T$

Table 8: Training settings.

$$\left\{ \begin{array}{ll} \min_{\mathbf{t}, \mathbf{x}, C_{max}} & C_{max} \\ \text{s.t.} & t_{jh} - t_{jk} \geq p_{jk}, \quad \forall (j, k), (j, h) \in \mathcal{O}, (j, k) \prec (j, h) \\ & t_{jk} - t_{ik} \geq p_{ik} - Mx_{jik}, \quad \forall (j, k), (i, k) \in \mathcal{O}, j < i \\ & t_{ik} - t_{jk} \geq p_{jk} - M(1 - x_{jik}), \quad \forall (j, k), (i, k) \in \mathcal{O}, j < i \\ & C_{max} \geq t_{jk} + p_{jk}, \quad \forall (j, k) \in \mathcal{O} \\ & t_{jk} \geq 0, \quad \forall (j, k) \in \mathcal{O} \\ & x_{jik} \in \{0, 1\}, \quad \forall (j, k), (i, k) \in \mathcal{O}, j < i \end{array} \right.$$

Where:

- p_{jk} are the processing times.
- $M = \left\lceil \sum_{(j,k) \in \mathcal{O}} p_{jk} \right\rceil$ is a Big-M value.
- C_{max} is a continuous variable indicating the makespan.
- t_{jk} are continuous variables indicating the non-negative starting time of operation (j, k) .
- x_{jik} are binary variables defined as

$$x_{jik} = \begin{cases} 1, & \text{if job } j \text{ precedes job } i \text{ on machine } k \\ 0, & \text{otherwise} \end{cases}$$