

# Modeling Performance in Open-Domain Dialogue with PARADISE

Marilyn Walker, Colin Harmon, James Graupera, Davan Harrison and Steve Whittaker

**Abstract** There has recently been an explosion of work on spoken dialogue systems, along with an increased interest in open-domain systems that engage in casual conversations on popular topics such as movies, books and music. These systems aim to socially engage, entertain, and even empathize with their users. Since the achievement of such social goals is hard to measure, recent research has used dialogue length or human ratings as evaluation metrics, and developed methods for automatically calculating novel metrics, such as coherence, consistency, relevance and engagement. Here we develop a PARADISE model for predicting the performance of Athena, a dialogue system that has participated in thousands of conversations with real users, while competing as a finalist in the Alexa Prize. We use both user ratings and dialogue length as metrics for dialogue quality, and experiment with predicting these metrics using automatic features that are both system dependent and independent. Our goal is to learn a general objective function that can be used to optimize the dialogue choices of any Alexa Prize system in real time and evaluate its performance. Our best model for predicting user ratings gets an  $R^2$  of .136 with a DistilBert model, and the best model for predicting length with system independent features gets an  $R^2$  of .865, suggesting that conversation length may be a more reliable measure for automatic training of dialogue systems.

## 1 Introduction

Over the last ten years there has been an explosion of work on spoken dialogue systems, along with an increased interest in open-domain systems that engage in casual conversations on popular topics such as movies, books and music. These systems aim to socially engage, entertain, and even empathize with their users [35, 21, 67]. Since the achievement of such social goals is hard to measure, recent


---

University of California, Santa Cruz, Santa Cruz, Ca., 95064 e-mail: mawalker@ucsc.edu

work has used dialogue length and human ratings as evaluation metrics [23, 27, 43]. Other work has focused on automatically calculating novel metrics such as coherence, consistency, relevance and engagement, using supervised models, or measures based on language model probabilities and word embedding cosine similarity [30, 32, 31, 22, 33, 5, 16, 63, 62] *inter alia*.

This paper develops a PARADISE-style dialogue evaluation model [57, 59, 49, 48], for a particular type of open-domain dialogue system, namely systems that compete in the Alexa Prize (AP) [13, 35, 9, 34, 18, 36, 14, 1, 8, 15]. The evaluation criteria for the AP explicitly specifies that systems will be evaluated on a combination of ratings from real users and the length of conversations: the ‘‘Grand Challenge’’ goal is conversations that last for twenty minutes and get an average rating of 4 out of 5 [51]. Real users can initiate AP conversations by saying *Let’s talk* to any Alexa device. They are then randomly assigned to an AP system, and, at the end of the conversation, are asked for a user satisfaction rating: *On a scale of 1 to 5, how interested are you in talking to this socialbot again?*. Because about 20% of users provide ratings, reliably predicting user satisfaction (ratings) would be valuable. Since the AP also aims for ‘‘long and engaging’’ conversations, conversation length is a second measure of dialogue quality. Conversation length makes particular sense in the context of the Alexa Prize, where real users **choose** when to stop the conversation. We thus experiment with predicting both user ratings and conversation length for Athena, a dialogue system that has been an AP finalist for the last two years [18, 36, 2]. In the 20/21 semi-finals, Athena’s average overall rating was 3.62 and average length was 2.12 minutes.

Previous work on open-domain dialogue has been trained on large-scale, unconstrained, freely available corpora, such as Twitter [41, 7, 12], Reddit [11], Open Subtitles [24], and Film Scripts [42, 60]. More recent models are trained on controlled, crowd-sourced datasets, which are shorter and text-based to facilitate

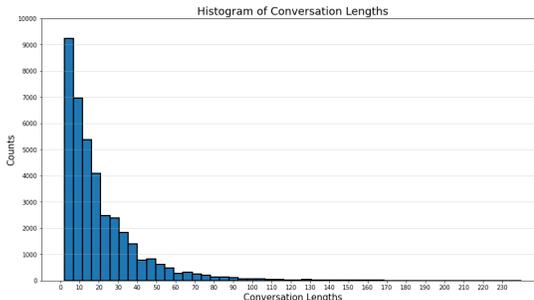

**Fig. 1** Conversation Lengths in Exchanges

collection, training and evaluation, with lengths of 2-4 exchanges for Empathetic Dialogues[39], 4 exchanges for Daily Dialogue[28], 6 exchanges for PersonaChat[65], and 10 exchanges for Topical Chat[17]. Conversations with AP systems are much longer: in recent challenges conversations average more than 20 exchanges in length, with some as long as 200 exchanges.<sup>1</sup> AP conversations are also a very different genre, due to the requirement that AP systems must carry out real-time, spoken conversations with hundreds of thousands of users, and respond to any


<sup>1</sup> We use the term exchanges, also known as adjacency pairs, since in AP parlance, a turn consists of both a user and system utterance, while a turn is a single user or system utterance in the typical usage in the spoken dialogue community.

topic that the user might bring up, including recent events. AP systems are expected to recognize and use up-to-date knowledge about sports and athletes, movies and TV shows and their actors, characters and directors, as well as books and their authors, and music, bands and musicians [15, 44, 3]. Thus, AP systems require mechanisms beyond training on static open-domain dialogue corpora [41, 66, 4, 38, 20].

Section 2 describes our corpus of Athena dialogues. Section 3 describes our experimental setup, and Section 4 presents both quantitative and qualitative results. We discuss related work throughout the paper where it is relevant, and sum up our results and future work in Section 5. We show that the best model for predicting user ratings results in an  $R^2$  of 0.135, while a model predicting conversation length using Athena Independent features results in an  $R^2$  of .862. These results suggest that conversation length could be a more reliable indicator of dialogue quality in large scale open-domain dialogue corpora that have been collected using interactions with real users. We expect these results to generalize to other AP systems and be useful for optimizing the system’s dialogue policy using reinforcement learning.

## 2 Athena Dialogue Corpus

We sampled a corpus of  $\sim 32K$  rated Athena dialogues from 2021. Figure 1 shows that many conversations are very short, often only consisting of one exchange, where the user seems to have invoked the AP skill by accident. The average conversation length is around 20 exchanges, with some conversations as long as 200 exchanges. The conversation ratings in Figure 2 shows that highly rated conversations dominate, with a median of 4 and an average of 3.7.



**Fig. 2** Conversation Ratings

We expected a strong correlation between length and rating but surprisingly, Row 1 of Table 1 shows that these two metrics are only weakly (but significantly) correlated. We also examine the correlations of dialogue acts indicating user satisfaction (compliments) or dissatisfaction (complaints), illustrated in Figure 3 and used as features in Section 3. While all correlations are significant, the largest is between length and compliments, similar to findings in previous work on AP dialogues[43]. User utterances such as these have also been used as the basis for open-domain evaluation models such as FED, based on contextualized queries to DialogGPT for language model probabilities [31, 66].

Metrics	Correlation
Rating/Length	0.134**
Rating/Compliments	0.068**
Rating/Complaints	-0.074**
Length/Compliments	0.216**
Length/Complaints	0.022**

**Table 1** Correlations between metrics: \*\* marks correlations  $p \leq .01$ .

Figure 4 provides examples of short conversations.<sup>2</sup> Each row counts as an exchange, so the first conversation is of length 3 (it includes Exchange 2 where the user says *alexa stop*). The second conversation is length 5. A conversation of length 1 only includes the greeting in Exchange 0. We believe that conversations of length  $<5$  don't justify any rating at all, and that understanding how dialogue behaviors affect ratings requires modeling the ratings of users who experienced enough of a conversation to judge its quality. We therefore only model conversations that are at length  $\geq 5$ , since greeting the user and asking their name takes  $\sim 4$  exchanges. See Figure 4. The final corpus has a median length of 17 exchanges and an average length of 23.7 exchanges.

Figure 5 and Figure 6 illustrate Athena conversations. Sub-dialogues are logged by topic and response generator and most conversations consist of multiple topics, some initiated by Athena, and others by the user. Each topic uses different types and amounts of content, and supports different conversation styles. Athena supports “niche” topics such as astronomy, nutrition, and comic books along with popular topics such as music, animals, movies and video games[36]. Figure 5 shows a sub-dialogue about *comic books*. Figure 6 shows a sub-dialogue about *movies*.

Compliments	Complaints
you are the best a.i.	none of your business
you talk really nice	you ask a lot of questions
you're interesting	i don't care
that's so cool	what is wrong with you
i never knew that	this is pretty boring

**Fig. 3** Example Compliments and Complaints

Ex	Topic	User	Athena
0	intro	chat with me	Hi, this is an Alexa Prize Socialbot. I hope you had a good weekend. How's it going.
1	intro	good	Okay, can't wait to get to know a thing or two about you. I don't think we've had a chance to meet yet. Would you like to tell me your name?
2		alexa stop	
0	intro	talk to me	Hi, this is an Alexa Prize Socialbot. I hope your week is off to a good start. How are you doing?
1	intro	good	Okay, can't wait to get to know a thing or two about you.</amazon:emotion> I don't think we've had a chance to meet yet. Would you like to tell me your name?
2	intro	colin	Okay, got it. It's nice to meet you, Colin! Did you watch the fireworks on Sunday?
3	intro	yes	Awesome! Unfortunately I couldn't go out and barbecue because I'm stuck in the cloud. But I hope you were able to celebrate! Anyway, What are some of the things you like to do in your free time.
4	intro	stop	

**Fig. 4** Two short conversations: the first (length 3) was rated 5, the second (length 5) was rated 3. Conversations of length  $\geq 5$  are included in our training data while those of length  $\leq 5$  are not.

A qualitative analysis of the goodness of topical sub-dialogues suggests that topic alone should have a large effect on user ratings. However, each conversation only

<sup>2</sup> In accordance with the AP Challenge rules, the shared conversations in Figure 4, Figure 5 and Figure 6 are between Athena and UCSC undergraduates rather than real users.


Ex.	Topic	User	Athena
18	comics	oh really	I am familiar with DC and marvel. Who is your favorite character?
19	comics	captain marvel	What about captain marvel do you like?
20	comics	how she's like super empowering	In general, why are you interested in comic books?
21	comics	because they're fun to read	That makes sense. I love comic books because they take you into another world with many different adventures. How often do you read them?
22	comics	i probably read one every week	Okay. I wish I had more time to read comics. Would you say you're an MCU expert? Like, I mean, have you seen most of the movies?
23	comics	yeah all of them	There's a ton of cool marvel characters in all the movies, it's hard to pick a single favorite character. How about Thor? I think Chris Hemsworth did a really good job playing him in the MCU. What do you think? Do you also think he did a good a job?
24	comics	i also think he did a good job	Yeah! Chris Hemsworth has been playing Thor for the past 8 years in 8 different marvel movies. Don't you find that a little bit intriguing?
25	comics	i think it is	My thoughts exactly. Here's a little trivia about the actual comic book character. Thor has actually been in 7187 different comic books.
26	comics	i did not know that	I was wondering. Tell me. If you could pick a character from DC to crossover into the Marvel Cinematic Universe, who would you pick and why?
27	comics	yes scarlet witch	Yeah, that makes sense, I would pick the iconic hero Superman. The DC movies always make him look drab, but the Marvel movies are more colorful, so Superman would fit right in. Anyhow, that's enough from me. I'm interested in your opinion. If you could have any one superpower from any superhero whatsoever, what would it be and why?
28	comics	scarlet witch is power because she can live things and do things with her mind	Yeah, I get that. I would definitely have the ability to fly like Superman. Being able to just take off at light speed and get anywhere I want in no time would be amazing. Anyway, I think it's cool that marvel comics has been around for so long. Marvel published a Generic Comic Book, in order to trademark the names "Super-Hero" and "Super-Villain"
29	comics	i know that DC is one of the biggest and most famous comic distributors out there.	Did you ever wonder if DC actually stands for anything? It actually stands for Detective Comics, so when you say "DC Comics," you're really saying Detective Comics Comics.
30	comics	that's pretty funny	...

**Fig. 5** Sub-dialogue on the *comics book* topic of a rated 5 conversation totaling 41 exchanges.

has one rating. We approximate topic ratings with three heuristic scoring functions that take into account the conversation rating, the length of the sub-dialogues for each topic, and the length of user utterances in topical sub-dialogues, assuming that longer user utterances indicate greater engagement. For each function, we create a population of scores over all conversations and then sum them and standardize them

Ex	Topic	User	Athena
36	movies	no i have one	I really like the Actor Eddie Murphy. Have you seen any of his movies?
37	movies	no	I really like the Movie Black Panther. Have you seen that movie?
38	movies	no	Scarlett Johansson did a really good job in her role in the Avengers. Scarlett Johansson wanted the role of Black Widow so much that she dyed her hair red to convince producers that she was right for the part.
39	movies	i don't care	Black Panther has actors David S. Lee and Winston Duke in it. What's your opinion of their performances?
40	movies	i don't care	I believe I read that Black Panther is directed by Ryan Coogler. Sometimes a director's unique voice really comes through in their work, do you think that happened in this case?

**Fig. 6** Sub-dialogue on the *movies* topic of a rated 1 conversation totaling 41 exchanges. Figure 3 includes “I don’t care” as a complaint.

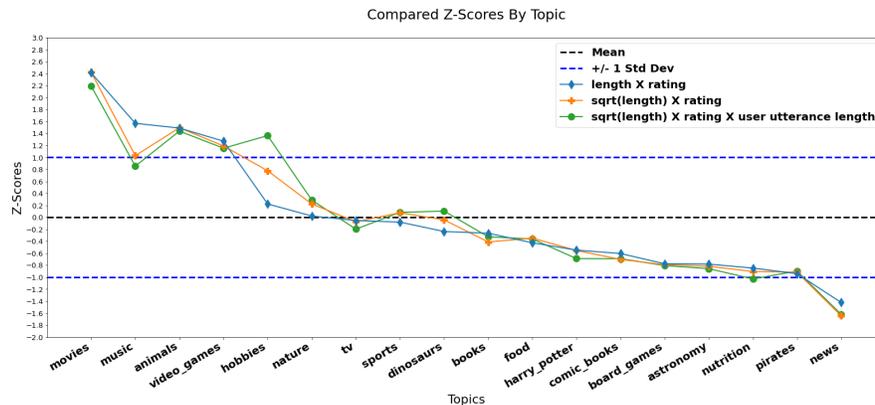

**Fig. 7** Z-scores of Ratings by Topic, for 3 different scoring functions

by calculating their Z-scores (standardized value). Figure 7 shows the Z scores for each topic for each scoring function. The first function (in blue in Figure 7) simply multiplies the number of exchanges on a topic by the rating of that conversation, and then sums the scores over the whole population of conversations. The second function (in orange in Figure 7) down-weights the effect of the length of the conversation by taking the square root of the length and then multiplying by rating. The third function multiplies each product by an additional factor of average user utterance length (in green in Figure 7). The relative ranking of topics changes little over the three functions, but hobbies, which has shorter conversations, but longer user utterances, moves from 5th place to 2nd when user utterance length is taken into account. Despite the shorter conversations, users appear to find the hobbies topic, where Athena discusses what they like to do in their free time, very engaging.

### 3 Experimental Setup

Our dataset consists of 32,235 conversations split (~80/10/10) into training (25,794), development (3,229), and test (3,212). Our goal is to develop models capable of predicting the goodness of a conversation using regression models trained to predict either user ratings or conversation lengths.<sup>3</sup> We also experiment with predicting dialogue outcomes in terms of length by only using features from the first 10 or 15 utterances in the conversation, to investigate whether we can make reliable predictions as the conversation unfolds, which could be then used as state variables for dialogue policy optimization, as in previous work on PROBLEMATIC DIALOGUE prediction [19, 26, 56]. Given the AP goal of “long and engaging” conversations, a problematic dialogue is one that is short.

The plot of conversation ratings in Figure 2 has a mean of 3.7 and a median of 4. Figure 1 shows a long tail for conversation lengths, with only 3% of conversations longer than 75 exchanges (2.52 standard deviations above the mean of 23.7). We represent these longer conversations as if they had length 75.

We develop features as real-time automatic proxies for Athena’s performance that are specific to Athena as well as dialogue quality features that we expect to generalize, as summarized in Table 2 [59, 45, 29]. We use frequencies to ensure that features don’t directly encode conversation length. Previous work on PARADISE included many such features, e.g. Reprompts counted system utterances where a question was repeated, and Apologies counted system utterances apologizing for misunderstanding [52, 53]. We standardize each feature with their Z-scores so their distribution has a mean of 0 and a standard deviation of 1. This prevents the relative scales of features from impacting model performance and, for linear models, indicates the relative importance of each feature with the magnitude of the weight assigned to it.

User Utterance	LengthMedian, Abuse%, SDA%, MIDAS% Repeat%, Red%
Topic	Topic%, RG%, Topic_Median

**Table 2** Extracted Features by Category.

**User Utterance Features.** To represent user utterances we calculate the median number of words in each response (LengthMedian in Table 2), expecting longer responses to indicate greater engagement. To capture user behaviors at a general level, we use two types of dialogue act taggers [52]. First, we utilize all the MIDAS dialogue act tags (MIDAS%) from Athena’s NLU [18, 64]: these are used by the dialogue manager to condition Athena’s conversational behaviors. These include DAs identifying the user responding negatively to a question or criticizing the system.

Athena also uses a second level of fine-grained dialogue acts. These Social Dialogue Acts (SDAs) identify specific actions, feelings, and intents in the user’s speech. Some SDAs are grouped as negative (SDA\_complaint) or positive feedback (SDA\_compliment), as shown in Figure 3. Rows 2 to 4 in Table 1 show these independent measures of dialogue quality have a lower correlation with ratings and a higher correlation with length. Other SDAs, such as SDA\_dev\_command, identify

<sup>3</sup> We carried out pilot experiments on binary classifiers by treating conversations rated 1 and 2 as bad, and conversations rated 5 as good, but these barely performed above the baseline.

cases where the user request can only be satisfied outside the AP skill, such as requests to play some music or to turn down the volume. These requests result in an Apology from Athena. Other features count dialogue acts where users ask Athena to repeat herself (Repeat%), and where user abuse Athena or engage in profanity (Abuse%), which may correlate with lower ratings. We also create features measuring user utterances on prohibited topics of conversation (Red%), which result in Athena saying *I am not the best person to discuss that with*.

**Topic Features.** Some users would be expected to inherently find certain topics more interesting and the analysis in Section 2 suggests Athena’s performance is better on some topics. Thus, we include Athena dependent features representing the fraction of the conversation spent on each topic (e.g. TOPIC\_FREQ\_movies), as well as the median number of exchanges over all topics (TOP\_DIST\_MEDIAN). A high median indicates that the user found most topics engaging.

Figure 5 and Figure 6 in Section 2 provide examples of Athena conversations that illustrate several of these features. For example, exchanges 18 and 26 in Figure 5 shows the user saying *Oh really* and *I didn’t know that*, which are classified as compliments and contribute to the SDA\_compliments for that conversation. Even though *comic books* is one of the less highly rated topics in Figure 7, this user is engaged, contributing long utterances, which are captured by the feature LengthMedian. The dialogue was 41 exchanges long, so the 13 comic exchanges here are represented by the feature Topic\_Freq\_comics having the value of 13/41. Figure 6 shows a sub-dialogue on the *movies* topic. Despite *movies* being Athena’s highest rated topic (see Figure 7), this user is not engaged. Exchanges 37 and 38 illustrate negative answers from the user (MIDAS\_neg\_answer), and exchanges 39 and 40 illustrate complaints. The LengthMedian is low due to the many short user utterances. The TOPIC\_FREQ\_movies value is 5/41.

**Model Setup.** We train regression models using Support Vector Regression models (SVR), Decision Tree and Random Forest models, Multi-layer Perceptron models (MLP), and Transformers. Our models are implemented using the Scikit-Learn Python package [37] and Huggingface Transformers.

- **Linear Regression.** Most linear regression experiments were done using ordinary least squares linear models. We also experimented with ridge and lasso regression models but they either matched or under-performed the least squares model.
- **SVR.** We used a Support Vector Regression model with a kernel containing a non-linear radial basis function. We also tuned the regularization parameter (traditionally denoted  $C$ ) for these models. A larger value of  $C$  optimizes for a decision boundary which separates the data more accurately, but with smaller margins, whereas a smaller value of  $C$  optimizes for a larger margin around the decision boundary, but allows more misclassified points. When predicting rating, we found that a regularization parameter of 0.1 returned the best results. For conversation length, a regularization parameter of 10 performed best.
- **Decision Tree and Random Forest.** When using the Decision Tree and Random Forest regression models, we ran experiments with maximum allowed depths of 5 and 10, as well as an unbounded maximum depth. For length, the unbounded

depth trees consistently performed the best, but limiting the maximum depth to 5 performed best when predicting rating.

- **MLP.** When predicting conversation rating, we found that the performance of the Multi-layer Perceptron algorithm was poor when the hidden layers were large. So we used a model with just 5 hidden nodes in a single hidden layer. For conversation length, we raised the maximum number of training epochs to 1000 and used a structure consisting of two hidden layers, the first of which contained 100 hidden nodes, the second containing 50 hidden nodes. We also tried single hidden layer models with 50, 100, and 150 hidden nodes, but these alternatives performed worse. In all cases, the “reLu” activation function was used at each hidden node.
- **DistilBERT.** DistilBERT is a lightweight Transformer[50] model based on the BERT-base[10] model. DistilBERT is trained by distilling BERT base so that it is smaller, faster, and cheaper, yet has only marginally lower performance. Compared to BERT, DistilBERT has 40% less parameters, runs 60% faster, and achieves 95% of BERT’s performance on the GLUE[61] language understanding benchmark. We initialize DistilBERT using the pre-trained weights available through Huggingface Transformers.<sup>4</sup>

## 4 Results

We train each regression model using the features described in Section 3, and report mean squared error (MSE), the coefficient of determination ( $R^2$ ), and the Pearson correlation ( $r$ ) for each model below.

**Predicting Ratings.** Table 3 shows for each model, the mean squared error (MSE) between the model’s predicted ratings and the ground-truth ratings, and the corresponding  $R^2$  and  $r$  values. The DistilBERT model yields

Model	MSE	$R^2$	$r$
SVR	1.799	0.025	0.252**
Decision Tree	1.767	0.042	0.210**
Random Forest	1.743	0.056	0.237**
Multi-layer Perceptron	1.726	0.065	0.258**
Least Squares Linear	1.709	0.074	0.272**
DistilBERT Transformer	1.597	<b>0.135</b>	0.370**

the lowest MSE and the highest  $R^2$  with an MSE of 1.597 and an  $R^2$  of 0.135. While all the models’  $r$  values are significant, these model fits are too low to be used to produce additional silver training data from unrated conversations. Given these values, we decided not to pursue training with Athena independent features. We plan to explore other approaches in future work.

We found it surprising that user ratings, one of the main evaluation criteria for the Alexa Prize, should be so challenging to predict, even given thousands of training examples [43]. One reason might be subjectivity in user ratings [51]. In previous work, a controlled study with UCSC undergrads showed that user personality and

<sup>4</sup> [github.com/huggingface/transformers](https://github.com/huggingface/transformers)


user expectations of a spoken SocialBot, affected ratings [1]. Athena ratings for conversations of lengths  $< 5$  also provides evidence for user subjectivity, given that we believe that these conversations are too short to justify any rating at all. The top plot in Figure 8 shows that most users rate conversations of length  $< 5$  with a 1 but there is large variance ( $\sigma^2 = 2.51$ ), while the variance for the whole training set is 1.85. The 5000 conversations of length 1, which only consisted of a greeting, were all rated 1. Figure 4 showed short conversations of length 3 and 5. The variance in ratings for conversations of lengths 3&4, at the bottom of Figure 8, clearly suggests an effect of user personality or subjectivity. This is why we filter out these conversations from our training data. In other settings, it would be possible to normalize user ratings according to the ratings distribution for a particular user (rater) [6], but only about 20% of AP users actually carry out multiple dialogues with Athena. While Alexa users may talk to an AP system repeatedly, the random assignment of users to systems means an individual system is not likely to see the same user twice.

As a final point, it is well known that the performance of ASR varies on an individual basis, and that ASR error and ASR confidence scores are predictive of user satisfaction and conversation length. However AP systems do not have access to acoustic properties or gold-standard transcriptions of user utterances, and therefore cannot model ASR error [29, 47, 58, 54, 55].

#### Predicting Conversation Length.

We expect better results for predicting conversation length, given the correlation in Table 1 of length with independent measures of user satisfaction (compliments). Recent work by Shalyminov et al [43] also shows that conversation length performs as well as user ratings for reinforcement learning in AP conversations. However, it is important when predicting conversation length, to ensure that features are represented in such a way to avoid indirectly encoding length. We thus only use features calculated as frequencies and medians. We also conduct ablation studies to show that individual features are not indirectly encoding length.


Table 4 shows, for each model and feature set, surprisingly good mean squared error (MSE), and  $R^2$  and  $r$  values. A model based on the DistilBERT architecture achieved the lowest MSE at 8.20 for Athena dependent features and the highest  $R^2$  at 0.975. However, these models also are likely to rely on many Athena independent features as suggested by the decision tree model shown in Figure 9. The top node splits on the SDA\_compliments feature. The sub-branch of the tree we include in the figure shows that the SDA\_compliments feature is highly predictive of dialogue length, as the model chooses to split on that feature multiple times. The Athena dependent features representing topics such as video games and music are not selected for model splits until the third layer of the tree. This may also reflect user subjectivity in their interests in different topics.

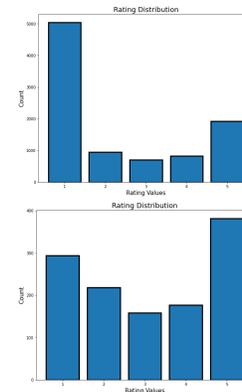

**Fig. 8** Distribution of Ratings for conversations of lengths  $< 5$ , and those of lengths 3&4.


Model	Athena Specific Features			Athena Independent Features		
	MSE	$R^2$	$r$	MSE	$R^2$	$r$
Least Squares Linear	95.82	0.684	0.827**	249.23	0.179	0.425**
Decision Tree	55.03	0.819	0.909**	80.69	0.734	0.866**
Random Forest	24.91	0.918	0.959**	41.78	<b>0.862</b>	0.929**
SVR	24.90	0.918	0.959**	106.63	0.649	0.824**
Multi-layer Perceptron	18.38	0.939	0.970**	54.24	0.821	0.907**
DistilBERT Transformer	08.20	<b>0.975</b>	0.995**	43.00	0.842	0.920**

**Table 4** Results of regression models trained to predict the length of the conversations for Athena Dependent and Athena Independent features. A \*\* indicates a significant  $r$  correlation at  $p \leq .01$ .

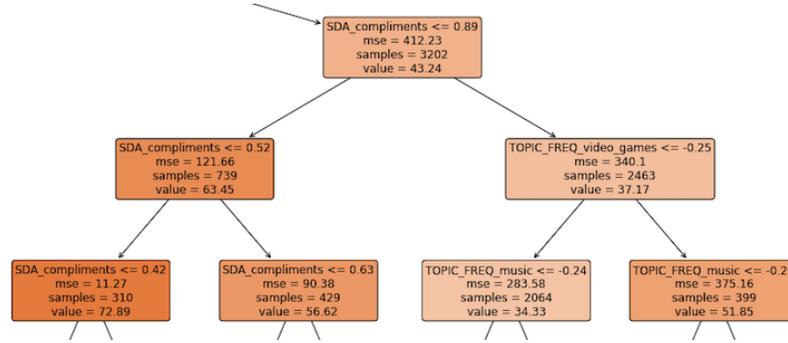

**Fig. 9** Second, Third and Fourth layers of the Decision Tree predicting Conversation Length using Athena Dependent Features, with an  $R^2$  model fit of 0.819 (see RHS of Row 2 of Table 4).

The z-scores in Figure 7 suggest that length prediction should benefit from topic features. Some topics such as music may be popular in any system, but topic performance is clearly Athena Dependent, reflecting whether large scale training data on that topic is present in corpora such as Topical Chat [17, 20], whether high quality topical data is in WikiData or sources like IGDB, and the human effort put into that topic. Thus, it is surprising that the RHS of Table 4 shows that the Athena Independent features achieve excellent performance, with an  $R^2$  value of 0.862 using a Random Forest model. Since SDA features can be calculated for any dialogue system, these results imply that the Athena Independent models are very general.

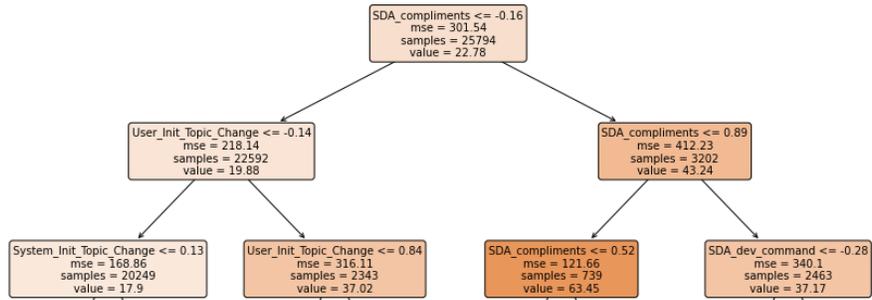


**Fig. 10** Top 3 layers of a Decision Tree predicting Conversation Length using Athena Independent Features, with an  $R^2$  model fit of 0.734 (LHS of Row 2 of Table 4).

Figure 10 shows the top three layers of the Athena Independent decision tree model. After doing an initial split on the SDA\_compliments feature, the model continues to rely on more general features. The LHS of the tree splits on the frequency of initiative dialogue acts that either select a topic or offer a menu of topics, in response to the user’s request to change the topic. The RHS of the tree continues to split on the SDA\_compliments feature, but also uses the SDA\_dev\_command dialogue act.

Table 5 reports results for an ablation study of the top Athena Dependent features according to their correlation with length. We use the Decision Tree models and then examine the effect of ablating particular features. Figure 11 shows a decision tree after ablating User and System Initiative and the SDA\_compliments feature. This model achieves an  $R^2$  of .762 using Athena Dependent topic features, indicating the topics that lead to longer conversations.

Features Ablated	MSE	$R^2$	$r$
TOPIC_DIST_MEDIAN	78.10	0.743	0.871**
TOPIC_FREQ_music	67.09	0.779	0.889**
TOPIC_FREQ_video_games	60.57	0.800	0.899**
SDA_compliments	50.38	<b>0.834</b>	0.917**
TOPIC_FREQ_movies	61.54	0.797	0.898**
User_Init, Sys_Init	72.26	0.762	0.880**
User_Init, Sys_Init, SDA_compliments	72.43	0.761	0.880**

**Table 5** Results of an ablation study using the Decision Tree model. \*\* indicates significant  $r$  correlation at  $p \leq .01$ .

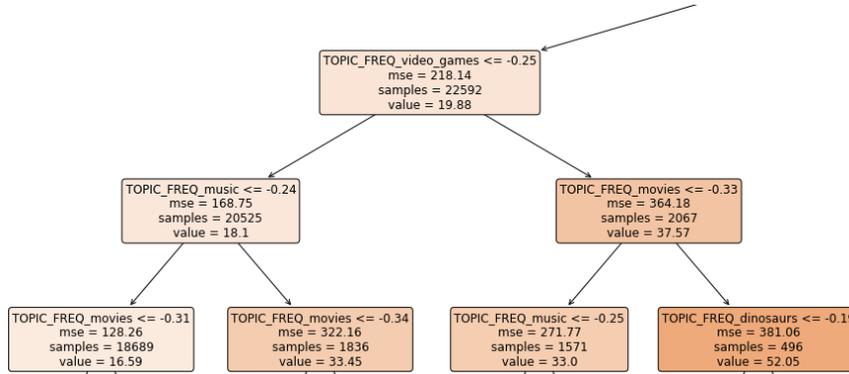

**Fig. 11** Ablating Initiative and Compliments. 3 LHS layers of a Decision Tree predicting Length using Athena Dependent Features, with an  $R^2$  model fit of .762 (See Row 7 of Table 5).

**Predicting Length from Initial Sequences.** We also explore whether initial segments of the dialogue can predict conversation length, as in early work on PROBLEMATIC DIALOGUE prediction for task-oriented dialogue. Examination of our corpus suggests that some users are adversarial, some conversations just go poorly from the start, or some users suffer from particularly poor ASR due to dialect or native language [47]. Such predictions can be added to the dialogue state table and used for reinforcement learning [19, 26, 56]. We experiment with initial segments of length 10 and 15, given that the median conversations length is 17 exchanges.

We first trained and tested logistic regression by binning conversations lengths into two bins, one for lengths less than the median, and another for lengths greater

Model	First 10 exchanges			First 15 exchanges		
	MSE	$R^2$	$r$	MSE	$R^2$	$r$
Least Squares Linear	0.211	0.154	0.394**	0.149	0.402	0.634**
Decision Tree	0.226	0.095	0.508**	0.086	0.656	0.828**
SVR	0.192	0.228	0.549**	0.100	0.597	0.775**
Random Forest	0.159	<b>0.361</b>	0.612**	0.047	<b>0.812</b>	0.902**
Multi-layer Perceptron	0.174	0.301	0.579**	0.081	0.676	0.827**

**Table 6** Results of logistic regression models trained to predict whether or not the conversation length would be less or greater than the median. A \*\* indicates a significant correlation at  $p \leq .01$ .

than or equal to the median, with results in Table 6. The  $R^2$  of the Random Forest model after seeing 15 turns of conversation is 0.812, only 0.10 less than a model that has seen the whole conversation, resulting in an excellent model for predicting whether the conversation is likely to end in the next few turns.

Model	First 10 exchanges			First 15 exchanges		
	MSE	$R^2$	$r$	MSE	$R^2$	$r$
Least Squares Linear	2.586	0.144	0.381**	2.186	0.276	0.526**
Decision Tree	3.159	-0.045	0.439**	2.768	0.084	0.554**
SVR	2.430	0.196	0.510**	2.035	0.326	0.620**
Random Forest	2.168	<b>0.283</b>	0.556**	1.645	<b>0.456</b>	0.683**
Multi-layer Perceptron	2.269	0.249	0.536**	2.035	0.326	0.612**

**Table 7** Results of regression models trained to predict conversation length bins of size 10. A \*\* indicates a significant correlation at  $p \leq .01$ .

We then experiment with conversation length binned into increments of 10 exchanges up to 70, with one final bin for conversations that were 70 exchanges or longer. These models use the same features as those in Table 6, with results in Table 7. The best performing Random Forest model after 15 turns of conversation results in an  $R^2$  of 0.456. Thus it performs fairly well at predicting how long the conversation will be in terms of 10 exchange chunks. Additional features and further tuning could easily lead to even better results.

## 5 Conclusion and Future Work

Our initial aim was to create a model that could predict the evaluation metrics that AP systems optimize for, namely dialogues that are “long and engaging”, in the style of work on PARADISE and Interaction Quality [57, 49]. The setting of the AP supports the collection of thousands of user ratings at the end of a conversation: these should be a valuable indication of how engaging a dialogue is. We created predictive models of the ratings using Athena dependent dialogue features, but the best  $R^2$  value was 0.139. We then showed that the variance in ratings of dialogues that are too short

to merit a rating, shows that there is great deal of subjectivity in these ratings [51]. In other settings, this subjectivity could be accounted for by normalizing ratings for each user [6], but only about 20% of AP users engage in multiple dialogues with Athena. Other work on AP systems modelled user individual differences such as Big Five personality, and user propensity to take the initiative [13, 8]. Athena models user topical preferences already, and e.g. makes inferences that interest in a sport like hiking may indicate an interest in a topic such as nature, or that interest in a topic like food may indicate interest in a topic such as nutrition. It seems clear that further work on personalized models of the user could be fruitful for better predicting user ratings [46].

However, the length metric is less subjective because users are volunteers, and only converse at length if they are engaged in the conversation. Results for predicting conversation length with a DistilBert model achieves an  $R^2$  of 0.975, using Athena Dependent features. Results for predicting length with Athena Independent features are also excellent with an  $R^2$  of 0.862 for a Random Forest model.

We also train models to predict length based on initial sequences of the dialogue of lengths 10 and 15. This ability is important for using length prediction in real-time to affect a dialogue system’s behavior. The best  $R^2$  is 0.34 for a model that only had access to the first 10 exchanges of a conversation, and the best  $R^2$  is 0.740 for a model that had access to the first 15 exchanges.

We believe that better results are possible, with additional features representing conversational behaviors. Features such as user response time might indicate confusion or a lack of interest, while our previous work showed that system response time directly affects user ratings [18]. Another speech feature missing from our models are ASR confidence scores and actual ASR error rates [47]. In future work, we will use the length predictor in the representation of dialogue state and condition the dialogue policy on predicted length. We would also like to test our model on other AP systems and conversational agents.

## 6 Acknowledgements

The work in this paper was supported by an NSF Grant #2019805 to AI Institute for Student AI Teaming (UCSC subcontract), NSF IIS #1748056, and an Amazon Alexa Prize grant. Thank you to the rest of the team for their work on Athena, and to folks at Amazon AI for feedback on an earlier version of this paper.

## References

1. K. K. Bowden, J. Wu, W. Cui, J. Juraska, V. Harrison, B. Schwarzmann, N. Santer, S.J. Whittaker, and M.A. Walker. Entertaining and opinionated but too controlling: a large-scale user study of an open domain A. a prize system. In *Proc. of the 1st International Conference on Conversational User Interfaces*, pp. 1–10, 2019.

2. K. K. Bowden, J. Wu, W. Cui, J. Juraska, V. Harrison, B. Schwarzmann, N. Santer, and M.A. Walker. Slugbot: Developing a computational model and framework of a novel dialogue genre. *arXiv preprint arXiv:1907.10658*, 2019.
3. K.K. Bowden, J. Wu, S. Oraby, A. Misra, and M.A. Walker. Slugnerds: A named entity recognition tool for open domain dialogue systems. In *Language Resources and Evaluation Conference, LREC*, 2018.
4. T. B. Brown, B. Mann, N. Ryder, M. Subbiah, J. Kaplan, P. Dhariwal, A. Neelakantan, and others. Language models are few-shot learners. In *Advances in Neural Information Processing, NeurIPS*, 2020.
5. E. Bruni and R.I. Fernandez. Adversarial evaluation for open-domain dialogue generation. In *Proc. of the 18th Annual SIGdial Meeting on Discourse and Dialogue*, p.p 284–288, 2017.
6. C. Callison-Burch. Fast, cheap, and creative: Evaluating translation quality using Amazon’s Mechanical Turk. In *Proc. of EMNLP*, pp. 286–295. 2009.
7. F. Charras, G. Duplessis, V. Letard, A.L. Ligozat, and S. Rosset. Comparing system-response retrieval models for open-domain and casual conversational agent. 2nd Workshop on Chatbots and Conversational Agent Technologies (WOCHAT@ IVA2016). 2016.
8. C.Y. Chen, D. Yu, W. W. , Y.M. Yang, J. Zhang, M. Zhou, K. Jesse, A. Chau, A. Bhowmick, S. Iyer, et al. Gunrock: Building a human-like social bot by leveraging large scale real user data. *Alexa Prize Proc.*, 2018.
9. A. C. Curry, I. Papaioannou, A. Suglia, S. Agarwal, I. Shalymov, X. Xu, O. Dušek, A. Eshghi, I. Konstas, V. Rieser, et al. Alana v2: Entertaining and informative open-domain social dialogue using ontologies and entity linking. *Alexa Prize Proc.*, 2018.
10. J. Devlin, M.W. Chang, K.N. Lee, and K. Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
11. J. Dodge, A. Gane, X. Zhang, A. Bordes, S. Chopra, A. H. Miller, A. Szlam, and J. Weston. Evaluating prerequisite qualities for learning end-to-end dialog systems. In *ICLR*, 2016.
12. Purely Corpus-based Automatic Conversation Authoring. D. Guillaume, V. Letard, A-L. Ligozat and S. Rosset, LREC. 2016.
13. H. Fang, H. Cheng, M. Sap, E. Clark, A. Holtzman, Y. Choi, N. A. Smith, and M.i Ostendorf. Sounding board: A user-centric and content-driven social chatbot. *NAACL HLT*, p 96, 2018.
14. S E Finch, J D Finch, A. Ahmadvand, X. Dong, R. Qi, H. Sahijwani, S. Volokhin, Z. Wang, Z. Wang, J. Choi, et al. Emora: An inquisitive social chatbot who cares for you. *Alexa Prize Proc.*, 2020.
15. R. Gabriel, Y. Liu, A. Gottardi, M. Eric, A. Khatri, A. Chadha, Qinlang Chen, B. Hedayatnia, P. Rajan, A. Binici, et al. Further advances in open domain dialog systems in the Third Alexa Prize Socialbot Grand Challenge. *Alexa Prize Proc.*, 2020.
16. S. Ghazarian, R. Weischedel, A. Galstyan, and N. Peng. Predictive engagement: An efficient metric for automatic evaluation of open-domain dialogue systems. In *Proc. of the AAAI Conference on Artificial Intelligence*, pp. 7789–7796, 2020.
17. K. Gopalakrishnan, B. Hedayatnia, Q. Chen, A. Gottardi, S. Kwatra, A. Venkatesh, R. Gabriel, D. Hakkani-Tür. Topical-chat: Towards knowledge-grounded open-domain conversations. *Proc. Interspeech 2019*, pp. 1891–1895, 2019.
18. V. Harrison, J. Juraska, W. Cui, L.I. Reed, K.K. Bowden, J. Wu, B. Schwarzmann, A. Ebrahimi, Rishi Rajasekaran, Nikhil Varghese, et al. Athena: Constructing dialogues dynamically with discourse constraints. *Proc. of the Alexa Prize*, 2020.
19. H. Wright Hastie, R. Prasad, and M. Walker. What’s the trouble: automatically identifying problematic dialogues in DARPA communicator dialogue systems. In *Proc. of ACL*, 2002.
20. B. Hedayatnia, S. Kim, Y. Liu, K. Gopalakrishnan, M. Eric, and D. Hakkani-Tur. Policy-driven neural response generation for knowledge-grounded dialogue systems. *International Conference on NLG*, 2020.
21. R Higashinaka, K. Dohsaka, and H Isozaki, Effects of self-disclosure and empathy in human-computer dialogue. *IEEE Spoken Language Technology Workshop*. 109–112. 2008.
22. R. Higashinaka, M. Araki, H. Tsukahara, and M. Mizukami. Improving taxonomy of errors in chat-oriented dialogue systems. In *9th IWSDS*, p. 331. 2019.

23. R. Higashinaka, L. D’Haro, B. Abu Shawar, R. Banchs, K. Funakoshi, M. Inaba, Y. Tsunomori, and T. Takahashi, and J. Sedoc. Overview of the dialogue breakdown detection challenge 4, *Increasing Naturalness and Flexibility in Spoken Dialogue Interaction*. 403–417. 2021.
24. C. Hori and T. Hori. End-to-end conversation modeling track in DSTC6. *arXiv preprint arXiv:1706.07440*, 2017.
25. J. Juraska, K. K. Bowden, and M. A. Walker. ViGGO: A video game corpus for data-to-text generation in open-domain conversation. In *Proc. of the 12th International Conference on NLG*, 2019.
26. I. Langkilde, M. A. Walker, J. Wright, A. Gorin, and D. Litman. Automatic prediction of problematic human-computer dialogues in How May I Help You? In *Proc. of the IEEE Workshop on Automatic Speech Recognition and Understanding, ASRU*, 1999.
27. Li, J., W. Monroe, A. Ritter, D. Jurafsky, M. Galley and J. Gao. Deep Reinforcement Learning for Dialogue Generation. *Proc. of EMNLP*. 1192–1202. 2016
28. Y. Li, H. Su, X. Shen, W. Li, Z. Cao, and S.i Niu. Dailydialog: A manually labelled multi-turn dialogue dataset. In *Proc. of the Eighth ICNLP*, pp. 986–995, 2017.
29. D. J. Litman, J. B. Hirschberg, and M. Swerts. Predicting automatic speech recognition performance using prosodic cues. In *Proc. of NAACL*, 2000.
30. CW Liu, R. Lowe, I.V. Serban, M. Noseworthy, L. Charlin, and J. Pineau. How not to evaluate your dialogue system: An empirical study of unsupervised evaluation metrics for dialogue response generation. In *Proc. of the 2016 Conference on EMNLP*, pp. 2122–2132, 2016.
31. S. Mehri and M. Eskenazi. Unsupervised evaluation of interactive dialog with dialogpt. In *Proc. of the 21st SIGDIAL*, pp. 225–235, 2020.
32. S. Mehri and M. Eskenazi. USR: An unsupervised and reference free evaluation metric for dialog. In *Annual Meeting of the ACL*, 2020.
33. B. Pang, E. Nijkamp, W. Han, L. Zhou, Y. Liu, and K.i Tu. Towards holistic and automatic evaluation of open-domain dialogue generation. In *Proc. of the 58th Annual Meeting of the ACL*, pp. 3619–3629, July 2020.
34. I. Papaioannou, A. Curry, J. L Part, I. Shalymov, X. Xu, Y. Yu, O. Dušek, V. Rieser, and O. Lemon. Alana: Social dialogue using an ensemble model and a ranker trained on user feedback. *Proc. Alexa Prize*, 2017.
35. A. Paranjape, A. See, K. Kenealy, H.J Li, A.Hardy, P. Qi, K R Sadagopan, N M Phu, D. Soyulu, and C. D Manning. Neural generation meets real people: Towards emotionally engaging mixed-initiative conversations. *Proc. Alexa Prize*, 2020.
36. O. Patil, L. Reed, K. K. Bowden, J. Juraska, W. Cui, V. Harrison, R. Rajasekaran, A. Ramirez, C. Li, E. Zamora, P. Lee, J. Bheemanpally, R. Pandey, A. Ratnaparkhi, and M.A. Walker, Athena 2.0: Discourse and User Modeling in Open Domain Dialogue. *Proc. of the Alexa Prize*, 2021
37. F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, and E. Duchesnay. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12:2825–2830, 2011.
38. A. Radford, J. Wu, R. Child, D. Luan, D. Amodei, and I. Sutskever. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9, 2019.
39. H. Rashkin, E M Smith, M Li, and Y-L Boureau. Towards empathetic open-domain conversation models: A new benchmark and dataset. In *Proc. of the 57th Annual Meeting of the ACL*, pp. 5370–5381, 2019.
40. L.I. Reed and M.A. Walker. Few shot Neural Natural Language Generation for Knowledge-graph based Response Generators. In *International Workshop on Spoken Dialogue Systems (IWSDS)*, 2021.
41. A. Ritter, C. Cherry, and W. B Dolan. Data-driven response generation in social media. In *Proc. of EMNLP*, pp. 583–593, 2011.
42. I V Serban, A. Sordoni, Y. Bengio, A.Courville, and J. Pineau. Building end-to-end dialogue systems using generative hierarchical neural network models. In *Thirtieth AAAI Conference* , 2016.

43. I. Shalyminov, O. Dušek, and O. Lemon. Neural response ranking for social conversation: A data-efficient approach. In *Proc. of the 2018 EMNLP Workshop on SCAI*, pp. 1–8, 2018.
44. M Shang, T. Wang, M. Eric, J. Chen, J. Wang, M. Welch, T. Deng, A. Grewal, H. Wang, Y. Liu, D. Hakkani-Tur. Entity resolution in open-domain conversations. In *NAACL-HLT 2021*, page 26, 2021.
45. S. Singh, M S. Kearns, D J. Litman, and M A. Walker. Empirical evaluation of a reinforcement learning spoken dialogue system. In *Proc. AAAI 2000*, 2000.
46. S. Stoyanchev and A. Stent. Lexical and syntactic adaptation and their impact in deployed spoken dialog systems. *Proc. of NAACL*, p.189–192, 2009.
47. S. Stoyanchev, P. Salletmayr, Jingbo Yang, and Julia Hirschberg. Localized detection of speech recognition errors. *IEEE Spoken Language Technology Workshop*. p.25–30, 2012.
48. S. Ultes, P. Budzianowski, I. Casanueva, N. Mrkšić, L. Rojas-Barahona, P-H. Su, T-H. Wang, , M. Gašić, and S. Young. Domain-independent user satisfaction reward estimation for dialogue policy learning. *Proc. Interspeech 2017*, pp. 1721–1725, 2017.
49. S. Ultes, A. Schmitt, and W. Minker. Analysis of temporal features for interaction quality estimation. *Dialogues with Social Robots: Enablements, Analyses, and Evaluation*, 427:367, 2016.
50. A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N Gomez, L. Kaiser, and I. Polosukhin. Attention is all you need. In *Advances in neural information processing systems*, pp. 5998–6008, 2017.
51. Venkatesh, C. Khatri, A. Ram, F. Guo, R. Gabriel, A. Nagar, R. Prasad, and M. Cheng. On evaluating and comparing conversational agents.
52. M. Walker and R. Passonneau. DATE: A dialogue act tagging scheme for evaluation. In *Human Language Technology Conference*, 2001.
53. M. Walker, A. Rudnicky, R. Prasad, J. Aberdeen, E. Bratt, J. Garofolo, H. Hastie, A. Le, B. Pellom, A. Potamianos, R. Passonneau, S. Roukos, G. Sanders, S. Seneff, and D. Stallard. DARPA communicator: Cross-system results for the 2001 evaluation. In *ICSLP 2002*, 2002.
54. M. Walker, J. Wright, and I. Langkilde. Using natural language processing and discourse features to identify understanding errors in a spoken dialogue system. In *Proc. of ICML*, 2000.
55. M. A. Walker, C. A. Kamm, and D. J. Litman. Towards developing general models of usability with PARADISE. In *Natural Language Engineering: Special Issue on Best Practice in Spoken Dialogue Systems*, 2000.
56. M. A. Walker, I. Langkilde-Geary, H. Wright Hastie, J. Wright, and A. Gorin. Automatically Training a Problematic Dialogue Predictor for a Spoken Dialogue System. *Journal of Artificial Intelligence Research*, 16:293–319, 2002.
57. M. A. Walker, D. Litman, C. A. Kamm, and A. Abella. PARADISE: A general framework for evaluating spoken dialogue agents. In *Proc. of the 35th Annual Meeting of the ACL, ACL/EACL*, pp. 271–280, 1997.
58. M.A. Walker, I. Langkilde-Geary, H.W. Hastie, J.H. Wright, A.L. Gorin, et al. Automatically training a problematic dialogue predictor for a spoken dialogue system. *Journal of Artificial Intelligence Research*, 16(1):293–319, 2002.
59. M. A. Walker. An application of reinforcement learning to dialogue strategy selection in a spoken dialogue system for email. *Journal of Artificial Intelligence Research*, 12:387–416, 2000.
60. M. A Walker, G. I Lin, and J. Sawyer. An annotated corpus of film dialogue for learning and characterizing character style. In *LREC*, pp. 1373–1378, 2012.
61. A.Wang, A. Singh, J.Michael, F. Hill, O. Levy, and S. R Bowman. Glue: A multi-task benchmark and analysis platform for natural language understanding. *arXiv preprint arXiv:1804.07461*, 2018.
62. Y-T. Yeh, M. Eskenazi, and S. Mehri. A comprehensive assessment of dialog evaluation metrics. *arXiv preprint arXiv:2106.03706*, 2021.
63. S. Yi, R. Goel, C. Khatri, A. Cervone, T. Chung, B. Hedayatnia, A. Venkatesh, R. Gabriel, and D. Hakkani-Tur. Towards coherent and engaging spoken dialog response generation using automatic conversation evaluators. In *Proc. of the 12th International Conference on NLG*, pp. 65–75, 2019.

64. D. Yu and Z. Yu. Midas: A dialog act annotation scheme for open domain humanmachine spoken conversations. In *Proc. of the 16th Conference of the EACL*, pp. 1103–1120, 2021.
65. S. Zhang, E. Dinan, J. Urbanek, A. Szlam, D. Kiela, and J. Weston. Personalizing dialogue agents: I have a dog, do you have pets too? In *Proc. of the 56th Annual Meeting of the ACL*, pp. 2204–2213, 2018.
66. Y. Zhang, S. Sun, M. Galley, Y.-C. Chen, C. Brockett, X. Gao, J. Gao, J. Liu, and W B Dolan. DialoGPT: Large-scale generative pre-training for conversational response generation. In *Proc. of the 58th Annual Meeting of the ACL*, pp. 270–278, 2020.
67. L. Zhou, J. Gao, Di Li, and H-Y. Shum. The design and implementation of Xiaoice, an empathetic social chatbot. *Computational Linguistics*, 46(1):53–93, 2020.