

Echopype: A Python library for interoperable and scalable processing of water column sonar data for biological information

Wu-Jung Lee^{1,*}, Emilio Mayorga¹, Landung Setiawan², Imran Majeed³, Kavin Nguyen³ and Valentina Staneva⁴

¹*Applied Physics Laboratory, University of Washington, Seattle, WA, USA*

²*School of Oceanography, University of Washington, Seattle, WA, USA*

³*Department of Electrical and Computer Engineering, University of Washington, Seattle, WA, USA*

⁴*eScience Institute, University of Washington, Seattle, WA, USA*

*Correspondence:

Wu-Jung Lee; leewj@uw.edu

Keywords: sonar, echosounder, fisheries acoustics, data standardization, distributed computing

ABSTRACT

High-frequency sonar systems deployed on a broad variety of ocean observing platforms are creating a deluge of water column sonar data at unprecedented speed from all corners of the ocean. Efficient and integrative analysis of these data, either across different sonar instruments or with other oceanographic datasets, holds the key to monitoring and understanding the response of marine organisms to the rapidly changing environments. In this paper we present echopype, an open-source Python software library designed to address this need. By standardizing water column sonar data from diverse instrument sources following a community convention and utilizing the widely embraced netCDF data model to encode sonar data as labeled, multi-dimensional arrays, echopype facilitates intuitive, user-friendly exploration and use of sonar data in an instrument-agnostic manner. Through leveraging existing open-source Python libraries optimized for distributed computing, echopype directly enables computational interoperability and scalability in both local and cloud computing environments. Echopype's modularized package structure further provides a conceptually unified implementation framework for expanding its support for additional instrument raw data formats and incorporating new data analysis and visualization functionalities. We envision the continued development of echopype as a catalyst for making information derived from water column sonar data an integrated component of regional and global ocean observation strategies.

1 INTRODUCTION

Active sonar systems are the workhorse for observing physical, biological, and geophysical features associated with the ocean due to their unique ability to collect data continuously at a wide range of resolution in time and space (Medwin and Clay, 1998). For measuring biological scatterers such as fish and zooplankton in the water column, decades of research since the 1970s have culminated in the stable use of scientific echosounder systems as a survey tool for fishery and marine ecological research (Stanton, 2012).

The recent successful integration of active sonar systems on a wide variety of ocean observation platforms (e.g., Chu et al., 2019; Moline et al., 2015; Suberg et al., 2014) and the broader availability of broadband echosounders and multibeam systems (e.g., Colbo et al., 2014; Demer et al., 2017) have created a deluge of ocean sonar data. From ships and moorings to autonomous surface and underwater vehicles, large volumes of data have been accumulating at an unprecedented speed from all corners of the ocean, including previously inaccessible remote regions and the deep sea. As an example, the volume of water column sonar data archived by the National Centers for Environmental Information (NCEI) in the U.S. (Wall et al., 2016) is 153.89 TB at the time of writing (September 2021) and has been growing at an average rate of ~15-20 TB per year since 2016. However, despite our dramatically expanded capability to collect data, much of these new datasets remain under-utilized or under-explored.

A root cause of this problem is the lack of interoperable and scalable data workflows, which are key to handling the rapidly increasing data volume and enabling integrative use of sonar data in multidisciplinary oceanographic research. Across the broad spectrum of sonar systems, the highly heterogeneous binary data files are tedious to “wrangle” together to deliver a coherent observational dataset (Fig. 1). Specifically, data storage formats differ significantly depending on the manufacturer, signals used (e.g., broadband vs narrowband), and primary observation targets (e.g., fish in the water column vs seafloor). The processing and analysis workflow (e.g., Fleischer et al., 2012) typically involves a multi-stage procedure that requires manipulating and transferring data across software systems with incongruent user expectations, such as those designed to be operated manually through a Graphical User Interface (GUI) and those designed to be accessed programmatically via an Application Programming Interface (API). In addition to issues with repeatability of the procedure and reproducibility of the results, the ingrained complexity has impeded efficient exploration of large datasets and increased cost associated with human resources and training. Furthermore, as the majority of commonly used software packages are closed-source or written in proprietary languages (Table 1), agile adjustments and rigorous verification of computational details remain challenging. While a number of open-source software packages were developed recently in the context of acoustics-based fisheries surveys (Ladroit et al., 2020; *open-ocean-sounding/echopy*, n.d.; Perrot et al., 2018; Wall et al., 2018), none are able to interface directly with scalable data storage formats or distributed computed resources that fully leverage the architecture of commercial computing cloud

platforms (see Vance et al., 2019); they also do not fully support community data conventions. These capabilities are crucial for broadening the use of sonar data beyond the immediate fisheries acoustics and ocean acoustics community.

In this paper we present echotype, an open-source Python software library that is designed to address these challenges by enabling interoperable and scalable processing of water column sonar data for biological information. In Sec. 2, we discuss the design philosophy of echotype, detail the advantages of our data standardization approach, and describe the package structure and current functionalities. In Sec. 3, we present two use case examples as cloud-hosted executable Jupyter Notebooks using publicly available data sources. In Sec. 4, we discuss the current adoption of echotype, its expansion flexibility, and the next stage of development goals. We conclude the paper by summarizing the contributions of echotype to the acoustics and the broader oceanography community, both as an open-source software tool and via the open forum it creates through a publicly hosted online code repository.

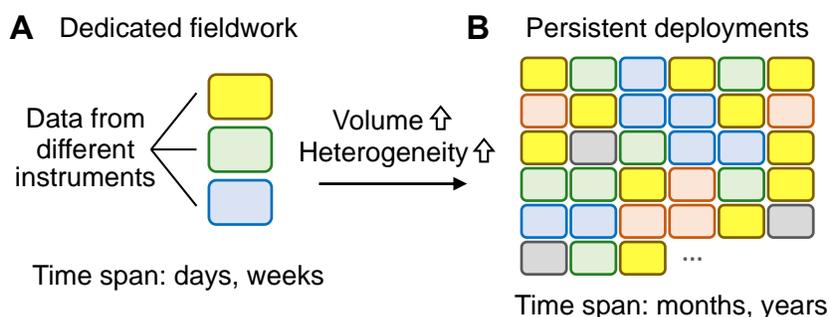


Figure 1. A side-by-side comparison of data characteristics before (A) and after (B) the dramatic enhancement of data collection capability. Blocks of different colors represent data collected by different instruments.

2 THE ECHOTYPE PACKAGE

2.1 Design philosophy

The goal of echotype is threefold: 1) to democratize the access and analysis of water column sonar data through implementation and computation based on a community-defined, standardized data convention; 2) to liberate scientists from the tedium of data wrangling by providing a platform-independent, uniform programmatic interface; and 3) to directly interface with the vastly scalable computing power of the cloud. To achieve this goal, we develop a workflow that focuses first on standardizing data to a widely supported data model and associated file formats. We then use the standardized data to build computation and visualization routines that leverage existing open-source Python libraries maintained by the broad scientific

computing community, especially those optimized for distributed computing. This design allows echotype to adapt flexibly to both local and cloud computing environments (see Sec. 2.2 for detail) and ensures its natural continuing evolution with state-of-the-art computing technologies.

Specifically, in echotype we choose to convert raw data from sonar instruments into labeled, multi-dimensional arrays following the Network Common Data Form (netCDF) data model (Rew and Davis, 1990; Unidata / NetCDF, n.d.). This data model widely supported in the marine and earth sciences communities automatically enables echotype’s capability to perform out-of-core computation on both local high-performance computing resources and the commercial cloud (Abernathey et al., 2018; Hoyer and Hamman, 2017). The self-describing and portable nature of this data model further promotes understanding and use of water column sonar data by the wider oceanography and geoscience community. To our knowledge, echotype is currently the only software package dedicated to water column sonar data processing that supports both reading from and writing to data files following the International Council for the Exploration of the Sea (ICES) SONAR-netCDF4 convention (Macaulay and Peña, 2018) and directly interfaces with data access, storage and computation on the cloud (Table 1).

Table 1. Comparison of echotype with other popular software packages for processing water column sonar data.

	Software package				
	Echotype	EchoView	LSSS	ESP3	Echolab/ PyEcholab
Language	Python	C++	Java	Matlab (proprietary)	Matlab/ Python
License	Open source (Apache 2.0)	Proprietary	Proprietary	Open source (MIT)	Open source (MIT)
Operating system	Cross-platform	Windows	Windows, Linux	Cross-platform	Cross-platform
Primary user interface	Programmatic API	GUI	GUI	GUI	Programmatic API
Supported file types	Simrad .raw AZFP .01A Nortek .ad2cp	Simrad .raw AZFP .01A	Simrad .raw	Simrad .raw AZFP .01A	Simrad .raw
SONAR-netCDF4 support	Read/Write	No	Read	No	No
Cloud-native data storage	Yes	No	No	No	No
Out-of-core computation	Yes	Unclear	Yes (memory mapping)	Yes (memory mapping)	No

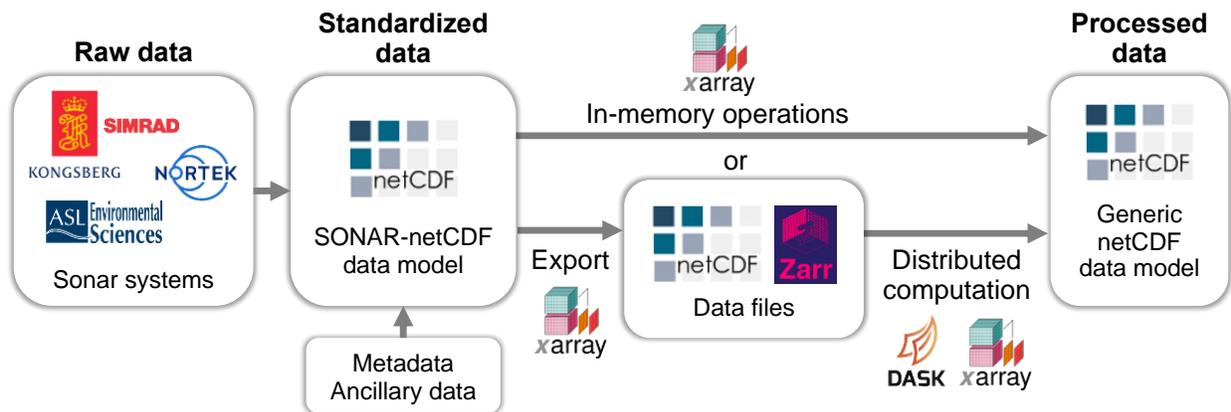


Figure 2. The echopye workflow. Echopye generates standardized data represented in a netCDF data model by converting raw data collected by the sonar systems and incorporating metadata and other ancillary data following the SONAR-netCDF4 convention. The ancillary data include environmental parameters and platform position (e.g., GPS) and movements (e.g., roll, pitch, heave). Once the standardized data are calibrated into physical quantities (e.g., Sv), the data are represented as generic xarray datasets and can be freely manipulated by the users.

2.2 Standardized data for interoperability and scalability

2.2.1 Data standardization

Echopye enables data interoperability across different sonar instruments and between the sonar data and other oceanographic datasets through the data standardization step at the first stage of its workflow (Fig. 2). This involves parsing raw instrument files, organizing and converting the data to conform with the ICES SONAR-netCDF4 v1.0 convention (Macaulay and Peña, 2018). SONAR-netCDF4 is a convention for the storage and exchange of fisheries sonar data and associated metadata, focused initially (v1.0) on raw backscatter and ancillary data from ship-mounted, omni-directional sonars. It leverages the open netCDF data model and associated Climate and Forecast (CF) conventions (*CF Conventions*; Hassell et al., 2017), including their standardized structures for multi-dimensional data, data and dataset attributes, and the organization of related data and metadata into logical groups introduced in netCDF4. The “netCDF-CF” data model, file format, and conventions have been widely embraced by the physical and biogeochemical ocean communities over the last two decades (Snowden et al., 2019; Tanhua et al., 2019). Data encoded in a SONAR-netCDF4 dataset or file represent one sonar instrument on one platform, potentially encompassing an entire survey or deployment. The data are organized into seven groups, with components defined as mandatory, recommended or optional.

For converted data, echopype implements a modification of the SONAR-netCDF4 data model that optimizes data access and filtering (“slicing”) efficiency and usability at the expense of potentially increased file storage (Fig. 3). For each sonar beam, the convention defines data variables such as `backscatter_r` based on a one-dimensional ragged array structure that uses a custom variable-length vector data type (`sample_t`) and `ping_time` as its coordinate dimension; each frequency channel is stored in a separate netCDF4 group (`Beam_group1`, `Beam_group2`, ...). Echopype restructures this multi-group ragged array representation into a single-group, 3-dimensional representation by introducing two new coordinate dimensions in the `Beam_group`, `range_bin` and `frequency`. Values from each frequency channel, stored in separate beam groups in the convention, are mapped along the new `frequency` dimension, while values from each ping time found in a `sample_t` vector in the convention are mapped along the new `range_bin` dimension. The uneven number of samples along range is addressed by padding with null values for frequencies with fewer bins. This data storage variant can be losslessly transformed into the contiguous ragged-array form defined in the convention and is equivalent to the CF convention’s “incomplete multi-dimensional array” feature type (Hassell et al., 2017). Echopype follows the convention specification that represents different sonar beams via a coordinate dimension (`beam`). Currently this dimension is implicit for single-beam and split-beam instruments such as Kongsberg Simrad EK60 and is named `quadrant` for the broadband Kongsberg Simrad EK80; this inconsistency will be addressed in an upcoming release.

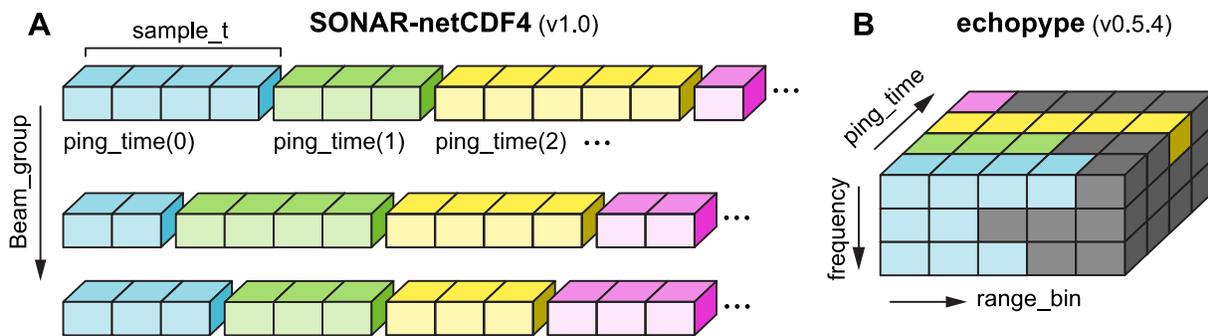


Figure 3. Representation of multi-dimensional sonar backscatter data, for a single beam. (A) The SONAR-netCDF4 convention defines a 1-dimensional contiguous ragged array structure with different frequency channels in different groups, `ping_time` as the dimension (different colors) and along-range values encoded using the custom `sample_t` variable-length vector data type. (B) Echopype uses the incomplete multidimensional array representation with three dimensions, where frequency channels are mapped along the `frequency` dimension, along-range values are mapped along the `range_bin` dimension and padded with null values (gray). See *NetCDF Climate and Forecast (CF) Metadata Conventions. Sec. 9.3* (n.d.) for a discussion on CF array representations.

Conversion of raw files to this SONAR-netCDF4 v1.0 variant has been implemented in echopy for several echosounder and ADCP models (see Sec. 2.3). As the convention is only on its first published version and its initial design was guided by a particular type of system (ship-mounted, omni-directional sonar), the ease of implementation has varied substantially across models. These implementations are currently undergoing a review to improve consistency, systematically verify convention adherence, and incorporate enhancements that may be proposed for future convention updates. For more processed data such as volume backscattering strength (S_v , unit: dB re 1 m⁻¹) resulting from system calibration, echopy currently relies on netCDF data model representations with sparser metadata and ancillary data content compared to SONAR-netCDF4. While a well described implementation of such processed data exists (Kunnath et al., 2018), no corresponding ICES community convention has been published yet.

For both raw and processed data, echopy leverages the netCDF data model as implemented in the widely used xarray package for handling labelled, multi-dimensional array data (Hoyer and Hamman, 2017). More broadly, xarray directly underlies echopy's netCDF data model capabilities. Echopy can save converted data to either netCDF4 or Zarr files. Zarr is a format for the storage of chunked, compressed, multi-dimensional arrays that is compatible with the netCDF data model and is optimized for cloud object storage compared to the netCDF format (Abernathey et al., 2018; *Overview of Zarr Support in NetCDF-C*, n.d.). Echopy returns processed data such as S_v as xarray datasets, at which point users may export to netCDF4 or Zarr, or manipulate data directly through built-in xarray methods (Fig. 2).

2.2.2 Interoperability and scalability

Echopy's approach to standardizing raw and processed active acoustic data using the widely used, self-describing netCDF data model facilitates intuitive, user-friendly exploration and use of data in an instrument-agnostic manner. Building on this standardized data model, echopy also directly enables computational interoperability and scalability through leveraging three tightly-coupled open-source Python libraries for distributed computing: Zarr, a library that implements the cloud-optimized Zarr storage format; xarray, a library for manipulating multi-dimensional labeled data; and Dask, a library for scalable computing. These libraries are designed such that code developed for local machines can be directly incorporated into a scalable cyberinfrastructure such as the commercial cloud without the need to reorganize datasets or rewrite algorithms. Specifically, chunked and compressed Zarr datasets can be read and computed directly via xarray, which transparently leverages Dask for distributed computation and task scheduling. The label-aware capability of xarray significantly reduces the cognitive load for implementing algorithms that involve multi-dimensional data with physically meaningful coordinates, such as frequency, time, range and geographical location, all typical for sonar datasets. All data interfacing and processing operations in echopy are implemented in this approach to take advantage of the computational scalability and the data labels that allow

researchers to easily understand any given function. This integration with core scientific Python packages is illustrated in two use cases implemented as Jupyter notebooks in Sec. 3.

2.3 Package structure and functionalities

The `echopype` package is platform-independent and can be easily installed via the Python Package Index (PyPI, n.d.) or the Conda package manager and the conda-forge community channel (*Conda-Forge*, n.d.). The package is hosted and being actively developed in a GitHub repository (<https://github.com/OSOceanAcoustics/echopype>) under the open-source Apache 2.0 license, with comprehensive documentation (<https://echopype.readthedocs.io/>). Current and planned functionalities are provided in a modularized structure outlined below.

2.3.1 Data conversion

The `convert` subpackage provides the functionality to parse and convert highly diverse instrument-specific binary data files into a standardized representation, the `EchoData` object, consisting of both data and metadata following a variant of the SONAR-netCDF4 convention (see Sec. 2.2). This `EchoData` object can be readily serialized into netCDF4 or Zarr file formats (Fig. 2). This subpackage also provides functionalities to incorporate into the converted files ancillary information such as platform metadata, geographical locations, and seawater properties, if they do not already exist in the raw data files or require updates. Our approach to first standardize data into these formats before any further processing has implications in both data interoperability and computation scalability (see Sec. 2.2). At present, `echopype` supports converting data files collected by the following sonar systems: Kongsberg Simrad EK60 and EK80, Kongsberg EA640, ASL Environmental Sciences Acoustic Zooplankton and Fish Profiler (AZFP), and the Nortek Signature series ADCP. Raw data files can be read from the local or attached file system, or remotely from a web (HTTP) server or cloud object storage such as Amazon Web Services (AWS) S3; the converted data can be written to file systems or cloud object storage. These files can be read into `EchoData` objects, which in turn serve as the starting point for the processing and analysis steps described below.

2.3.2 Calibration

Acoustic data recorded by sonar instruments typically requires additional unit conversion and calibration to arrive at physically meaningful quantities that can be used directly in oceanographic and geophysical research (Demer et al., 2015; Simmonds and MacLennan, 2007). This procedure is non-trivial and highly instrument-specific, constituting a barrier for broad access and understanding for water column sonar data. The `calibrate` subpackage provides the functionality to process converted raw data records into physically meaningful quantities, such as Sv. After calibration, the previously heterogeneous data records from diverse instruments could be intuitively understood and used by a wider range of users beyond experts in acoustics.

2.3.3 Quality control

Anomalies in the data and non-uniformity in the configuration of instruments, such as incorrectly encoded sonar ping times and variable data records along range, can often hamper simple arithmetic operations when a large number of files are to be combined in the computation. The `qc` subpackage provides functionalities to detect and mitigate these problems when possible to facilitate computation over large volumes of data. At present the subpackage contains functions to detect and offset small timestamp reversals, with several more quality control functions planned.

2.3.4 Preprocessing

The `preprocess` subpackage provides commonly used routines to further enhance the coherence of calibrated sonar data in the temporal and/or spatial dimensions and to mitigate noise contamination of the data. For example, we provide a function for computing bin-averaged Sv values (the mean volume backscattering strength, or MVBS, with the mean operation carried out in the linear domain) across both sonar ping time and range, which are commonly used to reduce data variability (MacLennan et al., 2002). This subpackage is currently under active development.

2.3.5 Metrics

The `metrics` subpackage contains functions to derive summary information based on calibrated and/or preprocessed data. It currently contains functions to compute summary statistics derived from ping-by-ping sonar data (Urmy et al., 2012). Capabilities under active development include the popular frequency-differencing method, which uses the difference in the strength of sonar echoes to discriminate between different types of scatterers, such as between fish and zooplankton (e.g., De Robertis et al., 2010; Jech and Michaels, 2006).

2.3.6 Visualization

The planned `visualize` subpackage will contain functionalities for users to have a “quick look” of the data, and is not intended to support elaborate interactive visualization compared to GUI-based software packages. Current development includes functions that are thin wrappers of plotting functions from the Matplotlib and xarray libraries, and provides echogram-specific colormaps that are familiar to the acoustics community (e.g., the “EK500” colormap; Blackwell et al., 2019). Importantly, the plotting functions will take advantage of the labeled nature of the netCDF data model and natively support displaying the physical units of data variables and coordinates (e.g., dates), which are crucial for data understanding and usage.

3 USE CASE EXAMPLES

In this paper we provide two executable examples (as Jupyter notebooks hosted on <https://github.com/OSOceanAcoustics/echopye-examples>; [doi:10.5281/zenodo.5618178](https://doi.org/10.5281/zenodo.5618178)) that demonstrate usage of echopye in processing water column sonar data collected from a ship and by a mooring (Fig. 4A). We recommend that echopye be imported as `ep` as shown in these examples for consistency.

In the example involving ship data (Fig. 4B; `ms_PacificHake_EK60_cruisetracks.ipynb`), we demonstrate the power of label-aware data manipulation in exploiting the multi-faceted sonar data based on the standardized netCDF data model. We show the workflow to access, select, and plot sonar data within a particular geographic region along the survey transect during the 2017 NOAA Northwest Fisheries Science Center Integrated Hake survey. The data conversion operations directly interact with raw data stored on the cloud and export data locally to the cloud-optimized Zarr format. We note that the process of matching the ship's geographic position with sonar data is straightforward and transferable to other scenarios requiring slicing, as long as the data follows the same standardized format (i.e., containing the specific data variables in the `Beam` and `Platform` groups as shown here).

In the example involving mooring data (Fig. 4C; `ms_OOI_EK60_mooringtimeseries.ipynb`), we demonstrate the cross-instrument interoperability enabled by echopye. We align sonar data collected by an upward-looking echosounder installed on a moored mid-water platform with shortwave irradiance measured by a surface mooring to observe the impact of a solar eclipse on the vertical migration behavior of zooplankton. Both instruments are maintained by the US Ocean Observatories Initiative (OOI). In a workflow similar to the one involving ship data, we generate standardized sonar data by interacting directly with the OOI Raw Data Archive (an HTTP server) and match the heterogeneous datasets again based on the data labels, along the time dimension in this case.

Jointly, these examples show the ease of accessing, processing, exploring, and visualizing water column sonar data by combining echopye with other commonly used open-source libraries in a single computational environment (the Jupyter Notebook). Echopye not only facilitates direct access of data hosted on a flexible range of sources but also alleviates the tedium of data wrangling across different software systems and datasets.

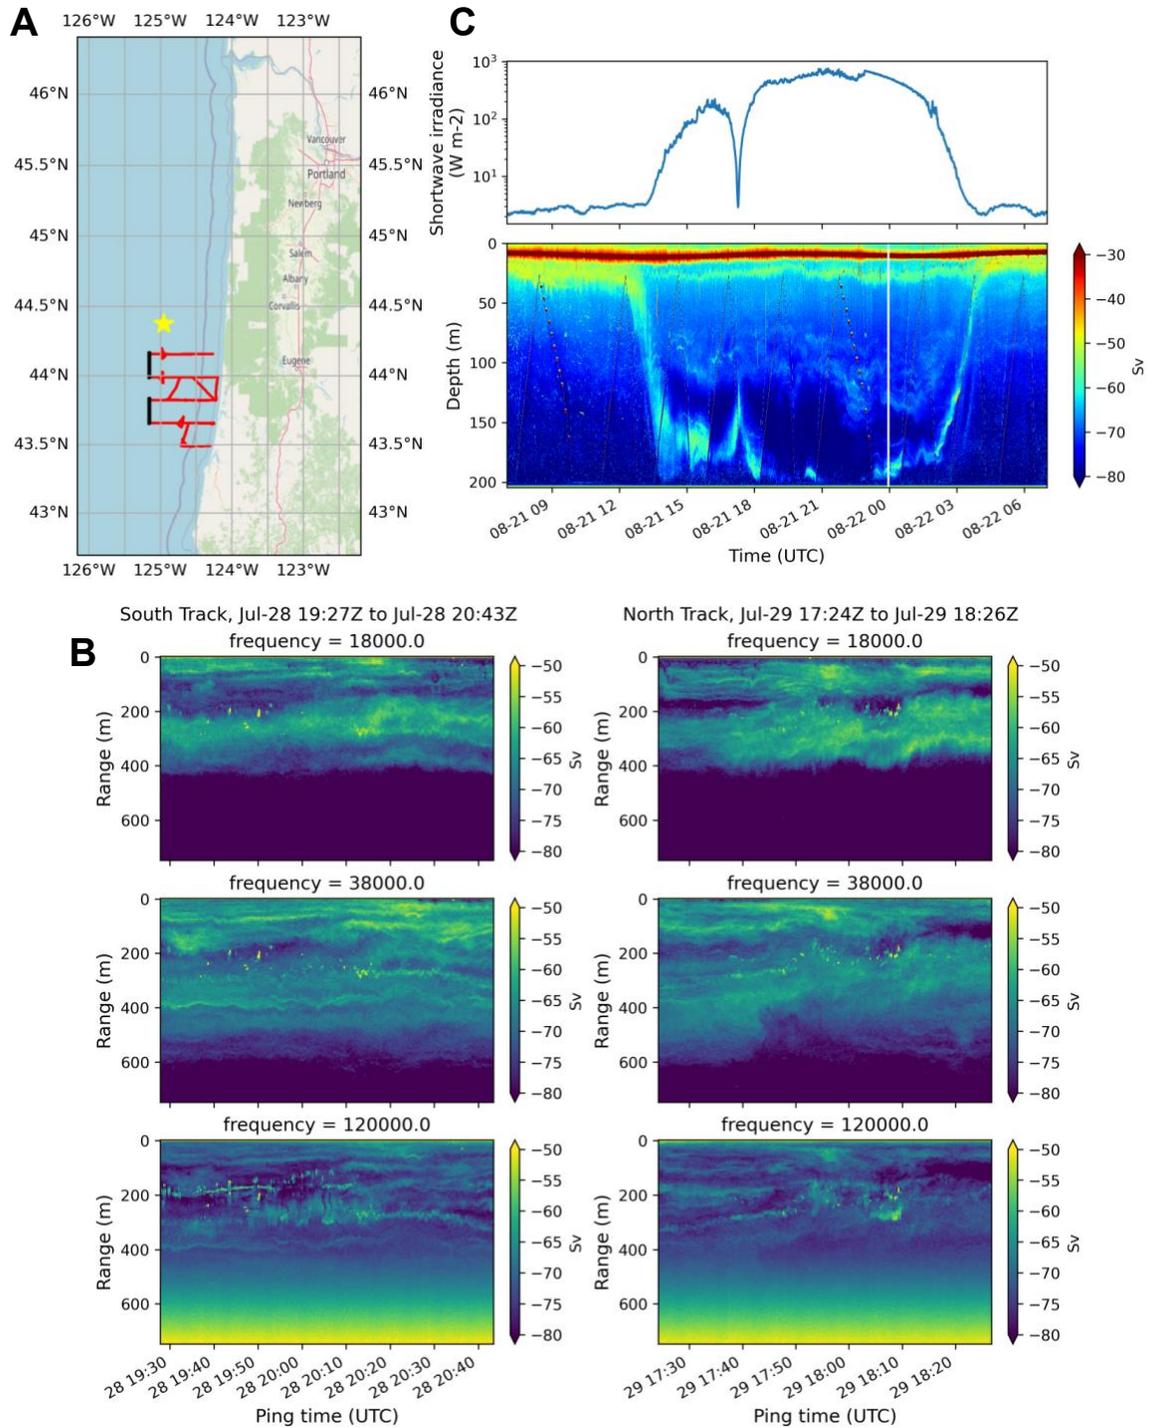


Figure 4. Outputs in the example Jupyter notebooks. (A) Location of the processed ship transect (red lines) and the mooring (yellow star) off the Oregon coast. (B) Multi-frequency echograms along the selected portions of the ship transect (black lines in the location map). (C) Shortwave irradiance showing the timing of the eclipse (top panel) and the echogram at 200 kHz showing the zooplankton response to the dimmed sunlight (bottom panel).

4 DISCUSSION

In this paper we present the echotype package designed for enabling interoperable and scalable processing of water column sonar data for biological information. By taking a unique approach to first standardize data following a community convention before downstream analyses and visualization, echotype provides not only a uniform interface to read and process measurements from diverse sonar instruments but also a clearly defined path toward broadening the understanding and use of water column sonar data.

Echotype is being adopted rapidly by the fisheries/ocean acoustics and the wider oceanography communities. Since the first release in early 2019, we have received numerous inquiries including bug reports and feature requests both in our GitHub repository and through private emails. The majority of bug reports were due to the highly flexible and evolving data format of the Kongsberg Simrad EK80 echosounder, whereas the majority of feature requests are for expanding support for data collected by other sonar instruments. In addition, the US OOI cyberinfrastructure services recently incorporated echotype into their processing pipeline for serving bio-acoustic sonar data products (*Oceanobservatories/Ooicgsn-Data-Tools*, n.d.). These data products were previously unavailable due to the complexities associated with accommodating specialized raw data formats and calibration needs. The NCEI is experimenting with adopting the Zarr format for cloud-hosted, interactive visualization of the archived water column sonar data (Wall et al., 2020), and has adapted code from echotype for extracting metadata for archival needs. These application examples show that echotype's philosophy to handle diverse water column sonar data through format standardization and an instrument-agnostic programmatic interface meets the critical needs of the community.

Echotype is well positioned to expand its functionalities under the goals of interoperability and scalability. The package structure is modularized and provides a conceptually unified implementation framework for 1) adding support for additional raw data formats from other sonar instruments and 2) incorporating new data analysis methods and visualization downstream of the standardized data. Specifically, while the raw data formats currently supported by echotype were driven by our own research needs, the crucial "binding" step of data standardization can be adapted flexibly to data from other sonar instruments. The standardized data further allows downstream analysis functions to be developed in a transparent manner and invoked by users through an instrument-agnostic programmatic interface. In the next stage of development, our goals are to expand echotype's data analysis subpackages to take full advantage of its native interface with cloud or local computing clusters for massive parallelized computation, and to enhance adherence and support for community standards and better processing provenance. One such standard being considered for implementation is the ICES AcMETA metadata convention (ICES, 2016).

The free and open-source nature of echopype contributes directly to democratizing the access to and the analysis of water column sonar data. The package's publicly hosted code repository provides an open forum centered around the standardization and processing of water column sonar data for a broad audience. It also creates an opportunity for the fisheries acoustics and ocean acoustics communities to incorporate best practices in data stewardship and an open, community-driven approach to technology development and scientific investigation. By providing a uniform and cross-platform programmatic interface that liberates scientists from the tedium of data reading and wrangling, we envision the continued development of echopype as a catalyst for making information derived from water column sonar data an integrated component of regional and global ocean observation strategies.

AUTHOR CONTRIBUTIONS

WJL conceptualized the manuscript. WJL and EM contributed significantly to the writing of this manuscript. VS provided important suggestions to the manuscript. WJL, EM and LS contributed significantly to the example notebooks. All authors contributed significantly to the design, code, testing and documentation of the echopype package. All authors revised and approved the manuscript.

ACKNOWLEDGEMENTS

We thank all previous and current contributors to echopype, including those whose contributions do not include code. WJL, VS, KN, and IM were funded in part by the NSF Award No. 1849930. WJL, EM, and LS were funded in part by NASA Award No. 17-ACCESS17-0003. WJL, EM, VS, IM and LS were funded in part by NOAA Award No. NA21OAR0110201. WJL and IM were funded in part by NOAA Award NA20OAR0110429. VS and LS were funded in part by the Gordon and Betty Moore foundation and the Alfred P. Sloan foundation Data Science Environments (MSDSE).

REFERENCES

- Abernathey, R. P., Hamman, J., and Miles, A. (2018). Beyond netCDF: Cloud native climate data with Zarr and XArray. *AGU Fall Meeting Abstracts*, 33.
- Blackwell, R. E., Harvey, R., Queste, B. Y., and Fielding, S. (2019). Colour maps for fisheries acoustic echograms. *ICES Journal of Marine Science*. doi:10.1093/icesjms/fsz242
- CF Conventions*. (n.d.). Retrieved July 13, 2021, from: <http://cfconventions.org/>
- Chu, D., Parker-Stetter, S., Hufnagle, L. C., Thomas, R., Getsiv-Clemons, J., Gauthier, S., and Stanley, C. (2019, October 1). 2018 Unmanned Surface Vehicle (Saildrone) acoustic survey off the west coasts of the United States and Canada. *OCEANS 2019 MTS/IEEE*

- Seattle. doi:10.23919/OCEANS40490.2019.8962778
- Colbo, K., Ross, T., Brown, C., and Weber, T. (2014). A review of oceanographic applications of water column data from multibeam echosounders. *Estuarine, Coastal and Shelf Science*, 145, 41–56. doi:10.1016/j.ecss.2014.04.002
- Conda-forge | community driven packaging for conda. (n.d.). Retrieved March 23, 2021, from <https://conda-forge.org/>
- Dask: Scalable analytics in Python. (n.d.). Retrieved October 29, 2021, from <https://dask.org/>
- De Robertis, A., McKelvey, D. R., and Ressler, P. H. (2010). Development and application of an empirical multifrequency method for backscatter classification. *Canadian Journal of Fisheries and Aquatic Sciences*, 67(9), 1459–1474. doi:10.1139/F10-075
- Demer, D. A., Andersen, L. N., Bassett, C., Berger, L., Chu, D., Condiotty, J., Cutter, G. R., Hutton, B., Korneliusen, R., Le Bouffant, N., Macaulay, G., Michaels, W. L., Murfin, D., Pobitzer, A., Renfree, J. S., Sessions, T. S., Stierhoff, K. L., and Thompson, C. H. (2017). 2016 USA-Norway EK80 Workshop Report: Evaluation of a wideband echosounder for fisheries and marine ecosystem science. doi:10.17895/ICES.PUB.2318
- Demer, D. A., Berger, L., Bernasconi, M., Bethke, E., Boswell, K. M., Chu, D., Domokos, R., Dunford, A., Fassler, S., Gauthier, S., Hufnagle, L., Jech, J., Bouffant, N., Lebourges-Dhaussy, A., Lurton, X., Macaulay, G., Perrot, Y., Ryan, T., Parker-Stetter, S. L., ... Williamson, N. (2015). *Calibration of acoustic instruments* (p. 133 pp). ICES Cooperative Research Report, No. 326.
- Fleischer, G. W., Ressler, P. H., Thomas, R. E., de Blois, S. K., Hufnagle, L. H., and Chu, D. (2012). *Pacific hake integrated acoustic and trawl survey methods* (p. 46). NOAA Fisheries, Northwest Fisheries Science Center (NWFSC) Fishery Resource Analysis and Monitoring Division Acoustics Team.
- Hassell, D., Gregory, J., Blower, J., Lawrence, B. N., and Taylor, K. E. (2017). A data model of the Climate and Forecast metadata conventions (CF-1.6) with a software implementation (cf-python v2.1). *Geoscientific Model Development*, 10(12), 4619–4646. doi:10.5194/gmd-10-4619-2017
- Hoyer, S. and Hamman, J. (2017). Xarray: N-D labeled arrays and datasets in Python. *Journal of Open Research Software*, 5(1), 10. doi:10.5334/jors.148
- ICES. (2016). *SISP 4—A metadata convention for processed acoustic data from active acoustic systems*. doi:10.17895/ICES.PUB.7434
- Jech, J. M. and Michaels, W. L. (2006). A multifrequency method to classify and evaluate fisheries acoustics data. *Canadian Journal of Fisheries and Aquatic Sciences*, 63(10), 2225–2235. doi:10.1139/F06-126
- Kunnath, H., Kloser, R., and Ryan, T. (2018). *IMOS SOOP-BA NetCDF Conventions. Version 2.2*. doi:10.25919/5b4a4836b349f
- Ladroit, Y., Escobar-Flores, P. C., Schimel, A. C. G., and O’Driscoll, R. L. (2020). ESP3: An open-source software for the quantitative processing of hydro-acoustic data. *SoftwareX*, 12, 100581. doi:10.1016/j.softx.2020.100581

- Macaulay, G. and Peña, H. (2018). *The SONAR-netCDF4 convention for sonar data, Version 1.0*. ICES Cooperative Research Report No. 341. doi:10.17895/ices.pub.4392
- MacLennan, D. N., Fernandes, P. G., and Dalen, J. (2002). A consistent approach to definitions and symbols in fisheries acoustics. *ICES Journal of Marine Science*, 59(2), 365–369. doi:10.1006/jmsc.2001.1158
- Medwin, H. and Clay, C. S. (1998). *Fundamentals of acoustical oceanography*. Academic Press.
- Moline, M. A., Benoit-Bird, K., O’Gorman, D., and Robbins, I. C. (2015). Integration of scientific echo sounders with an adaptable autonomous vehicle to extend our understanding of animals from the surface to the bathypelagic. *Journal of Atmospheric and Oceanic Technology*, 32(11), 2173–2186. doi:10.1175/JTECH-D-15-0035.1
- NetCDF Climate and Forecast (CF) Metadata Conventions. Sec. 9.3. Representations of collections of features in data variables.* (n.d.). Retrieved October 13, 2021, from <http://cfconventions.org/Data/cf-conventions/cf-conventions-1.8/cf-conventions.html#representations-features>
- Oceanobservatories/ooicgsn-data-tools.* (n.d.). Retrieved March 23, 2021, from <https://github.com/oceanobservatories/ooicgsn-data-tools>
- open-ocean-sounding/echopy.* (n.d.). Retrieved March 23, 2021, from <https://github.com/open-ocean-sounding/echopy>
- Overview of Zarr Support in netCDF-C.* (n.d.). News @ Unidata. Retrieved March 23, 2021, from <https://www.unidata.ucar.edu/blogs/developer/en//entry/overview-of-zarr-support-in>
- Perrot, Y., Brehmer, P., Habasque, J., Roudaut, G., Behagle, N., Sarré, A., and Lebourges-Dhaussy, A. (2018). Matecho: An Open-Source Tool for Processing Fisheries Acoustics Data. *Acoustics Australia*, 46(2), 241–248. doi:10.1007/s40857-018-0135-x
- PyPI - The Python Package Index.* (n.d.). Retrieved November 13, 2020, from <https://pypi.org/>
- Rew, R. and Davis, G. (1990). NetCDF: An interface for scientific data access. *IEEE Computer Graphics and Applications*, 10(4), 76–82. doi:10.1109/38.56302
- Simmonds, J. and MacLennan, D. (2007). Fisheries acoustics: Theory and practice: Second edition. In *Fisheries Acoustics: Theory and Practice: Second Edition*. Blackwell Science. doi:10.1002/9780470995303
- Snowden, D., Tsontos, V. M., Handegard, N. O., Zarate, M., O’ Brien, K., Casey, K. S., Smith, N., Sagen, H., Bailey, K., Lewis, M. N., and Arms, S. C. (2019). Data interoperability between elements of the Global Ocean Observing System. *Frontiers in Marine Science*, 6. doi:10.3389/fmars.2019.00442
- Stanton, T. K. (2012). 30 years of advances in active bioacoustics: A personal perspective. *Methods in Oceanography*, 1–2, 49–77. doi:10.1016/j.mio.2012.07.002
- Suberg, L., Wynn, R. B., Kooij, J. V. D., Fernand, L., Fielding, S., Guihen, D., Gillespie, D., Johnson, M., Gkikopoulou, K. C., Allan, I. J., Vrana, B., Miller, P. I., Smeed, D., and Jones, A. R. (2014). Assessing the potential of autonomous submarine gliders for ecosystem monitoring across multiple trophic levels (plankton to cetaceans) and pollutants in shallow shelf seas. *Methods in Oceanography*, 10, 70–89.

doi:10.1016/j.mio.2014.06.002

Tanhua, T., Pouliquen, S., Hausman, J., O'Brien, K., Bricher, P., de Bruin, T., Buck, J. J. H., Burger, E. F., Carval, T., Casey, K. S., Diggs, S., Giorgetti, A., Glaves, H., Harscoat, V., Kinkade, D., Muelbert, J. H., Novellino, A., Pfeil, B., Pulsifer, P. L., ... Zhao, Z. (2019). Ocean FAIR Data Services. *Frontiers in Marine Science*, 6.

doi:10.3389/fmars.2019.00440

Unidata / NetCDF. (n.d.). Retrieved July 13, 2021, from

<https://www.unidata.ucar.edu/software/netcdf/>

Urmy, S. S., Horne, J. K., and Barbee, D. H. (2012). Measuring the vertical distributional variability of pelagic fauna in Monterey Bay. *ICES Journal of Marine Science*, 69(2), 184–196. doi:10.1093/icesjms/fsr205

Vance, T. C., Wengren, M., Burger, E., Hernandez, D., Kearns, T., Medina-Lopez, E., Merati, N., O'Brien, K., O'Neil, J., Potemra, J. T., Signell, R. P., and Wilcox, K. (2019). From the oceans to the cloud: Opportunities and challenges for data, models, computation and workflows. *Frontiers in Marine Science*, 6. doi:10.3389/fmars.2019.00211

Wall, C. C., Jech, J. M., and McLean, S. J. (2016). Increasing the accessibility of acoustic data through global access and imagery. *ICES Journal of Marine Science: Journal Du Conseil*, 73(8), 2093–2103. doi:10.1093/icesjms/fsw014

Wall, C. C., Towler, R., Anderson, C., Cutter, R., and Jech, J. M. (2018). PyEcholab: An open-source, python-based toolkit to analyze water-column echosounder data. The 176th Meeting of the Acoustical Society of America. doi:10.1121/1.5067860

Wall, C. C., Slater, C., Klucik, R., Anderson, C., and Martinez, V. (2020). *EchoFish—Visualizing water column sonar data*. Ocean Sciences Meeting 2020.

Zarr—Zarr 2.10.2 documentation. (n.d.). Retrieved October 29, 2021, from

<https://zarr.readthedocs.io/en/stable/>