
The Klarna Product Page Dataset: A Realistic Benchmark for Web Representation Learning

Alexandra Hotti

KTH Royal Institute of Technology
Web Automation Research, Klarna
Stockholm, Sweden
hotti@kth.se

Riccardo S. Risuleo

Web Automation Research, Klarna
Stockholm, Sweden
riccardo.risuleo@klarna.com

Stefan Magureanu

Web Automation Research, Klarna
Stockholm, Sweden
stefan.magureanu@klarna.com

Aref Moradi

Web Automation Research, Klarna
Stockholm, Sweden
aref.moradi@klarna.com

Jens Lagergren

SciLifeLab, School of EECS
KTH Royal Institute of Technology
Stockholm, Sweden
jens.lagergren@scilifelab.se

Abstract

This paper tackles the under-explored problem of DOM tree element representation learning. We advance the field of machine learning-based web automation and hope to spur further research regarding this crucial area with two contributions. First, we adapt several popular Graph-based Neural Network models and apply them to embed elements in website DOM trees. Second, we present a large-scale and realistic dataset of webpages. By providing this open-access resource, we lower the entry barrier to this area of research. The dataset contains 51,701 manually labeled product pages from 8,175 real e-commerce websites. The pages can be rendered entirely in a web browser and are suitable for computer vision applications. This makes it substantially richer and more diverse than other datasets proposed for element representation learning, classification and prediction on the web. Finally, using our proposed dataset, we show that the embeddings produced by a Graph Convolutional Neural Network outperform representations produced by other state-of-the-art methods in a web element prediction task.

1 Introduction

Machine perception has seen impressive progress in the past few decades, through leaps in computer vision (CV) and natural language processing (NLP). Despite the importance of the Web expanding at a staggering pace, very little recent research has tackled machine perception of the World Wide Web [21, 31, 32], in comparison to CV for the physical world and NLP for human language.

One application of increasing commercial interest is web automation. In the ever-growing e-commerce landscape, enforcing uniform standards has proven to be an impractical approach to enabling automation. Many small and tedious tasks, like navigating various workflows (e.g., completing purchases and closing pop-ups) and searching for information (how much a product costs, which forms need

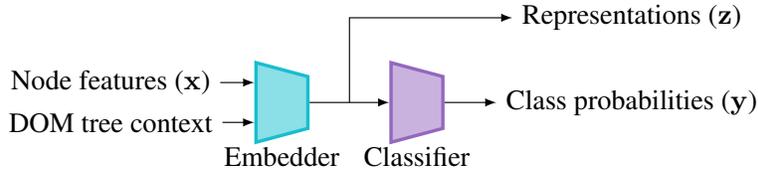


Figure 1: Block diagram of the model considered in this paper. The *embedder* component is a graph neural network model that takes DOM elements along with their context and computes a latent embedding z . The embedding is fed to a single-layer fully connected *classifier*. Our aim is to compare the quality of different state of the art embedders by measuring their impact on the classifier.

filling, etc.), still require substantial user input and attention. Deep learning, however, could solve these tasks while still operating over existing web interfaces.

In order to develop agents capable of assisting users in navigating and interacting efficiently with the Internet, similar to agents controlling self-driving cars in the physical world, we need algorithms that are able to construct representations of the virtual world that the Internet constitutes, make predictions based on those, and, ultimately, take action. Our work aims to be a step in the direction of achieving BART-like [18] pre-trained embedding models for webpages (a vision also mentioned in [20]), and to ultimately facilitate *self-driving Internet browsers*. Access to powerful representations of webpages is also bound to open the door to information retrieval applications, such as extracting product information from arbitrary websites and detecting the state of or types of actions available to an assistant feature (e.g., when completing a purchase for a user).

Given that e-commerce alone has become a multi-trillion dollar industry consisting of tens of millions of websites worldwide, the progress of machine perception in this domain so far appears modest. Relatively few papers published in recent years have addressed webpage representation learning, content extraction, or element classification [20, 42, 25, 1, 38, 7, 26]. An additional few have investigated the related topic of reinforcement learning over the web [10, 23, 15, 27]. Research in this area currently faces two major hurdles. First, from the algorithmic perspective, the main difficulty lies in extracting meaningful patterns from the high dimensional and vastly varying webpage designs. Second, from a more practical perspective, there are very few datasets [12, 33] available to researchers interested in this area, and these datasets do not exhibit the richness found in datasets collected from the physical world, e.g., for computer vision and natural language processing applications.

We hope to generate a larger interest in this exciting and under-studied problem space, partly by lowering the entry barriers to this research field. In particular:

- We adapt and apply six algorithms from the two most popular families of graph neural networks (GNNs) applicable to a web element prediction task: recurrent GNNs (Tree Long Short-Term Memory network based) and convolutional GNNs.
- We introduce the *Product Page Dataset*¹, which consists of 51,701 manually labeled product pages suitable for representation learning and element prediction, collected from 8,175 different e-commerce websites. Further dataset details can be found in Section 5. We make this dataset available to the research community to develop and test novel methods.
- We compare the methods to four state-of-the-art baselines for learning representations of DOM trees on the task of webpage element prediction on our rich and realistic dataset. Our experiments show that a 2-layer graph convolution network (GCN) model referred to as GCN-Mean, inspired by GraphSage [11] and PinSage [37], outperforms the average accuracy of the second-best model by 9.8 percentage points.
- We measure the effectiveness of incorporating the text present on the page in addition to the computer-readable information structured into a DOM tree. We show that models using text attain, on average, higher predictive accuracy; however, we also show that there are tasks for which accuracy decreases when text is added as a feature.

¹Available at <https://github.com/klarna/product-page-dataset> under the CC BY-NC-SA license.

2 Problem Statement

In this work, we compare models for DOM tree element representation learning. We aim to bring us one step closer to producing universal Web representations. The algorithms are trained on a diverse set of labels in the Product Page Dataset, described in Section 5. In the evaluation phase, the trained models are used to predict these labels on pages from unseen merchants. We believe that the methods that show promise in our setting will generalize and be useful in other tasks, such as when training on unseen e-commerce websites, other types of web pages, or even as action-state estimators for RL agents operating over the Internet.

Two aspects of our experiment design help gauge the expressiveness of the trained representations. First, we evaluate whether the algorithms are expressive enough to model varied types of elements, by predicting nodes that pose different types of challenges. More concretely, information relevant for the representation of one node of a DOM tree may be located at other nodes. Accounting for this *contextual information*, contributes in different amounts to the performance in each prediction task. Some elements are described mostly by local information, i.e., information present at the node, such as the *price* elements, and the task is then similar in spirit to web data extraction. For other elements, the semantic meaning is at least partly defined by contextual information spread across the DOM tree. Two examples are the *cart* and *buy* buttons, whose meaning depends on the content of their children. An even more telling example is the highly abstract *subject node*, defined here as the lowest common ancestor of all other labeled nodes on the page. Second, we evaluate the methods’ ability to generalize across web page templates by applying the representation learning GNNs to the diverse Product Page Dataset.

Note that we do not train the models directly on the prediction task because the best way to formulate the prediction loss function is non-trivial and a topic of ongoing research. Instead, as a proxy to the prediction task, we train them on a classification task where the models are asked to classify a small number of labeled and unlabeled nodes in each iteration.

Scope: In this paper, we do not explore computer-vision based approaches and, therefore, do not consider web page screenshots. Representation learning approaches that combine information from both screenshots and DOM trees are likely to achieve the highest performance. However, to the best of our knowledge, no previous work has made an extensive comparison between page screenshots and DOM trees in the context of representation learning. Due to recent promising research in DOM-based representation learning [20, 41, 16], our current goal is to investigate the DOM tree’s potential and to identify the most promising DOM-tree embedders. Nevertheless, our work is a stepping stone towards comparing, and ultimately integrating, methods that use information from the DOM tree and those that use the rendered page. Similarly, while prior work exists on specialized methods for extracting product attributes from product pages [29, 22], here, we focus on the general task of web representation learning and use element prediction as a means of evaluation and do not aim to compete concerning the prediction of specific element types, e.g., the price. In practice, generic deep learning methods such as ours would likely benefit substantially from incorporating the output of specialized methods as features.

3 Related Work

In this section, we present the prior art relevant to embedding DOM tree nodes. We will both focus on architectures designed specifically for this task and on GNNs, which can be adapted to tackle DOM trees. In addition, we describe existing datasets relevant to our problem and their limitations.

3.1 Graph Neural Networks

3.1.1 Graph Convolutional Networks

Over the recent years, there has been an upsurge in papers about node classification on learning low-dimensional representations with GCNs. GCNs have shown notable performance on social network graphs [39, 6, 5], citation networks [43, 9], and biochemical graphs [6, 39, 24]. These promising results from such a wide range of applications hint that GCNs could potentially be applicable to the task of DOM-tree node embedding. The core idea behind GCNs is to aggregate features within local node neighborhoods in an iterative fashion. This lets it leverage both graph

structure and feature information. To the best of our knowledge, the first embedding method for graphs based on representation learning is DeepWalk [30]. DeepWalk constructs graph embeddings using the SkipGram model [28] on nodes retrieved from truncated random walks. Some recent papers have focused on making the GCN efficient for sizeable graphs with large node neighborhoods. *FastGCN* [4] samples a predetermined number of nodes for each convolution layer. GraphSage [11] uniformly samples a fixed number of neighbours around each node. PinSage [37] uses random walks about local nodes to compute importance scores for a neighborhood sampling routine.

3.1.2 Tree Long Short-Term Memory networks

Another type of GNN is the *Tree Long Short-Term Memory network* (Tree-LSTM), which is based on the LSTM [13] architecture that usually is applied to sequential data. Here we apply the sequential LSTM in a top-down fashion on the path between the root and the target node. A similar top-down tree method was proposed by [40]. In this paper, we also explore a method called *Child-Sum Tree-LSTM* [34]. In the Child-Sum Tree-LSTM, a node is embedded by aggregating information from all of its children. The Tree-LSTMs is a third variation of the LSTM methodology that we investigate; it is a bidirectional [35, 7] approach that combines the ideas underlying the top-down and the bottom-up approaches.

3.1.3 DOM tree specific embedders

There are also representation-learning methods that were designed specifically for DOM trees. For instance, the *RiSER* [16] architecture was proposed in the context of classifying entire email DOM trees into *Hotel* or *Bill* related emails. We did not include RISER in the experiments in our paper since it is not naturally applicable to our task. RISER was designed for embedding entire DOM trees, while we focused on embedding individual DOM elements.

Another DOM tree-based architecture, *FreeDOM*, was proposed in [20]. It has two stages of training that incorporate local and global information, respectively. The first stage of FreeDOM can be viewed as a local representation learning method that for each node in the DOM tree uses HTML markup information and the text of its parent node as local features. The learned local representations are used to perform an initial classification of the nodes. In the second stage, the method exploits distances and similarities between first stage representations of node pairs to improve the classification.

Finally, the *DOM-Q-Net* method [15] builds representations of DOM elements that consist of both local and global information. These representations are then used as a state and action estimator in a reinforcement learning setting. In addition to considering discrete features, every element is related to a goal, described by a natural language sentence, by measuring the cosine similarity between the text within an element and the goal description. Our setting is quite different to the reinforcement learning task for which DOM-Q-Net was designed. First, there is no concept of a goal in our problem. Also, DOM-Q-Net is used on various types of pages for different types of tasks and therefore, including global information in the representations is useful. In our experiments, we only use product pages, and therefore it is unlikely that a global component would be helpful. Instead of directly implementing this approach, we use a method inspired by DOM-Q-Net, where we have incorporated its applicable components.

3.2 Existing Datasets

In the literature, there is a surprising scarcity of datasets suitable for web element prediction and representation learning. The World-of-bits [33] (WoB) environment, particularly its minimalistic variant *Mini-WoB*, is useful for task solving over the web using reinforcement learning. Mini-WoB aims to offer controlled interfaces as a playground for agents and thus does not provide the same level of complexity encountered on the Internet, with its adverts, recommendations, menus, normal styling elements or page sizes. These interfaces measure only 160×160 pixels, and on average, contain 112 lines of HTML/CSS/JavaScript and are therefore not representative of webpages encountered in real life. Although the WoB environment can be set up to interact with live pages, it still lacks a source of ground truth and needs expensive data collection efforts.

Other related publicly available datasets exist, which contain realistic pages that are useful for web content extraction and page classification. The *L3Sdataset* can be used for boilerplate detection. It was gathered in 2008 and consists of 621 English Google News articles from 408 different websites [17].

Text segments in these pages have been manually annotated as for instance *boilerplate*, *headline*, *full-text*, and *comments*. Another dataset is the *4 Universities Data Set* from the WebKB project [8]. This dataset was collected from computer science departments of various US universities in 1997. It contains 8,282 pages that are grouped by university and are manually classified into page types such as *course page* and *department page*. A more recent dataset for extraction tasks is the *Weir dataset* [2], which contains pages from 40 websites across the domains *soccer players*, *stock quotes*, *books*, and *video games*, with between 50 and 2,700 pages per website. Finally, the SWDE dataset [12], used by the authors of FreeDOM, contains 124,291 individual webpages collected from 80 websites. This dataset only contains labels for leaf nodes that contain text.

The lack of complexity of MiniWOB and the limited number of domains in the content extraction datasets, unfortunately, limit our ability to train realistic representations for pages encountered at commercial websites. The Product Page Dataset, introduced here, improves on some of these limitations by providing a large number of webpages sampled from a more diverse set of websites—8,175 merchants from several different geographical markets. This novel dataset also contains labels posing more varied learning challenges for prediction algorithms. We believe that the Product Page Dataset’s variety of both webpage structures and labels provides significant improvements over state-of-the-art datasets for benchmarking of algorithms on prediction and, more generally, learning representations tasks targeting webpages. The Product Page Dataset is described in more detail in Section 5.

4 Representation Algorithms for DOM tree Elements

In this section, we present the graph neural networks that we employ for learning representations of web page elements. The considered models represent three important GNN families, specifically recurrent, convolutional and attention-based networks. From these families, we compared 10 embedding architectures which we now detail and then evaluate in the simulation section.

4.1 GCN-Mean

The first model we consider is a multi-layer GCN model inspired by GraphSage [11] and PinSage [37]. Each convolutional layer ℓ , computes the embedding of the current node, v , as $\mathbf{z}_v^{(\ell)}$ based on the local encoding and an average encoding $\mathbf{h}^{(\ell)}$ of its immediate neighborhood $\mathcal{N}(v)$. In our implementation, the SAMPLE_p procedure samples each node from $\mathcal{N}(v)$ without replacement with a fixed probability p . The embedding is obtained according to the following:

$$\begin{aligned} \mathbf{h}_v^{(\ell)} &= \text{AVG}(\{\text{ReLU}(\mathbf{V}_\ell \mathbf{z}_u^{(\ell-1)} + \mathbf{b}_\ell), u \in \text{SAMPLE}_p(\mathcal{N}(v))\}), \\ \mathbf{k}_v^{(\ell)} &= \text{ReLU}(\mathbf{W}_\ell \cdot \text{CONCAT}(\mathbf{z}_v^{(\ell-1)}, \mathbf{h}_v^{(\ell)}) + \mathbf{w}_\ell), \\ \mathbf{z}_v^{(\ell)} &= \mathbf{k}_v^{(\ell)} / \|\mathbf{k}_v^{(\ell)}\|_2, \end{aligned} \tag{1}$$

where \mathbf{V}_ℓ , \mathbf{W}_ℓ , \mathbf{b}_ℓ and \mathbf{w}_ℓ are the trainable weight matrices for convolution layer ℓ and $\mathbf{z}_i^{(0)} = \mathbf{x}_i^{(0)}$ for all i . We use the same dimension for the encodings $\mathbf{h}_v^{(\ell)}$ and $\mathbf{k}_v^{(\ell)}$. Encoding size, embedding size, sampling probability p , and total number of layers are tunable hyperparameters. By stacking K convolution layers, information can be propagated from K -hop neighborhoods.

4.2 The TransformerEncoder

This model consists of a single-layer multi-headed attention encoder stack [36] fed with a sequence consisting of the features \mathbf{x}_v of the local node, v , stacked with the features \mathbf{x}_u of its neighbors $u \in \mathcal{N}(v)$. The embedding \mathbf{z}_v of node v is then extracted as the first element (here, at index 0) of the sequence \mathbf{H}_v computed by the transformer encoder stack:

$$\begin{aligned} \mathbf{H}_v &= \text{TransformerEncoder}(\text{STACK}(\mathbf{x}_v, \{\mathbf{x}_u, u \in \mathcal{N}(v)\})), \\ \mathbf{z}_v &= \mathbf{H}_v[0] \end{aligned} \tag{2}$$

In our implementation, the number of heads in the encoder and the embedding size are tunable hyperparameters. As the elements in the DOM tree do not have an obvious natural ordering, we did not use positional encodings. In fact, how to effectively encode positional information for elements in DOM trees is the focus of ongoing research.

4.3 Tree-LSTMs

We consider four tree-based LSTM models. They all revolve around a standard LSTM cell [13] and are characterized by how the input sequence is constructed from the DOM tree.

In the top-down model (LSTM-TD), the embedding \mathbf{z}_v^D of node v is the last element of the LSTM encoding of the path from the root to node v : each unit receives hidden and cell states from its parent, according to

$$\mathbf{h}_v^D, \mathbf{c}_v^D = \text{LSTM}(\mathbf{x}_v, \mathbf{h}_{\text{Parent}(v)}^D, \mathbf{c}_{\text{Parent}(v)}^D), \quad \mathbf{z}_v^D = \mathbf{h}_v^D. \quad (3)$$

where $\text{LSTM}(x, h, c)$ denotes a standard LSTM cell with input x , hidden state h and cell state c . Cell and hidden states were initialized as zero for the root node.

In the bottom-up model (LSTM-BU), we consider the child-sum tree-LSTM algorithm [34]. Here, the sequence is defined recursively from the leaves to each node v . At each node, the hidden state is the sum of the hidden states of the children, and the cell state is computed based on the cell states of the children, with one forget gate per child state.

$$\begin{aligned} \mathbf{h}_v^U, \mathbf{c}_v^U &= \text{ChildSumLSTM}(\mathbf{x}_v, \{\mathbf{h}_u^U, u \in \mathcal{C}(u)\}, \{\mathbf{c}_u^U, u \in \mathcal{C}(u)\}), \\ \mathbf{z}_v^U &= \mathbf{h}_v^U \end{aligned} \quad (4)$$

To account for more context when computing the element embeddings, we combined the bottom-up and top-down approaches into a bidirectional model (LSTM-Bi) where the embeddings are the concatenation of the embeddings computed by the two previous models, $\mathbf{z}_v^B = \text{CONCAT}(\mathbf{z}_v^D, \mathbf{z}_v^U)$. In this case, the weights in the top-down and the bottom-up components are trained simultaneously.

Finally, we considered a global bidirectional model (LSTM-BiE) that computes node representations based on the whole DOM-tree [7]. This method has three steps. First, a bottom-up representation \mathbf{z}_v^U is calculated for each node v . Second, this representation is then used as the input to a top-Down architecture that gives a representation \mathbf{z}_v^E for each node v :

$$\mathbf{h}_v^E, \mathbf{c}_v^E = \text{LSTM}(\mathbf{z}_v^U, \mathbf{h}_{\text{Parent}(v)}^E, \mathbf{c}_{\text{Parent}(v)}^E), \quad \mathbf{z}_v^E = \mathbf{h}_v^E. \quad (5)$$

Third, the two representations are concatenated into a final representation for the node $\mathbf{z}_v^{\text{BiE}} = \text{CONCAT}(\mathbf{z}_v^E, \mathbf{z}_v^U)$. Also, in this case, the weights in both components are trained simultaneously.

GCN-GRU: This model is inspired by the local embedding module in the DOM-Q-Net algorithm [15]. Here, the encoding of node v is computed by feeding a Gated Recurrent Unit (GRU) with the local features of the node and an average encoding of the neighborhood of the node; then, the embedding is computed with a transformation of the local encoding \mathbf{h}_v and the input features:

$$\begin{aligned} \mathbf{h}_v &= \text{GRU}(\mathbf{x}_v, \text{AVG}(\{\mathbf{V}\mathbf{x}_u + \mathbf{b}, u \in \mathcal{N}(u)\})), \\ \mathbf{z}_v &= \mathbf{W} \cdot \text{CONCAT}(\mathbf{x}_v, \mathbf{h}_v) + \mathbf{w}, \end{aligned} \quad (6)$$

where \mathbf{V} , \mathbf{b} , \mathbf{W} , and \mathbf{w} , are trained together with the parameters of the GRU.

4.4 FreeDOM

We adapt the state of the art FreeDOM architecture from [20]. FreeDOM is a two-stage method where a neural network model first computes node embeddings based on local and contextual information (based on both text and HTML), and then uses embedding distances and semantic relatedness between node pairs in the second stage. It is worth mentioning that, in the original implementation, the authors perform a filtering step where templates common to multiple webpages are identified and used to substantially reduce the number of nodes that are considered by the model. In our case, this is not possible due to the fact that the pages we consider do not, in general, come from the same set of websites. With that being said, FreeDOM could potentially be at a disadvantage to the other models since it does not perfectly suit our application and the Product Page Dataset. However, the authors set out to learn site-invariant feature representations and found that FreeDOM could generalize well to unseen websites without additional human effort. Therefore, we believe that we can include it in our representation learning comparison.

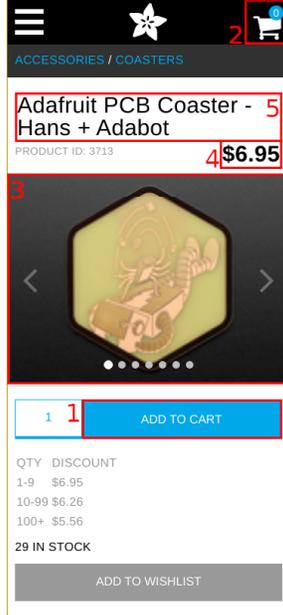


Figure 2: A sample webpage in our dataset with 748 nodes. The labeled elements are surrounded by red boxes. (1) is the *buy button*, (2) is the *cart button*, (3) is the *image*, (4) is the *price* and (5) is the *product name*.

5 The Product Page Dataset

The Product Page Dataset was collected over several months spanning from 2018 to 2019 and contains 51,701 individual product pages selected among 8,175 distinct e-commerce merchants, conveniently split into training and test sets such that no merchant appears in both. An overview of the statistics of the dataset can be seen in Table 1.

Each page contains 5 labeled elements, 2 corresponding to action elements (*buy button* and *cart button*) and 3 corresponding to information elements (*product price*, *product name*, and *product image*). These labels have been manually placed on every webpage by human analysts. In our experiments, we also consider a 6-th more abstract label: the *subject node*—defined as the lowest common ancestor of all other labels. An example webpage from our dataset can be found in Figure 2. Our choice of labels provides the added benefit of benchmarking across varied tasks: identification of action elements (the *buy* and *cart* buttons), and information retrieval tasks which require algorithms to consider different amounts of contextual information; for instance, identifying the *subject node* should require substantially more contextual information, as the node itself contains almost no information regarding its semantic meaning, compared to other elements.

Table 1: An overview of the Product Page Dataset.

market	language	# websites	# webpages	median # nodes/page
DE	German	2,941	16,765	1,391
US	English	1,794	11,003	1,394
GB	English	1,360	11,144	1,291
FI	Finnish	1,125	5,623	779
AT	German	899	1,316	1,499
SE	Swedish	619	4,866	1,450
NO	Norwegian	180	852	1,477
NL	Dutch	130	132	1,628
Total		8,175	51,701	1,308

Note that the Product Page Dataset is substantially more diverse than the SWDE [12] dataset, both in terms of variety of labels but most notably in terms of diversity of DOM tree structures. Our dataset contains templates from 8,175 domains, compared to the 80 domains present in SWDE. Furthermore, each page in our dataset is saved as an MHTML file which contains all images and assets required to re-render the page. Therefore, our dataset is suitable also for computer vision approaches.

5.1 Collection Procedure and Potential Biases

The analysts were given a set of instructions during the labeling process, which guided and potentially biased the data collection procedure. First, they obtained a list of e-commerce domain names. This list of domains was biased towards popular e-commerce merchants. Then, for every e-commerce website, they were asked to identify a small number of webpages corresponding to physical products. The exact number depended on the market; see Table 1.

The analysts were also instructed to select products that were in stock and to avoid picking product pages with configuration fields (e.g., color and size). This second instruction was unrelated to our prediction task. Once on a product page, they would label the elements corresponding to the product *price*, *name*, and *image*, as well as the *cart* and *buy* buttons by clicking on them on the rendered HTML using an in-house developed tool. The tool rendered the pages in a mobile viewport using an iPhone X device agent. This means that mobile versions of pages are over-represented, though not all domains render differently for mobile browsers.

6 Experiments

The goal of our experiments is to determine how well the methods described in Section 4 leverage information concerning the class of a few important nodes that are dispersed throughout the rest of the DOM tree of a page. We consider four LSTM-based embedders (LSTM-TD, LSTM-BU, LSTM-Bi, LSTM-BiE), the mean-pooled GCN model (GCN-Mean), the GRU based GCN inspired by DOM-Q-Net (GCN-GRU), and the transformer-encoder embedder (TE). For comparison, we also present the results of the FreeDOM embedder with the features defined in [20], as well as an extended version (FreeDOM-ext) which also uses the style features used by our other embedders, described below. All the embedders were followed by a single-layer fully connected neural network acting as a classifier. For context, we also present the results of a 2-layer, *Fully Connected Network (FCN)* that uses the same input features as the rest of the models and thus acts as a context-oblivious baseline.

Local node features: For each node, we define a set of *style features* which includes the bounding box of the elements as rendered on the page, the font weight, the font size, the number of images contained within the subtree, the visibility, and the HTML tag. For the FreeDOM-specific, pre-trained, NLP features described in [20], we use the Spacy²[14] library. To gauge the impact of textual features, we perform an experiment in Section 6.2 where we augment the features with pre-trained embeddings computed using the *Universal Sentence Encoder*³ [3]. The implementation of FreeDOM stays the same during this experiment as it already uses text.

6.1 Training Procedure

From each DOM tree, we randomly sampled 5 labeled and 10 unlabeled nodes. We minimized a cross-entropy training objective using the Adam optimizer. During training, we tracked model losses on the training and validation sets and saved the model that achieved the lowest validation loss. We trained the models on the classification task as a proxy for the prediction task. This is because formulating a cost function for the prediction task is a topic of ongoing research, as mentioned in Section 2.

For the experiments in the paper, we ensured that all hyper-parameters were optimised on this problem setting. For FreeDOM, we used the hyper-parameters provided by the original paper since our setting is very similar. For the TreeLSTM-based algorithms, we used the results of the hyper-parameter tuning in [7]. We then performed hyper-parameter tuning on GCN-mean (PinSage/GraphSage adaptation), GCN-GRU (the DOM-Q-net adaptation), FCN and the TransformerEncoder. We tuned

²v2.3.5 *en_core_web_sm* <https://spacy.io/models/en> (accessed 27 May 2021)

³Version 4, <https://tfhub.dev/google/universal-sentence-encoder/4> (accessed 26 May 2021)

these particular algorithms since we have adapted and applied them to a substantially different setting than what they were originally designed for.

In the tuning procedure, we performed a grid-search over values found in the SOURCE/HYPERPARAMETER_GRIDS folder⁴, measuring the predictive performance on the validation set. The best performing hyper-parameter set was then used for training and obtaining the results in our experiments. To prevent unreasonable compute times, we performed this step on a subset of the Product Page Dataset containing 2,000 data points (not the entire 10,000 used in the experiments) over 75 epochs. We used the RAY TUNE [19] library for this step.

6.2 Performance Comparison

In this experiment, we train all methods based on the training procedure described in Section 6.1 on a subset of the Product Page Dataset containing 10,000 pages from English-speaking markets. We did not train the models on the entire dataset because the LSTM models, mainly LSTM-BiE, LSTM-Bi and LSTM-TD, are very computationally expensive. We only used pages from English markets in order to use a pre-trained text embedder based on a well-known approach, and we could not find such an embedder that supported all of the languages in our dataset. Additionally, it offers a more level playing field to the state-of-the-art FreeDOM architecture, which relies on page text and was originally tested on English websites. After training the models, we evaluate them by measuring their classification and prediction performance on a held-out test set.

6.2.1 Evaluation of Classification Performance

After training the models we measure their classification performance. During the classification task, a model is given five labeled and five unlabeled nodes, together with their model-specific contexts, from every webpage in the test set. We summarize these results by calculating an F1 score, a precision and a recall metric for all models over all labels on a test set with 6,706 pages from merchants not present in the training set. The precision and recall metrics can be found in the Appendix in Table 2. We present the F1 score results in two different settings in Figure 3. In the first setting (depicted by solid bars), all models use the style features as inputs (except for FreeDOM, which also uses the text of the page). Using dashed bars, we show the performance of the models when using the text present in the element in addition to the style features. On average, all models, with the exception of FreeDOM without style features, achieve F1 scores well above 0.9. As mentioned in Section 2, the classification task is used as a proxy for the prediction task. However, the classification task is different from and significantly easier than the prediction task. Thus the prediction performance is worse compared to the classification performance, see Section 6.2.2. Since the classification F1 score is close to 1, it could suggest that our training procedure is close to reaching its ceiling. Still, as we will show in Section 6.2.2, the prediction performance has only exhibited a fraction of the accuracy seen on the classification task. Thus, future research could explore new approaches for training on the prediction task to improve the predictive accuracy.

6.2.2 Evaluation of Predictive Accuracy

The trained models were also evaluated based on their predictive performance. To measure predictive accuracy, each trained model was used to classify all nodes on every webpage in a test set. The node that achieved the highest predicted probability for each class was selected as the predicted node of that class; in doing this, we used the knowledge that there is only a single labeled node per class in each page. We then compared the predictions against the ground truth labels and calculated a prediction accuracy for each class. Note that the task of predicting elements on a page is substantially more difficult than the classification task the models were trained on, where we would show our models an element and ask it to provide a label. In the prediction task, the algorithms are asked to select a single node out of the thousands comprising each page that have the potential to confuse our models.

The prediction accuracy of the models evaluated on the same test pages that were used in Section 6.2.1, is presented in Figure 4. Here we again present the predictive accuracy for all models across the 6 labels in the same two settings as described in Section 6.2.1.

⁴The code, along with all the hyperparameters, is available at <https://github.com/klarna/product-page-dataset>.

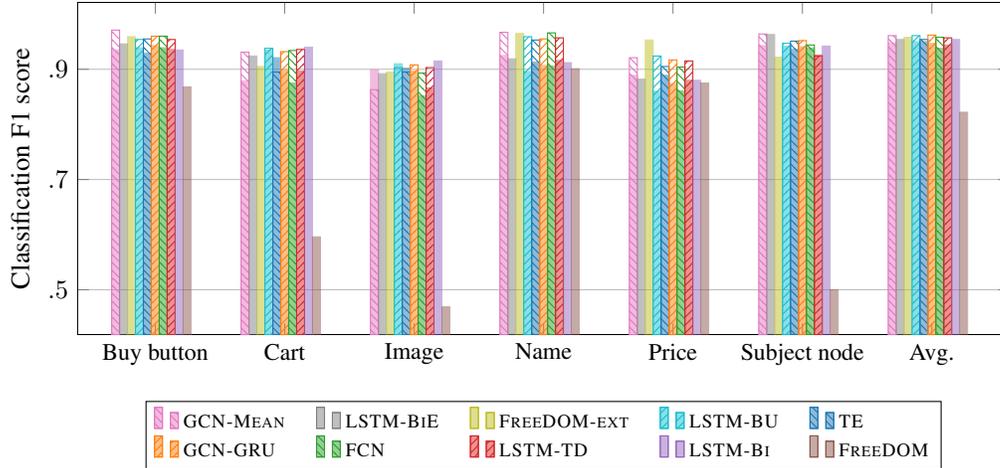


Figure 3: Classification F1 score of the models with (dashed bars) and without (solid bars) text included in the local node features, shown for 6 different types of elements.

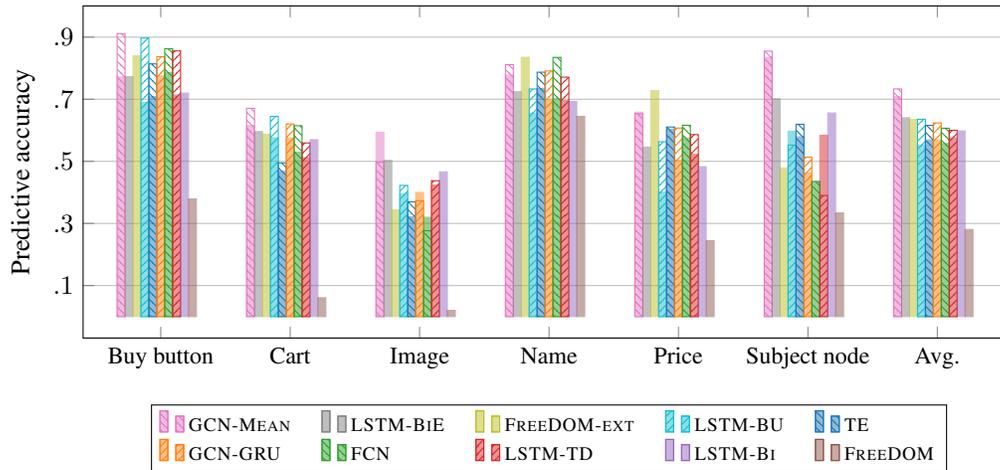


Figure 4: Predictive accuracy of the models with (dashed bars) and without (solid bars) text included in the local node features, shown over the different prediction tasks.

From the results in Figure 4, the first thing we notice is that, when using style features only (full bars), GCN-Mean achieves the highest average predictive accuracy by a relatively wide margin. GCN-Mean consistently scores among the highest accuracy measurements for all tasks explored here. LSTM-BiE, FreeDOM-ext, GCN-GRU and LSTM-BU all show similar average performance. It is worth noting that LSTM-BiE is substantially more computationally demanding than both GCN-Mean and FreeDOM-ext.

When adding text features (dashed bars), GCN-Mean still has the highest average predictive accuracy. There are also tasks for which predictive accuracy is lowered by the addition of text features (most notably, LSTM-TD on the *subject node* task). The highest gain in predictive accuracy is seen for LSTM-BU.

6.3 The Impact of Text and Other Contextual Information on the Page

From the experiments, we have noticed that adding more contextual information, i.e. information not present in the local features of the target node, to the algorithms can improve their performance for certain tasks.

For all tasks, the performance of FCN represents an indicator of the importance of context: the gap between the best model and the FCN for each class is a lower bound on the gain that can be achieved for that specific task when using contextual information. With this in mind, it is possible to identify tasks where contextual information is more important (e.g., the identification of the *subject node* which, in and of itself, does not contain much information and needs context to be identified since it is defined by its relationship to other salient nodes in the tree), and less important (e.g., the identification of the *buy button*, which seems to contain sufficient information to be correctly identified based on local features only). Another interesting observation is that LSTM-BiE outperforms LSTM-Bi on all tasks; this indicates that processing all context from the page leads to improved accuracy.

One important note is that algorithms attempting to exploit side-information (from context or text) show worse performance when this information is irrelevant to the task. We can observe this decrease in performance when GCN-Mean, GCN-GRU, even FCN attempt to exploit text when predicting the *picture*. LSTM-TD shows much worse performance with text than without since it attempts to exploit text from nodes above the *subject node*, which is usually close to the root of the DOM tree and hence none of the nodes in the considered sequence are likely to have text. Similarly, LSTM-BU without text shows substantially worse performance than the FCN baseline on the *price* prediction task: it attempts to use context from deeper nodes in the DOM tree, but *price* nodes are usually leaves, so this context is irrelevant, even confusing for parents of *price* nodes. This observed variety in performances indicates that the chosen labels require varied levels of contextual information to be taken into account when making predictions. It further points towards the Product Page Dataset presenting algorithms with a comprehensive set of challenges that not all architectures are able to easily overcome.

6.4 Accuracy over Amount of Training Data

In this experiment, we aim to check how the predictive performance of the proposed methods increases as they are allowed to train on more data. Our goal is to verify whether any of the algorithms show signs of performing substantially better as the training set grows. If this were the case, it would suggest the further experiments should be run using a larger training set. We therefore trained the models on 5 subsets from the Product Page Dataset increasing in size by powers of 2, from 128 to 2048 DOM trees and an additional 6-th dataset containing the 10,000 webpages in the previous experiment. Each model was trained with fixed hyperparameters, all models use internal representations of size 150, for 50 epochs on every dataset, on only the local style features. The average predictive performance over the 6 labels of each model over the 6 datasets of increasing sizes is displayed in Figure 5. Here, again we see that, among the best performing algorithms, GCN-MEAN also exhibits the largest accuracy gain from adding more data. This raises our confidence that convolutional neural networks are worth considering in more detail for web prediction tasks.

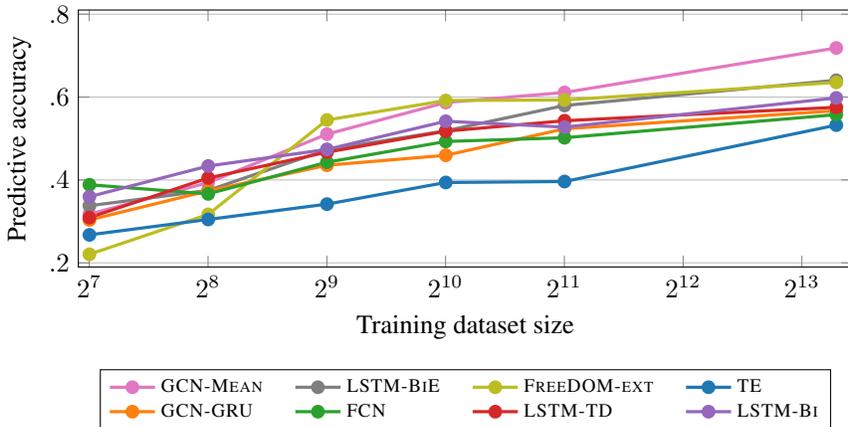


Figure 5: The predictive accuracy of each algorithm trained on datasets of increasing size.

7 Limitations

We acknowledge that our study has several limitations.

Demanding ground truth. One shortcoming of the experiments is that far from all elements have a ground truth label. We only have one label per class per page, which causes results to be slightly pessimistic. In reality, a click event on several elements comprising the *buy button* (e.g. the button itself and the label containing the button text) could generate the same result. All such predictions are acceptable responses in practice. The *single label per element type issue* limits the number of positive training examples in the training set and furthermore increases the difficulty of the prediction task. While this results in a lower overall accuracy than what would be otherwise achieved in practice, it should not affect the comparison between methods: they are all subject to a prediction task of the same difficulty.

Furthermore, comprehensively annotating a dataset of this size is very challenging and would require substantial web-development knowledge and considerably more time spent per label. An approach for mitigating the single labeled node issue would be to devise the evaluation based on node content. Still, this is not appropriate for all action-elements. Also, it is unclear whether it would improve the results, as this would highly depend on the content extraction heuristics.

Computational constraints. Due to computational limitations, we were unable to train LSTM-BiE and LSTM-Bi with the text on the page as part of the input features on the datasets measuring 10,000 pages. In addition, due to computational constraints, we consider further feature engineering and hyperparameter tuning of the models as being beyond the scope of this paper. The features used are relevant enough to offer valid insights into the algorithms’ expected performance and that we offered equal footing to all algorithms when optimising their hyperparameters.

8 Conclusions and Future Work

In this paper, we explore the potential of convolutional, recurrent, and attention-based graph neural networks on the problem of webpage element representation learning. We then evaluate the quality of these GNN embedders relative to state-of-the-art algorithms in a web element prediction task. The purpose of the prediction task is to evaluate the embedders’ potential to generalize across different labeling tasks and webpage templates. For this purpose, we introduce the Product Page Dataset a new, large-scale, realistic dataset containing 51,701 e-commerce product pages belonging to 8,175 merchants with labels that pose different types of challenges. We use our dataset in a well-rounded evaluation of 10 candidate neural network architectures, including those of the state-of-the-art DOM tree node prediction algorithms FreeDOM and GCN-GRU.

Our experiments highlight the under-explored potential of the GCN-Mean algorithm for DOM tree node representation learning. They furthermore expose the impact of factoring in natural language text and page context on predictive performance, and how in practice, careful consideration needs to be given to these aspects.

For future work, we defer experiments on the full Product Page Dataset considering several languages, as well as allowing algorithms that make use of page screenshots. The latter aspect requires further method development to reliably allow for integrating visual features, which goes beyond the scope of this paper. The relevance of feature engineering is made clear in the performance gap between FreeDOM and FreeDOM-ext, as well as the impact of text on accuracy. We leave further study of which features represent the best base for general DOM tree representation learning for future work. In order to improve the Product Page Dataset by further increasing its diversity, future efforts will target the addition of other types of pages likely to be encountered on e-commerce websites, such as category pages or populated cart pages.

References

- [1] L. Bing, T.-L. Wong, and W. Lam. Unsupervised extraction of popular product attributes from e-commerce web sites by considering customer reviews. *ACM Trans. Internet Technol.*, 16(2), Apr. 2016. ISSN 1533-5399.
- [2] L. Blanco, V. Crescenzi, P. Merialdo, and P. Papotti. Supporting the automatic construction of entity aware search engines. In *Proceedings of the 10th ACM Workshop on Web Information and Data Management*, WIDM '08, page 149–156, New York, NY, USA, 2008. Association for Computing Machinery. ISBN 9781605582603.
- [3] D. Cer, Y. Yang, S.-y. Kong, N. Hua, N. Limtiaco, R. St. John, N. Constant, M. Guajardo-Cespedes, S. Yuan, C. Tar, B. Strope, and R. Kurzweil. Universal sentence encoder for English. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 169–174, Brussels, Belgium, Nov. 2018. Association for Computational Linguistics. URL <https://www.aclweb.org/anthology/D18-2029>.
- [4] J. Chen, T. Ma, and C. Xiao. FastGCN: Fast learning with graph convolutional networks via importance sampling. In *International Conference on Learning Representations*, 2018.
- [5] J. Chen, J. Zhu, and L. Song. Stochastic training of graph convolutional networks with variance reduction. In J. Dy and A. Krause, editors, *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pages 942–950. PMLR, 10–15 Jul 2018. URL <http://proceedings.mlr.press/v80/chen18p.html>.
- [6] W.-L. Chiang, X. Liu, S. Si, Y. Li, S. Bengio, and C.-J. Hsieh. Cluster-gcn: An efficient algorithm for training deep and large graph convolutional networks. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, KDD '19, page 257–266, New York, NY, USA, 2019. Association for Computing Machinery. ISBN 9781450362016.
- [7] C. Cook. Learning context-aware representations of subtrees. Master's thesis, Ecole Polytechnique Federale de Lausanne, Lausanne, 2019.
- [8] M. Craven, A. McCallum, D. PiPasquo, T. Mitchell, and D. Freitag. Learning to extract symbolic knowledge from the world wide web. Technical report, Carnegie-mellon univ pittsburgh pa school of computer Science, 1998.
- [9] H. Gao, Z. Wang, and S. Ji. Large-scale learnable graph convolutional networks. In *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pages 1416–1424, 2018.
- [10] I. Gur, U. Rueckert, A. Faust, and D. Hakkani-Tur. Learning to navigate the web. *ArXiv preprint arXiv:1812.09195*, 2018.
- [11] W. L. Hamilton, R. Ying, and J. Leskovec. Inductive representation learning on large graphs. In *Proceedings of the 31st International Conference on Neural Information Processing Systems*, NIPS'17, page 1025–1035, Red Hook, NY, USA, 2017. Curran Associates Inc. ISBN 9781510860964.
- [12] Q. Hao, R. Cai, Y. Pang, and L. Zhang. From one tree to a forest: A unified solution for structured web data extraction. In *Proceedings of the 34th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 775–784. ACM, 2011.
- [13] S. Hochreiter and J. Schmidhuber. Long short-term memory. *Neural Computation*, 9(8): 1735–1780, 1997.
- [14] M. Honnibal, I. Montani, S. Van Landeghem, and A. Boyd. spaCy: Industrial-strength Natural Language Processing in Python, 2020.
- [15] S. Jia, J. R. Kiros, and J. Ba. DOM-Q-NET: Grounded RL on structured language. In *International Conference on Learning Representations*, 2019. URL <https://openreview.net/forum?id=HJgd1nAqFX>.

- [16] F. Kocayusufoglu, Y. Sheng, N. Vo, J. Wendt, Q. Zhao, S. Tata, and M. Najork. RiSER: Learning better representations for richly structured emails. In *The World Wide Web Conference, WWW '19*, page 886–895, 2019.
- [17] C. Kohlschütter, P. Fankhauser, and W. Nejdl. Boilerplate detection using shallow text features. In *Proceedings of the third ACM international conference on Web search and data mining*, pages 441–450, 2010.
- [18] M. Lewis, Y. Liu, N. Goyal, M. Ghazvininejad, A. Mohamed, O. Levy, V. Stoyanov, and L. Zettlemoyer. BART: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7871–7880, 2020.
- [19] R. Liaw, E. Liang, R. Nishihara, P. Moritz, J. E. Gonzalez, and I. Stoica. Tune: A research platform for distributed model selection and training. *arXiv preprint arXiv:1807.05118*, 2018.
- [20] B. Y. Lin, Y. Sheng, N. Vo, and S. Tata. Freedom: A transferable neural architecture for structured information extraction on web documents. *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, Jul 2020.
- [21] L. Lin and L. Zhou. Leveraging webpage classification for data object recognition. In *Proceedings of the IEEE/WIC/ACM International Conference on Web Intelligence (WI'07)*, pages 667–670. IEEE, 2007.
- [22] B. Liu and Y. Zhai. Net – a system for extracting web data from flat and nested data records. In A. H. H. Ngu, M. Kitsuregawa, E. J. Neuhold, J.-Y. Chung, and Q. Z. Sheng, editors, *Web Information Systems Engineering – WISE 2005*, pages 487–495, Berlin, Heidelberg, 2005. Springer Berlin Heidelberg. ISBN 978-3-540-32286-3.
- [23] E. Z. Liu, K. Guu, P. Pasupat, T. Shi, and P. Liang. Reinforcement learning on web interfaces using workflow-guided exploration. In *Proceedings of the International Conference on Learning Representations*, 2018.
- [24] Z. Liu, C. Chen, L. Li, J. Zhou, X. Li, L. Song, and Y. Qi. Geniepath: Graph neural networks with adaptive receptive paths. *Proceedings of the AAAI Conference on Artificial Intelligence*, 33(01):4424–4431, Jul. 2019. URL <https://ojs.aaai.org/index.php/AAAI/article/view/4354>.
- [25] C. Lockard, X. L. Dong, A. Einolghozati, and P. Shiralkar. Ceres: Distantly supervised relation extraction from the semi-structured web. *Proceedings of the VLDB Endowment*, 11(10), 2018.
- [26] C. Lockard, P. Shiralkar, X. L. Dong, and H. Hajishirzi. ZeroShotCeres: Zero-shot relation extraction from semi-structured webpages. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8105–8117, Online, July 2020. Association for Computational Linguistics. URL <https://www.aclweb.org/anthology/2020.acl-main.721>.
- [27] N. Merkle and P. Philipp. Cooperative web agents by combining semantic technologies with reinforcement learning. In *Proceedings of the 10th International Conference on Knowledge Capture, K-CAP '19*, page 205–212, New York, NY, USA, 2019. Association for Computing Machinery. ISBN 9781450370080.
- [28] T. Mikolov, K. Chen, G. Corrado, and J. Dean. Efficient estimation of word representations in vector space. In Y. Bengio and Y. LeCun, editors, *1st International Conference on Learning Representations, ICLR 2013, Scottsdale, Arizona, USA, May 2-4, 2013, Workshop Track Proceedings*, 2013. URL <http://arxiv.org/abs/1301.3781>.
- [29] R. Murali. An intelligent web spider for online e-commerce data extraction. *2018 Second International Conference on Green Computing and Internet of Things (ICGCIoT)*, pages 332–339, 2018.

- [30] B. Perozzi, R. Al-Rfou, and S. Skiena. Deepwalk: Online learning of social representations. In *Proceedings of the 20th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, KDD '14, page 701–710, New York, NY, USA, 2014. Association for Computing Machinery. ISBN 9781450329569.
- [31] L. Safae, B. El Habib, and T. Abderrahim. A review of machine learning algorithms for web page classification. In *Proceedings of the 5th IEEE International Congress on Information Science and Technology (CiSt)*, pages 220–226. IEEE, 2018.
- [32] G. T. Sahid, R. Mahendra, and I. Budi. E-commerce merchant classification using website information. In *Proceedings of the 9th International Conference on Web Intelligence, Mining and Semantics*, pages 1–10, 2019.
- [33] T. Shi, A. Karpathy, L. Fan, J. Hernandez, and P. Liang. World of bits: An open-domain platform for web-based agents. In *International Conference on Machine Learning*, pages 3135–3144. PMLR, 2017.
- [34] K. S. Tai, R. Socher, and C. D. Manning. Improved semantic representations from tree-structured long short-term memory networks. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1556–1566, July 2015.
- [35] Z. Teng and Y. Zhang. Head-lexicalized bidirectional tree lstms. *Transactions of the Association for Computational Linguistics*, 5(1):163–177, 2017.
- [36] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, and I. Polosukhin. Attention is all you need. In *Advances in neural information processing systems*, pages 5998–6008, 2017.
- [37] R. Ying, R. He, K. Chen, P. Eksombatchai, W. L. Hamilton, and J. Leskovec. Graph convolutional neural networks for web-scale recommender systems. In *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pages 974–983, 2018.
- [38] Y. Zhai and B. Liu. Web data extraction based on partial tree alignment. In *Proceedings of the 14th International Conference on World Wide Web*, WWW '05, page 76–85, New York, NY, USA, 2005. Association for Computing Machinery. ISBN 1595930469.
- [39] J. Zhang, X. Shi, J. Xie, H. Ma, I. King, and D. Yeung. Gaan: Gated attention networks for learning on large and spatiotemporal graphs. In *UAI*, 2018.
- [40] X. Zhang, L. Lu, and M. Lapata. Top-down tree long short-term memory networks. In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 310–320, San Diego, California, June 2016. Association for Computational Linguistics. URL <https://www.aclweb.org/anthology/N16-1035>.
- [41] Y. Zhou, Y. Sheng, N. Vo, N. Edmonds, and S. Tata. Simplified DOM trees for transferable attribute extraction from the web. *CoRR*, abs/2101.02415, 2021. URL <https://arxiv.org/abs/2101.02415>.
- [42] Y. Zhou, Y. Sheng, N. Vo, N. Edmonds, and S. Tata. Simplified dom trees for transferable attribute extraction from the web. *ArXiv preprint arXiv:2101.02415*, 2021.
- [43] C. Zhuang and Q. Ma. Dual graph convolutional networks for graph-based semi-supervised classification. In *Proceedings of the 2018 World Wide Web Conference*, pages 499–508, 2018.

9 Appendix

9.1 Classification and Predictive Performance

This section details the predictive performance of all the models evaluated in Section 6.2.2. The accuracies displayed in the upper part of Table 3 correspond to the performance of the models trained without text as a local feature (i.e. solid bars in Figure 4). In the lower part of the Table the local text has been embedded and added to the feature set of each local node (i.e. dashed bars in Figure 4). Note that the implementation of FreeDOM and FreeDOM-ext uses text in both the text and non-text experiments, and therefore the results remain unchanged.

From the classification task in Section 6.2.1, we also provide additional precision and recall metrics for all model over all labels in Table 6.2.2. The classification performance without text is presented in the upper table and with text in the lower table.

Table 2: Classification accuracy (Precision/Recall) where the text is added as a feature in the lower table.

	buy button	cart button	product image	name	price	subject node	avg.
LSTM-BI	.91/.95	.92/.95	.89/.94	.93/.89	.85/.90	.96/.91	.95/.95
LSTM-BIE	.97/.92	.95/.89	.92/.85	.92/.91	.90/.86	.96/.96	.95/.95
GCN-GRU	.95/.92	.93/.86	.90/.88	.90/.90	.89/.85	.95/.93	.94/.94
FREEDOM	.80/.93	.45/.88	.50/.43	.91/.88	.86/.88	.96/.33	.84/.82
FREEDOM-EXT	.95/.95	.92/.88	.89/.90	.97/.95	.96/.94	.92/.91	.95/.95
FCN	.96/.91	.94/.81	.91/.80	.89/.91	.83/.88	.93/.94	.93/.93
LSTM-TD	.94/.93	.93/.86	.90/.83	.92/.91	.90/.85	.94/.90	.94/.94
TE	.91/.94	.90/.94	.88/.91	.92/.90	.84/.93	.95/.91	.95/.95
GCN-MEAN	.97/.90	.96/.80	.94/.85	.93/.92	.93/.84	.97/.91	.94/.94

	buy button	cart button	product image	name	price	subject node	avg.
LSTM-BU-T	.92/.98	.92/.95	.88/.92	.97/.94	.92/.92	.95/.93	.96/.96
GCN-GRU-T	.95/.97	.91/.94	.88/.93	.98/.92	.91/.92	.94/.95	.96/.96
FREEDOM	.80/.93	.45/.88	.50/.43	.91/.88	.86/.88	.96/.33	.84/.82
FREEDOM-EXT	.95/.95	.92/.88	.89/.90	.97/.95	.96/.94	.92/.91	.95/.95
FCN-T	.95/.96	.91/.95	.86/.92	.97/.96	.87/.94	.92/.96	.95/.95
LSTM-TD-T	.93/.97	.93/.94	.87/.93	.97/.93	.92/.90	.93/.91	.95/.95
TE-T	.93/.97	.90/.88	.89/.89	.96/.94	.85/.96	.96/.93	.95/.95
GCN-MEAN-T	.98/.96	.96/.90	.95/.78	.98/.95	.95/.89	.98/.94	.96/.96

Table 3: Predictive accuracy of the models shown over the different prediction tasks. In the lower table, the text is added to the local node features.

	buy button	cart button	product image	name	price	subject node	avg.
LSTM-BI	.720	.570	.466	.693	.483	.656	.598
LSTM-BIE	.773	.596	.503	.724	.546	.702	.641
GCN-GRU	.775	.576	.400	.700	.504	.462	.569
FREEDOM	.379	.061	.020	.645	.245	.334	.281
FREEDOM-EXT	.840	.588	.343	.835	.728	.479	.635
FCN	.786	.530	.320	.702	.575	.433	.558
LSTM-TD	.714	.512	.424	.696	.523	.584	.575
TE	.708	.468	.322	.734	.604	.579	.569
GCN-MEAN	.772	.616	.594	.778	.659	.835	.709

	buy button	cart button	product image	name	price	subject node	avg.
LSTM-BU-T	.897	.645	.423	.733	.563	.552	.636
GCN-GRU-T	.837	.620	.373	.791	.607	.514	.624
FREEDOM	.379	.061	.020	.645	.245	.334	.281
FREEDOM-EXT	.840	.588	.343	.835	.728	.479	.635
FCN-T	.862	.615	.277	.835	.616	.435	.607
LSTM-TD-T	.856	.559	.438	.771	.586	.390	.600
TE-T	.814	.495	.369	.787	.611	.619	.616
GCN-MEAN-T	.911	.671	.497	.811	.653	.855	.733