
DeBERTaV3: Improving DeBERTa using ELECTRA-Style Pre-Training with Gradient-Disentangled Embedding Sharing

Pengcheng He¹, Jianfeng Gao², Weizhu Chen¹

¹ Microsoft Azure AI

² Microsoft Research

{penhe, jfgao, wzchen}@microsoft.com

Abstract

This paper presents a new pre-trained language model, DeBERTaV3, which improves the original DeBERTa model by replacing mask language modeling (MLM) with replaced token detection (RTD), a more sample-efficient pre-training task. Our analysis shows that vanilla embedding sharing in ELECTRA hurts training efficiency and model performance. This is because the training losses of the discriminator and the generator pull token embeddings in different directions, creating the “tug-of-war” dynamics. We thus propose a new *gradient-disentangled embedding sharing* method that avoids the tug-of-war dynamics, improving both training efficiency and the quality of the pre-trained model. We have pre-trained DeBERTaV3 using the same settings as DeBERTa to demonstrate its exceptional performance on a wide range of downstream natural language understanding (NLU) tasks. Taking the GLUE benchmark with eight tasks as an example, the DeBERTaV3 Large model achieves a 91.37% average score, which is 1.37% over DeBERTa and 1.91% over ELECTRA, setting a new state-of-the-art (SOTA) among the models with a similar structure. Furthermore, we have pre-trained a multi-lingual model mDeBERTa and observed a larger improvement over strong baselines compared to English models. For example, the mDeBERTa Base achieves a 79.8% zero-shot cross-lingual accuracy on XNLI and a 3.6% improvement over XLM-R Base, creating a new SOTA on this benchmark. We have made our pre-trained models and inference code publicly available at <https://github.com/microsoft/DeBERTa>¹.

1 Introduction

Recent advances in pre-trained language models (PLMs) have created new state-of-the-art results on many natural language processing (NLP) tasks. While scaling up PLMs with billions or trillions of parameters [1, 2, 3, 4, 5] is a well-proved way to improve the capacity of the PLMs, it is more important to explore more energy-efficient approaches to build PLMs with fewer parameters and less computation cost while retaining high model capacity.

Towards this direction, there are a few works that significantly improve the efficiency of PLMs. The first is RoBERTa [6] which improves the model capacity with a larger batch size and more training data. Based on RoBERTa, DeBERTa [4] further improves the pre-training efficiency by incorporating disentangled attention which is an improved relative-position encoding mechanism. By scaling up to 1.5B parameters, which is about an eighth of the parameters of xxlarge T5 [1], DeBERTa surpassed human performance on the SuperGLUE [7] leaderboard for the first time. The second

¹The models are also publicly available at <https://huggingface.co/models?other=deberta-v3>

new pre-training approach to improve efficiency is replaced token detection (RTD), proposed by ELECTRA [8]. Unlike BERT [9] which uses a transformer encoder to predict corrupted tokens with masked language modeling (MLM), RTD uses a generator to generate ambiguous corruptions and a discriminator to distinguish the ambiguous tokens from the original inputs, similar to Generative Adversarial Networks (GAN). The effectiveness of RTD is also verified by follow-up works, including CoCo-LM [10], XLM-E [11], and SmallBenchNLP [12].

In this paper, we explore two methods of improving the efficiency of pre-training DeBERTa. Following ELECTRA-style training, we replace MLM in DeBERTa with RTD where the model is trained as a discriminator to predict whether a token in the corrupted input is either original or replaced by a generator. We show that DeBERTa trained with RTD significantly outperforms the model trained using MLM.

The second is a new embedding sharing method. In ELECTRA, the discriminator and the generator share the same token embeddings. However, our analysis shows that embedding sharing hurts training efficiency and model performance, since the training losses of the discriminator and the generator pull token embeddings into different directions. This is because the training objectives between the generator and the discriminator are very different. The MLM used for training the generator tries to pull the tokens that are semantically similar close to each other while the RTD of the discriminator tries to discriminate semantically similar tokens and pull their embeddings as far as possible to optimize the binary classification accuracy. This creates the “tug-of-war” dynamics, as illustrated in [13]. On the other hand, we show that using separated embeddings for the generator and the discriminator results in significant performance degradation when we fine-tune the discriminator on downstream tasks, indicating the merit of embedding sharing, e.g., the embeddings of the generator are beneficial to produce a better discriminator, as argued in [8]. To seek a tradeoff, we propose a new *gradient-disentangled embedding sharing* (GDES) method where the generator shares its embeddings with the discriminator but stops the gradients in the discriminator from back propagating to the generator embeddings to avoid the tug-of-war dynamics. We empirically demonstrate that GDES improves both pre-training efficiency and the quality of the pre-trained models.

We pre-train three variants of DeBERTaV3 models, i.e., DeBERTaV3_{large}, DeBERTaV3_{base} and DeBERTaV3_{small}. We evaluate them on various representative natural language understanding (NLU) benchmarks and set new state-of-the-art numbers among models with a similar model structure. For example, DeBERTaV3_{large} surpasses previous SOTA models with a similar model structure on GLUE [14] benchmark with an average score over +1.37%, which is significant. DeBERTaV3_{base} achieves a 90.6% accuracy score on the MNLI-matched [15] evaluation set and an 88.4% F1 score on the SQuAD v2.0 [16] evaluation set. This improves DeBERTa_{base} by 1.8% and 2.2%, respectively. Without knowledge distillation, DeBERTaV3_{small} surpasses previous SOTA models with a similar model structure on both MNLI-matched and SQuAD v2.0 evaluation set by more than 1.2% in accuracy and 1.3% in F1, respectively. We also train DeBERTaV3_{base} on the CC100 [17] multi-lingual data using a similar setting as XLM-R [17] but with only a third of the training passes. We denote the model as mDeBERTa_{base}. Under the cross-lingual transfer setting, mDeBERTa_{base} achieves a 79.8% average accuracy score on the XNLI [18] task, which outperforms XLM-R_{base} and mT5_{base} [19] by 3.6% and 4.4%, respectively. This makes mDeBERTa the best model among multi-lingual models with a similar model structure. All these results strongly demonstrate the efficiency of DeBERTaV3 models and set a good base for future exploration towards more efficient PLMs.

2 Background

2.1 Transformer

A Transformer-based language model is composed of stacked Transformer blocks [20]. Each block contains a multi-head self-attention layer followed by a fully connected positional feed-forward network. The standard self-attention mechanism lacks a natural way to encode word position information. Thus, existing approaches add a positional bias to each input word embedding so that each input word is represented by a vector whose value depends on both its content and position. The positional bias can be implemented using absolute position embedding [3, 9, 20] or relative position embedding [21, 22]. Studies have shown that relative position representations are more effective for natural language understanding and generation tasks [4, 23, 24].

2.2 DeBERTa

DeBERTa improves BERT with disentangled attention and an enhanced mask decoder. The disentangled attention mechanism differs from existing approaches in that it represents each input word using two separate vectors: one for the content and the other for the position. Meanwhile, its attention weights among words are computed via disentangled matrices on both their contents and relative positions. Like BERT, DeBERTa is pre-trained using masked language modeling. The disentangled attention mechanism already considers the contents and relative positions of the context words, but not the absolute positions of these words, which in many cases are crucial for the prediction. DeBERTa uses an enhanced mask decoder to improve MLM by adding absolute position information of the context words at the MLM decoding layer.

2.3 ELECTRA

2.3.1 Masked Language Model

Large-scale Transformer-based PLMs are typically pre-trained on large amounts of text to learn contextual word representations using a self-supervision objective, known as MLM [9]. Specifically, given a sequence $\mathbf{X} = \{x_i\}$, we corrupt it into $\tilde{\mathbf{X}}$ by masking 15% of its tokens at random and then train a language model parameterized by θ to reconstruct \mathbf{X} by predicting the masked tokens \tilde{x} conditioned on $\tilde{\mathbf{X}}$:

$$\max_{\theta} \log p_{\theta}(\mathbf{X}|\tilde{\mathbf{X}}) = \max_{\theta} \sum_{i \in \mathcal{C}} \log p_{\theta}(\tilde{x}_i = x_i|\tilde{\mathbf{X}}) \quad (1)$$

where \mathcal{C} is the index set of the masked tokens in the sequence. The authors of BERT propose to keep 10% of the masked tokens unchanged, another 10% replaced with randomly picked tokens and the rest replaced with the [MASK] token.

2.3.2 Replaced token detection

Unlike BERT, which uses only one transformer encoder and trained with MLM, ELECTRA was trained with two transformer encoders in GAN style. One is called generator trained with MLM; the other is called discriminator trained with a token-level binary classifier. The generator is used to generate ambiguous tokens to replace masked tokens in the input sequence. Then the modified input sequence is fed to the discriminator. The binary classifier in the discriminator needs to determine if a corresponding token is either an original token or a token replaced by the generator. We use θ_G and θ_D to represent the parameters of the generator and the discriminator, respectively. The training objective in the discriminator is called RTD (Replaced Token Detection). The loss function of the generator can be written as,

$$L_{MLM} = \mathbb{E} \left(- \sum_{i \in \mathcal{C}} \log p_{\theta_G}(\tilde{x}_{i,G} = x_i|\tilde{\mathbf{X}}_G) \right) \quad (2)$$

, where $\tilde{\mathbf{X}}_G$ is the input to the generator by randomly masking 15% tokens in \mathbf{X} .

The input sequence of the discriminator is constructed by replacing masked tokens with new tokens sampled according to the output probability from the generator:

$$\tilde{x}_{i,D} = \begin{cases} \tilde{x}_i \sim p_{\theta_G}(\tilde{x}_{i,G} = x_i|\tilde{\mathbf{X}}_G), & i \in \mathcal{C} \\ x_i, & i \notin \mathcal{C} \end{cases} \quad (3)$$

The loss function of the discriminator is written as,

$$L_{RTD} = \mathbb{E} \left(- \sum_i \log p_{\theta_D}(\mathbb{1}(\tilde{x}_{i,D} = x_i)|\tilde{\mathbf{X}}_D, i) \right) \quad (4)$$

, where $\mathbb{1}(\cdot)$ is the indicator function and $\tilde{\mathbf{X}}_D$ is the input to the discriminator constructed via Equation 3. In ELECTRA, L_{MLM} and L_{RTD} are optimized jointly, $L = L_{MLM} + \lambda L_{RTD}$, where λ is the weight of the discriminator loss L_{RTD} , which was set to 50 in ELECTRA.

3 DeBERTaV3

This section describes DeBERTaV3, which improves DeBERTa by using the RTD training loss of [8] and a new weight-sharing method.

3.1 DeBERTa with RTD

Since RTD in ELECTRA and the disentangled attention mechanism in DeBERTa have proved to be sample-efficient for pre-training, we propose a new version of DeBERTa, referred to as *DeBERTaV3*, by replacing the MLM objective used in DeBERTa with the RTD objective to combine the strengths of both methods.

In our implementation, the generator is the same width as the discriminator but is half the depth of the discriminator. Wikipedia and the bookcorpus [25] are used as training data, following the base model configuration of (author?) [9]. The batch size is set to 2048, and the model is trained for 125,000 steps with a learning rate of $5e-4$ and warming up steps of 10,000. Following [8], we use $\lambda = 50$ with the same optimization hyperparameters. We validate the effectiveness of DeBERTaV3 on two representative NLU tasks, i.e., MNLI and SQuAD v2.0. The results, presented in ① of Table 2, show that DeBERTaV3 significantly outperforms DeBERTa, i.e., +2.5% on the MNLI-m accuracy and +3.8% on the SQuAD v2.0 F1.

In the next two subsections, we will show that the performance of DeBERTaV3 can be further improved by replacing token Embedding Sharing (ES) used for RTD, originally proposed in [8], by a new Gradient-Disentangled Embedding Sharing (GDES) method. We start with an analysis of ES in Section 3.2.

3.2 Token Embedding Sharing in ELECTRA

In pre-training, ELECTRA uses a generator and a discriminator, which share token embeddings, as illustrated in Figure 1 (a). In what follows, we refer to this sharing method as Embedding Sharing (ES). Let \mathbf{E} and $g_{\mathbf{E}}$ denote the parameters and the gradients of the token embeddings, respectively. In each training pass of ELECTRA, $g_{\mathbf{E}}$ is computed by back-propagation using accumulated errors with respect to both the MLM loss of the generator and the RTD loss of the discriminator, respectively, as

$$g_{\mathbf{E}} = \frac{\partial L_{MLM}}{\partial \mathbf{E}} + \lambda \frac{\partial L_{RTD}}{\partial \mathbf{E}}. \tag{5}$$

Equation 5 presents a multitask learning problem, where the gradient from each task (i.e., the MLM task of the generator, or the RTD of the discriminator) pulls the solution towards its optimum, leading to a tug-of-war procedure [13], resulting in an equilibrium between the gradients of the two tasks.

It is well known that by carefully controlling the speed of parameter update (e.g., by using a small learning rate or gradient clipping) such a tug-of-war procedure does converge. However, the training can be highly inefficient if the two tasks are dramatically different so that they require parameters to be updated in very different directions.

Unfortunately, the tasks of MLM and RTD pull token embeddings into very different directions. MLM tries to map the tokens that are semantically similar to the embedding vectors that are close to each other. RTD, on the other hand, tries to *discriminate* semantically similar tokens, pulling their embeddings as far as possible to optimize the classification accuracy.

To verify our hypothesis, we implement a variant of ELECTRA without token embedding sharing, referred to as the No Embedding Sharing (NES) method, as illustrated in Figure 1 (b). In each training pass of NES, the generator and discriminator are updated alternatively. Specifically, we first run a forward pass with the generator to generate inputs for the discriminator, and then run a backward pass with respect to L_{MLM} to update the parameters of the generator, including its token embeddings \mathbf{E}_G . After that, we run a forward pass for the discriminator using the inputs produced by the generator and run a backward pass with respect to L_{RTD} to update the discriminator, including its token embeddings \mathbf{E}_D .

Now, we compare ES and NES in terms of training speed, quality of the resulting word embeddings, and performance on downstream NLU tasks.

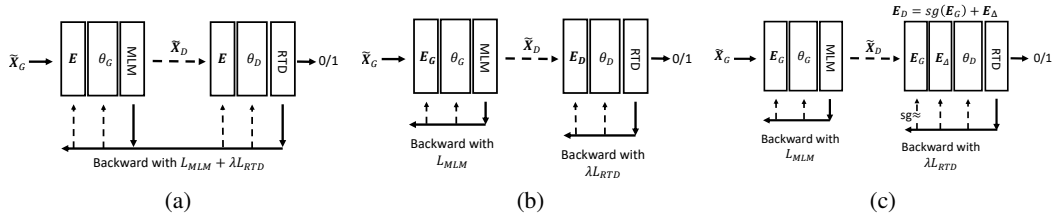


Figure 1: Illustration of different embedding sharing methods. (a) ES: E , θ_G and θ_D will be jointly updated in a single backward pass with regards to $L_{MLM} + \lambda L_{RTD}$. (b) NES: E_G and θ_G will first be updated via the backward pass with regards to L_{MLM} , then E_D and θ_D will be updated via the backward pass with regards to λL_{RTD} . (c) GDES: E_G and θ_G will first be updated in the backward pass with regards to L_{MLM} , then E_Δ and θ_D will be updated via the backward pass with regards to λL_{RTD} and E_G . sg is the stop gradient operator that prevents the discriminator from updating E_G

As shown in Figure 2, NES does converge faster than ES. This is expected because NES does not suffer from training inefficiency due to the tug-of-war dynamics as in ES.

We then compute the average cosine similarity scores of token embeddings². As shown in Table 1, NES produces two different embedding models. The average token similarity score computed using E_G is much higher than that of E_D . This is consistent with our hypothesis. However, the embeddings learned using NES does not lead to any visible performance gain on the two representative downstream NLU tasks (i.e., MNLI and SQuAD v2.0), as shown in Table 2. The result confirms the merit of the ES method as argued in [8]. In addition to parameter-efficiency, the embeddings of the generator are beneficial to produce a better discriminator. In the next subsection, we propose a new weight sharing method which not only retains the strength of ES, but also makes the model training as efficient as NES.

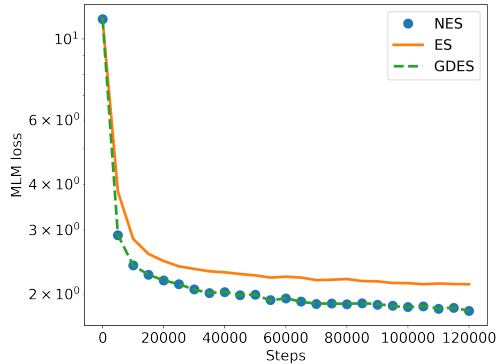


Figure 2: MLM training loss of the generator with different word embedding sharing methods.

Word Embedding Sharing	E_G	E_D	E_Δ
① ES	0.02	0.02	-
② NES	0.45	0.02	-
③ GDES	0.45	0.29	0.02

Table 1: Average cosine similarity of word embeddings of the generator and the discriminator with different embedding sharing methods.

²We sample 10% of the word pieces from the vocabulary and calculate the average cosine similarity of every pair of two word pieces.

Model	MNLI-m/mm Acc	SQuAD v2.0 F1/EM
BERT _{base} [9]	84.3/84.7	76.3/73.7
ELECTRA _{base} [8]	85.8/-	-/-
DeBERTa _{base} [4]	86.3/86.2	82.5/79.3
DeBERTa+RTD _{base}		
① ES	88.8/88.4	86.3/83.5
② NES	88.3/87.9	85.3/82.7
③ GDES	89.3/89.0	87.2/84.5

Table 2: Fine-tuning results on MNLI and SQuAD v2.0 tasks of base models trained with different embedding sharing methods.

3.3 Gradient-Disentangled Embedding Sharing

The Gradient-Disentangled Embedding Sharing method is illustrated in Figure 1 (c). Like ES in Figure 1 (a), we share the token embeddings between the generator and the discriminator so as to retain the merit of ES mentioned above. But the sharing is restricted throughout the model training. In each training iteration, the gradients of the generator are computed only based on the MLM loss, but not on the RTD loss, thus avoiding the tug-of-war procedure and allowing the model to be trained as efficiently as NES. Unlike ES, the sharing in GDES is one-directional in that the gradients computed w.r.t. MLM are used for updating both \mathbf{E}_G and \mathbf{E}_D whereas the gradients computed w.r.t. RTD are used for updating \mathbf{E}_D only.

GDES is implemented by re-parameterizing the token embeddings of the discriminator as

$$\mathbf{E}_D = sg(\mathbf{E}_G) + \mathbf{E}_\Delta, \quad (6)$$

where sg is the stop gradient operator which only allows gradients propagation through \mathbf{E}_Δ .

The training of GDES follows that of NES. \mathbf{E}_Δ is initialized as a zero matrix. In each training pass, we first run a forward pass with the generator to generate the inputs for the discriminator, and then run a backward pass with respect to the MLM loss to update \mathbf{E}_G , which is shared by both the generator and the discriminator. After that, we run a forward pass for the discriminator using the inputs produced by the generator and run a backward pass with respect to the RTD loss to update \mathbf{E}_D by propagating gradients only through \mathbf{E}_Δ . After model training, \mathbf{E}_Δ is added to \mathbf{E}_G and the sum is saved as \mathbf{E}_D in the discriminator, as Equation 6.

To verify the effectiveness of GDES, we compare it against ES and NES in terms of training speed, quality of the resulting token embeddings, and performance on downstream tasks. Several conclusions can be drawn from the experimental results in Figure 2, Tables 1 and 2. First, Figure 2 shows that the model with GDES converges faster than the model with ES, and the training with GDES is as efficient as the model with NES. Second, Table 1 shows that like NES, GDES also produces two different token embedding matrices, and the average token similarity score computed using \mathbf{E}_G is higher than that of \mathbf{E}_D . However, the gap is smaller than that in NES due to the restricted weight sharing in GDES. Third, Table 2 shows that the model pre-trained with GDES produces the best results, after fine-tuning, on two downstream tasks, MNLI and SQuAD v2.0. These results verify that GDES is an effective weight-sharing method for language model pre-trained with MLM and RTD.

4 Experiment

4.1 Main Results on NLU tasks

To further verify the effectiveness of those technologies, we combine RTD, DES and DA to train models of different sizes (i.e. large, base and small) using standard pre-training settings. Since all of our experiments are modified based on DeBERTa code base and follow most of the settings of DeBERTa, we denote the new models as DeBERTaV3_{large}, DeBERTaV3_{base} and DeBERTaV3_{small}. The discriminator part of DeBERTaV3_{large} and DeBERTaV3_{base} are the same as DeBERTa_{large} and

DeBERTa_{base}, respectively. The discriminator of DeBERTaV3_{small} has the same width and attention heads as DeBERTa_{base} and half the depth of DeBERTa_{base}, i.e. 6 layers with 768 hidden size and 12 attention heads. The generator of DeBERTaV3 has the same width as the discriminator and half the depth of the discriminator. We train those models with 160GB data which is the same as DeBERTaV2 and RoBERTa, and use the same SentencePiece [26, 27] vocabulary as DeBERTaV2 [4] which contains 128,000 tokens. All the models are trained for 500,000 steps with a batch size of 8192 and warming up steps of 10,000. The learning rate for base and small model is 5e-4, while the learning rate for large model is 3e-4. Following the DeBERTa setting, we use the AdamW [28] optimizer which is a fixed version of Adam [29] with weight decay, and set $\beta_1 = 0.9$, $\beta_2 = 0.98$ for the optimizer. After pre-training, the discriminators of those models are used for downstream task fine-tuning following the same paradigm as Transformer PLMs, such as BERT, RoBERTa, ELECTRA, and DeBERTa. We provide more details on the hyper parameters of pre-training and fine-tuning in the Appendix.

4.1.1 Performance on Large Models

Following previous studies on PLMs, we first evaluate our model on the eight NLU tasks in GLUE [14], which are the most representative sentence classification tasks. We fine tune the pre-trained models on those tasks by plugging a classification head on top of the hidden states of the [CLS] token at the last layer. We summarize the results in Table 3, where DeBERTaV3 is compared with previous Transform-based PLMs of similar structures (i.e. 24 layers with hidden size of 1024), including BERT, RoBERTa, XLNet [22], ALBERT [30], ELECTRA and DeBERTa. Compared to previous SOTA models, DeBERTaV3 performs consistently comparable or mostly better across all the tasks. Meanwhile, DeBERTaV3 outperforms XLNet in seven out of eight tasks. In terms of average GLUE score, DeBERTaV3 outperforms other SOTA PLMs with a large margin (> 1.3%). Particularly, compared with previous best numbers, there are big jumps on the performance of low resource tasks (i.e., RTE (+4.4%), CoLA (+4.8%)). This indicates DeBERTaV3 is more data efficient and has a better generalization performance. We also note that the improvements on SST-2, STS-B, and MRPC are relatively small (< 0.3%). We conjecture this is due to the performance on those tasks is close to be saturated, and thus even small but consistent improvements on them are valuable.

Model	CoLA	QQP	MNLI-m/mm	SST-2	STS-B	QNLI	RTE	MRPC	Avg.
	Mcc	Acc	Acc	Acc	Corr	Acc	Acc	Acc	
#Train	8.5k	364k	393k	67k	7k	108k	2.5k	3.7k	
BERT _{large}	60.6	91.3	86.6/-	93.2	90.0	92.3	70.4	88.0	84.05
RoBERTa _{large}	68.0	92.2	90.2/90.2	96.4	92.4	93.9	86.6	90.9	88.82
XLNet _{large}	69.0	92.3	90.8/90.8	97.0	92.5	94.9	85.9	90.8	89.15
ELECTRA _{large}	69.1	92.4	90.9/-	96.9	92.6	95.0	88.0	90.8	89.46
DeBERTa _{large}	70.5	92.3	91.1/91.1	96.8	92.8	95.3	88.3	91.9	90.00
DeBERTaV3 _{large}	75.3	93.0	91.8/91.9	96.9	93.0	96.0	92.7	92.2	91.37

Table 3: Comparison results on the GLUE development set.

To further evaluate the model performance, in addition to GLUE, DeBERTaV3_{large} is evaluated on three categories of representative NLU benchmarks: (1) Question Answering: SQuAD v2.0, RACE [31], ReCoRD [32] and SWAG [33]; (2) Natural Language Inference: MNLI; and (3) NER: CoNLL-2003 [34]. Among those tasks, RACE, SWAG, and MNLI are fine-tuned using the same way as sentence classification tasks. SQuAD v2.0, ReCoRD and NER are fine-tuned as sequence tagging tasks, where a token classification head is plugged on top of the hidden states of each token at the last layer. For comparison, we include ALBERT_{xxlarge}³, DeBERTa_{large}, DeBERTa_{1.5B}, and Megatron [35] with three different model sizes, denoted as Megatron_{336M}, Megatron_{1.3B} and Megatron_{3.9B}, which are trained using the same dataset as RoBERTa. Note that Megatron_{336M} has a similar model size as other models mentioned above⁴.

³The hidden dimension of ALBERT_{xxlarge} is 4 times of DeBERTa and the computation cost is about 4 times of DeBERTa.

⁴T5 [1] has more parameters (11B). [1] only report the test results of T5 which are not comparable with models mentioned above.

We summarize the results in Table 4. Compared to the previous SOTA PLMs with a similar model size (i.e., BERT, RoBERTa, XLNet, ALBERT_{large}, Megatron_{336M} and DeBERTa_{large}), DeBERTaV3_{large} shows superior performance on all six tasks. We see a big performance jump on RACE(+2.4%) and SWAG(+2.6%), which require the models to have non-trivial reasoning capability [31] and common-sense knowledge [33]. We conjecture those improvements indicate DeBERTaV3_{large} has a better capability of reasoning and common sense knowledge. Although it is well proved to improve the model capacity by increasing the number of parameters [1, 5], compared with larger models, DeBERTaV3_{large} outperforms ALBERT_{xxlarge} and Megatron_{1.3B} by a large margin on all three tasks, as well as outperforming Megatron_{3.3B} on both MNLi and SQuAD v2.0. Compared with DeBERTa_{1.5B}, which used to be the SOTA NLU models on GLUE and SuperGLUE leaderboards, DeBERTaV3_{large} is still on par with it on MNLi but outperforms it on SWAG.

Model	MNLi-m/mm	SQuAD v2.0	RACE	ReCoRD	SWAG	NER
	Acc	F1/EM	Acc	F1/EM	Acc	F1
BERT _{large}	86.6/-	81.8/79.0	72.0	-	86.6	92.8
ALBERT _{large}	86.5/-	84.9/81.8	75.2	-	-	-
RoBERTa _{large}	90.2/90.2	89.4/86.5	83.2	90.6/90.0	89.9	93.4
XLNet _{large}	90.8/90.8	90.6/87.9	85.4	-	-	-
ELECTRA _{large}	90.9/-	-/88.1	-	-	-	-
Megatron _{336M}	89.7/90.0	88.1/84.8	83.0	-	-	-
DeBERTa _{large}	91.1/91.1	90.7/88.0	86.8	91.4/91.0	90.8	93.8
DeBERTaV3 _{large}	91.8/91.9	91.5/89.0	89.2	92.3/91.8	93.4	93.9
ALBERT _{xxlarge}	90.8/-	90.2/87.4	86.5	-	-	-
Megatron _{1.3B}	90.9/91.0	90.2/87.1	87.3	-	-	-
Megatron _{3.9B}	91.4/91.4	91.2/88.5	89.5	-	-	-
DeBERTa _{1.5B}	91.7/91.9	92.2/89.7	90.8	94.5/94.0	92.3	-

Table 4: Results on MNLi in/out-domain, SQuAD v2.0, RACE, ReCoRD, SWAG, CoNLL 2003 NER development set. Note that missing results in literature are signified by “-”.

4.1.2 Performance on Base and Small Models

We evaluate DeBERTaV3_{base} and DeBERTaV3_{small} on two representative tasks, i.e., MNLi and SQuAD v2.0, and summarize the results in Table 5. DeBERTaV3_{base} consistently outperforms DeBERTa_{base} and ELECTRA_{base} by a larger margin than that in the Large models. For example, on MNLi-m, DeBERTaV3_{base} obtains an improvement of +1.8 (90.6% vs. 88.8%) over both DeBERTa_{base} and ELECTRA_{base}. On SQuAD v2.0 in terms of the EM score, DeBERTaV3_{base} achieves an improvement of +4.9% (85.4% vs. 80.5%) over ELECTRA_{base} and +2.3% (85.4% vs 83.1%) over DeBERTa_{base}.

Compared with small-size models with a similar model structure, DeBERTaV3_{small} outperforms BERT_{small} [37] by a large margin on those two tasks (i.e., a 6.4% improvement on MNLi-m and a 9.7% F1 score improvement on SQuAD v2.0). Surprisingly, even though DeBERTaV3_{xsmall} has only half the parameters of DeBERTaV3_{small}, it performs on par or even better than DeBERTaV3_{small} on these two tasks. We conjecture that this is due to DeBERTaV3_{xsmall} has deeper layers which allows to extract better semantic features. Without knowledge distillation, DeBERTaV3_{small} outperforms MiniLMv2_{small} [38] by 1.2% and 1.3% on MNLi-m and SQuAD v2.0, respectively. DeBERTaV3_{xsmall} outperforms MiniLMv2_{xsmall} [38] by 1.2% and 2.5% on MNLi-m and SQuAD v2.0, respectively. It’s worth noting that, even though DeBERTaV3_{xsmall} has only 1/4 backbone parameters of RoBERTa_{base} and XLNet_{base}, the former significantly outperforms both models on these two representative tasks (i.e. 0.5% improvement on MNLi-m and 1.5% EM score improvement on SQuAD v2.0). This further demonstrates the efficiency of the DeBERTaV3 models.

4.2 Multilingual Model

As an important extension, we extend DeBERTaV3 to multi-lingual. We train the multi-lingual model with the 2.5T CC100 multi-lingual dataset which is the same as XLM-R. We denote the model as mDeBERTa_{base}. We use the same SentencePiece vocabulary as mT5 which has 250k tokens. The model structure is the same as our base model, i.e., 768 hidden size, 12 layers, and 12 attention heads.

Model	Vocabulary Size(K)	Backbone #Params(M)	MNLI-m/mm ACC	SQuAD v2.0 F1/EM
Base models:12 layers,768 hidden size,12 heads				
BERT _{base}	30	86	84.3/84.7	76.3/73.7
RoBERTa _{base}	50	86	87.6/-	83.7/80.5
XLNet _{base}	32	92	86.8/-	-/80.2
ELECTRA _{base}	30	86	88.8/-	-/80.5
DeBERTa _{base}	50	100	88.8/88.5	86.2/83.1
DeBERTaV3 _{base}	128	86	90.6/90.7	88.4/85.4
Small models:6 layers,768 hidden size,12 heads				
TinyBERT _{small}	30	44	84.5/-	77.7/-
MiniLMv2 _{small}	30	44	87.0/-	81.6/
BERT _{small}	30	44	81.8/-	73.2/-
DeBERTaV3 _{small}	128	44	88.2/87.9	82.9/80.4
XSmall models:12 layers,384 hidden size,6 heads				
MiniLMv2 _{xsmall}	30	22	86.9/-	82.3/
DeBERTaV3 _{xsmall}	128	22	88.1/88.3	84.8/82.0

Table 5: Results on MNLI in/out-domain (m/mm) and SQuAD v2.0 development set. TinyBERT_{small} [36], MiniLMv2_{small} and MiniLMv2_{xsmall} models are pre-trained with knowledge distillation while BERT_{small}, DeBERTaV3_{small} and DeBERTaV3_{xsmall} are trained from scratch with MLM and RTD objective, respectively.

It is worth noting that, unlike XLM or XLM-E, we have not trained our model with any parallel data⁵. The pre-training settings are similar to XLM-R, except that we only train the model with 500k steps instead of 1.5M steps. As XNLI is one of the major benchmarks to measure multi-lingual model generalization performance, we evaluate the performance of mDeBERTa on XNLI across 15 languages. Following previous multi-lingual PLMs, we report both the zero-shot cross-lingual transfer performance and the translate train all performance. Zero-shot cross-lingual transfer is to fine-tune the model with English data only and evaluate it on multi-lingual test sets. Translate train all is to fine-tune the model with English data and multi-lingual data translated from English data which is provided together with the XNLI dataset [18], and then evaluate the model on multi-lingual test sets. As shown in Table 6, mDeBERTa_{base} significantly outperforms previous SOTA model XLM-R_{base} on all languages under both settings. With regards to the average score, mDeBERTa_{base} obtains an improvement of +3.6% (79.8% v.s. 76.2%) compared with XLM-R_{base} in the cross-lingual transfer setting, as well as achieving an improvement of +3.1% (82.2% v.s. 79.1%) compared with XLM-R_{base} under the translate train all setting. These results clearly show the effectiveness of DeBERTaV3 and the disentanglement is simultaneously valuable to multi-lingual pre-training.

All these clearly demonstrate the efficiency of the DeBERTaV3 models. The consistent improvements over a large range of the downstream tasks also show the huge value of improving pre-trained language models. We make all the DeBERTaV3 models publicly available on <https://huggingface.co/models?other=deberta-v3> with instructions to reproduce the performance of the tasks mentioned above, as well as leveraging DeBERTaV3 for other tasks.

5 Conclusions

In this paper we explored methods to further improve the pre-training efficiency of PLMs. We start with combining DeBERTa with ELECTRA which shows a significant performance jump. Next, we perform extensive analysis and experiments to understand the interference issues between the generator and the discriminator which is well known as the “tug-of-war” dynamics. Further we proposed *gradient-disentangled embedding sharing* as a new building block of DeBERTaV3 to avoid the “tug-of-war” issue and achieve a better pre-training efficiency.

⁵we expect to have a better model by continually pre-training on parallel data and will release a new model when available

Model	en	fr	es	de	el	bg	ru	tr	ar	vi	th	zh	hi	sw	ur	Avg
Cross-lingual transfer																
XLM	83.2	76.7	77.7	74.0	72.7	74.1	72.7	68.7	68.6	72.9	68.9	72.5	65.6	58.2	62.4	70.7
mT5 _{base}	84.7	79.1	80.3	77.4	77.1	78.6	77.1	72.8	73.3	74.2	73.2	74.1	70.8	69.4	68.3	75.4
XLM-R _{base}	85.8	79.7	80.7	78.7	77.5	79.6	78.1	74.2	73.8	76.5	74.6	76.7	72.4	66.5	68.3	76.2
mDeBERTa _{base}	88.2	82.6	84.4	82.7	82.3	82.4	80.8	79.5	78.5	78.1	76.4	79.5	75.9	73.9	72.4	79.8
Trasnlate train all																
XLM	84.5	80.1	81.3	79.3	78.6	79.4	77.5	75.2	75.6	78.3	75.7	78.3	72.1	69.2	67.7	76.9
mT5 _{base}	82.0	77.9	79.1	77.7	78.1	78.5	76.5	74.8	74.4	74.5	75.0	76.0	72.2	71.5	70.4	75.9
XLM-R _{base}	85.4	81.4	82.2	80.3	80.4	81.3	79.7	78.6	77.3	79.7	77.9	80.2	76.1	73.1	73.0	79.1
mDeBERTa _{base}	88.9	84.4	85.3	84.8	84.0	84.5	83.2	82.0	81.6	82.0	79.8	82.6	79.3	77.3	73.6	82.2

Table 6: Results on XNLI test set under cross-lingual transfer and translate train all settings.

We evaluate the DeBERTaV3 on a broad range of representative NLU tasks and show the significant performance improvements over previous SOTA models, e.g., DeBERTaV3_{large} outperforms other models with a similar model structure by more than 1.37% with regards to GLUE average score and mDeBERTa_{base} outperforms XLM-R_{base} by 3.6% in terms of the cross lingual transfer accuracy on the XLNI task. Our results demonstrate the efficiency of all the DeBERTaV3 models and make DeBERTaV3 the new state-of-the-art PLMs for natural language understanding at multiple different model sizes, i.e., Large, Base, and Small. Meanwhile, this work clearly shows a huge potential to further improve model’s parameter efficiency and provide some direction for future studies of far more parameter-efficient pre-trained language models.

6 Acknowledgments

This effort is part of the Microsoft’s AI at Scale initiative⁶ and project Alexander. We thank all the people contributing to this. We also thank Davis Mueller for proofreading the paper and providing insightful comments.

References

- [1] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21(140):1–67, 2020.
- [2] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. *OpenAI Blog*, 1(8), 2019.
- [3] Tom B Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *arXiv preprint arXiv:2005.14165*, 2020.
- [4] Pengcheng He, Xiaodong Liu, Jianfeng Gao, and Weizhu Chen. Deberta: Decoding-enhanced bert with disentangled attention. In *International Conference on Learning Representations*, 2020.
- [5] William Fedus, Barret Zoph, and Noam Shazeer. Switch transformers: Scaling to trillion parameter models with simple and efficient sparsity. *arXiv preprint arXiv:2101.03961*, 2021.
- [6] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019.
- [7] Alex Wang, Yada Pruksachatkun, Nikita Nangia, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. Superglue: A stickier benchmark for general-purpose language understanding systems. In *Advances in neural information processing systems*, pages 3266–3280, 2019.
- [8] Kevin Clark, Minh-Thang Luong, Quoc V. Le, and Christopher D. Manning. ELECTRA: Pre-training text encoders as discriminators rather than generators. In *ICLR*, 2020.

⁶<https://innovation.microsoft.com/en-us/ai-at-scale>.

- [9] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, 2019.
- [10] Yu Meng, Chenyan Xiong, Payal Bajaj, Saurabh Tiwary, Paul Bennett, Jiawei Han, and Xia Song. Coco-lm: Correcting and contrasting text sequences for language model pretraining. *arXiv preprint arXiv:2102.08473*, 2021.
- [11] Zewen Chi, Shaohan Huang, Li Dong, Shuming Ma, Saksham Singhal, Payal Bajaj, Xia Song, and Furu Wei. Xlm-e: Cross-lingual language model pre-training via electra. *arXiv preprint arXiv:2106.16138*, 2021.
- [12] Kamal Raj Kanakarajan, Bhuvana Kundumani, and Malaikannan Sankarasubbu. Small-bench nlp: Benchmark for small single gpu trained models in natural language processing. *ArXiv*, abs/2109.10847, 2021.
- [13] Raia Hadsell, Dushyant Rao, Andrei A Rusu, and Razvan Pascanu. Embracing change: Continual learning in deep neural networks. *Trends in Cognitive Sciences*, 24(12):1028–1040, 2020.
- [14] Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. Glue: A multi-task benchmark and analysis platform for natural language understanding. In *7th International Conference on Learning Representations, ICLR 2019*, 2019.
- [15] Adina Williams, Nikita Nangia, and Samuel Bowman. A broad-coverage challenge corpus for sentence understanding through inference. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 1112–1122. Association for Computational Linguistics, 2018.
- [16] Pranav Rajpurkar, Robin Jia, and Percy Liang. Know what you don’t know: Unanswerable questions for squad. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 784–789, 2018.
- [17] Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Édouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. Un-supervised cross-lingual representation learning at scale. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8440–8451, 2020.
- [18] Alexis Conneau, Ruty Rinott, Guillaume Lample, Adina Williams, Samuel Bowman, Holger Schwenk, and Veselin Stoyanov. Xnli: Evaluating cross-lingual sentence representations. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2475–2485, 2018.
- [19] Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. mt5: A massively multilingual pre-trained text-to-text transformer. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 483–498, 2021.
- [20] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in neural information processing systems*, pages 5998–6008, 2017.
- [21] Cheng-Zhi Anna Huang, Ashish Vaswani, Jakob Uszkoreit, Ian Simon, Curtis Hawthorne, Noam Shazeer, Andrew M Dai, Matthew D Hoffman, Monica Dinulescu, and Douglas Eck. Music transformer: Generating music with long-term structure. 2018.
- [22] Zhilin Yang, Zihang Dai, Yiming Yang, Jaime Carbonell, Russ R Salakhutdinov, and Quoc V Le. Xlnet: Generalized autoregressive pretraining for language understanding. In *Advances in neural information processing systems*, pages 5754–5764, 2019.

- [23] Zihang Dai, Zhilin Yang, Yiming Yang, Jaime G Carbonell, Quoc Le, and Ruslan Salakhutdinov. Transformer-xl: Attentive language models beyond a fixed-length context. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2978–2988, 2019.
- [24] Peter Shaw, Jakob Uszkoreit, and Ashish Vaswani. Self-attention with relative position representations. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 464–468, 2018.
- [25] Yukun Zhu, Ryan Kiros, Rich Zemel, Ruslan Salakhutdinov, Raquel Urtasun, Antonio Torralba, and Sanja Fidler. Aligning books and movies: Towards story-like visual explanations by watching movies and reading books. In *Proceedings of the IEEE international conference on computer vision*, pages 19–27, 2015.
- [26] Taku Kudo. Subword regularization: Improving neural network translation models with multiple subword candidates. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 66–75, 2018.
- [27] Rico Sennrich, Barry Haddow, and Alexandra Birch. Neural machine translation of rare words with subword units. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1715–1725, Berlin, Germany, August 2016. Association for Computational Linguistics.
- [28] Ilya Loshchilov and Frank Hutter. Fixing weight decay regularization in adam. 2018.
- [29] Diederik Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- [30] Zhenzhong Lan, Mingda Chen, Sebastian Goodman, Kevin Gimpel, Piyush Sharma, and Radu Soricut. Albert: A lite bert for self-supervised learning of language representations. In *International Conference on Learning Representations*, 2019.
- [31] Guokun Lai, Qizhe Xie, Hanxiao Liu, Yiming Yang, and Eduard Hovy. Race: Large-scale reading comprehension dataset from examinations. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 785–794, 2017.
- [32] Sheng Zhang, Xiaodong Liu, Jingjing Liu, Jianfeng Gao, Kevin Duh, and Benjamin Van Durme. ReCoRD: Bridging the gap between human and machine commonsense reading comprehension. *arXiv preprint 1810.12885*, 2018.
- [33] Rowan Zellers, Yonatan Bisk, Roy Schwartz, and Yejin Choi. Swag: A large-scale adversarial dataset for grounded commonsense inference. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 93–104, 2018.
- [34] Erik Tjong Kim Sang and Fien De Meulder. Introduction to the conll-2003 shared task: Language-independent named entity recognition. In *Proceedings of the Seventh Conference on Natural Language Learning at HLT-NAACL 2003*, pages 142–147, 2003.
- [35] Mohammad Shoeybi, Mostofa Patwary, Raul Puri, Patrick LeGresley, Jared Casper, and Bryan Catanzaro. Megatron-lm: Training multi-billion parameter language models using gpu model parallelism. *arXiv preprint arXiv:1909.08053*, 2019.
- [36] Xiaoqi Jiao, Yichun Yin, Lifeng Shang, Xin Jiang, Xiao Chen, Linlin Li, Fang Wang, and Qun Liu. Tinybert: Distilling bert for natural language understanding. *arXiv preprint arXiv:1909.10351*, 2019.
- [37] Wenhui Wang, Furu Wei, Li Dong, Hangbo Bao, Nan Yang, and Ming Zhou. Minilm: Deep self-attention distillation for task-agnostic compression of pre-trained transformers. *arXiv preprint arXiv:2002.10957*, 2020.
- [38] Wenhui Wang, Hangbo Bao, Shaohan Huang, Li Dong, and Furu Wei. Minilmv2: Multi-head self-attention relation distillation for compressing pretrained transformers. *arXiv preprint arXiv:2012.15828*, 2020.

- [39] Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. SQuAD: 100,000+ questions for machine comprehension of text. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, November 2016.
- [40] Alex Warstadt, Amanpreet Singh, and Samuel R Bowman. Neural network acceptability judgments. *arXiv preprint arXiv:1805.12471*, 2018.
- [41] Richard Socher, Alex Perelygin, Jean Wu, Jason Chuang, Christopher D Manning, Andrew Ng, and Christopher Potts. Recursive deep models for semantic compositionality over a sentiment treebank. In *Proceedings of the 2013 conference on empirical methods in natural language processing*, pages 1631–1642, 2013.
- [42] Daniel Cer, Mona Diab, Eneko Agirre, Inigo Lopez-Gazpio, and Lucia Specia. Semeval-2017 task 1: Semantic textual similarity-multilingual and cross-lingual focused evaluation. *arXiv preprint arXiv:1708.00055*, 2017.
- [43] William B Dolan and Chris Brockett. Automatically constructing a corpus of sentential paraphrases. In *Proceedings of the Third International Workshop on Paraphrasing (IWP2005)*, 2005.
- [44] Ido Dagan, Oren Glickman, and Bernardo Magnini. The pascal recognising textual entailment challenge. In *Proceedings of the First International Conference on Machine Learning Challenges: Evaluating Predictive Uncertainty Visual Object Classification, and Recognizing Textual Entailment*, MLCW’05, Berlin, Heidelberg, 2006.
- [45] Roy Bar-Haim, Ido Dagan, Bill Dolan, Lisa Ferro, and Danilo Giampiccolo. The second PASCAL recognising textual entailment challenge. In *Proceedings of the Second PASCAL Challenges Workshop on Recognizing Textual Entailment*, 01 2006.
- [46] Danilo Giampiccolo, Bernardo Magnini, Ido Dagan, and Bill Dolan. The third PASCAL recognizing textual entailment challenge. In *Proceedings of the ACL-PASCAL Workshop on Textual Entailment and Paraphrasing*, pages 1–9, Prague, June 2007. Association for Computational Linguistics.
- [47] Luisa Bentivogli, Ido Dagan, Hoa Trang Dang, Danilo Giampiccolo, and Bernardo Magnini. The fifth pascal recognizing textual entailment challenge. In *In Proc Text Analysis Conference (TAC’09)*, 2009.
- [48] Hector Levesque, Ernest Davis, and Leora Morgenstern. The winograd schema challenge. In *Thirteenth International Conference on the Principles of Knowledge Representation and Reasoning*, 2012.
- [49] Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. BoolQ: Exploring the surprising difficulty of natural yes/no questions. In *Proceedings of NAACL-HLT 2019*, 2019.
- [50] Daniel Khashabi, Snigdha Chaturvedi, Michael Roth, Shyam Upadhyay, and Dan Roth. Looking beyond the surface: A challenge set for reading comprehension over multiple sentences. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 252–262, 2018.
- [51] Marie-Catherine De Marneffe, Mandy Simons, and Judith Tonhauser. The commitmentbank: Investigating projection in naturally occurring discourse. In *proceedings of Sinn und Bedeutung*, volume 23, pages 107–124, 2019.
- [52] Mohammad Taher Pilehvar and Jose Camacho-Collados. Wic: the word-in-context dataset for evaluating context-sensitive meaning representations. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 1267–1273, 2019.
- [53] Aaron Gokaslan and Vanya Cohen. Openwebtext corpus. <http://Skylion007.github.io>, 2019.

- [54] Trieu H Trinh and Quoc V Le. A simple method for commonsense reasoning. *arXiv preprint arXiv:1806.02847*, 2018.
- [55] Sebastian Nagel. Cc-news. URL: <http://web.archive.org/save/http://commoncrawl.org/2016/10/newsdatasetavailable>, 2016.

A Appendix

A.1 Dataset

Corpus	Task	#Train	#Dev	#Test	#Label	Metrics
General Language Understanding Evaluation (GLUE)						
CoLA	Acceptability	8.5k	1k	1k	2	Matthews corr
SST	Sentiment	67k	872	1.8k	2	Accuracy
MNLI	NLI	393k	20k	20k	3	Accuracy
RTE	NLI	2.5k	276	3k	2	Accuracy
WNLI	NLI	634	71	146	2	Accuracy
QQP	Paraphrase	364k	40k	391k	2	Accuracy/F1
MRPC	Paraphrase	3.7k	408	1.7k	2	Accuracy/F1
QNLI	QA/NLI	108k	5.7k	5.7k	2	Accuracy
STS-B	Similarity	7k	1.5k	1.4k	1	Pearson/Spearman corr
SuperGLUE						
WSC	Coreference	554k	104	146	2	Accuracy
BoolQ	QA	9,427	3,270	3,245	2	Accuracy
COPA	QA	400k	100	500	2	Accuracy
CB	NLI	250	57	250	3	Accuracy/F1
RTE	NLI	2.5k	276	3k	2	Accuracy
WiC	WSD	2.5k	276	3k	2	Accuracy
ReCoRD	MRC	101k	10k	10k	-	Exact Match (EM)/F1
MultiRC	Multiple choice	5,100	953	1,800	-	Exact Match (EM)/F1
Question Answering						
SQuAD v1.1	MRC	87.6k	10.5k	9.5k	-	Exact Match (EM)/F1
SQuAD v2.0	MRC	130.3k	11.9k	8.9k	-	Exact Match (EM)/F1
RACE	MRC	87,866	4,887	4,934	4	Accuracy
SWAG	Multiple choice	73.5k	20k	20k	4	Accuracy
Token Classification						
CoNLL 2003	NER	14,987	3,466	3,684	8	F1
Multi-lingual Natural Language Inference(XNLI)						
XNLI _{cross-lingual}	NLI	393k	37k	75k	3	Accuracy
XNLI _{translate train}	NLI	5.9M	37k	75k	3	Accuracy

Table 7: Summary information of the NLP application benchmarks.

- **GLUE.** The General Language Understanding Evaluation (GLUE) benchmark is a collection of nine natural language understanding (NLU) tasks. As shown in Table 7, it includes question answering [39], linguistic acceptability [40], sentiment analysis [41], text similarity [42], paraphrase detection [43], and natural language inference (NLI) [15, 44, 45, 46, 47, 48]. The diversity of the tasks makes GLUE very suitable for evaluating the generalization and robustness of NLU models.
- **SuperGLUE.** SuperGLUE is an extension of the GLUE benchmark, but more difficult, which is a collection of eight NLU tasks. It covers a variety of tasks including question answering [32, 49, 50], natural language inference [44, 45, 46, 47, 51], coreference resolution [48] and word sense disambiguation [52].
- **RACE** is a large-scale machine reading comprehension dataset collected from English examinations in China designed for middle school and high school students [31].
- **SQuAD v1.1/v2.0** is the Stanford Question Answering Dataset (SQuAD) v1.1 and v2.0 [16, 39], two popular machine reading comprehension benchmarks from approximately 500 Wikipedia articles with questions and answers obtained by crowdsourcing. The SQuAD v2.0 dataset includes unanswerable questions about the same paragraphs.

- **SWAG** is a large-scale adversarial dataset for the task of grounded commonsense inference, which unifies natural language inference and physically grounded reasoning [33]. SWAG consists of 113k multiple choice questions about grounded situations.
- **CoNLL 2003** [34] is an English dataset consisting of text from a wide variety of sources. It has 4 types of named entities.
- **XNLI** [18] comes with ground truth dev and test sets in 15 languages, and a ground-truth English training set which is same as MNLI training set. The training set has been machine-translated to the remaining 14 languages, providing synthetic training data for these languages as well.

A.2 Pre-training Dataset

For DeBERTa pre-training, we use Wikipedia (English Wikipedia dump⁷; 12GB), BookCorpus [25]⁸ (6GB), OPENWEBTEXT (public Reddit content [53]; 38GB) and STORIES⁹ (a subset of CommonCrawl [54]; 31GB). The total data size after data deduplication [35] is about 78GB. In addition, CC-News [55] data is also added to the training data of DeBERTa_{1.5B} and DeBERTaV3. The multi-lingual version of DeBERTaV3 is trained with 2.5TB CC100 data which is the same as XLM-R. For pre-training, we also sample 5% of the training data as the validation set to monitor the training process. Table 8 compares datasets used in different pre-trained models.

Model	Wiki+Book 16GB	OpenWebText 38GB	Stories 31GB	CC-News 76GB	Giga5 16GB	ClueWeb 19GB	Common Crawl 110GB	CC100 2.5TB
BERT	✓							
XLNet	✓				✓	✓	✓	
RoBERTa	✓	✓	✓	✓				
DeBERTa	✓	✓	✓					
DeBERTa _{1.5B}	✓	✓	✓	✓				
DeBERTaV3	✓	✓	✓	✓				
mDeBERTa _{base}								✓

Table 8: Comparison of the pre-training data.

A.3 Implementation Details

Our pre-training almost follows the same setting as DeBERTa [4]. The generators are trained with MLM where we randomly replace 15% input tokens with [MASK] tokens. The discriminator is trained with RTD which is the same as ELECTRA. The experiments in Section 3 are trained using Wikipedia English data and Bookcorpus data with a batch size of 2k for 125k steps. The experiments in Section 4 are trained using data listed in Table 8 with a batch size of 8k for 500k steps. We list the detailed hyper parameters of pre-training in Table 9. For pre-training, we use Adam [29] as the optimizer with weight decay [28]. For fine-tuning, we use Adam [29] as the optimizer for a fair comparison. For fine-tuning, we train each task with a hyper-parameter search procedure, each run taking about 1-2 hours on a DGX-2 node. All the hyper-parameters are presented in Table 10. The model selection is based on the performance on the task-specific development sets. Our fine-tuning script and hyper parameters are also available at <https://github.com/microsoft/DeBERTa/tree/master/experiments/>

Our code is implemented based on DeBERTa [4]¹⁰ and ELECTRA [8]¹¹.

⁷<https://dumps.wikimedia.org/enwiki/>

⁸https://github.com/butsugiri/homemade_bookcorpus

⁹https://github.com/tensorflow/models/tree/master/research/lm_commonsense

¹⁰<https://github.com/microsoft/DeBERTa>

¹¹<https://github.com/google-research/electra>

Hyper-parameter	DeBERTaV3 _{large}	DeBERTaV3 _{base}	DeBERTaV3 _{small}	mDeBERTa _{base}	DeBERTaV3 _{base-analysis}
Number of Layers	24	12	6	12	12
Hidden size	1024	768	768	768	768
FNN inner hidden size	4096	3072	3072	3072	3072
Attention Heads	12	12	12	12	12
Attention Head size	64	64		6464	64
Dropout	0.1	0.1	0.1	0.1	0.1
Warmup Steps	10k	10k	10k	10k	10k
Learning Rates	3e-4	6e-4	6e-4	6e-4	5e-4
Batch Size	8k	8k	8k	8k	2k
Weight Decay	0.01	0.01	0.01	0.01	0.01
Max Steps	500k	500k	500k	500k	125k
Learning Rate Decay	Linear	Linear	Linear	Linear	Linear
Adam ϵ	1e-6	1e-6	1e-6	1e-6	1e-6
Adam β_1	0.9	0.9	0.9	0.9	0.9
Adam β_2	0.98	0.98	0.98	0.98	0.999
Gradient Clipping	1.0	1.0	1.0	1.0	1.0

Table 9: Hyper-parameters for pre-training DeBERTaV3.

Hyper-parameter	DeBERTaV3 _{large}	DeBERTaV3 _{base}	DeBERTaV3 _{small}	mDeBERTaV3 _{base}
Dropout of task layer	{0,0.15,0.3}	{0,0.1,0.15}	{0,0.1,0.15}	{0,0.1,0.15}
Warmup Steps	{50,100,500,1000}	{50,100,500,1000}	{50,100,500,1000}	{50,100,500,1000}
Learning Rates	{5e-6, 8e-6, 9e-6, 1e-5}	{1.5e-5, 2e-5, 2.5e-5, 3e-5}	{1.5e-5, 2e-5, 3e-5, 4e-5}	{1.5e-5, 2e-5, 2.5e-5, 3e-5}
Batch Size	{16,32,64}	{16,32,48,64}	{16,32,48,64}	{16,32,48,64}
Weight Decay	0.01	0.01	0.01	0.01
Maximun Training Epochs	10	10	10	10
Learning Rate Decay	Linear	Linear	Linear	Linear
Adam ϵ	1e-6	1e-6	1e-6	1e-6
Adam β_1	0.9	0.9	0.9	0.9
Adam β_2	0.999	0.999	0.999	0.999
Gradient Clipping	1.0	1.0	1.0	1.0

Table 10: Hyper-parameters for fine-tuning DeBERTa on down-streaming tasks.