

Variational Learning for Unsupervised Knowledge Grounded Dialogs

Mayank Mishra, Dhiraj Madan, Gaurav Pandey, Danish Contractor

IBM Research, India

mayank.mishra1@in.ibm.com, dmadan07@in.ibm.com, gpandey1@in.ibm.com, dcontrac@in.ibm.com

Abstract

Recent methods for knowledge grounded dialogs generate responses by incorporating information from an external textual document (Lewis et al. 2020; Guu et al. 2020). These methods do not require the exact document to be known during training and rely on the use of a retrieval system to fetch relevant documents from a large index. The documents used to generate the responses are modeled as latent variables whose prior probabilities need to be estimated. Models such as RAG (Lewis et al. 2020), marginalize the document probabilities over the documents retrieved from the index to define the log likelihood loss function which is optimized end-to-end.

In this paper, we develop a variational approach to the above technique wherein, we instead maximize the Evidence Lower bound (ELBO). Using a collection of three publicly available open-conversation datasets, we demonstrate how the posterior distribution, that has information from the ground-truth response, allows for a better approximation of the objective function during training. To overcome the challenges associated with sampling over a large knowledge collection, we develop an efficient approach to approximate the ELBO. To the best of our knowledge we are the first to apply variational training for open-scale unsupervised knowledge grounded dialog systems.

1 Introduction

Dialog systems are typically modeled as sequence-to-sequence tasks where the dialog context (history) is encoded and then used to generate responses. These models are trained end-to-end by maximizing the likelihood of responses on a given training set of conversational logs (Sordoni et al. 2015). However real-world conversational systems also need to be able to incorporate external (structured or unstructured) knowledge while generating responses (Gangi Reddy et al. 2019; Budzianowski et al. 2018; Qu et al. 2020; Kim et al. 2020). Existing work for knowledge grounded tasks typically relies on the availability of conversation logs and the associated knowledge source instance (Qu et al. 2020; Gangi Reddy et al. 2019), though some recent methods relax the dependence on annotated logs (Raghu, Gupta et al. 2020; Lewis et al. 2020; Guu et al. 2020).

Unstructured Knowledge Grounded Dialog: In this paper we focus our attention on the task of generating responses

grounded on information present in external textual documents. Similar to recent models such as RAG (Lewis et al. 2020) and REALM (Guu et al. 2020) we do not require the exact document to be known during training and we rely on the use of a retrieval system to fetch documents from a large (indexed) collection.

In methods such as RAG (Lewis et al. 2020), the documents used to generate responses are modeled as latent variables and, the *document-prior* and *response-likelihood* probabilities are defined using outputs of their respective sub-networks. Specifically, the document-prior distribution is defined by querying a knowledge index (Johnson, Douze, and Jégou 2017; Karpukhin et al. 2020) using the dialog context (history), and then converting the retrieval scores of the top- k^1 documents into a probability distribution. The response-likelihood can be defined using any neural language generator such as GPT2 (Radford et al. 2019). It then performs a marginalisation of the latent variable over the retrieved documents to compute the approximate probability of the response, given the context. The negative log likelihood under this approximation forms the loss function to train.

One of the weaknesses of such approaches is that, using the document-prior to query the index during training, ignores crucial information present in the ground-truth response. As a result, the response-likelihood network parameters may receive a weaker signal while training, which, in-turn, can cause models to try reducing their dependence on external knowledge by ‘memorizing’.

Variational Training: Querying the index with additional information from the ground-truth response while training can help retrieve more relevant documents, and thus, provide a stronger signal to the response-likelihood parameters. Therefore, in this paper, instead of using the *document-prior* distribution to retrieve documents while training, we retrieve the document under a *document-posterior* distribution and optimize the Evidence Lower Bound or ELBO, which forms the basis of variational auto encoders (Kingma and Welling 2013). The loss function in this case consists of an expectation of negative log-likelihood (response-

¹typical $k = 5-10$. Note that this an approximation of the document-prior distribution – sampling a document based on the prior distribution, would require retrieval scores for each document in the index collection which can be expensive to compute (Guu et al. 2020; Lewis et al. 2020)

likelihood) under the document-posterior distribution and a Kullback–Leibler (KL) divergence between document-posterior and document-prior distributions.

One of the advantages of variational training is that it provides a low variance estimate of the objective (as compared to sampling from the document-prior distribution), for the same number of samples. However, we note that directly training under the variational objective may be prohibitively expensive in case of a very large² document collection (sampling an element from the posterior distribution, would require retrieval scores for each document in the index collection).

In this work we overcome this challenge by performing a sum over the top-k retrieved documents (instead of all documents) to approximate the variational objective. Top-k retrieval can be performed efficiently using an index for nearest neighbor search such as Faiss (Johnson, Douze, and Jégou 2017).

Contributions: In this paper we describe our approach called VRAG or Variational Retrieval-Augmented Generation³ which allows us to extend variational optimization to cases where documents are retrieved from large document collections. We present experiments on three, publicly available, conversational QA datasets and we show that variational training helps build better knowledge grounded dialog systems. Our experiments show that, not only does VRAG perform better on the end-task, it also learns better document-priors. To the best of our knowledge, we are the first to apply variational training for open-scale unsupervised knowledge grounded dialog systems.

2 Background

Open conversational QA (OQA) tasks require systems to retrieve a document from a large collection and then ground the generated response based on information from the document. Training such models end-to-end without the ground-truth document is challenging – the only source of supervision is in the generated responses and they present a weak signal for improving the retriever.

As is commonly done in dialog modeling tasks, we represent the collection of dialogs as a set of context (dialog history) and response pairs; $\mathcal{T} = \{(\mathbf{x}^{(i)}, \mathbf{y}^{(i)})\}_{i=1}^m$ where each context $\mathbf{x}^{(i)}$ as well as its response $\mathbf{y}^{(i)}$ is a sequence of tokens. Further let $\mathcal{D} = \{d_j\}_{j=1}^N$ be a set of documents in the form of a large indexed document collection. We assume that each context-response pair requires exactly 1 document $d_j \in \mathcal{D}$ (where $1 \leq j \leq N$) to generate the corresponding response. Let $z^{(i)}$ denote a discrete variable which indicates the document (from the indexed collection) needed for training instance i i.e., $d_{z^{(i)}} \in \mathcal{D}$. We can now model the joint likelihood of a context response pair $(\mathbf{x}^{(i)}, \mathbf{y}^{(i)})$ as $p(\mathbf{y}^{(i)}, z^{(i)} | \mathbf{x}^{(i)}) = p(z^{(i)} | \mathbf{x}^{(i)})p(\mathbf{y}^{(i)} | \mathbf{x}^{(i)}, z^{(i)})$.

With document-level supervision: If we are given the

²Open-scale document collections can have millions of documents

³All associated source code with this paper will be open-sourced and released on Github

ground-truth labels of $z^{(i)}$ for each training instance, we can maximize $\log \prod_i p(\mathbf{y}^{(i)}, z^{(i)} | \mathbf{x}^{(i)}) = \sum_i \log p(z^{(i)} | \mathbf{x}^{(i)}) + \log p(\mathbf{y}^{(i)} | z^{(i)}, \mathbf{x}^{(i)})$. Since the sum splits, we can model the two distributions (document-prior and response-likelihood) separately, by training neural networks for each of them. However for unsupervised settings the $z^{(i)}$ variables are unknown or ‘latent’.

Without document-level supervision: In the absence of document-level supervision we will be maximizing $\log p(\mathbf{y}^{(i)} | \mathbf{x}^{(i)})$. To compute this likelihood we marginalize over the latent variable $z^{(i)}$ i.e., $p(\mathbf{y}^{(i)} | \mathbf{x}^{(i)}) = \sum_z p(z^{(i)} | \mathbf{x}^{(i)})p(\mathbf{y}^{(i)} | z^{(i)}, \mathbf{x}^{(i)})$. However, since an explicit summation over the entire document collection can be computationally intractable, one needs to resort to a few approximation techniques. For ease of notation, we will drop the superscript (i) from now on.

1. **Retrieval based approaches:** Approaches such as RAG (Lewis et al. 2020) and REALM (Guu et al. 2020), maintain an index which allows one to retrieve the top-k documents with high prior probability. The objective is then approximated as a sum over these retrieved documents.

Specifically, the document-prior distribution $p(z | \mathbf{x})$ is defined based on scores returned by the Dense Passage Retriever (DPR) (Karpukhin et al. 2020):

$$p(z | \mathbf{x}) = \text{softmax}(f(z)^T g(\mathbf{x})), \quad (1)$$

where f and g are parameterized representations of documents (z) and dialog contexts/query (\mathbf{x}), created using neural models such as BERT (Devlin et al. 2018).

The top-k most relevant documents (S_k^p) for a query (dialog context) are retrieved from an index that allows efficient retrieval (Johnson, Douze, and Jégou 2017) using MIPS search. We denote the approximate document-prior distribution, normalized over the set S_k^p , as:

$$\hat{p}(z | \mathbf{x}) = \frac{p(z | \mathbf{x})}{\sum_{z' \in S_k^p} p(z' | \mathbf{x})}. \quad (2)$$

The overall objective for generating the response can then be written as:

$$\log \left[\sum_{z \in S_k^p} \hat{p}(z | \mathbf{x}) p(\mathbf{y} | z, \mathbf{x}) \right].$$

2. **Variational techniques:** Another approach is to maximize a variational lower bound on the objective. Here we need to define an Evidence Lower Bound (ELBO) on the likelihood as $\log p(\mathbf{y} | \mathbf{x}) \geq \mathbb{E}_{z \sim q(z | \mathbf{x}, \mathbf{y})} \left[\log \left(\frac{p(\mathbf{y}, z | \mathbf{x})}{q(z | \mathbf{x}, \mathbf{y})} \right) \right]$. This lower bound holds for any distribution q . Variational autoencoders (Kingma and Welling 2013) define another network to model the distribution q . To train such networks, the ELBO is split as $\mathbb{E}_{z \sim q} [\log p(\mathbf{y} | z, \mathbf{x})] - KL [q || p(z | \mathbf{x})]$.

The first term is an expectation that can be estimated by sampling documents from the document-posterior

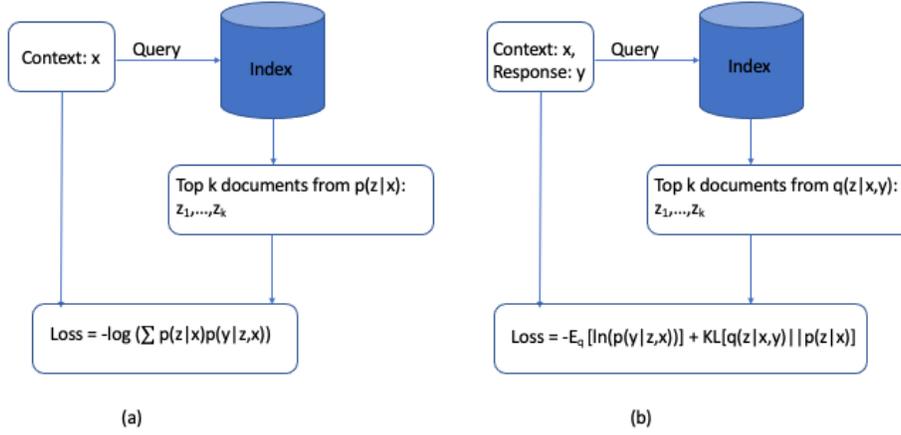


Figure 1: Schematic representation of (a) RAG and (b) VRAG models

$q(z|x, y)$ distribution. The response-likelihood network is then run only using these sampled documents. One can either use re-parameterization trick (with Gumbel softmax distribution) (Jang, Gu, and Poole 2016; Maddison, Mnih, and Teh 2016) or policy gradient method to back propagate through the sampling step. However, in order to sample a document, one would need to compute the entire distribution over the documents. This can be prohibitively expensive when using a large document collection.

The second term (KL-divergence) is also computed as an explicit sum, given access to prior and posterior probability distributions, and is also intractable for large document collections.

In summary, variational training which uses the posterior distribution to retrieve documents while training, can help retrieve more relevant documents for training the response-generator. However, we would first need to be able to compute the ELBO objective more efficiently. In the next section we describe our approach to overcome this challenge.

3 Variational RAG (VRAG)

Variational training involves using both, the document-prior and document-posterior distributions. In our VRAG model, we continue to use the document-prior distribution as defined by RAG (Equation 2) and similarly define the approximate document-posterior distribution (\hat{q}):

$$\hat{q}(z|x, y) \propto \exp(f(z)^T h(x, y)) \quad (3)$$

Here, $h(x, y)$ denotes the joint embedding of the context-response pair while $f(z)$ indicates the document embeddings. In practise, h and f are often implemented using neural networks. We use a single network to compute the document embeddings $f(z)$ for both prior and posterior. This

allows us to use a common document index as well. The overall cost is then computed using Evidence Lower Bound as

$$\mathbb{E}_{\hat{q}} [\log p(y|z, x)] - KL[\hat{q}||\hat{p}(z|x)] \quad (4)$$

Here for the first term, we normalize \hat{q} over the set of top-k documents (denoted by S_k^q) returned by the index when queried using the posterior (i.e, the response and the dialog context). The first term is then approximated as:-

$$\sum_{z \in S_k^q} \hat{q}(z|x, y) \log p(y|z, x). \quad (5)$$

To approximate the KL-divergence we use the top-k knowledge instances retrieved by querying the index using the dialog-context (for prior) and the context-response pair (for posterior). We then take union of the two sets S_k^p and S_k^q to form the set S_{KL} . We use this set (S_{KL}) to approximate the KL-divergence. Thus, the KL-divergence in Equation 4 is given by:

$$KL[\hat{q}||\hat{p}] = \sum_{z \in S_{KL}} \hat{q}(z) \log \left(\frac{\hat{q}(z)}{\hat{p}(z)} \right), \quad (6)$$

where the approximate posterior (\hat{q}) and prior (\hat{p}) in this case are obtained by normalizing the retrieval scores on S_{KL} . Similar to other variational models, VRAG is trained end-to-end.

3.1 Architecture

We now describe the neural networks used to model the prior and posterior distributions, and the response generator.

Prior Distribution We need to create document and context representations defined by functions f and g , respectively for modelling the prior.

To define the function g we use the BERT Model (Devlin et al. 2018). We consider the context x as a sequence of

turns $x_1, \dots, x_i, \dots, x_n$, where each turn x_i , is an utterance from either one of the two speakers ‘S1’ or ‘S2’ in the dialog. We then create an input representation of the context $= [CLS], \langle S1 \rangle, x_1, \langle S2 \rangle, x_2, \langle S1 \rangle, \dots, x_n, [SEP]$, where $[CLS], [SEP], \langle S1 \rangle, \langle S2 \rangle$ are marker tokens. This input representation is then fed to BERT; the embedding at the final layer of $[CLS]$ token is then passed through a linear layer to obtain the embedding representation $g(\mathbf{x})$ of the context \mathbf{x} .

Similarly $\text{enc}(z) = [CLS], z, [SEP]$ forms the input encoding for document z . This is also passed through a (separate) BERT model, followed by the application of a linear layer to the embedding at $[CLS]$ token. This gives the embedding representation $f(z)$ for document z .

Posterior Distribution Similar to the modeling of the prior distribution, we use another (separate) BERT to model the posterior. Here we create the input representation of the context-response pair (\mathbf{x}, \mathbf{y}) as: $[CLS], \langle S1 \rangle, x_1, \langle S2 \rangle, x_2, \langle S1 \rangle, \dots, x_n, \langle RSEP \rangle, \mathbf{y}, [SEP]$. Here, $\langle RSEP \rangle$ is a special marker token used to separate the response from the dialog-context. This input representation is passed through BERT model and we obtain the representation $g(\mathbf{x}, \mathbf{y})$ by applying a linear layer on the embedding of the $[CLS]$ token at last layer.

Response Likelihood We use the standard sequence to sequence formulation for response likelihood, where

$$\log p(\mathbf{y}|\mathbf{z}, \mathbf{x}) = \sum_j \log p(\mathbf{y}_j|\mathbf{y}_{<j}, \mathbf{z}, \mathbf{x}). \quad (7)$$

Here, we use the GPT2 (Radford et al. 2019) model as our decoder. We encode the input sequence as $\langle bos \rangle, \text{enc}(\mathbf{x}), \langle KSEP \rangle, \text{enc}(z), \langle eos \rangle$, where $\langle bos \rangle$ and $\langle eos \rangle$ are the begin- and end-of-sequence markers, and $\langle KSEP \rangle$ is a special marker token to separate the dialog context from the document (knowledge).

For each response token index j , $\log p(\mathbf{y}_j|\mathbf{y}_{<j}, \mathbf{z}, \mathbf{x})$ is then defined by passing the output at the j^{th} index of the decoder through a linear layer.

3.2 Training details

We train our network to maximize the ELBO objective (Equation 4). We initialize our document-prior (for both RAG and VRAG) and document-posterior (for VRAG) networks with the pretrained DPR-Multiset model.⁴ This model is pre-trained using data from the Natural Questions (Kwiatkowski et al. 2019), TriviaQA (Joshi et al. 2017), WebQuestions (Berant et al. 2013), and CuratedTREC (Baudiš and Šedivý 2015) datasets.

During the training of the model, it can be difficult to rebuild the document index after every change to the document representation parameters in f , therefore the parameters in f are kept constant (Lewis et al. 2020).

We used early stopping with *patience* = 5 on recall of the validation sets to prevent overfitting of models. The loss was optimized using AdamW Optimizer (Loshchilov and Hutter

⁴This can be used to initialize a model in Hugging Face, see https://huggingface.co/transformers/model_doc/dpr.html

2017). More details about the hyper-parameter settings are available in Appendix B. We also found it useful to continue training the response-likelihood for both RAG and VRAG after the joint training is complete. This is because while training, the decoder-likelihood function often lags behind prior (for RAG) and posterior (for VRAG) – we discuss this in more detail in Section 5.4.

3.3 Response Generation

At test time we need to generate the response for a given context by first retrieving a document – thus, in both RAG and VRAG models we use the trained document-prior model to retrieve the top-k documents using the dialog context as query. We experiment with two different decoding strategies to generate the response:

- 1. Top Document Decoding:** In this case the document with highest prior probability is used to condition the generator. The response is then generated using beam search (beam width=3) on the trained GPT-2 response generation model; the most likely beam is taken to be the prediction of the model. We refer to this method as the ‘top-1 decoding’ in our experiments.
- 2. Top-k Documents Decoding:** Here top (k=5) documents are retrieved from the prior distribution, say z_1, \dots, z_5 . A beam search is then run to generate the top response from each of these say r_1, \dots, r_5 . We use the estimate of $p(r_i|\mathbf{x}) \approx p(z|\mathbf{x})p(r_i|z, \mathbf{x})$. The most likely response under the estimated distribution is taken to be the response generated by the model⁵. We refer to this as ‘top-5 decoding’ in our experiments.

4 Related Work

In this paper we have focused on the task of open domain dialog question answering with large document corpus. Previously, (Chen et al. 2020) and (Kim, Ahn, and Kim 2020) had used VAE loss to improve the performance of knowledge grounded dialogs in supervised settings. Here they had access to the ground truth knowledge to query the index while training which they then used to compute the ‘knowledge’ loss. There has also been work done to use variational objective for unsupervised training of knowledge grounded dialogs (Lian et al. 2019), but such methods rely on a small list of 5 – 10 candidate knowledge documents that was provided for each training instance. As a result, such models were not required to query the entire knowledge corpus. In contrast, in our work the challenge was to apply variational training to the setting where we don’t have any specific document annotations for training instances and we had to also query a document index.

The REALM model (Guu et al. 2020) has previously used latent variables to train a knowledge retriever with language model in a non-variational manner. Retrieval-Augmented Generator (RAG) (Lewis et al. 2020) had also used a similar objective but had used a pre-trained retriever and extended it to generative tasks. To the best of our knowledge,

⁵This is the same as ‘Fast Decoding’ as defined in (Lewis et al. 2020).

we are the first to use the variational objective for open domain document-grounded response generation, using a large document collection.

5 Experiments

Our experiments aim to answer the following questions: (1) Does Variational RAG (VRAG), which uses samples from the approximated document-posterior distribution, perform better than vanilla RAG? (2) Does the quality of generated responses improve by decoding using the top-k documents? (3) How do the trained document retriever modules for RAG and VRAG compare with each other? (4) Are the quality of samples returned by the document-posterior of VRAG better than document-prior of RAG as hypothesized? (5) Is further fine-tuning of the response-likelihood possible using the trained prior-distributions of the joint models?

5.1 Datasets

We present our experiments on the following datasets:

OR-QuAC (Qu et al. 2020): This dataset is a modified version of the QuAC (Choi et al. 2018) dataset. The dataset consists of dialog conversations, where each conversation is associated with the top-5 most relevant documents (retrieved using TF-IDF based BM25 ranking (Robertson and Zaragoza 2009)) from the QuAC dataset. To create an open-scale collection for our task, we index the set of all the documents available in the train, validation and test splits. In some cases of the test and validation set, the ground-truth document may be missing in the top-5 list associated with each conversation. In such cases, we obtain the ground-truth document from the original QuAC dataset and add it to the indexed collection.

DSTC9 (Kim et al. 2020): This dialog dataset was released as part of the DSTC9 challenge. The dataset comprises of dialog conversation turns in which the system: (i) needs to identify the turns in which to consult a collection for textual FAQs, (ii) retrieve the FAQ if required, (iii) and then generate the response based on the retrieved FAQ. The universe of knowledge documents in this dataset is the set of FAQs.

The training dataset consists of conversations based on 4 different domains i.e hotels, restaurants, trains and taxis. The test dataset contains an additional domain, attractions, which is not found in the train and validation splits.

DoQA (Campos et al. 2020): This dataset comprises of open-ended dialog conversations on different domains like cooking, travel and movies. Unlike, the OR-QuAC and DSTC9 datasets, most questions in this dataset are not factoid/specific questions, and are open-ended. We only use the cooking split for both training and testing.

We preprocess all the datasets by removing all the examples if the ground truth response is ‘‘CANNOT-ANSWER’’ (unanswerable). The statistics for the different datasets used are summarized in Table 1. Each ‘instance’ refers to a context-response pair.

Question-Answering Task: The OR-QuAC dataset also contains non-contextual variations of questions at each dialog turn and we use them in a QA setting (referred to as OR-QuAC-QA).

	OR-QuAC	DSTC9	DoQA
Train instances	25,942	19,184	3,341
Val. instances	2,828	2,673	662
Test instances	4,421	1,981	1,263
Knowledge documents	68,031	12,039	1,108

Table 1: Dataset statistics : Each ‘instance’ refers to a dialog context-response pair.

5.2 Baselines

Apart from our approach (VRAG), we also train and evaluate on the original RAG model for each dataset. We also experiment with a pipeline model which uses the pre-trained DPR-Multiset Retriever and a GPT2 based decoder which is fine-tuned to generate responses. We refer to this as the DPR + GPT2 baseline in our experiments.

5.3 Evaluation metrics

For each of our experimental runs, we report the Mean Reciprocal Rank@5 (MRR@5), Recall@1 (R@1), Recall@5 (R@5) to evaluate prior’s performance. We also report BLEU scores (both with top-1 and top-5 decoding) to assess the performance of generator. The BLEU-1 and BLEU-4 scores in our tables are denoted by B-1 and B-4 respectively. We also consider BLEU-penalized scores (indicated by BP-1 and BP-4) which consider the BLEU score at a given test instance as 0 if the document retrieved for the given instance is incorrect. These help ensure that a model is not able to produce a high score by memorizing on a particular given domain.

5.4 Results

As can be seen in Table 3, VRAG outperforms RAG on all retrieval tasks (Recall and MRR metrics) on every dataset. We also note that both RAG and VRAG significantly improve the performance of the baseline DPR based retriever model. Further Table 7 shows the results of language generation tasks on all datasets. Note that all results in Table 7 are obtained after further fine tuning the generator networks for both RAG and VRAG after joint training is complete. The results shows that the VRAG model outperforms the RAG model on language generation tasks (BLEU metrics) on all datasets except DoQA. We believe this difference is due to the nature of documents used in this dataset - other datasets have a lot more fact based questions to be answered using knowledge in documents, while more than 66% of the questions in the DoQA dataset are non-fact based and open-ended. Perhaps the use of a stronger reasoning model which is capable of answering such questions better, may be required on this dataset. Another, possibility is that the RAG model is memorizing and overfitting better on the domain. Note that on other datasets, the relative gain of VRAG (over RAG) is also significantly higher in penalized BLEU scores (BP-1 and BP-4). This indicates that VRAG model is more likely to generate the response using the correct document and not by merely memorizing on a given domain.

Dataset	Model	top-1 decoding				top-5 decoding			
		B-1	B-4	BP-1	BP-4	B-1	B-4	BP-1	BP-4
OR-QuAC (Qu et al. 2020)	DPR + GPT2	13.65	6.11	4.41	3.11	16.06	7.97	11.36	7.37
	RAG	12.88	5.94	4.60	3.03	15.39	7.64	11.72	7.21
	VRAG	13.97	7.58	5.61	4.02	16.30	9.11	13.10	8.72
DSTC9 (Kim et al. 2020)	DPR + GPT2	31.84	7.21	4.37	1.08	31.81	7.17	11.14	2.60
	RAG	33.28	8.26	25.87	6.86	33.30	8.27	28.75	7.45
	VRAG	33.49	8.70	26.49	7.57	33.51	8.67	29.80	8.03
DoQA (Campos et al. 2020)	DPR + GPT2	21.26	14.31	17.83	14.20	22.60	15.73	20.53	15.62
	RAG	23.59	17.04	20.86	16.92	24.27	17.73	22.75	17.60
	VRAG	23.38	17.02	20.91	16.94	23.29	16.88	21.93	16.80
OR-QuAC-QA (Qu et al. 2020)	DPR + GPT2	9.11	1.88	1.81	1.07	10.18	2.61	4.95	2.38
	RAG	9.12	2.31	2.36	1.44	10.39	2.97	5.75	2.75
	VRAG	9.64	2.93	2.83	1.66	10.65	3.49	6.73	3.36

Table 2: Comparison of VRAG and RAG models in terms of BLEU and BLEU-penalized on all datasets after decoder fine-tuning.

Dataset	Model	R@1	R@5	mrr@5
OR-QuAC (Qu et al. 2020)	DPR	19.8	49.0	0.315
	RAG	24.2	54.9	0.366
	VRAG	26.0	56.9	0.388
DSTC9 (Kim et al. 2020)	DPR	13.2	34.3	0.208
	RAG	69.4	84.3	0.758
	VRAG	73.3	87.0	0.792
DoQA (Campos et al. 2020)	DPR	54.3	71.7	0.612
	RAG	61.8	79.0	0.687
	VRAG	62.4	79.1	0.691
OR-QuAC-QA (Qu et al. 2020)	DPR	9.6	30.7	0.174
	RAG	15.0	38.1	0.239
	VRAG	16.4	41.0	0.261

Table 3: Comparison of VRAG and RAG models in terms of retrieval accuracy (document recall $R@K$ and MRR scores) on all datasets.

Effect of Top-5 Decoding From Table 7 we find that in almost all cases, using top-5 decoding to generate responses performs better than using the single (best scored) document to generate responses. This indicates that both RAG and VRAG are able to incorporate information from the correct document even if it is not returned as the top-ranked document. Lastly, as mentioned previously, VRAG performs better than RAG when using, both, top-1 and top-5 decoding.

Benefit of Document Posterior In Section 3, we motivated the VRAG model by suggesting that using the posterior to sample documents while training the decoder could help train a better model. Table 4 compares the performance of the VRAG (posterior) against the RAG (prior) on a retrieval task using the test data. Figure 2 shows the retrieval performance versus epoch for VRAG prior and posterior as well as RAG prior during training. As can be seen, the use of the responses by VRAG (posterior), to query the index during training, results in significantly better retrieval accuracy than RAG (prior) at every epoch. The better samples from posterior help in training the generator network as well. While this is perhaps intuitive and expected, our results

on recall in Table 7 demonstrate the VRAG (prior) which is trained indirectly via the KL-divergence with VRAG (posterior) also outperforms the RAG (prior). We attribute this gain to the fact that the generator in VRAG learns to focus well on the generated documents which further reinforces the posterior network (and indirectly the prior network through KL term) to improve.

Effect of Decoder fine-tuning Training VRAG involves optimizing two objectives - reducing the KL-divergence between the document-prior and document-posterior, and, maximizing the log likelihood of the responses. VAE models often end up prioritizing the KL-divergence over the likelihood objective and sometimes end up with zero KL-divergence by forcing the document-posterior to match the prior (called posterior-collapse) (Lucas et al. 2019; Bowman et al. 2015; Chen et al. 2016; Oord, Vinyals, and Kavukcuoglu 2017). However, we hypothesize even in cases where there is no posterior collapse, the joint training could result in the response-generator (likelihood term) being inadequately trained.

We observed that fine-tuning the response decoder after freezing the weights of priors, results in an improvement in both RAG and VRAG. The results shown in Table 7 were obtained after fine tuning the generator after the joint training is complete. In appendix C, we show the results both with and without fine tuning. It is interesting to note on the DoQA dataset, RAG initially reported a B-4 of only 0.69 (top-5 decoding) which goes up to 17.04 after fine-tuning (refer to Table in Appendix C).

Study of Memorization One of the issues in such an unsupervised learning is that generator may fail to use the retrieved knowledge. Instead the parameters might have been trained to internally model the external knowledge sources themselves, a phenomenon we call 'memorization'. In order to study memorization in the models, we compared the results on response generation of the pipeline, RAG and VRAG models in the absence of the correct document - if the correct document is missing, the models should perform very poorly. A good performance even without obtaining correct document, would indicate lesser reliance on exter-

	OR-QuAC		DSTC9		DoQA		OR-QuAC-QA	
	$R@1$	$R@5$	$R@1$	$R@5$	$R@1$	$R@5$	$R@1$	$R@5$
RAG (Prior)	24.2	54.9	69.4	84.3	61.8	79.0	15.0	38.1
VRAG (Posterior)	39.0	72.4	82.4	90.6	82.7	93.2	31.6	65.4

Table 4: Recall scores for RAG (Prior) and VRAG (Posterior)

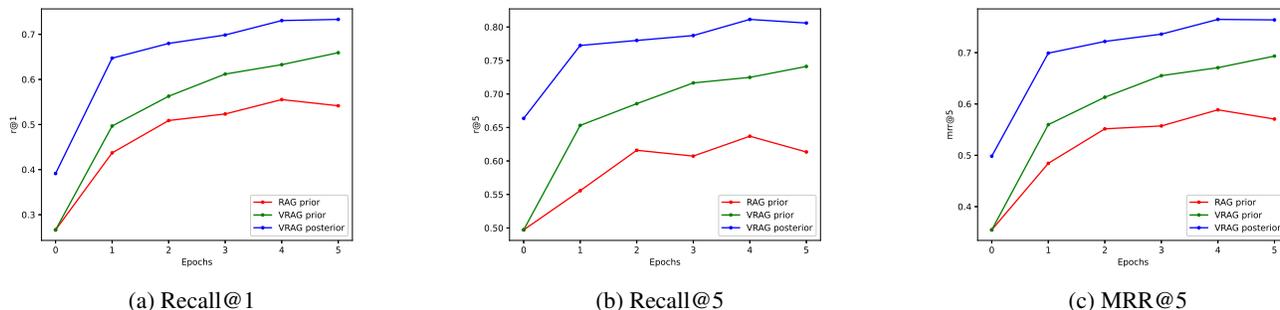


Figure 2: Recall versus epoch numbers on training set for DoQA dataset for RAG prior, VRAG prior and posterior distributions.

		top-1 decoding B-1	top-5 decoding B-1
OR-QuAC	DPR	-42.28%	-48.64%
	RAG	-36.77%	-45.19%
	VRAG	-43.22%	-49.88%

Table 5: Percentage drop in BLEU score when correct documents have been removed.

nal knowledge and hence a higher tendency for ‘memorization’. We, thus rebuild the document index without including any of the documents from the test set and then re-evaluate the performance of our models. Table 5, shows the drop in BLEU scores for each of the models after removing the correct document on OR-QuAC dataset. However the percentage drop is highest in the VRAG model. This indicates a higher usage of knowledge instance and hence lesser memorization.

Effect of top-k We also consider the case when we reduce the number of samples (k) while training. Figure 3 shows the variation in $R@3$ versus k on the DoQA dataset. Here we observe that recall decreases with decrease in k . This is because the computation of objective becomes less accurate for decrease in k . We also note that when only one document is sampled, RAG outperforms VRAG. We hypothesize, that in this case the VRAG prior trains poorly due to an extremely weak approximation of the KL divergence⁶.

6 Conclusion

In this paper we described an approach to run variational training on knowledge grounded dialog with a large corpus. Our experiments on three conversational QA datasets indicate that variational training is helpful as it produces better

⁶approximation has just 1-2 samples when $k=1$

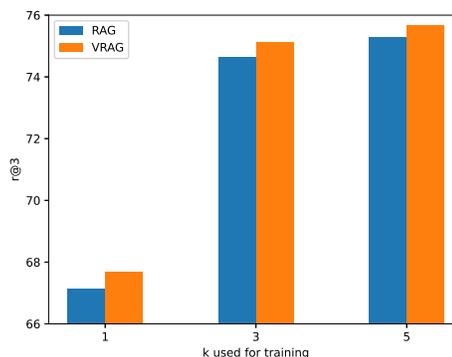


Figure 3: Variation in Recall as models are trained with different values of k (top- k documents). Results shown with $k = 3$ on the DoQA dataset.

document samples while training. We find that our model, VRAG (having access to superior samples from posterior while training), not only generates better responses, it also learns a better retriever (prior distribution).

We believe that such sampling approximations could also be helpful in other tasks; for instance, it could also be interesting to apply them to other approaches such as Reinforcement Learning to the setting of a large corpus. This would require overcoming similar challenges in sampling as we did in this paper for variational training.

References

Baudiš, P.; and Šedivý, J. 2015. Modeling of the question answering task in the yodaqa system. In *International Conference of the Cross-Language Evaluation Forum for European Languages*, 222–228. Springer.

- Berant, J.; Chou, A.; Frostig, R.; and Liang, P. 2013. Semantic parsing on freebase from question-answer pairs. In *Proceedings of the 2013 conference on empirical methods in natural language processing*, 1533–1544.
- Bowman, S. R.; Vilnis, L.; Vinyals, O.; Dai, A. M.; Jozefowicz, R.; and Bengio, S. 2015. Generating sentences from a continuous space. *arXiv preprint arXiv:1511.06349*.
- Budzianowski, P.; Wen, T.-H.; Tseng, B.-H.; Casanueva, I.; Ultes, S.; Ramadan, O.; and Gašić, M. 2018. MultiWOZ—A Large-Scale Multi-Domain Wizard-of-Oz Dataset for Task-Oriented Dialogue Modelling. *arXiv preprint arXiv:1810.00278*.
- Campos, J. A.; Otegi, A.; Soroa, A.; Deriu, J.; Cieliebak, M.; and Agirre, E. 2020. DoQA - Accessing Domain-Specific FAQs via Conversational QA. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 7302–7314. Online: Association for Computational Linguistics.
- Chen, X.; Kingma, D. P.; Salimans, T.; Duan, Y.; Dhariwal, P.; Schulman, J.; Sutskever, I.; and Abbeel, P. 2016. Variational lossy autoencoder. *arXiv preprint arXiv:1611.02731*.
- Chen, X.; Meng, F.; Li, P.; Chen, F.; Xu, S.; Xu, B.; and Zhou, J. 2020. Bridging the Gap between Prior and Posterior Knowledge Selection for Knowledge-Grounded Dialogue Generation. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 3426–3437.
- Choi, E.; He, H.; Iyyer, M.; Yatskar, M.; Yih, W.-t.; Choi, Y.; Liang, P.; and Zettlemoyer, L. 2018. QuAC: Question Answering in Context. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, 2174–2184. Brussels, Belgium: Association for Computational Linguistics.
- Devlin, J.; Chang, M.-W.; Lee, K.; and Toutanova, K. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.
- Gangi Reddy, R.; Contractor, D.; Raghu, D.; and Joshi, S. 2019. Multi-Level Memory for Task Oriented Dialogs. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, 3744–3754. Minneapolis, Minnesota: Association for Computational Linguistics.
- Guu, K.; Lee, K.; Tung, Z.; Pasupat, P.; and Chang, M.-W. 2020. Realm: Retrieval-augmented language model pre-training. *arXiv preprint arXiv:2002.08909*.
- Jang, E.; Gu, S.; and Poole, B. 2016. Categorical reparameterization with gumbel-softmax. *arXiv preprint arXiv:1611.01144*.
- Johnson, J.; Douze, M.; and Jégou, H. 2017. Billion-scale similarity search with GPUs. *arXiv preprint arXiv:1702.08734*.
- Joshi, M.; Choi, E.; Weld, D. S.; and Zettlemoyer, L. 2017. Triviaqa: A large scale distantly supervised challenge dataset for reading comprehension. *arXiv preprint arXiv:1705.03551*.
- Karpukhin, V.; Oğuz, B.; Min, S.; Wu, L.; Edunov, S.; Chen, D.; and Yih, W.-t. 2020. Dense Passage Retrieval for Open-Domain Question Answering. *arXiv preprint arXiv:2004.04906*.
- Kim, B.; Ahn, J.; and Kim, G. 2020. Sequential Latent Knowledge Selection for Knowledge-Grounded Dialogue. *arXiv preprint arXiv:2002.07510*.
- Kim, S.; Eric, M.; Gopalakrishnan, K.; Hedayatnia, B.; Liu, Y.; and Hakkani-Tur, D. 2020. Beyond Domain APIs: Task-oriented Conversational Modeling with Unstructured Knowledge Access. In *Proceedings of the 21th Annual Meeting of the Special Interest Group on Discourse and Dialogue*, 278–289. 1st virtual meeting: Association for Computational Linguistics.
- Kingma, D. P.; and Welling, M. 2013. Auto-encoding variational bayes. *arXiv preprint arXiv:1312.6114*.
- Kwiatkowski, T.; Palomaki, J.; Redfield, O.; Collins, M.; Parikh, A.; Alberti, C.; Epstein, D.; Polosukhin, I.; Devlin, J.; Lee, K.; et al. 2019. Natural questions: a benchmark for question answering research. *Transactions of the Association for Computational Linguistics*, 7: 453–466.
- Lewis, P.; Perez, E.; Piktus, A.; Petroni, F.; Karpukhin, V.; Goyal, N.; Küttler, H.; Lewis, M.; Yih, W.-t.; Rocktäschel, T.; et al. 2020. Retrieval-augmented generation for knowledge-intensive nlp tasks. *arXiv preprint arXiv:2005.11401*.
- Lian, R.; Xie, M.; Wang, F.; Peng, J.; and Wu, H. 2019. Learning to select knowledge for response generation in dialog systems. *arXiv preprint arXiv:1902.04911*.
- Loshchilov, I.; and Hutter, F. 2017. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*.
- Lucas, J.; Tucker, G.; Grosse, R.; and Norouzi, M. 2019. Understanding posterior collapse in generative latent variable models.
- Maddison, C. J.; Mnih, A.; and Teh, Y. W. 2016. The concrete distribution: A continuous relaxation of discrete random variables. *arXiv preprint arXiv:1611.00712*.
- Oord, A. v. d.; Vinyals, O.; and Kavukcuoglu, K. 2017. Neural discrete representation learning. *arXiv preprint arXiv:1711.00937*.
- Qu, C.; Yang, L.; Chen, C.; Qiu, M.; Croft, W. B.; and Iyyer, M. 2020. *Open-Retrieval Conversational Question Answering*, 539–548. New York, NY, USA: Association for Computing Machinery. ISBN 9781450380164.
- Radford, A.; Wu, J.; Child, R.; Luan, D.; Amodei, D.; and Sutskever, I. 2019. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8): 9.
- Raghu, D.; Gupta, N.; et al. 2020. Unsupervised Learning of KB Queries in Task Oriented Dialogs. *arXiv preprint arXiv:2005.00123*.
- Robertson, S.; and Zaragoza, H. 2009. The Probabilistic Relevance Framework: BM25 and Beyond. *Found. Trends Inf. Retr.*, 3(4): 333–389.
- Sordoni, A.; Bengio, Y.; Vahabi, H.; Lioma, C.; Grue Simonsen, J.; and Nie, J.-Y. 2015. A hierarchical recurrent

encoder-decoder for generative context-aware query suggestion. In *Proceedings of the 24th ACM International on Conference on Information and Knowledge Management*, 553–562.

A Error guarantee for KL approximation

In this appendix, we justify the our approximation to KL term.

Theorem 1. *Let q and p be distributions over sample space $\Omega = \{1, 2, \dots, n\}$. Let $\delta > 0$. Define $S_{p,low}(\delta) = \{z : p(z) \leq \delta\}$ and $S_{q,high}(\delta) = \{z : q(z) \geq \delta\}$. Let $S(\delta) = S_{p,low}(\delta) \cup S_{q,high}(\delta)$. Let*

$$KL[q||p] = \sum_{z \in \Omega} q(z) \log \left(\frac{q(z)}{p(z)} \right)$$

and

$$\hat{KL}_\delta[q||p] = \sum_{z \in S(\delta)} q(z) \log \left(\frac{q(z)}{p(z)} \right)$$

Then for $\delta = \min \left\{ \frac{\epsilon/2N}{\log(2N/\epsilon)}, \frac{1}{e} \right\}$ we have $|KL - \hat{KL}_\delta| < \epsilon$.

Proof.

$$|KL - \hat{KL}_\delta| = \left| \sum_{z \in \Omega \setminus S(\delta)} q(z) \log \left(\frac{q(z)}{p(z)} \right) \right| \quad (8)$$

$$\leq \sum_{z \in \Omega \setminus S(\delta)} \left| q(z) \log \left(\frac{q(z)}{p(z)} \right) \right| \quad (9)$$

$$\text{(By Triangular inequality)} \quad (10)$$

$$= \sum_{z \in \Omega \setminus S(\delta)} q(z) \left| \log \left(\frac{q(z)}{p(z)} \right) \right| \quad (11)$$

$$\leq \sum_{z \in \Omega \setminus S(\delta)} q(z) |\log q(z)| \quad (12)$$

$$+ q(z) |\log p(z)| \quad (13)$$

$$\text{(Using triangular inequality)} \quad (14)$$

Now for $z \in \Omega \setminus S(\delta)$, we have that $q(z) < \delta$ and $p(z) > \delta$. Now for $f(x) = x|\log(x)| = -x \log(x)$, we have $f'(x) = -1 - \log(x)$. Thus $f'(x) \geq 0$ for $x \leq \frac{1}{e}$. Thus $f(x) = x|\log(x)|$ is an increasing function of x for $x < \frac{1}{e}$. Thus for $q(z) < \delta < \frac{1}{e}$, we have that $q(z)|\log q(z)| < \delta|\log(\delta)| = -\delta \log(\delta)$.

Also the second term $q(z)|\log p(z)| = -q(z) \log p(z)$. Thus for $z \notin S(\delta)$, we have $q(z) < \delta$ and $p(z) > \delta$. Thus $\log p(z) > \log(\delta)$ or $-\log p(z) < -\log(\delta)$. Overall, $q(z)|\log p(z)| < -\delta \log(\delta)$. Hence

$$|KL - \hat{KL}_\delta| \leq \sum_{z \in \Omega \setminus S(\delta)} -2\delta \log(\delta) \quad (15)$$

$$\leq n(-2\delta \log(\delta)). \quad (16)$$

Now, $\lim_{x \rightarrow 0^+} x \log(x) = 0$. Thus, given $\epsilon > 0, \exists \delta_0 > 0$ s.t. $|\delta_0 \log(\delta_0)| < \frac{\epsilon}{2N}$.

In fact, we can choose $\delta_0 = -\frac{\epsilon/2N}{\log(\epsilon/2N)}$. Now, choose $\delta = \min \left\{ \delta_0, \frac{1}{e} \right\}$. Then

$$|KL - \hat{KL}_\delta| \leq -2N\delta \log(\delta) \quad (17)$$

$$\leq 2N \cdot \frac{\epsilon}{2N} \quad (18)$$

$$= \epsilon \quad (19)$$

□

B Hyperparameters and Training Details

Dataset	Learning rate	Time per epoch
OR-QuAC	10^{-5}	3 hrs
DSTC9	10^{-6}	2 hrs
DoQA	10^{-6}	20 mins
OR-QuAC-QA	10^{-5}	2.5 hrs

Table 6: Hyperparameters and training time for each epoch

We train both RAG and VRAG with AdamW optimizer. We train for 10 epochs with early stopping (patience = 5). The learning rates and time per epoch are given in Table 6. We use BERT base (110 million parameters) for the context encoders in both prior and posterior networks and GPT2 small (117 million parameters) for the decoder network. The document encoder is also a BERT base (110 million parameters) which is fixed at training time.

All of our experiments are conducted on a single machine with 100GB of system memory and Nvidia V100 GPU.

C Comparison of language generation results both with and without fine tuning on all datasets

Table 7 shows the results on RAG and VRAG both with and without fine tuning.

Dataset	Model	top-1 decoding				top-5 decoding			
		B-1	B-4	BP-1	BP-4	B-1	B-4	BP-1	BP-4
OR-QuAC (Qu et al. 2020)	DPR + GPT2	13.65	6.11	4.41	3.11	16.06	7.97	11.36	7.37
	RAG	13.06	6.19	4.68	3.19	15.73	7.87	12.09	7.49
	VRAG	11.80	5.83	4.73	3.26	13.54	6.71	10.76	6.41
	RAG (fine-tuned)	12.88	5.94	4.60	3.03	15.39	7.64	11.72	7.21
	VRAG (fine-tuned)	13.97	7.58	5.61	4.02	16.30	9.11	13.10	8.72
DSTC9 (Kim et al. 2020)	DPR + GPT2	31.84	7.21	4.37	1.08	31.81	7.17	11.14	2.60
	RAG	32.54	8.35	24.47	6.89	32.55	8.33	28.17	7.43
	VRAG	32.76	8.60	25.81	7.36	32.79	8.64	29.18	7.90
	RAG (fine-tuned)	33.28	8.26	25.87	6.86	33.30	8.27	28.75	7.45
	VRAG (fine-tuned)	33.49	8.70	26.49	7.57	33.51	8.67	29.80	8.03
DoQA (Campos et al. 2020)	DPR + GPT2	21.26	14.31	17.83	14.20	22.60	15.73	20.53	15.62
	RAG	2.19	0.69	1.73	0.64	3.23	0.77	2.68	0.74
	VRAG	17.54	11.70	15.52	11.70	17.87	11.85	16.73	11.85
	RAG (fine-tuned)	23.59	17.04	20.86	16.92	24.27	17.73	22.75	17.60
	VRAG (fine-tuned)	23.38	17.02	20.91	16.94	23.29	16.88	21.93	16.80
OR-QuAC-QA (Qu et al. 2020)	DPR + GPT2	9.11	1.88	1.81	1.07	10.18	2.61	4.95	2.38
	RAG	9.30	2.49	2.61	1.56	10.81	3.35	6.36	3.17
	VRAG	9.16	2.76	2.88	1.73	10.46	3.25	6.60	3.16
	RAG (fine-tuned)	9.12	2.31	2.36	1.44	10.39	2.97	5.75	2.75
	VRAG (fine-tuned)	9.64	2.93	2.83	1.66	10.65	3.49	6.73	3.36

Table 7