

GKS: Graph-based Knowledge Selector for Task-oriented Dialog System

Jen-Chieh Yang*,¹ Jia-Yan Wu*,² Sung-Ping Chang,³ Ya-Chieh Huang,²

¹ Academic Sinica

² National Taiwan University

³ Columbia University

richardyangms3@gmail.com, b06701216@ntu.edu.tw, sksk29292929@gmail.com, b06701235@ntu.edu.tw

Abstract

In previous research, knowledge selection tasks mostly rely on language model-based methods or knowledge ranking. However, approaches simply rely on the language model take all knowledge as sequential input that knowledge does not contain sequential information in most circumstances. On the other hand, the knowledge ranking method leverage dialog history and each given knowledge but not between pieces of knowledge. In the 10th Dialog System Technology Challenges (DSTC 10), we participated the second track of Knowledge-grounded Task-oriented Dialogue Modeling on Spoken Conversations. To deal with the problems mentioned above, we modified training methods based on SOTA models for the first and third sub-tasks and proposed Graph-Knowledge Selector (GKS), utilizing a graph-attention base model incorporated with language model for knowledge selection sub-task two. GKS makes knowledge selection decisions in the dialog by simultaneously considering each knowledge embedding generated from the language model, without sequential features. GKS also leverages considerable knowledge in the decision-making, takes relations across knowledge as a part of the selection process. GKS outperforms several SOTA models proposed in the data-set on knowledge selection from the 9th Dialog System Technology Challenges (DSTC9).

1 Introduction

Task-oriented dialog system has been widely used nowadays, providing specific services in different industries. Building dialog systems with the ability to deal with heterogeneous data become significant to make robust and general frameworks for wide-range applied scenarios. The problem is amplified under the situation when input data is considered to be spoken language, making input data with even more variance. In this paper, we proposed our approach to construct dialog system in each sub-task to alleviate differentiation for data-sets. We mainly focus on Knowledge selection task, aiming to solve potential obstacles which past knowledge selection might encounter.

In DSTC10 track 2, the goal is to perform dialog system on spoken language, which is not straight forward to cope with via pre-trained language model. Regarding task 1, we

design our knowledge-seeking turn detection model with de-noise language model. The model is pre-trained with text data, aiming to transfer spoken language to text-style data.

Knowledge selection approach in the past mostly utilized language models. These approaches often have minor or no change on model structure but training objective and some training techniques such as data augmentation. We assume information within knowledge for dialog should not be taken simply in sequential style language model (see. Table 1). To better capture knowledge information, we form our knowledge selection model with graph-based design for task 2. The proposed Graph-Knowledge Selector (GKS) takes knowledge-embedding as input to make selection task. GKS does not simply concatenate knowledge and question together in forward into language model as input and output prediction. Instead, GKS leverages information between each knowledge and between knowledge and question with graph-attention model.

As to assure our proposed frameworks in previous tasks, we select a model proposed in DSTC9 without much modification. We select (Bao et al. 2020) with modification as our generation model, which takes output from knowledge selection task prediction as input.

The main contribution in this paper is the new knowledge selection model for dialog system. However, since our approach does not solve the problem of spoken language quite well, we further test our framework on DSTC9 dataset, which consists of text data. The experiment result shows that our proposed framework outperforms models proposed in last year's challenge. Our implementation will be released upon acceptance.

2 Related Work

The recent development of task-oriented dialogue system benefits from pre-trained language models like GPT-2 (Radford et al. 2018; Budzianowski and Vulic 2019; Ham et al. 2020). Furthermore, BERT-like (Devlin et al. 2019) architectures, such as RoBERTa (Liu et al. 2019), achieved state-of-the-art performance on natural language understanding task like GLUE dataset (Wang et al. 2018). In subtask 1 and subtask 3, we leveraged this architecture to attain a better performance.

Detected turn	Does the hotel offer accessible parking?
Knowledge0	Does the hotel offer accessible parking?
Knowledge1	Is there on-site private parking at the Bridge Guest House?
Knowledge2	Do I have to pay for parking?
Knowledge3	Is there a cost for parking?
Knowledge4	Can I make a reservation for parking?
Knowledge5	Do they have help for disabled parking?
Knowledge6	Do you provide room service daily?
Knowledge7	Are there any fitness center or gym?

Table 1: Example from dialog turn and knowledge. The desired knowledge for the user should be Knowledge0. However, there are no sequential relation between knowledge but many approach simply connect knowledge together as input. Moreover, if we train the model simply pairing Detected Turn with each knowledge and sampling training pairs, the overlapping information between knowledge might be wasted. In the example, Knowledge0-5 refer to parking issues, we try let the model distinguish Knowledge0 from all the others according to detected turn but not with sampling approaches.

Knowledge-Seeking Turn Detection

The knowledge-seeking turn detection was first introduced in DSTC9 track1 by (Kim et al. 2020). A binary classifier was proposed to solve this task, while Tang et al. (2021) used a supervised method with an ELECTRA-based model followed by a fully connected layer (Clark et al. 2020) to determine whether to trigger knowledge. In other way, Mi et al. (2021) employed ensemble algorithm of four pre-trained models, such as RoBERTa and UniLM (Dong et al. 2019), to solve it as a classification task as well. Bao et al. (2020) proposed to consider API and external knowledge by schema description method. (Shah et al. 2019; Eric et al. 2019; Rastogi et al. 2020)

Knowledge Selection

The knowledge selection task is to retrieve candidate snippets from knowledge base for response generation. Traditionally, TF-IDF technique (Ramos 2003) and language model are applied on similar tasks. As mentioned above, the limitations of previous works lie in the model structure. On the other hand, we are inspired by Kernel Graph Attention Network proposed by (Liu et al. 2021), which performs fine-grained fact verification with kernel-based attention. We believe such graph-based model can be used to better capture information and select a more plausible set of knowledge snippets.

Knowledge Grounded Generation

The third component of our system is to generate responses given select knowledge snippets. Recently, Pre-trained language models such as BERT propel progress in natural language generation, but also demonstrate limitation while being directly fine-tuned on small conversation datasets (Rashkin et al. 2019; Wolf et al. 2019). PLATO (Bao et al.

2020) was proposed to address this problem by using uni- and bi-directional processing with further pre-training on large-scale Reddit and Twitter conversations. In addition, they introduced a discrete latent variable to grasp one-to-many utterances relationship information between conversations. In DSTC9 track1, Tan et al. (2020) further incorporated knowledge copy method to calculate the probability of response by combining generation distribution with the knowledge-attention distribution. Tan et al. (2020) provides an efficient way to generate sentences under the given knowledge, reducing the pressure added on the decoder and is easier for models to generalize to unseen knowledge.

3 Methodology

In this section, we first define our problem by dividing it into three separated sub-tasks, then discuss how we address each part of it with different models. Fig 1 shows our overall framework.

3.1 Knowledge-Seeking Turn Detection

In the first phase of our system, we deploy a binary classifier to decide whether to trigger the knowledge access branch for a given utterance and dialogue history.

Data Representations To capture whether the current dialog turn will need to trigger the knowledge, we decide to concatenate the current dialog with dialog history. We hope the model can consider richer information than only using one dialog turn. Besides, to make the model understand the speaker of dialog, we added a speaker token ([User] or [Sys]) before every dialog. The speaker tokens represent this dialog turn is spoken by user or system. We believe that different speakers will provide implicit information to the dialog history and will make our system perform better. Below is the representation of our input data:

$$[User]U_i[Sys]S_0[User]U_0\dots[Sys]S_{i-1} \quad (1)$$

where U_i equals to the i_{th} turn of user, S_i equals to the i_{th} turn of system.

Binary Classification Model In this part, we defined Knowledge-Seeking Turn Detection as a binary classification task. To extract informative features in the dialog context, we chose to use RoBERTa as our encoder since it outperformed most of pre-trained language model currently. Besides, we applied a new dialogue turn embedding, which represents the number of turns in the whole dialogue, in our training procedure. We hope model can learn more from this embedding and will regard turn number as an important information. After fine-tuning the RoBERTa model, the probability of x_0 being the correct answer is calculated as:

$$e_0 = \sum W_h h_0, \quad (2)$$

$$p(x_0) = \text{sigmoid}(e_0), \quad (3)$$

where $h_0 \in \mathbb{R}^{d_{h_j}}$ is the output hidden states of [CLS] token, $W_h \in \mathbb{R}^{d_{h_j}}$ are trainable parameters, $p(x_0)$ is the probability that input dialog will need to trigger the knowledge branch access.

3.2 Knowledge Selection

This section describes how we develop our graph-based knowledge selection model GKS.

Knowledge Embedding To construct node embedding for GKS, we first build knowledge embedding with Bert model. For pre-training Bert model, we first concatenate detected knowledge-needed questions (refer to detected knowledge-seeking turns) and each knowledge with [SEP] token as input, and add [CLS] at the first of every question-knowledge pair. We train the Bert model combined with a linear layer as a binary classification task, which refer to “Related” and “Unrelated”. We then reference this pretrained bert model to make node embedding.

$$e^n = Bert(k^n) \quad (4)$$

k^n is the n^{th} knowledge in the set K connected with question with [SEP], where K is the knowledge set consists of $k^1 \dots k^n \dots k^l$ with l knowledge pieces of the current entity. e^n is the hidden state of the n^{th} knowledge-question pair. To elaborate, e_0^n represent [CLS]. $e_{1:m}^n$ and $e_{1:m+p}^n$ represent question and knowledge where question contains m words (tokens) and knowledge p words (tokens).

Graph-Attention Knowledge Selection Inspired by (Liu et al. 2021), which successfully capture text information with graph attention model for factual verification, we develop our selection model with graph-based model. The prediction is made per-node, which the node with the highest probability indicates the predicted knowledge. We follows (Zhou et al. 2019), utilizing node kernel to determine relevance between dialog turn and each knowledge with “readout” function. First, Graph-Attention Knowledge Selector (GKS) applies the translation matrix M^{q, e^n} on the n^{th} knowledge hidden state k^n and q , where q is the question of the user, by the hidden state $e_{1:m}^n$ and $e_{1:m+p}^n$. GKS then applies the kernel *Kernel* match feature on the translation matrix to construct node representation $S(k^n)$ for knowledge selection

$$S(k^n) = \frac{1}{m} \sum_i^m Kernel(M^{q, k^n}) \quad (5)$$

and

$$P(k^n|E) = softmax_p(Linear(S(k^n))) \quad (6)$$

function as the readout to calculate n^{th} knowledge selection probability $P(k^n|E)$. The whole model is trained end-to-end by minimizing the cross entropy loss:

$$L = CrossEntropy(k^*, P(k^p|E)) \quad (7)$$

where k^* is the golden knowledge to the detect knowledge turn.

3.3 Knowledge Grounded Generation

After candidate knowledge snippets were given, we then select the one snippet with the highest probability as an input for knowledge grounded generation. Inspired by Bao et al. (2020) and Tan et al. (2020), we then leverage RoBERTa-based architecture with the consideration of latent variable.

Model	Recall	Precision	F1
Baseline	0.9992	0.9719	0.9853
ROBERTA-HS	0.9981	0.9963	0.9972
ROBERTA-WD (DA)	0.9996	0.9985	0.9990
(He et al. 2021)	0.99102	0.9969	0.9939
(Tang et al. 2021)	0.9817	0.9465	0.9638
Ours	0.9918	0.9921	0.9920

Table 2: Our result of Knowledge-Seeking Turn Detection. Where ROBERTA-HS and ROBERTA-WD (DA) are from (Mi et al. 2021).

Inspired by Tan et al. (2020), we concatenate knowledge snippet and dialogue history with special tokens as input. Unlike Tan et al. (2020), we consider both question and answer part of the knowledge snippet:

$$\langle BOS \rangle k^s \langle sp1 \rangle s_1 \langle sp2 \rangle s_2 \dots \langle sp2 \rangle r \langle EOS \rangle . \quad (8)$$

where k^s represents selected knowledge snippet, $\langle sp_1 \rangle$ and $\langle sp_2 \rangle$ represent two speakers in the dialogue respectively, and s_n denotes n^{th} term in dialog history. r represents the response. Following Tan et al. (2020), we encode response into the Z matrix, of which each row represents a special z corresponding to given examples. To select a specific z as our latent variable, we estimate posterior probability $q_\phi(z|S, k^s, r)$, where S denotes dialogue history. The rest of the architecture and calculation process, such as knowledge copy mechanism, segmented response generation, and modified beam search, are essentially identical to the ones in Tan et al. (2020). We illustrate it with subtask2 model in Figure 1.

4 Experiments

This section demonstrates our experiment results. For the Baseline and chosen baselines, we report from their paper presented in DSTC9 last year.

Knowledge Seeking-Turn Detection

Table 2 shows our result on the DSTC9 data-set. As the proposed baseline model of DSTC9 is already performing very well, other proposed models have only a slight difference in their result. According to our experiment result, our model outperformed several baseline on F1 score, which indicates our approach to training model with [User] and [Sys] tokens gives language model more ability to learn user utterance’s pattern. (Engelmore and Morgan 1986) perform better from selected models. We assume their proposed training strategy with data augmentation is the key reason to gain performance under the condition that most language models could gain very good performance on the original data-set.

Knowledge Selection

Since our motivation is aiming to develop a better solution for the knowledge section without noise in spoken language translation and preventing potential defects mentioned in earlier sections that previous approaches don’t cope with, we further test our proposed model on the DSTC9 dataset.

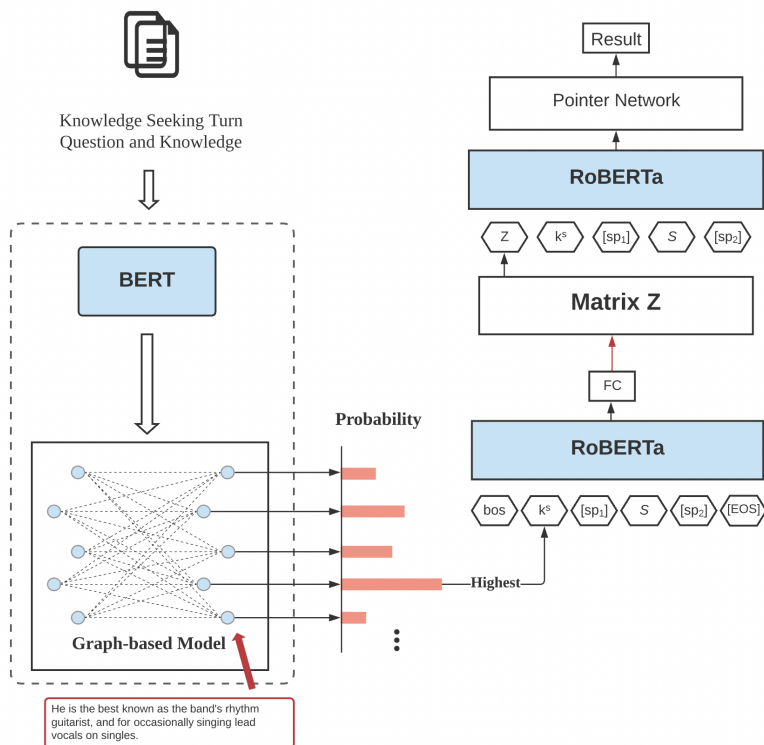


Figure 1: The figure shows the overall framework for knowledge selection and knowledge-grounded generation. The left part describes the workflow of knowledge selection, generating the probability for each node. The generation model takes the highest probability among all nodes as knowledge snippets as input for generation.

Model	Acc@5	Acc@1	MRR@5
Baseline	0.8772	0.6201	0.7263
ROBERTA-WD	0.9745	0.9145	0.9428
ROBERTA-WD (IS)	0.9741	0.9456	0.9589
ROBERTA-WD-listwise	0.9752	0.9394	0.9566
(He et al. 2021)	0.9892	0.9465	0.9665
(Tang et al. 2021)	0.9665	0.9117	0.9372
KGS	0.9899	0.95435	-

Table 3: Result of our presented Knowledge Selection model KGS. ROBERTA-WD, ROBERTA-WD (IS), and ROBERTA-WD-listwise are proposed in (Mi et al. 2021).

Table 3 shows the final result of KGS model performance on DSTC9 track 1 dataset. We selected several models proposed in last year’s competition and SOTA models as baseline. ROBERTA-WD (IS) in (Mi et al. 2021) used sampling technique and k-fold cross-validation during the training process. (He et al. 2021) acquired multi-scale negatives to replace random sampling, which might lead to coarse-grained class separation. (Tang et al. 2021) is ELECTRA-based model with proposed aggregated loss, which contains correlation between the domains, entity names, knowledge snippets, and dialog contexts. The result shows that our model, which applies graph-based model in selection process, outperforms past approaches that only rely on language models, even without data augmentation.

Knowledge Grounded Generation

The generated results are demonstrated in Table 4, it is compared with others in DSTC9. Following Tan et al. (2020), our RoBERTa-based model has the same hyperparameters as the baseline model in Kim et al. (2021). Learning rate is $6.25e - 5$, batch size is 4, and gradient accumulation steps is 32. The number of hidden variable z is set to 5. Our model is trained in 20 epochs, we use copy mechanism followed by vanilla beam search to get our final generated result.

5 Conclusion

In this paper, we proposed a framework for DSTC10 and DSTC9. Our main goal is to develop a better solution for knowledge selection tasks, which only rely on language models to perform selection in the past. The results showed that our proposed knowledge selection model with a graph-based model performed better than the proposed models last year. For our future goal, we are interested in replacing knowledge turn question embedding, which is constructed with text sentence embedding in our original setting, with wave embedding. We assume this could better obtain spoken without hurting the overall system.

Model	BLEU-1	BLEU-2	BLEU-3	BLEU-4	METEOR	ROUGE-1	ROUGE-2	ROUGE-L
Baseline	0.3601	0.2202	0.1389	0.0956	0.3600	0.3939	0.1749	0.3501
(Mi et al. 2021)	0.4330	0.3061	0.2133	0.1616	0.4535	0.4795	0.2520	0.4304
(Tang et al. 2021)	0.3684	0.2374	0.1531	0.1030	0.3719	0.4113	0.1938	0.3692
(He et al. 2021)	0.4267	0.2789	0.1858	0.1357	0.4324	0.4587	0.2249	0.4093
Ours	0.4356	0.2978	0.1993	0.1378	0.4400	0.4711	0.2415	0.4262

Table 4: Automatic metric of our generation model against other baselines in subtask3.

References

- Bao, S.; He, H.; Wang, F.; Wu, H.; and Wang, H. 2020. PLATO: Pre-trained Dialogue Generation Model with Discrete Latent Variable. arXiv:1910.07931.
- Budzianowski, P.; and Vulic, I. 2019. Hello, It’s GPT-2 - How Can I Help You? Towards the Use of Pretrained Language Models for Task-Oriented Dialogue Systems. *CoRR*, abs/1907.05774.
- Clark, K.; Luong, M.-T.; Le, Q. V.; and Manning, C. D. 2020. ELECTRA: Pre-training Text Encoders as Discriminators Rather Than Generators. arXiv:2003.10555.
- Devlin, J.; Chang, M.-W.; Lee, K.; and Toutanova, K. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, 4171–4186. Minneapolis, Minnesota: Association for Computational Linguistics.
- Dong, L.; Yang, N.; Wang, W.; Wei, F.; Liu, X.; Wang, Y.; Gao, J.; Zhou, M.; and Hon, H.-W. 2019. Unified Language Model Pre-training for Natural Language Understanding and Generation. arXiv:1905.03197.
- Engelmore, R.; and Morgan, A., eds. 1986. *Blackboard Systems*. Reading, Mass.: Addison-Wesley.
- Eric, M.; Goel, R.; Paul, S.; Kumar, A.; Sethi, A.; Ku, P.; Goyal, A. K.; Agarwal, S.; Gao, S.; and Hakkani-Tur, D. 2019. MultiWOZ 2.1: A Consolidated Multi-Domain Dialogue Dataset with State Corrections and State Tracking Baselines. arXiv:1907.01669.
- Ham, D.; Lee, J.-G.; Jang, Y.; and Kim, K.-E. 2020. End-to-End Neural Pipeline for Goal-Oriented Dialogue Systems using GPT-2. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 583–592. Online: Association for Computational Linguistics.
- He, H.; Lu, H.; Bao, S.; Wang, F.; Wu, H.; Niu, Z.; and Wang, H. 2021. Learning to Select External Knowledge with Multi-Scale Negative Sampling. arXiv:2102.02096.
- Kim, S.; Eric, M.; Gopalakrishnan, K.; Hedayatnia, B.; Liu, Y.; and Hakkani-Tur, D. 2020. Beyond Domain APIs: Task-oriented Conversational Modeling with Unstructured Knowledge Access. arXiv:2006.03533.
- Kim, S.; Eric, M.; Hedayatnia, B.; Gopalakrishnan, K.; Liu, Y.; Huang, C.-W.; and Hakkani-Tur, D. 2021. Beyond Domain APIs: Task-oriented Conversational Modeling with Unstructured Knowledge Access Track in DSTC9. arXiv:2101.09276.
- Liu, Y.; Ott, M.; Goyal, N.; Du, J.; Joshi, M.; Chen, D.; Levy, O.; Lewis, M.; Zettlemoyer, L.; and Stoyanov, V. 2019. RoBERTa: A Robustly Optimized BERT Pretraining Approach. *CoRR*, abs/1907.11692.
- Liu, Z.; Xiong, C.; Sun, M.; and Liu, Z. 2021. Fine-grained Fact Verification with Kernel Graph Attention Network. arXiv:1910.09796.
- Mi, H.; Ren, Q.; Dai, Y.; He, Y.; Sun, J.; Li, Y.; Zheng, J.; and Xu, P. 2021. Towards Generalized Models for Beyond Domain API Task-oriented Dialogue. *DSTC 9*.
- Radford, A.; Wu, J.; Child, R.; Luan, D.; Amodei, D.; and Sutskever, I. 2018. Language Models are Unsupervised Multitask Learners.
- Ramos, J. E. 2003. Using TF-IDF to Determine Word Relevance in Document Queries.
- Rashkin, H.; Smith, E. M.; Li, M.; and Boureau, Y.-L. 2019. Towards Empathetic Open-domain Conversation Models: a New Benchmark and Dataset. arXiv:1811.00207.
- Rastogi, A.; Zang, X.; Sunkara, S.; Gupta, R.; and Khaitan, P. 2020. Schema-Guided Dialogue State Tracking Task at DSTC8. arXiv:2002.01359.
- Shah, D. J.; Gupta, R.; Fayazi, A. A.; and Hakkani-Tur, D. 2019. Robust Zero-Shot Cross-Domain Slot Filling with Example Values. arXiv:1906.06870.
- Tan, C.-H.; Yang, X.; Zheng, Z.; Li, T.; Feng, Y.; Gu, J.-C.; Liu, Q.; Liu, D.; Ling, Z.-H.; and Zhu, X. 2020. Learning to Retrieve Entity-Aware Knowledge and Generate Responses with Copy Mechanism for Task-Oriented Dialogue Systems. arXiv:2012.11937.
- Tang, L.; Shang, Q.; Lv, K.; Fu, Z.; Zhang, S.; Huang, C.; and Zhang, Z. 2021. RADGE: Relevance Learning and Generation Evaluating Method for Task-Oriented Conversational Systems. *DSTC 9*.
- Wang, A.; Singh, A.; Michael, J.; Hill, F.; Levy, O.; and Bowman, S. R. 2018. GLUE: A Multi-Task Benchmark and Analysis Platform for Natural Language Understanding. *CoRR*, abs/1804.07461.
- Wolf, T.; Sanh, V.; Chaumond, J.; and Delangue, C. 2019. TransferTransfo: A Transfer Learning Approach for Neural Network Based Conversational Agents. arXiv:1901.08149.
- Zhou, J.; Han, X.; Yang, C.; Liu, Z.; Wang, L.; Li, C.; and Sun, M. 2019. GEAR: Graph-based Evidence Aggregating and Reasoning for Fact Verification. arXiv:1908.01843.