

Natural Language Deduction through Search over Statement Compositions

Kaj Bostrom Zayne Sprague Swarat Chaudhuri Greg Durrett
Department of Computer Science
The University of Texas at Austin
{kaj@cs, zaynesprague@, swarat@cs, gdurrett@cs}.utexas.edu

Abstract

In settings from fact-checking to question answering, we frequently want to know whether a collection of evidence entails a hypothesis. Existing methods primarily focus on end-to-end discriminative versions of this task, but less work has treated the *generative* version in which a model searches over the space of entailed statements to derive the hypothesis. We propose a system for natural language deduction that decomposes the task into separate steps coordinated by best-first search, producing a tree of intermediate conclusions that faithfully reflects the system’s reasoning process. Our experiments demonstrate that the proposed system can better distinguish verifiable hypotheses from unverifiable ones and produce natural language explanations that are more internally consistent than those produced by an end-to-end T5 model.

1 Introduction

When we read a passage from a novel, a Wikipedia page, or any other piece of text, the meaning we gather from it is not limited to what is written on the page. We make many additional inferences by combining multiple statements and applying our background knowledge. This ability to synthesize meaning, determine the consequences of a set of statements, and generate new conclusions is a significant part of natural language understanding. Humans are able to give step-by-step explanations of the reasoning that they do as part of these processes. However, current machine learning approaches for reading comprehension or natural language inference involve end-to-end fine-tuning of pre-trained language models. These models are black boxes and do not offer interpretable explanations for their predictions; there is no notion of step-by-step deduction. This limitation prevents users from understanding and accommodating models’ affordances (Hase and Bansal, 2020; Bansal et al., 2021).

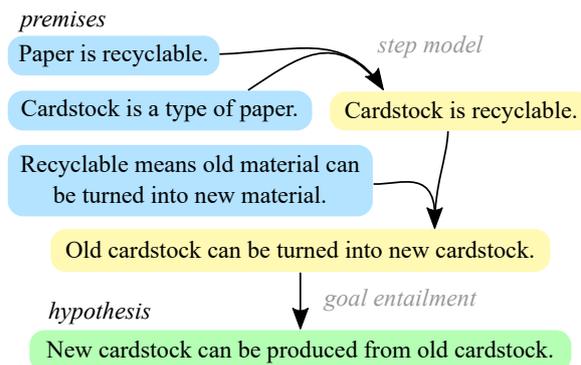


Figure 1: An example of multi-step natural language deduction performed by our system. From input premises, our model generates new statements in a heuristic-guided way to try to prove a given hypothesis.

A simple way of representing this reasoning process is through a natural language proof: a derivation indicating how intermediate conclusions were composed from their premises. Ultimately, the natural language proof should either lead to the desired conclusion or refute it by providing no logical path to support it. Figure 1 contains an example of such a derivation.

Generative sequence-to-sequence models can be fine-tuned on this task if examples of proofs are given. However, we argue in this paper that this conflates the generation of individual reasoning steps with the planning of the overall reasoning process. An end-to-end model is encouraged by its training objective to generate steps that arrive at the goal, but it is not constrained to do so by following a sound structure. As we show later, the outputs of such methods may not form coherent chains of reasoning and may end up skipping steps while claiming a hypothesis is proven. Interpretability is not enough; we need explanations to be consistent and faithfully reflect a reasoning process that the model commits to (Jacovi and Goldberg, 2020).

In this work, we propose a system that factors the deduction process into search over intermediate

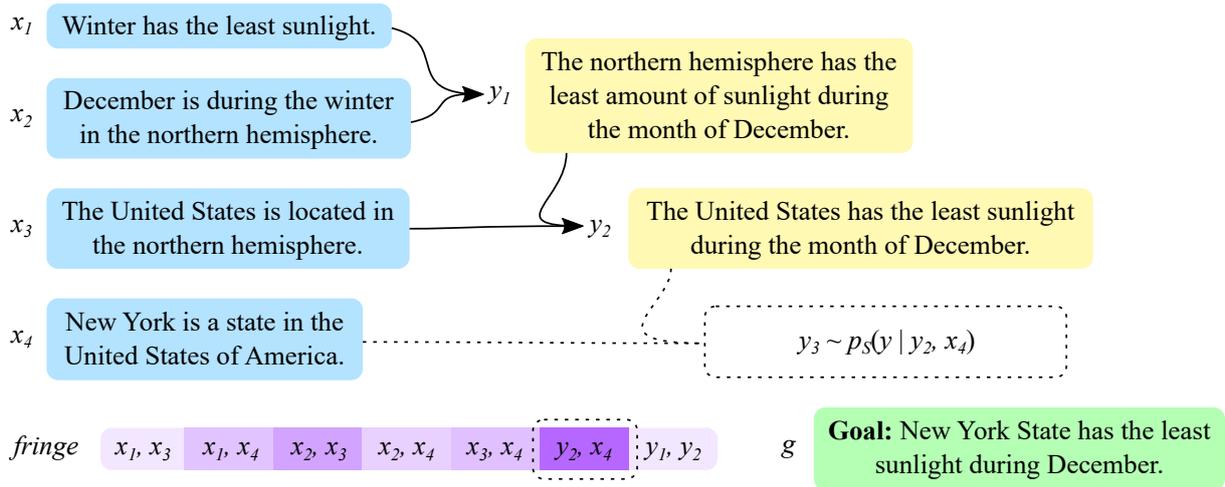


Figure 2: Overview of the problem setting and our approach. The next step to be taken will be the entry with the highest score in the fringe according to the heuristic h (indicated here by purple shading), in this case combining y_2 and x_4 . The result of the next step will be obtained by sampling a string y_3 from the generative distribution of the step model S conditioned on the concatenation of y_2 and x_4 .

steps. The core of our system is a step deduction module which generates the direct consequence of composing a pair of statements. This model is used as a primitive in a search procedure over entailed statements. By separating the deduction itself from the task of deciding what pairs of sentences to combine, we can use different heuristics to attempt to prove the hypothesis. We experiment with simple rule-based heuristics based on word overlap as well as a more complex learned heuristic.

We evaluate our method on the EntailmentBank dataset (Dalvi et al., 2021). We show that our approach can successfully prove true hypotheses while rejecting false ones, a capability lacking in an end-to-end T5 model (Raffel et al., 2020) fine-tuned on this data. Our goal-conditioned heuristic is able to guide our model to successfully prove a majority of valid goals; while theoretically the model may need to explore exponentially many statements, effective heuristic guidance keeps the runtime manageable. These results argue in favor of using this kind of decomposition instead of end-to-end models in complex reasoning settings. Errors nevertheless arise from complex semantic phenomena in the composed sentences themselves; however, our individual deduction step quality is improved by integrating semi-synthetic training data from Bostrom et al. (2021).

Our contributions are: (1) A factored, interpretable system for natural language deduction, separating the concerns of proof planning from generation of intermediate conclusions. (2)

Exploration of several search heuristics, including a learned goal-oriented heuristic. (3) Comparison to an end-to-end model from prior work (Dalvi et al., 2021) in two settings of varying difficulty. (4) A systematic analysis of our model’s strengths and weaknesses.

2 Problem Description and Motivation

The general setting we consider is shown in Figure 2. We assume we are given a collection of evidence sentences $X = \{x_1 \dots x_n\}$.¹ Our task is to classify a natural language goal g as either entailed or not. In addition, we want to construct a tree of natural language statements T with the following properties:

1. Any node $t \in T$ is entailed by its children $c(t)$, and thus transitively should derive from the premises at the leaves of its subtree.
2. The root of the tree t_0 entails the goal g .

Crucially, we assume that the intermediate nodes of this tree must be generated and are not present in the input premise set X . This constraint differs from prior work on question answering with multi-hop reasoning (Yang et al., 2018; Chen et al.,

¹In the settings we consider in this paper, n does not exceed 25. However, this is not a hard limit imposed by our approach; we theoretically allow for arbitrarily large premise sets, although for improved efficiency, classic retrieval methods or neural approaches like DPR (Karpukhin et al., 2020) should be used to prune the premise set to a manageable size.

2021a) or other models that build a proof structure (Saha et al., 2020, 2021) but don’t actually generate new conclusions. Our setting therefore requires a generative step deduction model S , which has been explored previously (Tafjord et al., 2021; Bostrom et al., 2021), to materialize intermediate conclusions given their immediate children. S parameterizes a distribution $p_S(y \mid x_1 \dots x_m)$ over step conclusions y conditioned on inputs x_i .

In our approach, we assume that each deduced step has exactly two inputs, so $m = 2$. Datasets like EntailmentBank feature some nodes with more than two children, but in preliminary investigation we found it possible to express the reasoning in these steps with binary branching. Even if the logic in a particular step requires more than two premise statements, it is trivially possible to coordinate two sentences into a single premise with the conjunction ‘and’, a step type which also appears in EntailmentBank. We do not apply this arity constraint to baseline models from past work.

3 Methods

Our proposed system consists of a step model S , a search procedure involving a heuristic h , and an entailment model which judges whether any generated conclusion entails the goal.

3.1 Step Deduction Model

Our step models are instances of the T5 sequence-to-sequence pre-trained language model (Raffel et al., 2020) fine-tuned on a collection of deduction steps. Training data is derived from a combination of datasets from prior work (Dalvi et al., 2021; Bostrom et al., 2021), which we discuss further in Section 4.3. Generation from these models at inference time is performed using nucleus sampling (Holtzman et al., 2020) with $p = 0.9$.

3.2 Search

The heuristic function $h(\{x_1 \dots x_m\}, g) \rightarrow \mathbb{R}$ accepts candidate step inputs x_i and a goal hypothesis g and returns a real-valued score indicating the priority of the potential step in the expansion order.

These priority values might reflect a combination of factors. We want to prioritize **compatible** compositions: combining two sentences from which we can make a meaningful inference, as opposed to two unrelated sentences. We also want to prioritize **useful** compositions from the

Algorithm 1

```

procedure SCSEARCH( $X = \{x_1 \dots x_n\}, g$ )
   $fringe \leftarrow \{\langle x_i, x_j \rangle \mid x_i, x_j \in X, i \neq j\}$ 
   $visited \leftarrow \{\}$ 
   $i \leftarrow 1$ 
   $maxSteps \in \mathbb{N}$ 
  while  $|fringe| > 0 \wedge i \leq maxSteps$  do
     $inputs \leftarrow \underset{\langle x_1, x_2 \rangle \in fringe}{\operatorname{argmax}} h(\{x_1, x_2\}, g)$ 
     $fringe \leftarrow fringe \setminus \{inputs\}$ 
     $\text{sample } y_i \text{ from } p_S(y \mid inputs)$ 
    if  $y_i \notin visited$  then
       $visited \leftarrow visited \cup \{y'\}$ 
      yield  $\langle inputs, y_i \rangle$ 
      if  $y_i = g$  then return
    else
       $fringe \leftarrow fringe \cup \{\langle y_i, x_j \rangle \mid x_j \in X\}$ 
       $\cup \{\langle y_i, y_j \rangle \mid 1 \leq j < i\}$ 
    end if
     $i \leftarrow i + 1$ 
  end if
end while
end procedure

```

perspective of proving the hypothesis: among compatible compositions, we should prefer those that are likely to derive statements that lead to the hypothesis. We discuss these criteria later in the context of our specific heuristics.

We define a search procedure over sentence compositions that we call SCSEARCH, described in Algorithm 1. SCSEARCH is a standard best-first search algorithm where the search fringe datastructure is a max-heap of statement pairs ordered by the heuristic scoring function h . SCSEARCH constructs trees by iteratively combining pairs of statements using the step deduction model, adding the generated conclusion to a forest of entailed statements. Once SCSEARCH terminates, if a node in the forest is judged by the goal entailment model to have reached the goal, any nodes in the forest outside the successful subtree can be discarded.

We consider several potential realizations of the heuristic function h :

Breadth-first Naively, the earliest fringe items are explored first; all steps combining initial premises will be explored before any steps involving an intermediate conclusion.

Overlap This heuristic scores potential steps according to the number of tokens shared between input sentences. Because overlap indicates expressions that can likely be unified (e.g., *paper* in the first composition step of Figure 1), this heuristic prioritizes according to premise compatibility. In

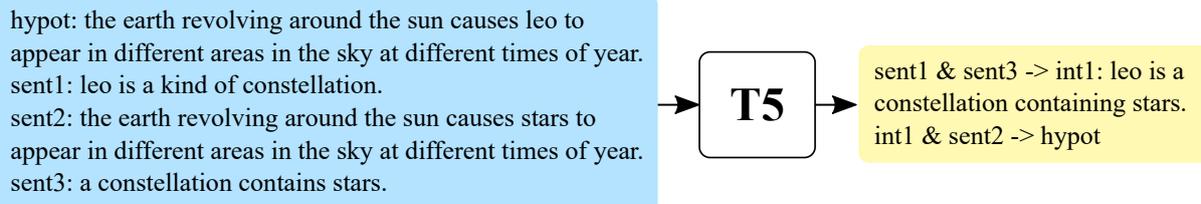


Figure 3: An example of the EntailmentWriter end-to-end system’s input and linearized output format.

the **Overlap+Goal** version, token overlap with the goal hypothesis is also incorporated into the score, capturing usefulness as well.

Repetition Past work on natural language deduction (Bostrom et al., 2021) has identified an important failure mode of deduction models. Namely, when two premises cannot be combined or when a model fails to produce a deduction, the model S is likely to ‘back off’ to copying the input, and in particular copying the first input premise x_1 .

This heuristic aims to capitalize on this as a measure of premise compatibility. Potential steps are scored according to $-p_S(x_1|x_1\dots x_n)$, i.e., the negative likelihood of generating a repetition of the first input statement.

Learned This heuristic uses an additional pre-trained model fine-tuned to predict whether input statements are part of a gold explanation of the hypothesis or not. We train this model on sets of step inputs drawn from a collection of valid steps augmented with negative samples produced by replacing one input with a random statement.

The **Learned** heuristic targets compatibility, but it cannot predict usefulness without seeing the goal. The **Learned+Goal** version of this heuristic is also trained with goal hypotheses in its input, so as to be able to select useful premises and guide search towards the hypothesis. Note, however, that the step model S which generates the results of individual compositions still does not see the goal; the goal only informs which step compositions are explored first during the search.

3.3 Goal Entailment

In order to determine whether the search has successfully reached the goal, we require an entailment model to judge the relationship between each generated conclusion and the goal. We use a DeBERTa model (He et al., 2021) pre-trained on the MNLI dataset (Williams et al., 2018) to predict the probability that each derived statement

entails the goal. During inference, rather than returning the class with the highest predicted probability, a threshold value α is applied to the probability of the ‘entailment’ class. A threshold on entailment allows for better control over the precision/recall trade-off. In order to determine the best threshold given a model and a set of human-labeled judgements (see Table 1), we test an evenly-spaced series of threshold values in the interval $[0, 1]$ and pick the threshold which yields the best F1 score.

4 Experimental Setup

4.1 End-to-end Baseline

An alternative approach to our structured search is to simply use a pre-trained generation model in a purely end-to-end fashion, as has been explored with the EntailmentWriter system in prior work Dalvi et al. (2021). EntailmentWriter is a sequence-to-sequence language model (T5 Large, Raffel et al. 2020) fine-tuned to generate an entire entailment tree in linearized form, conditioned on the concatenation of a set of premises and a hypothesis. The EntailmentWriter tree linearization format is shown in Figure 3.

By conditioning on the hypothesis, an end-to-end model is likely to hallucinate tokens that lead to the hypothesis without having derived them from evidence in a sound fashion. Moreover, by requiring the model to emit a flag token to indicate that it has reached the goal, this approach relies on the generative model also acting as a powerful discriminative entailment model, despite most of its training signal not optimizing it for this purpose.

4.2 Models

All sequence-to-sequence language models we experiment with are instances of T5 Large (Raffel et al., 2020) with 770M parameters. Bridging entailment models and learned heuristic models are derived from DeBERTa Large (He et al., 2021) with 350m parameters. Fine-tuning is performed with

Statement	Goal Hypothesis	Label
A fish is a kind of scaled animal that uses their scales to defend themselves.	Scales are used for protection by fish.	Entailment
Information in an organism’s chromosomes causes an inherited characteristic to be passed from parent to offspring by dna.	Children usually resemble parents.	Neutral
A rheumatoid arthritis will happen first before other diseases affect the body’s tissues.	The immune system becomes disordered first before rheumatoid arthritis occurs.	Neutral

Table 1: Examples of instances from the EBENTAIL dataset. The goal hypotheses are directly from EntailmentBank, and the statements are from the SCSEARCH algorithm applied to the original EntailmentBank premises. Although the third example in the table would be labeled as a contradiction according to MNLI annotation standards, the EBENTAIL dataset does not make the distinction between neutral and contradiction.

the Hugging Face `transformers` library (Wolf et al., 2020). Further details including fine-tuning hyperparameters are included in the appendix.

4.3 Training Data

Step deduction model We train our step deduction model using gold steps sampled from trees in the EntailmentBank training split, totaling 2,762 examples. We additionally evaluate models mid-trained on ParaPattern substitution data (Bostrom et al., 2021), derived semi-synthetically from English Wikipedia, totaling $\sim 120k$ examples. In the mid-training configuration, an instance of T5 is first fine-tuned for one epoch on the ParaPattern substitution data, and the resulting model parameters are then fine-tuned on the EntailmentBank steps for one epoch, after which optimal validation loss is reached.

Learned heuristic models Data for our learned heuristic models is constructed by taking step inputs from steps in the EntailmentBank training set’s gold trees. For each positive step example, a corresponding negative example is produced by replacing one input statement with a sentence drawn at random from all statements in training set gold trees that do not appear in the original step’s subtree. Examples used to train the Learned+Goal heuristic additionally contain the original step’s gold goal concatenated to their input.

Goal entailment model To produce a set of reference judgements for threshold selection and entailment model evaluation, we sampled 150 instances of generated conclusions from inference over EntailmentBank examples with their corresponding gold goals. Three annotators labeled the entailment relationship between these generated inferences and the goal. We select a consensus annotation with a majority vote. These examples

form an in-domain evaluation set which we call EBENTAIL.

There is a significant domain mismatch between MNLI and the scientific facts that make up EBENTAIL, leading to low performance of the base MNLI model (see Table 4). We experiment with two ways of improving performance. First, we fine-tune on the EBENTAIL examples and evaluate on this same dataset with cross-validation. We use 3-fold cross-validation where each cross-validation fold is constructed to contain unique goals not seen in its respective training fold.

Second, we construct an additional dataset EBENTAIL-ACTIVE using active learning. We select 150 additional instances with the lowest confidence (highest prediction entropy) following the initial fine-tuning. These instances are manually labeled by at least one annotator and used in a subsequent training run.

We evaluate our best model with a tuned threshold value in Table 4. For our main experiments, we train a separate model on both EBENTAIL and EBENTAIL-ACTIVE in order to use as much data as possible.²

4.4 Evaluation Data

We evaluate our models in two settings, both derived from the validation set of the English-language EntailmentBank dataset. Each setting consists of a 1:1 mixture of examples with valid goals (the original EntailmentBank validation examples) and negative examples with invalid goals, produced by replacing the hypothesis of each original example with a distinct one drawn from another example at random.

In **Task 1**, examples contain only gold premises (between 2 and 15), while in **Task 2**, each premise

²We use $\alpha = 0.791$ as our threshold value, which was determined in an earlier set of experiments.

System	Goal%	Task 1		Task 2		
		AUROC	#Steps	Goal%	AUROC	#Steps
Breadth-first	47.5 ± 1.7	0.73 ± 0.01	2.7 ± 2.0	13.6 ± 1.7	0.42 ± 0.01	8.0 ± 5.4
Overlap	25.0 ± 1.7	0.47 ± 0.01	1.8 ± 1.2	3.7 ± 0.5	0.30 ± 0.02	1.5 ± 0.8
Overlap (Goal)	45.0 ± 2.1	0.67 ± 0.02	2.0 ± 1.5	38.6 ± 1.2	0.61 ± 0.01	2.7 ± 2.7
Repetition	30.8 ± 2.3	0.55 ± 0.02	1.8 ± 1.4	7.1 ± 1.3	0.31 ± 0.01	2.6 ± 1.6
Learned	44.7 ± 2.3	0.66 ± 0.01	2.2 ± 1.6	16.8 ± 1.9	0.44 ± 0.01	4.9 ± 4.0
Learned (Goal)	63.8 ± 1.8	0.81 ± 0.01	2.5 ± 2.0	69.6 ± 0.7	0.85 ± 0.01	3.1 ± 2.9
Learned (Goal)+PPM	66.1 ± 1.8	0.82 ± 0.01	2.6 ± 2.0	71.0 ± 1.9	0.86 ± 0.01	3.6 ± 3.5
End-to-end	100*	0.53 ± 0.02	2.9 ± 2.1	100*	0.65 ± 0.02	1.9 ± 1.2

Table 2: Results from our main experiments on the EntailmentBank validation sets. Mean ± standard deviation is reported for each metric, taken across 10 trials varying the random seed used for nucleus sampling. **Goal%** indicates the proportion of valid goals reached by a system’s generated trees. * The end-to-end model trivially achieves perfect recall by always emitting the hypothesis flag token at the end of its output. **AUROC** indicates the area under the receiver operating characteristic when attempting to distinguish gold goals from invalid goals. **#Steps** indicates the average number of steps expanded before reaching the goal among proofs which reached valid goals; this metric’s standard deviation is computed at the example level. See Section 4.5 for more details.

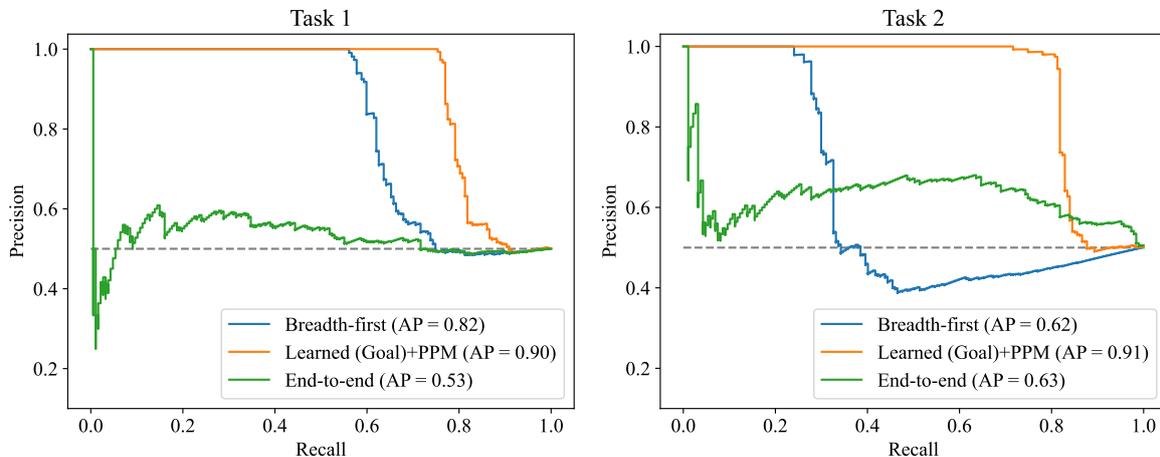


Figure 4: Precision-recall curves for breadth-first search, our full method, and the end-to-end baseline. The dashed line at precision= 0.5 corresponds to random chance.

System	Step Validity
Learned (Goal)	70.7%
Learned (Goal)+PPM	76.0%
End-to-end	55.0%

Table 3: Results from manual annotation of step validity. Steps are sampled from inference on Task 2. Macro-average inter-annotator agreement (Cohen’s κ) is 0.73.

set is expanded to 25 premises through the addition of distractors retrieved from the original premise corpora. We set the *maxSteps* hyperparameter of the SCSEARCH algorithm to 20, as the maximum gold proof step count in EntailmentBank is 17.

4.5 Metrics

For both of these tasks, consistent models should be able to reach gold goals while also failing to prove invalid goals. To measure the former, we report the number of valid goals reached by each system as **Goal%**. For our search systems, this metric is computed as the proportion of examples with valid goals for which any generated conclusion received a goal entailment score higher than the threshold α from Section 4.3. Goal% scores for the end-to-end model are trivially fixed at 100% as this model always ends its output with `-> hypot.`

To measure whether systems are able to distinguish invalid goals from valid goals, we also compute precision-recall curves and report the area under the receiver operating characteristic (**AUROC**) of each system for both tasks. We produce these curves for search models by varying

the goal entailment threshold α .

In order to evaluate whether the end-to-end model distinguishes between valid and invalid proof structures, we use the model’s average output confidence over the generated proof, computed as the mean token log-likelihood $\frac{1}{L} \sum_{i=1}^L \log p_{\theta}(t_i | t_1 \dots t_{i-1})$ motivated by the hypothesis that a language model trained as a density estimator of sound proofs should assign low likelihood to unsound deductions. We fit a linear model to predict the goal validity $\in \{0, 1\}$ based on this quantity, and vary the linear model’s classification boundary to compute precision-recall curves and the AUROC for the end-to-end model.

We report the average number of steps expanded before reaching a valid goal as **#Steps**. This metric is averaged over examples for which a system is able to reach the goal. It increases slightly for more effective models, as these are able to better construct longer proofs, but we still see the largest number of steps being required by less effective search methods like breadth-first.

In addition to evaluating end-to-end consistency through the above tasks, we would also like to understand the internal consistency of generated proofs. To that end, we conduct a manual study of step validity. We sample 100 steps uniformly across valid-goal Task 2 examples for each of three systems: our full system, our system without mid-training, and the end-to-end system. The resulting set of 300 steps is shuffled and triply labeled by three annotators in the blind.

5 Results

The results of our experiments on Task 1 and Task 2 are shown in Table 2. Table 3 shows the results of our manual step validity evaluation.

5.1 Complete Deductions

The end-to-end approach is not a sound model of proof structure. The end-to-end model is nominally able to ‘prove’ 100% of goals, as it always emits the `-> hypot` sequence at the end of its output. However, as shown in Figure 4, when using the generation confidence of the end-to-end model to discriminate between valid goals and invalid goals, the resulting classifier (AP 0.53/0.63) is not much better than random chance (AP 0.5). This indicates that the model has similar confidence when hallucinating proofs for invalid goals as it does when generating proofs for valid

goals. Importantly, this means that in the end-to-end regime, the model’s output distribution does not penalize the generation of invalid steps, and thus the end-to-end system is not behaving as a model of consistent proofs.

Our approach is able to prove most valid goals while exhibiting much better internal consistency than the end-to-end approach.

Our full system is able to prove approximately 70% of the gold goals across both settings, and achieves a rate of step validity 21% higher than the end-to-end approach. Viewing our system as a discriminator and varying the threshold α used for goal entailment decisions, it exhibits perfect precision up to $\sim 75\%$ recall in both tasks. This confirms that our system is able to prove the proportion of valid goals reported in Table 2 (for the goal entailment threshold with best human agreement) without producing any false positive proofs for invalid goals.

A goal-oriented heuristic is critical. In Task 2, incorporating goal information into the planning process is essential, as only the Overlap (Goal) and Learned (Goal) heuristics are able to reach a reasonable number of valid goals in the presence of distractor premises.

Notably, the Overlap heuristic without goals performs significantly worse than naive breadth-first search on Task 1. Examining the resulting trees reveals that Overlap biases the search towards repeatedly recombining intermediate conclusions with their premises, since step conclusions almost always share a large amount of lexical content with at least one premise. This indicates an opportunity for future work to explore better rule-based heuristics by combining guidance from Overlap (Goal) with a penalty to circumvent the detrimental recycling behavior.

5.2 Individual Step Validity

Table 3 shows that our best model produces valid inferences 76% of the time, improving over the end-to-end model as well as the version of our system without mid-training on ParaPattern. Mid-training the step deduction model also increases the proportion of reachable valid goals by 2% (Table 2). These improvements suggest that additional semi-synthetic data targeting certain challenging cases has the potential to provide further benefit; see Section 5.1.

In prior work, [Bostrom et al. \(2021\)](#) found that a BART Large model (400M parameters) fine-tuned on EntailmentBank steps achieves around 80% validity (including redundancies) on step inputs from gold validation set trees. We measure validity for conclusions produced during multi-step inference, leading to two sources of domain shift: (1) the imperfect premise selection heuristic can provide incompatible premise pairs, and (2) step inputs can contain previously generated conclusions, resulting in error propagation. Given these domain shifts, our observed step validity rates are reasonable in light of prior observations.

We can use our step validity rate to approximate the expected number of fully-valid proofs based on the observed depth distribution. Under the conservative assumption that observed errors are distributed uniformly w.r.t. depth, the expected number of fully valid trees in a dataset $D = \{T_1 \dots T_{|D|}\}$ for validity rate v can be computed as follows:

$$\frac{1}{|D|} \sum_{i=1}^{|D|} v^{|T_i|}$$

At a step validity rate of 76% we should expect $\sim 50\%$ of trees generated by our system to be error-free, as the depth distribution is dominated by relatively shallow instances. Under the same assumption, according to the end-to-end model’s step validity rate we should expect $\sim 27\%$ of its trees to be fully valid. This figure roughly agrees with the results of [Dalvi et al. \(2021\)](#)’s evaluation, in which the authors find that an end-to-end model with the same configuration is able to recover approximately 26% of gold trees in the Task 2 setting.³

In Section 5.4 we examine observed error patterns in invalid steps. Crucially, even when our system produces a proof involving an invalid step, it is possible to audit the proof and determine exactly where the reasoning error occurred, since each step is generated conditioned only on its immediate premises. In contrast, the end-to-end model attends to all premises and the hypothesis at every step, meaning that when an inconsistent step is generated, it is difficult to diagnose what led to it.

³We discovered that their model was trained with some overlap between deduction steps in the train and validation sets. However, their evaluation metric also compares against a single reference tree and they find that it tends to underestimate validity. Because of these sources of error, we caution that this number should be interpreted as a rough estimate.

5.3 Goal Entailment

Model	Threshold	F1	Precision	Recall
DeBERTa MNLI	0.973	70.8	76.6	65.7
EBENTAIL	0.956	71.8	79.3	65.7
EBENTAIL-ACTIVE	0.694	72.4	91.3	60.0

Table 4: Evaluation of goal-bridging entailment models. EBENTAIL indicates DeBERTa MNLI fine-tuned using our manually annotated judgements. EBENTAIL-ACTIVE indicates DeBERTa MNLI fine-tuned further on our active learning annotations as well as the judgements from EBENTAIL. Both of the fine-tuned models are evaluated using 3-fold cross validation.

The results in Table 2 depend on an accurate assessment of when we have successfully deduced the hypothesis. Table 4 shows the results of our evaluation on the EBENTAIL dataset (Section 3.3). Our goal entailment model can achieve an F1 score of 72% after fine-tuning on EBENTAIL-ACTIVE. The baseline has a relatively high best threshold, partially because the entailment criterion learned on MNLI is not well-fit to this domain and many positive examples of entailment are assigned low scores by the model leading the model to be overly restrictive. After fine-tuning, the best threshold is lower, but actually yields even higher precision than the baseline. We view precision as more important than recall, as a stringent criteria for determining whether a proof is correct increases confidence in our evaluation results.

Metric	Score
Macro-average F1	0.8266
κ	0.535

Table 5: Annotator Disagreement metrics on the triply-annotated examples used to evaluate the entailment model.

Our best F1 score is slightly lower than the lowest F1 score of the annotators when evaluated over the gold labels with majority vote. Annotator agreement overall is moderate as seen in Table 5; there are a few common instance types that cause ambiguous labels and disagreement between the annotators, therefore also decreasing the model’s F1.

5.4 Error Analysis: Step Model

Although the step model cannot hallucinate based on the goal hypothesis, it can still fail to produce valid intermediate steps due to several challenging reasoning patterns.

Monotonicity Misinterpreting the monotonicity of a context in the premises is a common error leading to unsound inferences. For example, given “*Rock is formed of minerals. Quartz and feldspar are both minerals.*” the step model generates “*Quartz and feldspar are the constituent minerals of rock.*” There is no indication in the premise set that these are the only minerals able to form rock, making this an unsound inference. Ignoring monotonicity is one case of a more general class of incorrect or overzealous substitutions.

Substitution When unifying premise statements, the step model can sometimes substitute a referent into the wrong context. For example, “*Hollow bones have a positive impact on the feathers of birds on some wings. Birds use feathers to fly.*” are combined to produce “*Hollow bones can be used to fly.*”, when a substitution in the other direction yielding “*Hollow bones have a positive impact on birds flying.*” would be preferred. Another example: the inputs “*As the amount of oxygen exposed to a fire increases the fire will burn longer. If something is left out in the open then that something is exposed to oxygen.*” yield “*The fire will burn longer when that something is left out in the open.*” This unification resembles a correct inference, but the model has failed to identify that “the fire” should also be substituted for “that something”. However, cases like this tended to be sources of annotator disagreement.

Relationship Assignment When given premises that contain parallel relations, the step model sometimes confuses the arguments assigned to each instance. For example, “*Mitosis produces cells that are identical to the parent cell. Meiosis produces cells that are different from the parent cell.*” will generate “*Mitosis produces cells that are different from the parent cell and meiosis produces cells that are identical to the parent cell.*”. This is a direct contradiction of the premises, as the model has mistakenly swapped members of the parallel relations expressed in the input while attempting to conjoin them. When given “*An acid changes the color of litmus paper from blue to red. Lemon juice changes the color of litmus paper from blue*

to red.” the step model produces “*Lemon juice and acid are the opposites.*”, as it mistakes a parallel relationship for one of the opposite polarity.

5.5 Error Analysis: Goal Entailment

Another source of error is when the goal entailment model is unable to predict the correct entailment relationship between an output from the step model and the goal hypothesis. The model often fails on nebulous instances that are not unanimously agreed upon by the annotators.

Definitional Knowledge When given the premise “*Sugar is soluble in water,*” the model does not predict entailment of the goal hypothesis “*Sugar cubes will dissolve in water when they are combined.*” English speakers who know the definition of ‘soluble’ and recognize that sugar cubes are made of sugar could reasonably understand this as entailed. However, the degree of common sense and definitional knowledge that should be expected of the entailment model is subjective and often a source of annotator disagreement.

Ill-Formed Statements Inaccurate or semantically incorrect statements are another error source in the entailment model. For example, the model predicts that “*Lichens and soil are similar to being produced by breaking down rocks.*” entails “*Lichens breaking down rocks can form soil.*” However, it is not entirely clear what is similar in the generated statement due to the confusing syntax, and this example’s gold label was neutral. Although many of these outputs have manual annotations to help the model, they are still a source of annotator disagreement and often produce different labels depending on how the annotator understood the step model’s output. Improving the step model to help prevent ill-formed statements resulting from compounding error will directly improve the goal entailment model’s performance.

Context Assumptions The model predicts that “*A new moon will occur on June 30 when the moon orbits the earth.*” entails “*The next new moon will occur on June 30.*” In this case, the model is assuming that ‘a new moon’ occurring is equivalent to ‘the next new moon’ occurring, something which is unfounded in the context despite the minor lexical difference. Depending on annotator assumptions, cases like this can also be somewhat subjective for humans.

Future work could expand the training data of our NLI model to account for the subjectivity of NLI judgments (Pavlick and Kwiatkowski, 2019; Chen et al., 2020; Nie et al., 2020), particularly by modifying our data collection procedure (Zhang et al., 2021).

6 Related work

Multi-hop question answering models (Chen et al. 2021a; Min et al. 2019; Nishida et al. 2019, inter alia) also build derivations linking multiple statements to support a conclusion. However, these models organize selected premises into a chain or leave them unstructured as opposed to composing them into an explicit tree. This linking approach is more similar to our premise selection problem than to our complete pipeline.

In a related vein, the NLProlog system (Weber et al., 2019) frames multi-hop reading comprehension explicitly as a proof process, using induced rules to perform soft unification over distributed representations of predicates and arguments extracted from sentences. In contrast to our bottom-up search over sentence compositions, the NLProlog system follows the logic programming archetype of backwards proof search through rule unification and subgoal expansion. Similar backward search ideas were used in Arabshahi et al. (2021). PRouter (Saha et al., 2020) and ProofWriter (Tafjord et al., 2021) also frame natural language deduction as proof search, although both systems are evaluated in a synthetic domain of limited complexity.

Related to our approach, Betz and Richardson (2021) train text-to-text models to translate between and reconstruct textual representations of formal arguments using synthetic data. They experiment with mid-training an end-to-end T5 model on their synthetic data before fine-tuning it on EntailmentBank Task 2, finding that mid-training improves its ability to select gold premises from the distractor-augmented premise sets. This parallels the increase in performance we observe from mid-training on semi-synthetic deduction steps, although they do not tackle the full pipeline task.

Hu et al. (2020) and Chen et al. (2021b) propose systems which perform single-sentence natural language inference through proof search in the natural logic space. Explicitly using the monotonicity calculus (Icard et al., 2017) and

natural logic to generate contrastive examples for semisynthetic mid-training is a promising future direction that could help to address the monotonicity issues encountered by our step deduction model, as discussed in Section 5.4. Our work also relates to earlier efforts on natural logic (MacCartney and Manning, 2009; Angeli et al., 2016) but is able to cover far more phenomena by relaxing the strict constraints of this framework. Finally, the Leap of Thought system (Talmor et al., 2020) captures some related ideas in a discriminative reasoning framework.

7 Discussion and Conclusion

In this work, we propose a system that performs natural language reasoning through generative deduction and heuristic-guided search. We demonstrate that our system produces proofs that are more internally consistent than those of an end-to-end model, and that its factored design allows it to successfully prove valid goals while being unable to hallucinate proofs for invalid goals.

While we truncate search at a constant number of steps in this work, the complexity of our approach is exponential in the worst case. The end-to-end approach enjoys the convenience of simple inference and quadratic complexity, arising from the premises all being fed into a Transformer model simultaneously. However, we show that end-to-end fine-tuning does not produce models of sound proof structure, as proof likelihoods for valid and invalid goals under end-to-end models are not reliably distinguishable. Furthermore, a sequence-to-sequence Transformer’s memory consumption places a hard limit on the proof length and premise count that can be handled in the end-to-end setting, while our structured approach allows arbitrarily large premise sets and step counts. We believe that this modular deduction framework can empower future reasoning systems, particularly as training datasets and pre-trained models continue to improve.

References

Gabor Angeli, Neha Nayak, and Christopher D. Manning. 2016. Combining natural logic and shallow reasoning for question answering. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 442–452, Berlin, Germany. Association for Computational Linguistics.

- Forough Arabshahi, Jennifer Lee, Mikayla Gawarecki, Kathryn Mazaitis, Amos Azaria, and Tom Mitchell. 2021. [Conversational neuro-symbolic common-sense reasoning](#). *Proceedings of the AAAI Conference on Artificial Intelligence*, 35(6):4902–4911.
- Gagan Bansal, Tongshuang Wu, Joyce Zhou, Raymond Fok, Besmira Nushi, Ece Kamar, Marco Tulio Ribeiro, and Daniel Weld. 2021. [Does the Whole Exceed Its Parts? The Effect of AI Explanations on Complementary Team Performance](#). In *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems*, New York, NY, USA. Association for Computing Machinery.
- Gregor Betz and Kyle Richardson. 2021. [DeepA2: A modular framework for deep argument analysis with pretrained neural text2text language models](#). *arXiv*, abs/2110.01509.
- Kaj Bostrom, Xinyu Zhao, Swarat Chaudhuri, and Greg Durrett. 2021. [Flexible generation of natural language deductions](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6266–6278, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Jifan Chen, Shih ting Lin, and Greg Durrett. 2021a. [Multi-hop Question Answering via Reasoning Chains](#). *arXiv*, abs/1910.02610.
- Tongfei Chen, Zhengping Jiang, Adam Poliak, Keisuke Sakaguchi, and Benjamin Van Durme. 2020. [Uncertain natural language inference](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8772–8779, Online. Association for Computational Linguistics.
- Zeming Chen, Qiyue Gao, and Lawrence S. Moss. 2021b. [NeuralLog: Natural language inference with joint neural and logical reasoning](#). In *Proceedings of *SEM 2021: The Tenth Joint Conference on Lexical and Computational Semantics*, pages 78–88, Online. Association for Computational Linguistics.
- Bhavana Dalvi, Peter Jansen, Oyvind Tafjord, Zhengnan Xie, Hannah Smith, Leighanna Pipatanangkura, and Peter Clark. 2021. [Explaining answers with entailment trees](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 7358–7370, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Peter Hase and Mohit Bansal. 2020. [Evaluating explainable AI: Which algorithmic explanations help users predict model behavior?](#) In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5540–5552, Online. Association for Computational Linguistics.
- Pengcheng He, Xiaodong Liu, Jianfeng Gao, and Weizhu Chen. 2021. [DeBERTa: Decoding-enhanced BERT with disentangled attention](#). In *International Conference on Learning Representations*.
- Ari Holtzman, Jan Buys, Li Du, Maxwell Forbes, and Yejin Choi. 2020. [The curious case of neural text degeneration](#). In *International Conference on Learning Representations*.
- Hai Hu, Qi Chen, Kyle Richardson, Atreyee Mukherjee, Lawrence S. Moss, and Sandra Kuebler. 2020. [MonaLog: a lightweight system for natural language inference based on monotonicity](#). In *Proceedings of the Society for Computation in Linguistics 2020*, pages 334–344, New York, New York. Association for Computational Linguistics.
- Thomas Icard, Lawrence Moss, and William Tune. 2017. [A monotonicity calculus and its completeness](#). In *Proceedings of the 15th Meeting on the Mathematics of Language*, pages 75–87, London, UK. Association for Computational Linguistics.
- Alon Jacovi and Yoav Goldberg. 2020. [Towards faithfully interpretable NLP systems: How should we define and evaluate faithfulness?](#) In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4198–4205, Online. Association for Computational Linguistics.
- Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. 2020. [Dense passage retrieval for open-domain question answering](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6769–6781, Online. Association for Computational Linguistics.
- Bill MacCartney and Christopher D. Manning. 2009. [An extended model of natural logic](#). In *Proceedings of the Eight International Conference on Computational Semantics*, pages 140–156, Tilburg, The Netherlands. Association for Computational Linguistics.
- Sewon Min, Victor Zhong, Luke Zettlemoyer, and Hannaneh Hajishirzi. 2019. [Multi-hop reading comprehension through question decomposition and rescoring](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 6097–6109, Florence, Italy. Association for Computational Linguistics.
- Yixin Nie, Xiang Zhou, and Mohit Bansal. 2020. [What can we learn from collective human opinions on natural language inference data?](#) In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 9131–9143, Online. Association for Computational Linguistics.

- Kosuke Nishida, Kyosuke Nishida, Masaaki Nagata, Atsushi Otsuka, Itsumi Saito, Hisako Asano, and Junji Tomita. 2019. [Answering while summarizing: Multi-task learning for multi-hop QA with evidence extraction](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2335–2345, Florence, Italy. Association for Computational Linguistics.
- Ellie Pavlick and Tom Kwiatkowski. 2019. [Inherent disagreements in human textual inferences](#). *Transactions of the Association for Computational Linguistics*, 7:677–694.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. [Exploring the limits of transfer learning with a unified text-to-text transformer](#). *Journal of Machine Learning Research*, 21(140):1–67.
- Swarnadeep Saha, Sayan Ghosh, Shashank Srivastava, and Mohit Bansal. 2020. [PProver: Proof generation for interpretable reasoning over rules](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 122–136, Online. Association for Computational Linguistics.
- Swarnadeep Saha, Prateek Yadav, and Mohit Bansal. 2021. [multiPProver: Generating multiple proofs for improved interpretability in rule reasoning](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 3662–3677, Online. Association for Computational Linguistics.
- Oyvind Tafjord, Bhavana Dalvi, and Peter Clark. 2021. [ProofWriter: Generating implications, proofs, and abductive statements over natural language](#). In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 3621–3634, Online. Association for Computational Linguistics.
- Alon Talmor, Oyvind Tafjord, Peter Clark, Yoav Goldberg, and Jonathan Berant. 2020. [Leap-of-thought: Teaching pre-trained models to systematically reason over implicit knowledge](#). In *Advances in Neural Information Processing Systems*, volume 33, pages 20227–20237. Curran Associates, Inc.
- Leon Weber, Pasquale Minervini, Jannes Münchmeyer, Ulf Leser, and Tim Rocktäschel. 2019. [NLProlog: Reasoning with weak unification for question answering in natural language](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 6151–6161, Florence, Italy. Association for Computational Linguistics.
- Adina Williams, Nikita Nangia, and Samuel Bowman. 2018. [A broad-coverage challenge corpus for sentence understanding through inference](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 1112–1122, New Orleans, Louisiana. Association for Computational Linguistics.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander M. Rush. 2020. [Transformers: State-of-the-art natural language processing](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45, Online. Association for Computational Linguistics.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. 2018. [HotpotQA: A dataset for diverse, explainable multi-hop question answering](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2369–2380, Brussels, Belgium. Association for Computational Linguistics.
- Shujian Zhang, Chengyue Gong, and Eunsol Choi. 2021. [Learning with different amounts of annotation: From zero to many labels](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 7620–7632, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.

A Implementation Details

Hugging Face `transformers` version: 4.12.5

Two NVidia Titan RTX GPUs were used for all experiments in this paper.

End-to-end model fine-tuning configuration (hyperparameters left at `transformers` default if unspecified):

Hyperparameter	Value
Base model	T5 Large
Total batch size	8
Initial LR	5e-5
Epoch count	3 (early stopping on val. loss)

EntailmentBank-only step deduction model fine-tuning:

Hyperparameter	Value
Base model	T5 Large
Total batch size	12
Initial LR	5e-5
Epoch count	2 (early stopping on val. loss)

Step deduction model mid-tuning on ParaPattern-substitution:

Hyperparameter	Value
Base model	T5 Large
Total batch size	12
Initial LR	5e-5
Epoch count	1

Goal entailment model fine-tuning on EBENTAIL+EBENTAIL-ACTIVE:

Hyperparameter	Value
Base model	DeBERTa Large MNLI
Total batch size	32
Initial LR	1e-5
Epoch count	1

Learned heuristic model fine-tuning:

Hyperparameter	Value
Base model	DeBERTa-v3 Large
Total batch size	32
Initial LR	2e-5
Epoch count	2 (no goals) 7 (w/goals) (early stopping on val. loss)