

Temporal Relation Extraction with a Graph-Based Deep Biaffine Attention Model

Bo-Ying Su

University of California, San Diego
b1su@ucsd.edu

Shang-Ling Hsu

Hong Kong University of Science and Technology
shsuaa@connect.ust.hk

Kuan-Yin Lai

National Taiwan University
eddy50811@gmail.com

Amarnath Gupta

University of California, San Diego
a1gupta@ucsd.edu

Abstract

Temporal information extraction plays a critical role in natural language understanding. Previous systems have incorporated advanced neural language models and have successfully enhanced the accuracy of temporal information extraction tasks. However, these systems have two major shortcomings. First, they fail to make use of the two-sided nature of temporal relations in prediction. Second, they involve non-parallelizable pipelines in inference process that bring little performance gain. To this end, we propose a novel temporal information extraction model based on deep biaffine attention to extract temporal relationships between events in unstructured text efficiently and accurately. Our model is performant because we perform relation extraction tasks directly instead of considering event annotation as a prerequisite of relation extraction. Moreover, our architecture uses Multilayer Perceptrons (MLP) with biaffine attention to predict arcs and relation labels separately, improving relation detecting accuracy by exploiting the two-sided nature of temporal relationships. We experimentally demonstrate that our model achieves state-of-the-art performance in temporal relation extraction.

1 Introduction

Event temporal relation extraction from text is a crucial task in natural language understanding, given its fundamental role in common sense reasoning, information retrieval, and clinical applications, such as disease progression. The extraction of temporal relations with events comprises several sub-tasks, including the identification of event expressions and temporal relations between events and times, as formally defined in SemEval-2016 (Bethard et al., 2016). An example of temporal relation extraction with events is shown in Figure 1, where **Dec 19, 2006** is the document creation time, and three event instances occur in the sentence:

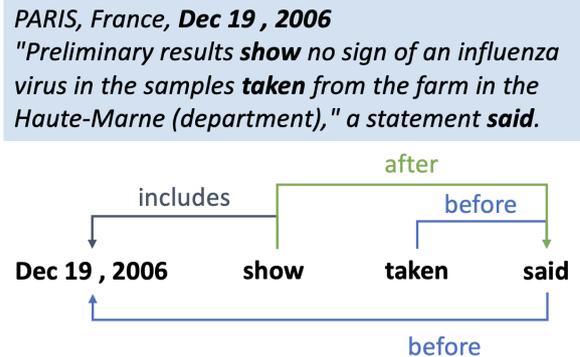


Figure 1: An illustration of temporal relation extraction with events. For simplicity, only the relations between time expressions and events are shown, but in practice, the relations involving other tokens are set to *NONE*. Our focus is to extract Event-Event relations in text.

show, **taken**, and **said**. According to the annotations, the time span of the event **show** *INCLUDES* **Dec 19, 2006** and is *AFTER* **said**. Besides, **said** happens *BEFORE* **Dec 19, 2006**, while **taken** happens even *BEFORE* **said**. The other relations between time expressions and event instances may be inferred accordingly or marked as *VAGUE*, such as the one between **show** and **taken**.

Early studies in event temporal relation extraction rely on human-engineered features (Wu et al., 2014; Daumé III, 2007; Blitzer et al., 2006), which may experience performance drop upon out-of-domain applications (Dligach et al., 2017). Later, a variety of neural models, such as convolutional neural network (CNNs) (Dligach et al., 2017) and long short-term memory neural networks (LSTMs) (Tourille et al., 2017), outperform hand-crafted feature-based models. Structured learning approaches are also proposed to enhance performance by incorporating more knowledge (Ning et al., 2017; Han et al., 2019). Recent research efforts further explore the power of pre-trained Transformer-based models (Vaswani et al., 2017) on temporal relation extraction by proposing ex-

tensions and variants (Wang et al., 2019; Ning et al., 2019; Yang et al., 2019; Han et al., 2019, 2020). Latest state-of-the-art performance has been achieved by end-to-end, multi-task approaches that conduct both event annotation and temporal relations extraction jointly (Han et al., 2019, 2020; Lin et al., 2020). Nonetheless, even if these systems are able to implement joint information extraction, they suffer from performance issues in the inference speed and accuracy, which may be the result of the computationally expensive decoding process and insufficient fusion of information extracted for classification.

To this end, we propose a Graph-Based Deep Biaffine Attention Model. Leveraging deep biaffine attention mechanisms and a lightweight decoder module while predicting the relations as a unified graph instead of isolated components, our end-to-end, multi-task model speeds up the inference time for around 39% and is able to achieve state-of-the-art performance on benchmark datasets of temporal relation extraction with events.

We summarize our contributions below:

- We propose the novel application of deep biaffine attention mechanisms in information extraction and demonstrate the benefits of separating arc and relation prediction.
- We speedup the decoding process of relation extraction by around 39% with highly parallelizable pipeline without a significance drop in terms of F1 score.
- Our model outperforms the state-of-the-art baselines in temporal relation extraction in benchmark datasets.

2 Problem Specification

We focus on the problem of extracting relations between events from raw text. The goal is to generate a Temporal Relation Graph from unstructured text. A Temporal Relation Graph represents the event-event temporal relationships in a piece of text, with events being the vertices and relations being the edges. Depending on the dataset, the edges in the Temporal Relation Graph may comprise of different set of labels. Our system is end-to-end, which means that event and relation annotations are only given in the training stage. On contrast, during prediction, only raw sentences are given, and the relations are predicted without prior event

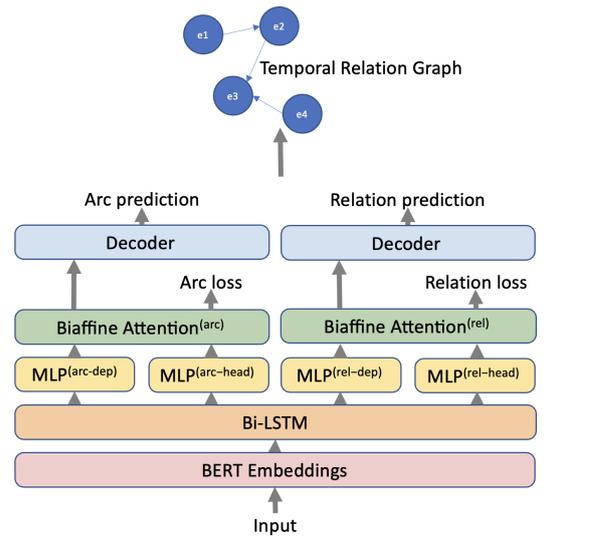


Figure 2: Neural architecture of Graph-Based Deep Biaffine Attention Model.

annotations. Solving such a problem is useful in real-world settings, as neither annotations of events nor relation data is easily accessible.

3 Graph-Based Deep Biaffine Attention Model

In this section, we describe the details of our proposed Graph-Based Deep Biaffine Attention Model.

The input sentences are first tokenized and embedded with a fine-tuned pre-trained BERT model. Then, the sequence of tokens is encoded with a Bidirectional-LSTM layer to create a neural representation of the input. Two separated Biaffine Attention Modules, ARC and REL, will then predict arcs and relation labels between each pair of tokens based on the neural representation respectively. These two pieces of information correspond to the edges and labels in the Temporal Graph. Finally, the decoder combines the most probable arc and temporal relation labels to make predictions of the temporal relations between each pair of tokens. We perform multi-task learning on our model. In other words, the losses of the ARC and REL module are combined to a total loss and are optimized jointly using cross-entropy loss.

Although we do utilize gold event span information during training, event information is not used during inference, which eliminates the requirement of event annotations and furthers the potential of the method to be put into production.

3.1 Preprocessing

In this section, we describe how we preprocess the raw annotations from the dataset.

Since the TimeBank-Dense dataset (TB-Dense) only annotates event relations across sentences that are not further than two sentences away (Cassidy et al., 2014), we apply a sliding window to capture the tokens in every two consecutive sentences and the event-event relations among them.

Then, we take a data augmentation step on the dataset. Consider $e_1 \subseteq X$ and $e_2 \subseteq X$ to be two annotated events, each containing one or more tokens from the dataset X , a relation tuple (x_1, x_2, r) containing two tokens $x_1, x_2 \in X$ and a relation label r is generated if and only if $x_1 \in e_1$ and $x_2 \in e_2$ and there is TLINK annotation between e_1 and e_2 in the dataset. This step effectively produces a dense graph among two event spans if there is a temporal relation between them.

All the inverse relations that could be inferred immediately from the dataset is also added to the training data.

3.2 BERT Fine-tuning

Similar to previous studies that utilizes pre-trained BERT model, we leverage the Masked Language Modeling target with implementation from huggingface (Wolf et al., 2019) to fine-tune the BERT-base model on each training corpus.

3.3 ARC and REL module

Our Graph-Based Deep Biaffine Attention Model makes two predictions for any given text: arc (ARC) and relation (REL). In this section, we describe how ARC and REL modules work.

ARC The purpose of the ARC module is to predict the existence of an arc between any pair of tokens. Additionally, the ARC module output also give us information about the direction of the arc, although it is not used. The motivation of the ARC module is to convert the problem of detection the existence of a temporal relationship between tokens to a prediction of a directed edge between a pair of tokens. This effectively gives the model more information about the relations labels than simply telling it if there is an arc or not.

For every text input, we create a binary two-dimensional matrix $ARC_{i,j} \in \{0, 1\}^{n \times n}$, where n denotes the sequence length, which is exactly the adjacency-list representation of the graph. $ARC_{i,j} = true$ if only if there is an arc that points

TB-Dense	MATRES
BEFORE	BEFORE
AFTER	AFTER
SIMULTANEOUS	SIMULTANEOUS
VAGUE	VAGUE
INCLUDE	-
IS_INCLUDED	-

Table 1: Temporal Relation Set annotated in evaluation datasets.

from x_i to x_j , where x_i denotes the i^{th} token in the sentence.

For each pair of two-sided temporal relations, such as $\{AFTER, BEFORE\}$ and $\{INCLUDE, IS_INCLUDED\}$, we arbitrary choose one side to be the source and the other to be the sink. Consequently, if there is a two-sided temporal relationship between a pair of token s_i and s_j , we have either $ARC_{i,j} = true$ or $ARC_{j,i} = true$, but not both.

For those temporal relations that does not have their counterparts, such as *SIMULTANEOUS* and *VAGUE*, we simply create two edges between them in ARC. For example, if there is a token-relation pair $(t_i, t_j, SIMULTANEOUS)$, the model will set $ARC_{i,j} = ARC_{j,i} = true$

A Biaffine attention operator is used to predict the ARC matrix, which we will discuss in the Biaffine Attention section below.

The cross-entropy loss of the ARC module is calculated as follows:

$$\begin{aligned} \mathcal{L}_{arc} &= loss \left(ARC^{gold}, \mathbf{s}^{(arc)} \right) \\ &= -\frac{1}{N^2} \sum_{i,j} ARC_{i,j}^{gold} \cdot \log \left(\mathbf{s}_{i,j}^{(arc)} \right) + \\ &\quad \left(1 - ARC_{i,j}^{gold} \right) \cdot \log \left(1 - \mathbf{s}_{i,j}^{(arc)} \right) \end{aligned} \quad (1)$$

Since our model does not have any event information during inference, the ARC module is trained to identify possible arcs among all token pairs. This is accomplished by sampling 50% of token pairs randomly in the input sentence during training.

REL The purpose of the REL module is to predict the temporal relation label between any pair of token. Here is a list of temporal relations that is annotated in the two datasets that we used for evaluation.

For every text input, we create a positive integer two-dimensional matrix $REL \in \{1, 2, \dots, n\}^{m \times m}$,

<i>REL</i>	<i>INV(REL)</i>
BEFORE	AFTER
AFTER	BEFORE
SIMULTANEOUS	SIMULTANEOUS
VAGUE	VAGUE
INCLUDE	IS_INCLUDED
IS_INCLUDED	INCLUDE

Table 2: Inverse mapping between two Temporal Relation labels.

where $REL_{i,j}$ stores the temporal relation labels if there is an arc that points from x_i to x_j , m denotes the sequence length, and n denotes the number of relations. Due to the two sided nature of temporal relations, we always have $REL_{i,j} = INV(REL_{j,i})$. The inverse mapping is provided in Table 2.

The cross-entropy loss of the REL module is calculated as follows:

$$\begin{aligned} \mathcal{L}_{rel} &= loss \left(REL^{gold}, \mathbf{s}^{(rel)} \right) \\ &= \sum_{i,j < i} -\log \left(\frac{\exp \left(\mathbf{s}_{i,j,REL_{i,j}^{gold}}^{(arc)} \right)}{\sum_k \exp \left(\mathbf{s}_{i,j,k}^{(rel)} \right)} \right) \quad (2) \end{aligned}$$

Note that since $REL_{i,j}$ provides the exact same information as $REL_{j,i}$ (the later is just the inversion of the former), the loss function of REL only takes account of the upper-half of the $REL_{j,i}$ tensor.

Conclusion By predicting both ARC matrices and REL tensors, we are able to construct a token-level temporal relation graph based on the input text. The ARC module predicts the existence of an edge in the token-level temporal graph, whereas the REL module gives us the fine-grained temporal relation labels.

3.4 Sentence Encoder

Similar to prior temporal relation extraction systems (Han et al., 2019, 2020; Ning et al., 2019), we use a BiLSTM layer to encode the token embeddings from the BERT model. The encoded sentences are then passed into four independent Multi-layer Perceptrons (MLP), which we will describe below.

3.5 MLP and Biaffine Attention Layer

The purpose of this Deep Biaffine Attention layer is to predict the ARC matrices and REL tensors which are mentioned earlier. Deep Biaffine Attention Architecture is first used to predict dependency edges

(Dozat and Manning, 2016). The predicted edges and labels are used to construct the dependency tree for a sentence, producing superior parsing accuracy and performance. In this work, we modified the Deep Biaffine Attention mechanism to predict directed edges and associated labels for constructing Temporal Relation Graphs.

Predicting ARC The goal here is to make a prediction of the ARC matrix. For each sentence encoding output from the BiLSTM layer, we first pass it through two Multilayer Perceptrons (MLP) to reduce its hidden dimension in half, creating two vectors, $\mathbf{h}_i^{(arc-dep)}$ and $\mathbf{h}_j^{(arc-head)}$. The reason of creating two separated vectors is to allow the two MLPs to be trained to distill head and dependent information for the Biaffine Attention Layers from the BiLSTM output, reducing its vector dimensions. Here, we use the term "head" to represent an encoded token being the source of other tokens (pointing outwards), whereas "dep" represents a token being a child of another token.

With $\mathbf{h}_i^{(arc-dep)}$ and $\mathbf{h}_j^{(arc-head)}$, we apply the Biaffine operator to compute the attention of all tokens to every other tokens, creating a two dimensional matrix $\mathbf{s}_{j,k}^{(arc)} \in \mathbb{R}^{m \times m}$, where m denotes the sequence length:

$$\mathbf{s}_{i,j}^{(arc)} = \text{Biaffine} \left(\mathbf{h}_i^{(arc-dep)}, \mathbf{h}_j^{(arc-head)} \right) \quad (3)$$

$$\text{Biaffine}(\mathbf{y}_1, \mathbf{y}_2) = \underbrace{\mathbf{y}_1^\top \mathbf{U} \mathbf{y}_2}_{\text{Bilinear}} + \underbrace{\mathbf{W}(\mathbf{y}_1 \circ \mathbf{y}_2)}_{\text{Linear}} + \mathbf{b} \quad (4)$$

Here, \mathbf{U} , \mathbf{W} and \mathbf{b} are a $m \times m$ tensor, $1 \times 2m$ matrix and a bias vector, where m is the sequence length of the given text (same as the length of the BiLSTM output).

The intuition here is to model both the prior probability of a token i having any dependents ($\mathbf{W}(\mathbf{y}_i)$) and the likelihood of i receiving a specific dependent j ($\mathbf{y}_i^\top \mathbf{U} \mathbf{y}_j$). In both cases, the higher probability means that we are more confident that there is an arc connected to i $\mathbf{s}_{i,j}^{(arc)}$ is then served as the prediction of $ARC(i, j)$.

Predicting REL The goal of this module is to assign every possible arcs between tokens a temporal relation label. Here, we leverage a Fixed-class Biaffine classifier.

Similar to predicting the ARC matrix, we feed the sentence encoding output from the BiLSTM layer through two Multilayer Perceptrons (MLP) to reduce its hidden dimension in half, creating two vectors $\mathbf{h}_i^{(arc-dep)}$ and $\mathbf{h}_j^{(arc-head)}$. Then, the Biaffine Attention operator is used to compute the likelihood $\mathbf{s}_{i,j}^{(rel)} \in \mathbb{R}^{m \times m \times n}$ of a token pair x_i, x_j connected by a temporal relation label k , where m denotes the sequence length, and n denotes the number of relation labels.

$$\mathbf{s}_{i,j}^{(rel)} = \text{Biaffine} \left(\mathbf{h}_i^{(rel-dep)}, \mathbf{h}_j^{(rel-head)} \right) \quad (5)$$

$$\text{Biaffine}(\mathbf{y}_1, \mathbf{y}_2) = \underbrace{\mathbf{y}_1^\top \mathbf{U} \mathbf{y}_2}_{\text{Bilinear}} + \underbrace{\mathbf{W}(\mathbf{y}_1 \circ \mathbf{y}_2) + \mathbf{b}}_{\text{Linear}} \quad (6)$$

Here, \mathbf{U} , \mathbf{W} and \mathbf{b} are a $m \times l \times m$ tensor, $l \times 2m$ matrix and a bias vector where m is the sequence length of the given text (same as the length of the Bi-LSTM output) and l is the number of temporal relation labels.

This construction allows the optimizer to learn the prior probability of a certain label being assigned to any pair of tokens, the likelihood of a head token taking a particular relation and how probable a relation is assigned given a head and a specific dependent. $\mathbf{s}_{i,j}^{(rel)}$ is then served as the prediction of $REL(i, j)$.

The Biaffine Attention mechanism allows us to model the temporal relation extraction task directly, instead of introducing additional non-linear activation functions to our model.

3.6 Loss function

In our Multi-task model that trains ARC and REL jointly, we compute the loss by simply adding ARC loss with REL loss. $\mathcal{L}_{arc-rel} = \mathcal{L}_{arc} + \mathcal{L}_{rel}$

3.7 Decoder

Our Event Module uses the same implementation as (ref??), with two Linear layers and a tanh activation function in between. The output of the Event module is an matrix of logits of length 2.

The ARC decoder predicts the arc between each pair of tokens x_i, x_j as

$$ARC_{pred}(i, j) = \mathbb{1}_{\mathbb{R}^+}(\mathbf{s}_{i,j}^{(arc)}), \quad (7)$$

where $\mathbb{1}$ is an indicator function.

	TB-Dense	MATRES
# Documents		
Train	22	183
Dev	5	-
Test	9	20
# Relation Pairs		
Train	4032	6332
Dev	629	-
Test	1427	827

Table 3: Dataset splits of TB-Dense and MATRES.

The Relation Decoder Module predicts the relation label between each pair of tokens. The first part is predicting the existence and the direction of an arc between two tokens x_i, x_j . As $LABEL_{pred}(i, j)$ and $REL_{pred}(i, j)$ are defined as follows:

$$LABEL_{pred}(i, j) = \underset{k}{argmax}(\mathbf{s}_{i,j,k}^{(rel)}) \quad (8)$$

$$a = ARC_{pred}(i, j) + ARC_{pred}(j, i) \quad (9)$$

$$REL_{pred}(i, j) = \begin{cases} 0 & \text{if } a = 0 \\ LABEL_{pred}(i, j) & \text{o.w.} \end{cases} \quad (10)$$

4 Experiment Setup

This section describes the details about the two datasets and evaluation metrics that we used to train and evaluate our system. We use our workstation

4.1 Dataset

We use TimeML-annotated (Pustejovsky et al., 2004) TimeBank-Dense dataset (TB-Dense) and Multi-Axis Temporal Relations for Start-points (MATRES) dataset to evaluate the performance of our system. Both TB-Dense and MATRES dataset provide event annotations and relations between events. High-quality temporal relation data has always been scarce resource, due to its challenging annotation process. Annotators often overlook some relations that can be implied from text, but hard to recognize at first glance, resulting in a low inter annotator agreement.

4.1.1 TB-Dense

The TB-Dense dataset mitigates such an issue by forcing the annotators to consider each pair of

	TB-Dense	MATRES
<u>BEFORE</u>	384	417
<u>AFTER</u>	274	266
<u>INCLUDES</u>	56	-
<u>IS_INCLUDED</u>	53	-
<u>SIMULTANEOUS</u>	22	31
<u>VAGUE</u>	638	113

Table 4: Relations in TB-Dense and MATRES. Acronyms of the relations are underlined.

events that co-exist in sentences that is no farther than two sentences away. The result is a dataset that contains approximately 10x more relations per document compared to the original Timebank dataset (Cassidy et al., 2014).

4.1.2 MATRES

Recent work by Ning et al. (2018) further improves the quality of temporal annotations by enforcing a multi-axis annotation scheme, improving the inner-annotator agreements significantly.

We use TB-Dense and MATRES datasets to evaluate our model. The data statistics are provided in Table 4.

4.2 Evaluation Metrics

To be consistent with previous research and the baseline models, we adopt the same standard micro-average scores for TB-Dense dataset. NONE relations are excluded from the calculations, following the convention of Information Extraction tasks.

For MATRES dataset, we also use the same micro-average metric as the baseline models.

Since the predictions from the proposed model is at token-level, and it does not predict event spans, we use the first token in every event as representing the entire event. In other words, all relations that is associated to a event in the gold annotation must exist as relations from/to the first token of the event to be considered correct.

The code for evaluation is provided in fmp/utis/metric.py

5 Baseline Models

We pick the state-of-the-art methods from Feature-Based Systems and Neural Systems to be our baselines.

5.1 Feature-Based Systems Baseline

For the TB-Dense dataset, we use CAEVO (Mirza and Tonelli, 2016) as our feature-based system

baseline. CAEVO is a rule-based system with Max-Ent classifier, utilizing linguistic features. It is the best performing feature-based temporal relation extraction system for TB-nse. For the MATRES dataset, we use the end-to-end system Cog-CompTime as our feature-based system baseline.

5.2 Neural Systems Baseline

We use the system by described by Han et al. (2020) as the baseline of the TB-Dense dataset, as it reports the best end-to-end performance to date. For MATRES, we use the end-to-end system by Han et al. (2019) as our baseline model.

6 Results

Table 5 contains our main results. In this section, we discuss the performance on the two datasets respectively.

6.1 TB-Dense

The proposed Graph Biaffine model outperforms the feature baseline by 11.5% and surpasses the neural baseline by 0.4 in the TB-Dense dataset. When looking at the score breakdown per label in Table 6, the proposed Graph-based Deep Biaffine model performs much better in predicting *INCLUDE* and *IS_INCLUDED* temporal relation labels, while falling short on predicting *BEFORE* and *AFTER*. We show that with a dedicated ARC module that detects arcs in the Temporal Graph instead of treating not having a relation merely as *NONE* label, the relation classifier could be much better at dealing with imbalanced data. In the TB-Dense dataset, *BEFORE* and *AFTER* relations account for 46.1% of all temporal relation annotations, while *INCLUDE* and *IS_INCLUDED* account for only 7.6% percent in total. Additionally, the F1 score of *VAGUE* relation improved 7.9%. We speculate this is due to our model being superior in distinguishing whether a relation exist between two tokens or not. *SIMULTANEOUS* remains to be the only label that is not predicted at all, probably due the the lack of samples in the training set (only 22 according to Table 4).

6.2 MATRES

Our proposed model also outperforms baseline models in MATRES dataset by a margin of 5.7%. Since every event is a single verb in MATRES, the proposed model does not have to ensure all relations that is associated to a event to be present in

	TB-Dense			MATRES		
	P	R	F1	P	R	F1
CAVEO (Mirza and Tonelli, 2016)	43.8	35.7	39.4	62.7	58.7	60.6
Han et al., 2019	52.6	46.5	49.4	59.0	60.2	59.6
Han et al., 2020	53.4	47.9	50.5	42.6	52.6	46.5
Graph-based Biaffine	50.6	51.3	50.9	65.8	66.8	66.3

Table 5: Comparison of our Graph-based Biaffine Model with the baselines.

	Baseline			Ours		
	P	R	F1	P	R	F1
B	58.6	55.7	57.1	54.3	37.4	44.2
A	67.8	51.5	58.5	57.3	35.2	43.5
I	8.3	1.8	2.9	12.1	5.4	7.48
II	-	-	-	15.2	7.6	10.1
S	-	-	-	-	-	-
V	47.6	51.4	49.4	50.7	66.0	57.3
Avg	53.4	47.9	50.5	50.6	51.3	50.9

Table 6: Comparison of the performance of different labels in the end-to-end settings on TB-Dense dataset. The baseline system The score breakdown is proposed by [Han et al. \(2020\)](#). Acronyms of the labels correspond to the underlined letters in Table 4.

every single token within its span. This explains why the improvement margin larger compared to that of TB-Dense dataset.

7 Computational Efficiency

In Table 7, we report the sentence per second performance during inference stage of our model, and compare it to the baseline models. We re-implemented the system by Han et al. (2020) for benchmark. To establish a fair comparison, we removed both the score calculation and standard input/output portion during the evaluation process. Every experiment is performed ten times on the TB-Dense dataset and taking the average. We use a workstation equipped with AMD Ryzen 9 5900x and Nvidia GTX1060 6gb as our test bench. For TB-Dense we trained it for 40 epochs, for MATRES we trained it for 19 epochs.

8 Ablation Studies

In this section, we perform ablation tests to demonstrate the effect of each improvement. Quantitative results can be found in Table 8.

8.1 Advantage of biaffine for label prediction

We compared the label prediction result of our biaffine model to the modified model using two standard Linear layers. The result showed that the Biaffine Attention Mechanism provide slight improvement over Linear layers. We also observe that our Biaffine Attention model runs faster on average.

8.2 Advantage of two biaffine modules over one classification for NONE relation

We use a special ARC module to predict the existence of an arc between two tokens. In this section, we show how having a specialized ARC module in predicting NONE relations to be superior than taking the NONE relation as a label in the REL module.

In this experiment, we completely disable the ARC module and do not take an additional step to filter out NONE relations.

9 Analysis

We analyze our experimental results from two aspects: The advantage of separate attention modules and the computational efficiency.

9.1 Advantage of two biaffine attentions over one classification for NONE relation

Most prior work uses NONE as a classification label in the temporal relation extraction process. In this work, however, the existence of an relation between two tokens is predicted directly by the ARC module. To show such improvement over traditional methods, we similarly added the NONE label to the REL module and completely disable the ARC module to compare the difference.

We found that without the ARC module, the overall F1 score of relation extraction decreases slightly, primary due to the degraded extraction performance on VAGUE labels. This proves that the detection of relation is better treated as a sep-

	TB-Dense	MATRES
Han et al. (2019)	-	125.8 sent/s
Han et al. (2020)	325 sent/s	-
Graph-based Biaffine	452 sent/s	386 sent/s

Table 7: Comparison of Relation Extraction Performance.

	TB-Dense			MATRES		
	P	R	F1	P	R	F1
- Biaffine Attention	49.3	50.6	49.9	69.1	61.8	65.2
- ARC	49.5	50.5	50.0	68.1	63.8	65.9
All	50.6	51.3	50.9	65.8	66.8	66.3

Table 8: Performance of relation extraction: ablation studies on the major components of our model.

arated task, instead of being compared directly to other temporal relation labels.

9.2 Computational Efficiency

Benchmarks show that in a fixed amount of time, our model processes more sentences than previous studies, while providing comparable accuracy. This is primarily due to our model design that removes the event extraction dependency for relation extraction. The prediction of temporal relation labels is performed in parallel with arc prediction, eliminating the need of the non-parallelizable, nested for-loop for extracting event pairs in the previous studies.

10 Conclusions and Future Work

In this paper, we propose a Graph-based Biaffine Attention Model for temporal relation extraction. We show that under end-to-end settings, our model predicts arcs and relation labels in the temporal graph directly, unlike standard two-step process that requires predictions of events before predicting relations. Our model is shown to provide better performance than traditional methods experimentally in F1-score and inference speed on benchmark datasets.

We plan to apply the proposed framework to other temporal reasoning tasks, such as extracting Time-Event and Time-Time relations.

References

- Steven Bethard, Guergana Savova, Wei-Te Chen, Leon Derczynski, James Pustejovsky, and Marc Verhagen. 2016. Semeval-2016 task 12: Clinical tempeval. In *Proceedings of the 10th International Workshop on Semantic Evaluation (SemEval-2016)*, pages 1052–1062.
- John Blitzer, Ryan McDonald, and Fernando Pereira. 2006. Domain adaptation with structural correspondence learning. In *Proceedings of the 2006 conference on empirical methods in natural language processing*, pages 120–128.
- Taylor Cassidy, Bill McDowell, Nathanel Chambers, and Steven Bethard. 2014. An annotation framework for dense event ordering. Technical report, CARNEGIE-MELLON UNIV PITTSBURGH PA.
- Hal Daumé III. 2007. Frustratingly easy domain adaptation. In *Proceedings of the 45th Annual Meeting of the Association of Computational Linguistics*, pages 256–263.
- Dmitriy Dligach, Timothy Miller, Chen Lin, Steven Bethard, and Guergana Savova. 2017. Neural temporal relation extraction. In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 2, Short Papers*, pages 746–751.
- Timothy Dozat and Christopher D Manning. 2016. Deep biaffine attention for neural dependency parsing. *arXiv preprint arXiv:1611.01734*.
- Rujun Han, Qiang Ning, and Nanyun Peng. 2019. Joint event and temporal relation extraction with shared representations and structured prediction. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 434–444.
- Rujun Han, Yichao Zhou, and Nanyun Peng. 2020. Domain knowledge empowered structured neural net for end-to-end event temporal relation extraction. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5717–5729.
- Ying Lin, Heng Ji, Fei Huang, and Lingfei Wu. 2020. A joint neural model for information extraction with global features. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7999–8009.

- Paramita Mirza and Sara Tonelli. 2016. [CATENA: CAusal and TEmporal relation extraction from NATural language texts](#). In *Proceedings of COLING 2016, the 26th International Conference on Computational Linguistics: Technical Papers*, pages 64–75, Osaka, Japan. The COLING 2016 Organizing Committee.
- Qiang Ning, Zhili Feng, and Dan Roth. 2017. A structured learning approach to temporal relation extraction. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 1027–1037.
- Qiang Ning, Sanjay Subramanian, and Dan Roth. 2019. An improved neural baseline for temporal relation extraction. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 6204–6210.
- Qiang Ning, Hao Wu, and Dan Roth. 2018. [A multi-axis annotation scheme for event temporal relations](#). In *ACL*.
- James Pustejovsky, Robert Ingria, Roser Sauri, José Castano, Jessica Littman, Rob Gaizauskas, Andrea Setzer, Graham Katz, and Inderjeet Mani. 2004. The specification language timeml.
- Julien Tourille, Olivier Ferret, Aurelie Neveol, and Xavier Tannier. 2017. Neural architecture for temporal relation extraction: A bi-lstm approach for detecting narrative containers. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 224–230.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *Proceedings of the 31st International Conference on Neural Information Processing Systems*, pages 6000–6010.
- Haoyu Wang, Ming Tan, Mo Yu, Shiyu Chang, Dakuo Wang, Kun Xu, Xiaoxiao Guo, and Saloni Potdar. 2019. Extracting multiple-relations in one-pass with pre-trained transformers. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 1371–1377.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, et al. 2019. Huggingface’s transformers: State-of-the-art natural language processing. *arXiv preprint arXiv:1910.03771*.
- Stephen Wu, Timothy Miller, James Masanz, Matt Coarr, Scott Halgrim, David Carrell, and Cheryl Clark. 2014. Negation’s not solved: generalizability versus optimizability in clinical natural language processing. *PloS one*, 9(11):e112774.
- Sen Yang, Dawei Feng, Linbo Qiao, Zhigang Kan, and Dongsheng Li. 2019. Exploring pre-trained language models for event extraction and generation. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 5284–5294.

A Hyperparameters

- Sentence Encoder: 2-layer BiLSTM, hidden size=400
- ARC module: We use two MLPs of same size, with output feature dimension=300
- REL module: We use two MLPs of same size, with output feature dimension=300
- Both BiLSTM and MLP dropout ratio=0.33
- Optimizer: lr=5e-5, mu=.9, nu=.9, epsilon=1e-12, clip=5.0, decay=.75
- All hyperparameters are tuned manually to optimize the development set in TB-Dense and MATRES respectively

B Dataset Summary

- Please refer to Table 4 for relation label statistics and Table 3 for document statistics

C Reproducibility List

- All code and datasets can be found in the project code base.
- The pre-trained BERT-base-uncased model is provided by Huggingface transformers.
- Hyperparameters can be found in the Hyperparameters section.