

TYPIC: A Corpus of Template-Based Diagnostic Comments on Argumentation

Shoichi Naito^{1,2,5}, Shintaro Sawada³, Chihiro Nakagawa^{3,2}, Naoya Inoue^{4,2},
Kenshi Yamaguchi¹, Iori Shimizu³, Farjana Sultana Mim¹, Keshav Singh¹, Kentaro Inui^{1,2}

¹Tohoku University, ²RIKEN, ³Osaka Prefecture University, ⁴Stony Brook University, ⁵Ricoh Company, Ltd.
shohichi.naitoh@jp.ricoh.com, {szb03072, scb03059}@edu.osakafu-u.ac.jp,
chihiro@me.osakafu-u.ac.jp, {naoya.inoue.lab, keshav.singh29}@gmail.com
{kenshi.yamaguchi.e7, inui}@tohoku.ac.jp, mim.farjana.sultana.t3@dc.tohoku.ac.jp

Abstract

Providing feedback on the argumentation of learner is essential for development of critical thinking skills, but it takes a lot of time and effort. To reduce the burden on teachers, we aim to automate a process of giving feedback, especially giving diagnostic comments which point out the weaknesses inherent in the argumentation. It is advisable to give specific diagnostic comments so that learners can recognize the diagnosis without misunderstanding. However, it is not obvious how the task of providing specific diagnostic comments should be formulated. We present a formulation of the task as template selection and slot filling to make an automatic evaluation easier and the behavior of the model more tractable. The key to the formulation is the possibility of creating a template set that is sufficient for practical use. In this paper, we define three criteria that a template set should satisfy: expressiveness, informativeness, and uniqueness, and verify the feasibility to create a template set that satisfies these criteria as a first trial. We will show that it is feasible through an annotation study that converts diagnostic comments given in text into a template format. The corpus used in the annotation study is publicly available.

Keywords: argument, argumentation, debate, formative feedback, diagnostic comment

1. Introduction

Argumentation and debate are shown to be an effective tool for the development of critical thinking skills (Roy and Macchiette, 2005). In such an argumentation-based education, it is shown that teachers' feedback helps learners efficiently develop their skills (Durón et al., 2006; Tsui, 1999; Paulus, 1999), and learners learn more efficiently when *specific feedback* is given (Shute, 2008). However, it will not be practical to ask all teachers to do this because they will need a substantial amount of time to give specific feedback to each student, and not all teachers have been trained to teach argumentation (Driver et al., 2000). It would be highly beneficial to develop a technology to automatically give specific feedback to students.

Essay Scoring aims for assessing students' arguments and giving feedback as a score. Some studies give a single holistic score for the entire essay (Burstein and Chodorow, 1999; Dong and Zhang, 2016), while others give multi-dimensional scores such as organization, clarity, and justification (Persing et al., 2010; Persing and Ng, 2013; Persing and Ng, 2014; Persing and Ng, 2015; Wachsmuth et al., 2017b; Carlile et al., 2018). However, we argue that these score-based feedback is not specific enough for students to develop their skills. Consider an example argument in Fig. 1 and imagine students receive feedback such as *Partially justified: The thesis justifies some of the author's opinions* (Carlile et al., 2018). The students may not know how to revise their arguments because they are not told *how* their justification is weak.

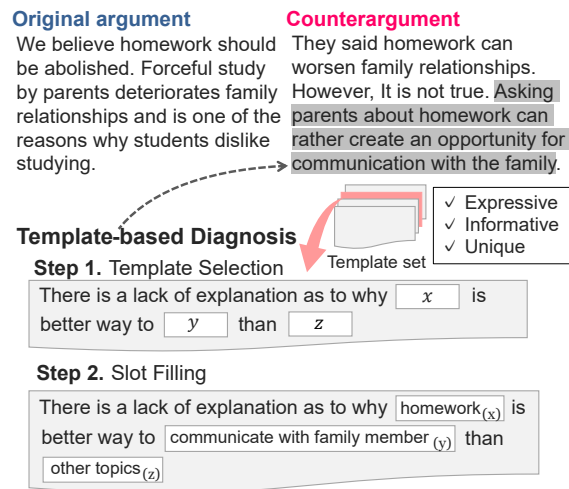


Figure 1: Overview of task setting.

Here, we aim to support learners by automatically giving *more specific diagnostic comments* that point out the weaknesses of their argumentation. One challenge here is that it is not obvious what task setting should be designed. One possible approach is to formulate it as a pure generation task, but there is an issue with evaluation. Automatic evaluation metrics such as BLEU (Papineni et al., 2002) are controversial in generation tasks such as machine translation and dialogue (Liu et al., 2016; Reiter, 2018; Mathur et al., 2020; Kocmi et al., 2021). However, it is costly and time-consuming to manually evaluate generated comments.

To address this issue, we propose to formulate the task of giving diagnostic comments by *template selection* and *slot filling* as shown in Fig. 1. The task is to select the most likely template from a predefined set of templates, and to extract or generate phrases for slots in the selected template. Our assumption is that frequently occurring diagnostic comments are limited, and covering them with a predefined set of templates is sufficient for practical use. Compared to the generation approach, this formulation enables us to use more interpretable evaluation measures such as an accuracy, precision, and recall of template selection. This also facilitates error analysis, such as which diagnosis the model tends to fail to recognize.

Our research question is the following. Can we create a set of templates that satisfies the following properties?: (i) *expressive*: represent a reasonable amount of common diagnostic comments, (ii) *informative*: preserve the meaning of original comments, and (iii) *unique*: ensure one-to-one mapping between comments and templates. To investigate this, we collect 1,000 counterarguments and ask people who experienced in debate education to give feedback on these counterarguments (§3). We then identify common patterns of feedback to induce a predefined set of templates (§4) and evaluate the quality of the induced set of templates (§5). Our main contributions can be summarized as follows:

- We propose expressive, informative, unique templates for argumentative diagnostic comments. Our study shows that 92.2% of unseen diagnostic comments can be represented by our templates with moderate inter-annotator agreement (Cohen’s Kappa of 0.517), 78% of which are judged as informative.
- We publicly release TYPIC corpus¹, consisting of 1,000 counterarguments, 197 of which are annotated with 1,082 diagnostic comments in both natural language and template formats.

2. Related Work

Essay scoring Essay scoring has been studied as a diagnostic tool for argumentation (Dikli, 2006). Some studies give a single holistic score for an entire essay (Burstein and Chodorow, 1999; Dong and Zhang, 2016), while others give scores for multiple dimensions such as organization (Persing et al., 2010), clarity (Persing and Ng, 2013), prompt adherence (Persing and Ng, 2014), and argument strength (Persing and Ng, 2015). Wachsmuth et al. (2017b) conducted a comprehensive survey on the dimensions of assessing argumentation and created a dataset with scores

from 15 dimensions. Also, Carlile et al. (2018) annotated the scores of multiple dimensions on Persuasive Essay Corpus, and (Ke et al., 2019) on the ICLE. In particular, (Carlile et al., 2018) annotated scores to the fine-grained target of the argumentative discourse unit. However, none of these approaches considered giving specific diagnostic comments. Even if a rubric of a score is given as a diagnostic comment, it will result in an abstract comment such as “Unjustified” and “Partially justified”. Since the reasons for the scores are unclear, there are issues that make it difficult for learners to understand why and what improvements are required.

Missing premise detection Several studies that give feedback to point out the lack of premises for the results of analyzing argumentation structure. Some studies propose an annotation scheme to detect the absence of the premise, considering that a proposition must be supported by an appropriate type of premise in order to be evaluable (Park et al., 2015; Park and Cardie, 2018). Morio and Fujita (2018) and Egawa et al. (2020) extend Park’s annotation scheme to capture interactions between users for online discussion forums, and Ida et al. (2019) propose an agent system that prompts users to provide additional premises when there are few premises supporting a claim. Wambsganss et al. (2020) proposes a support system that analyzes an argumentation made by learners, displays the argumentation structure, and points out unsupported claims. However, these approach is not able to give an in-depth diagnosis of what kind of premise is lacking.

Revision support for argumentative writing There exists some research that supports the revision process on argumentative writing. ArgRewrite takes the students’ draft and its revision and automatically classifies the purpose of the revision from 8 categories such as Reasoning, Rebuttal, Evidence, Fluency, etc. (Zhang and Litman, 2014; Zhang and Litman, 2015; Zhang et al., 2016; Zhang et al., 2017; Afrin et al., 2021). By showing the classification results, learners can check whether a revision is consistent with their intentions. These studies focus on feedback on the revisions made by learners, not on what revisions should be made.

Recognition of weakness in argumentation Some studies recognize the types of weakness in argumentation and give them to learners as feedback. Stab and Gurevych (2017) create a dataset that annotates whether an argument satisfies sufficiency, a criterion of whether premises provide sufficient evidence to accept or reject a claim. Persing and Ng (2017) defines five error types, Grammar Error, Lack of Objectivity, Inadequate Support, Unclear Assertion, and Unclear Justification, as factors that make an argument unpersuasive, and annotates the presence of these errors in addition to the holistic score. However, these approaches can provide the presence of errors, but do not provide a specific diagnosis that is specific enough for the learner to

¹TYPIC corpus will be publicly available at <https://github.com/snaitoh/TYPIC>. The diagnostic comments are given in Japanese, but a translation of them into English will be published.

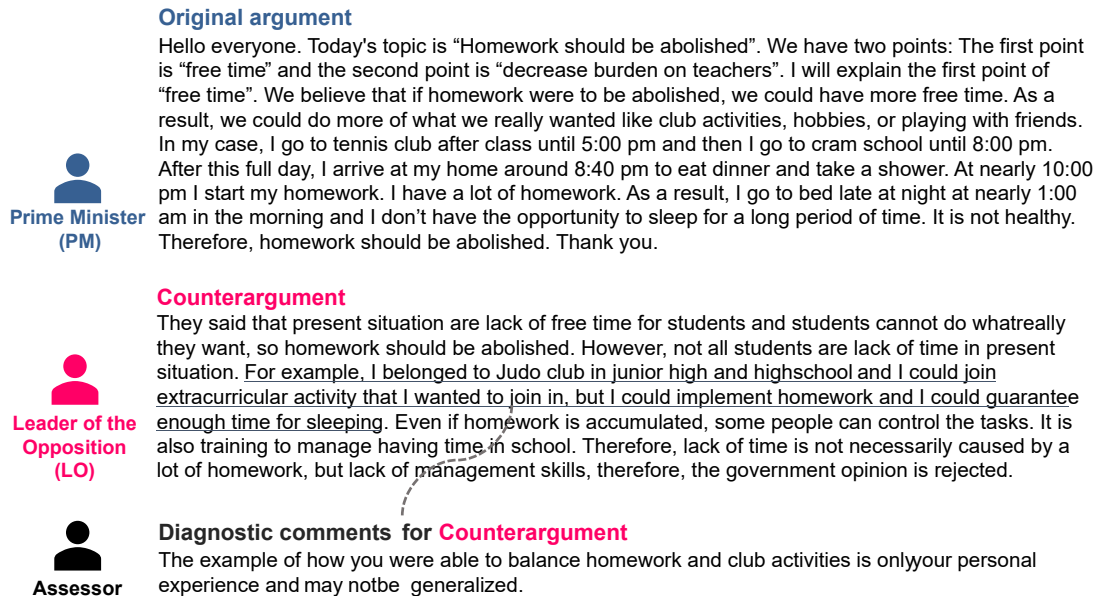


Figure 2: An example of parliamentary debate style argumentation and diagnostic comment on counterargument to be collected.

recognize how to correct them. The most related work to ours is Song et al. (2014). They proposed a modified Critical Question (CQ) based on Argumentation Scheme (Walton et al., 2008), which provides specific feedback on the weaknesses inherent in the argumentation. However, datasets annotated with CQ are not publicly available, and feasibility in terms of expressiveness and semantic change cannot be assessed. Besides, we believe that their annotation scheme of selecting a single segment, such as a sentence or clause, and assigning a static CQ is not sufficient for the purpose of providing specific feedback. For example, if a CQ is about cause and effect, at least two segments must be selected, cause and effect, otherwise ambiguity remains. In addition, diagnosis using phrases that are not mentioned in the argumentation cannot be expressed. Our annotation scheme in the form of a template with slots has the capability to express both in a natural way.

3. Dataset

3.1. Counterarguments

We collect counterarguments written in the form of parliamentary debate as the target for giving diagnostic comments (see Fig. 2). Parliamentary debate is an impromptu debate in which two groups, the government side and the opposition side, argue about a given topic. The government takes a position in favor of the topic, and the opposition takes a position against the topic, and they give a speech in turn. This study focuses on the first two speakers, Prime Minister (PM) on the government side and Leader of the Opposition (LO) on the opposition side (i.e. original arguments and counterarguments, respectively).

We prepared 10 PM speeches as the original argu-

ment on the topics *Homework should be abolished* and "Death penalty should be abolished," as shown in Table 1. For each of the 10 PM speeches, 100 LO speeches are collected. Out of 1,000 LO speeches, 250 speeches are written by experienced debaters affiliated with Parliamentary Debate Personnel Development Association (PDA²). The remaining 750 speeches are written by Amazon Mechanical Turk workers with Master Qualification. We pay \$1.60 as a reward per speech.

3.2. Diagnostic Comments

We randomly select a total of 200 LO speeches (100 for each topic) from the collected counterarguments and asked four assessors to give diagnostic comments on these speeches. The assessors are people with at least 4 years of debate experience and judge experience in high school debate competitions held by PDA. The assessors read an original argument and counterargument, select the target sentences to be diagnosed, and give a diagnostic comment in natural language sentences. The instruction is designed to give diagnostic comments on content rather than grammatical errors or expressions, in order to focus on developing thinking skills. In particular, diagnostic comments are given in terms of relevance to the original argument, justification, and appropriateness of the examples.

All counterarguments are evaluated by two assessors each. The annotation is conducted under descriptive paradigm (Röttger et al., 2021), and no instructions are given to ensure that the diagnostic comments of the two assessors agree. The purpose of adopting this approach is to collect diverse diagnostic comments and analyze

²<https://pdpda.org/>

Homework should be abolished	
HW1	Abolishing homework gives students more free time
HW2	Forcing students to do homework makes them passive in character
HW3	It is not good for students to be obliged to study by their teachers or parents
HW4	Students have memorized the incorrect way to study with homework
HW5	Schools should take responsibility for the academic skills of children, not parents at home

Death penalty should be abolished	
DP1	Death penalty is an inhumane punishment
DP2	Abolishing death penalty will prevent the ending the life of innocent people
DP3	Because of the high stress on the executioner, death penalty should be abolished
DP4	Death penalty deprives criminals of the opportunity for rehabilitation
DP5	The society is brutalized by the use of death penalty

Table 1: Points of the original argument.

# Counterargument	1,000
Avg. tokens per argument	124.0
Avg. sentences per argument	7.1
# Diagnostic Comments	1,082
Avg. # comments per argument	5.5

Table 2: Statistics of TYPIC Corpus.

the characteristics of this task.

Finally, we divide the collected diagnostic comments into two separate set with the 0.25:0.75 ratio: DEVSET and EVALSET. We use DEVSET for inducing a predefined set of templates, and EVALSET for evaluating the quality of the created template set.

4. Inducing Template Set

As discussed in §1, we formulate the task of argumentative diagnosis as a template-based task. We assume that frequently occurring diagnostic comments are limited, and covering them with a predefined set of templates is sufficient. Towards this end, we manually induce a predefined set of templates from the collected arguments.

4.1. Design Choice

We assume that an ideal set of templates should satisfy the following properties:

Expressive It should be able to cover a majority of diagnostic comments. This ensures learners to receive a wide variety of diagnoses.

Informative It should preserve the meaning of the original diagnostic comment and maintain the same level of specificity. This is important for our goal of giving specific diagnostic comments.

Unique Only one unique template must be identified for one diagnostic comment. This is essential to ensure the reliability of the annotations.

The challenge is that it is not easy to create a template set that satisfies all these properties. To see the trade-off between these properties, assume two extreme cases:

(i) a template set consisting of only one versatile template (e.g. *This argument is not persuasive.*), and (ii) a template set consisting of very specific templates designed for each single diagnostic comment. Case (i) clearly satisfies the expressiveness property because the abstract template can represent almost all kinds of diagnostic comments. It can also satisfy the uniqueness since there is only one template. However, the informativeness is not satisfied because template-based representation is significantly different from the original diagnosis comment. In Case (ii), on the other hand, the informativeness is clearly satisfied since the template is exactly the same as the original diagnostic comment. However, the expressiveness cannot be satisfied because these specific templates are rarely applied to other diagnostic comments.

4.2. Templates

Having the design choice in our mind, we manually designed a template set by analyzing common patterns of the diagnostic comments in DEVSET. Table 3 summarizes our template set. Each template consists of a natural language comment and placeholders (henceforth, *slots*). These slots are intended to be filled with phrases extracted from input arguments or newly generated. Our templates can be categorized into a standard dimension used in argumentation quality assessment; see Wachsmuth et al. (2017b) and Wachsmuth et al. (2017a) for more information.

4.3. Task Setting

Given the predefined templates, we formulate the task of argumentative diagnosis as two subtasks: *template selection* and *slot filling*, as shown in Fig. 1.

Template Selection Given (i) an argument, (ii) its counterargument, and (iii) target argument (indicated by sentences in the counterargument), the task is to find the weakness of the target argument and to select a template that best describes the weakness from the predefined set of templates described in §4. We assume that there can be multiple weaknesses for one target

Quality Dimension	Category	Template
Local Acceptability	CA2	なぜ x によって y という悪い結果が起こるのかが不明確 It is unclear why x causes a bad result of y
	VAL1	なぜ y にとって x が良いことなのかが不明確 It is unclear why x is good for y
	CLS1	なぜ x は y という特性を持つと言えるのかが不明確 It is unclear why x has the property of y
Local Sufficiency	CLS2	なぜ z という点において x と y は同じ/似ているのかが不明確 It is unclear why x and y are the same/similar in term of z
	EX3	x というのは限定的な状況である It is a limiting situation that x
	CMP2	y を実現するのに、なぜ z ではなく x という方法が良いのかの説明が不足している It lacks an explanation of why x is a better way to y instead of z
Local Relevance	LR1	なぜ x という理由が y という結論を支持するのかが不明確 It is unclear why a premise x supports a claim y
Global Relevance	GR2	肯定側の x という主張に y というのは直接的な反論になっていない It is not a direct objection of the government's claim x to say y
Global Sufficiency	GS1	なぜ肯定側の y という主張よりも否定側の x という主張が優位だと言えるのかが不明確 It is unclear why the opposition's claim x is superior to the government's claim y
	GS2	肯定側からの x という反論が想定される It is expected that the government side will object that x

Table 3: An excerpt of the template set used in the annotation study (See Table 8 in the Appendix for the full version).

argument and consider template selection as a multi-label classification task. That is, the output is formally defined as a label vector $l = (l_1, l_2, \dots, l_n)$, where $l_i \in \{0, 1\}$ indicates whether i -th template is an answer or not, and n is the size of template set. One can evaluate models' prediction with evaluation metrics for multi-label classification tasks, such as F1 and accuracy.

Slot Filling Given the selected template in template selection, the task is to fill the slots of the template. We assume that some slot fillers can be extracted from an original argument or counterargument, and some of them must be generated. One can evaluate models' prediction with the similarity between predicted fillers and gold-standard fillers such as n-gram overlaps.

5. Annotation Study

We verify the template set described in §4.2 satisfies the three criteria through an annotation study. In the annotation study, we annotate the diagnostic comments in EVALSET with a template using the predefined template set (§5.1). We then evaluate whether the three criteria are satisfied by using the corresponding evaluation metrics (§5.2).

5.1. Annotation Procedure

We conduct an annotation study to convert diagnostic comments in natural language text into template form using a template set.

The annotation of template application involves template selection and slot filling. In template selection, the annotator selects a template from the template set that expresses the same point as the diagnostic comment. In slot filling, the annotator fills the slots of the selected template with a phrase.

(1) **Diagnostic comment (natural language):**

宿題を廃止すれば、生徒は性格的に受動的になるという主張の根拠となる理由や例がなく、PMの主張を否定しきれていない

Since there are no reasons or examples to support the claim that students will become passive in character if homework is abolished, the PM's claim cannot be denied.

For the example above, the diagnosis questions the causality between abolishing homework and the passive personality of students. In template selection, the appropriate template is CA2, which asks for causality between x and a bad consequence y . The two slots x and y in template CA2 are filled with $x = abolishing homework$ and $y = students becoming passive in character$, respectively. The final annotation result is as follows.

(2) **Diagnostic comment (templated):**

(CA2) なぜ 宿題廃止 によって 生徒は性格的に受動的になる という悪い結果が起こるのかが不明確

(CA2) It is unclear why *abolishing homework*

Score	Description
3	It gives the same diagnosis as the original, without lacking specificity.
2	It gives the same diagnosis, but is less specific.
1	It gives different diagnosis than the original.

Table 4: Description of the informativeness scores.

causes a bad result of *students becoming passive in character*

If there was no applicable template in the template set, the annotator selects “Not Applicable”.

The annotation of template application is conducted by two annotators who are not authors. To calculate inter-annotator agreement (IAA), 74 diagnostic annotations are annotated with overlap between two annotators. One round of calibration is conducted before the main annotation.

5.2. Evaluation Metrics

We evaluate how well the template set satisfies the three criteria described in §4.1.

Expressiveness is evaluated by the coverage of the template set for unseen diagnostic comments. The template set is built on the observation of 25% of the diagnostic comments. We evaluate the coverage of the remaining 75% of diagnostic comments as a metric.

Informativeness is evaluated by whether it can express the same points as the diagnostic comments in text without lacking in specificity. We use crowdsourcing for manually evaluating informativeness of the templates.³ We compare the diagnostic comments in text and those after applying the template and evaluate them using a numerical score from 1 to 3. Table 4 shows the rubric. Each diagnostic comment is judged by five workers, and the results are aggregated by majority voting⁴.

Uniqueness is evaluated by IAA of template selection. This is because if the appropriate template can be uniquely identified, the IAA for template selection should inevitably be high. We use the agreement rate for the 74 cases where two annotators annotate overlapping as a metric.

5.3. Results

Expressiveness The coverage of the template set for unseen comments is 92.2% (757/821). Fig. 3 shows the distribution of the templates. Some examples of diagnostic comments in natural language and the ones after

³We used Yahoo! Crowdsourcing (<https://crowdsourcing.yahoo.co.jp/>) as a platform.

⁴The result of the majority vote is more consistent with the judgment of the experts than that of MACE (Hovy et al., 2013). In case of a tie in the majority vote, we count it as a worse score.

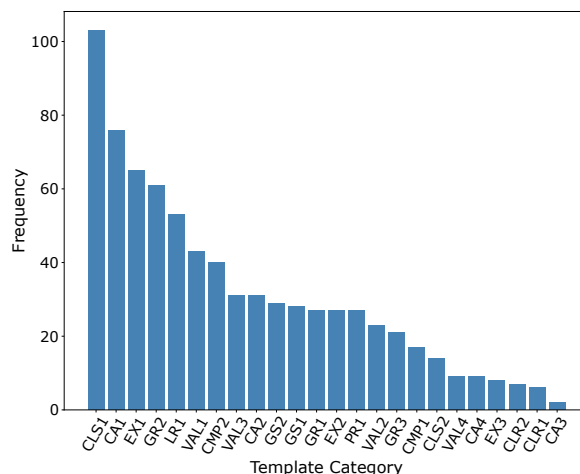


Figure 3: Distribution of Template.




Figure 4: Distribution of informativeness score.

applying the template are shown in Table 5. The result indicates that the types of frequently occurring diagnostic comments are limited and that typical templates can cover a large number of diagnostic comments.

Informativeness Fig. 4 shows the distribution of informativeness scores⁵. The result shows that 78.6% (857/1090) have the same specificity as a diagnostic comment in text even after applying a template. It indicates that template-based diagnostic comments can adequately express the intent of the original diagnosis.

Uniqueness The IAA is 0.517 for Cohen’s kappa (Cohen, 1960), which corresponds to moderate agreement (Landis and Koch, 1977). Additionally, we evaluate whether the contents of the slots are the same for cases where the template selection is agreed. The results of the manual evaluation showed that 89% (65/73) of the slots are substantially consistent in content. These results suggest that the annotators can select the appropriate template and fill in the slots with a certain degree of reliability.

Overall, we conclude that it is feasible to create a template set that satisfies three criteria of expressiveness, informativeness, and uniqueness.

5.4. Analysis

5.4.1. Characteristics of Fillers

To analyze the difficulty of slot filling, we randomly select some diagnostic comments and analyze whether or not fillers can be extracted from the original argument

⁵The inter-annotator agreement between workers is 0.265 in Krippendorff’ α with ordinal distance function (Krippendorff, 1980).

Category	Diagnostic comment in natural language text	Diagnostic comment after applying template
VAL1	教育が浅く広い場合の生徒にとってのメリットが分かりにくい It is difficult to understand the benefits to students when education is shallow and broad	なぜ 生徒 にとって 教育が浅く広いこと が良いことなのかが不明確 It's unclear why <i>having a shallow and broad education</i> good for <i>students</i> .
LR1	社会に残酷性は常に存在しているから存在してもいい、は論理が飛躍している It is a leap of logic to argue that because brutalization has always existed in society, therefore it is okay to exist.	なぜ 社会に残酷性は常に存在している という理由が 存在してもいい という結論を支持するのが不明確 It is unclear why a premise <i>brutalization has always existed in society</i> supports a claim <i>it is okay to exist</i> .
CLS1	なぜ生徒のレベルにあった宿題が出されるのかの理由が述べられていない There is no explanation as to why homework is assigned according to the student's level.	なぜ 先生が出す宿題 は 生徒のレベルに合っている という特性を持つと言えるのかが不明確 It is unclear why <i>homework assigned by the teacher</i> has the property of <i>being suitable for the student's level</i> .
GR2	PMによる健康や好きなことについての主張に対して成績が落ちるという反論がどう関係するのかが不明瞭である It is unclear how the claim of failing grades relates to PM's claims about health and liking.	肯定側の 宿題の廃止により好きなことをして健康的な生活ができるようになる という主張に 宿題の廃止により成績が落ちてしまう というのは直接的な反論になっていない It is not a direct objection of the government's claim <i>abolishing homework allows students to do what they want and live a healthy life</i> to say <i>abolishing homework will result in a drop in grades</i> .

Table 5: The examples of annotation for template application (See Table 9 in the Appendix for the others).

or counterargument. Table 6 shows the proportion of filler that can be extracted from an original argument or counterargument.

For 75.9% (126/166) of the fillers, they can be extracted from the arguments with minor modifications such as changing the part of speech and paraphrasing.

For 8.4% of the fillers, the basic phrases can be extracted, but some substantial changes are required. For instance, the following is a case where the extracted concepts need to be combined.

(3) **Counterargument (excerpt):**

That is to say even if abolishing homework, students become passive in character. This is because students are instructed by teachers in club activity or cram school in many situation.

Diagnostic comment (templated):

(CLS2) It is unclear why *passivity due to homework* and *passivity due to club activities* are the same.

Consider the second filler, “passivity due to club activity”. The phrases “passive in character” and “club activity” can be extracted from the counterargument, but they need to be combined to make the filler.

For 15.7% of the fillers, it cannot be extracted from an original argument or counterargument. Some fillers belong to this case for diagnoses that give the learner a new perspective.

(4) **Diagnostic comment (templated):**

(CMP2) It lacks an explanation of why *homework* is a better way to achieve *basic skill ac-*

quisition for students instead of *independent study*.

In the above case, the third filler, “independent study”, which is taken up as a comparison, is not mentioned in the original argument or counterargument.

(5) **Diagnostic comment (templated):**

(GS2) It is expected that the government will object that *death penalty is still one of the factors causing brutality in modern society*.

Similarly, the filler of template for anticipated objection (GS2) tends not to be extracted, as it points out things that have not been considered in the counterargument (see Example (5)).

This result suggests that the approach to extract fillers from the arguments can cover the majority of fillers. We think this characteristic of the filler will increase the feasibility of automated models. Despite recent breakthroughs by pre-trained language modeling, it is still challenging to generate argumentative knowledge with reasoning (Saha et al., 2021). The approach to extract fillers can alleviate the difficulty of the problem.

5.4.2. Different Diagnoses for Same Target

To analyze whether the template selection should be a single-label classification or a multi-label classification, we examine how many cases in which the same target sentences are given different templates. Table 7 shows the percentage of different templates given to target sentences.

For 28.9% of the cases, two to five different diagnoses (templates) are given for the same target. The following is one of the examples of such a case.

	Percentage	
Extractable	75.9%	(126 / 166)
Extractable (some essential changes are required)	8.4%	(14 / 166)
Not extractable	15.7%	(26 / 166)

Table 6: Percentage of filler that can be extracted from original argument or counterargument.

# Different diagnoses	Percentage	
1	71.1%	(542 / 762)
2	18.9%	(144 / 762)
3	6.8%	(52 / 762)
4	2.5%	(19 / 762)
5	0.7%	(5 / 762)

Table 7: Percentage of different diagnoses given to target sentences.

(6) **Counterargument (excerpt):**

The training through homework can cultivate students’ perspectives, values, and curiosities.

Diagnostic comment 1 (templated):

(CA1) It is unclear why *homework* causes a good result of *cultivating student’s curiosities*.

Diagnostic comment 2 (templated):

(CMP2) It lacks an explanation of why *homework* is a better way to achieve *cultivating students’ perspectives, values, and curiosities* instead of *other means*.

Diagnostic comment 1 questions the belief that homework cultivates students’ curiosities. On the other hand, diagnostic comment 2 questions whether homework is more suitable than other means to cultivate students’ curiosities. These diagnostic comments differ in how the relationship between homework and students’ curiosities is viewed, but both are reasonable.

The results indicate that there are multiple reasonable diagnoses for the same target sentence. Therefore, we adopt multi-label classification as a task setting of template selection.

6. Discussion

Limitation We have not verified whether the template set satisfies the three criteria for diagnostic comments on different topics and given by different assessors. Whether it can be generalized to other conditions should be explored in the future. Also, there are still some issues in the current template set. Template CLS1 is applicable in many cases, and there is room for further subdivisions. As a result of human disagreement analysis, templates VAL1 and VAL4 tend to be confused, and they may need to be combined into one. Although some issues are still to be addressed, we believe that they can be properly addressed by repeating the error analysis.

Data Collection of Counterargument This study takes the approach of collecting counterarguments intensively by focusing on a few topics. This is because we think it would be difficult to adequately address this task with a broad and shallow approach to collecting counterarguments. To present appropriate diagnostic comments, it is necessary to analyze argumentation structure of an original argument and counterargument accurately. Although pre-trained language models have improved the performance, it is still challenging to analyze argumentation structures with implicit relations (Atwell et al., 2021). We aim to alleviate the difficulty by covering the counterarguments that typically appear in a topic.

Of course, the cost of expanding to other topics will be higher than a broad and shallow approach to collecting argumentation. However, if we think about actual usage scenarios, there will be many situations where just a few topics will be immediately useful. For example, for use in a high school classroom, five topics may be enough to be worthwhile. It is not necessary to have different topics for each class, nor is it necessary to change them every year.

Data Collection of Diagnostic Comments To collect various diagnostic comments and analyze the task’s characteristics, we collected diagnostic comments based on the descriptive paradigm, which does not adjust for agreement among assessors. It is not suitable for training a model to make consistent predictions. We plan to refine the corpus based on this trial to make it more suitable for model training and evaluation.

7. Conclusion

We proposed a template-based formulation to make the task of giving specific diagnostic comments on argumentation more tractable. As a first attempt, we verified the feasibility to create a template set that satisfies three criteria of *expressiveness*, *informativeness*, and *uniqueness*. We showed that it is feasible through an annotation study that converts diagnostic comments given in text into a template format. We publish the corpus used for the annotation study. The corpus consists of 1,000 counterarguments, 197 of which are annotated with 1,082 diagnostic comments in both natural language and template formats.

Our future work is to refine the corpus to be more suitable for model training and evaluation based on this annotation study. For modeling, we plan to analyze what kind of information needs to be captured by the model to give a correct diagnostic comment.

8. Acknowledgements

The authors would like to thank Paul Reisert and members of the Tohoku NLP Lab for their helpful feedback, and the assessors and the annotators for their a lot of time and effort.

9. Bibliographical References

- Afrin, T., Kashefi, O., Olshefski, C., Litman, D., Hwa, R., and Godley, A., (2021). *Effective Interfaces for Student-Driven Revision Sessions for Argumentative Writing*. Association for Computing Machinery, New York, NY, USA.
- Atwell, K., Li, J. J., and Alikhani, M. (2021). Where are we in discourse relation recognition? In *Proceedings of the 22nd Annual Meeting of the Special Interest Group on Discourse and Dialogue*, pages 314–325, Singapore and Online, July. Association for Computational Linguistics.
- Burstein, J. and Chodorow, M. (1999). Automated essay scoring for nonnative English speakers. In *Computer Mediated Language Assessment and Evaluation in Natural Language Processing*.
- Carlile, W., Gurrupadi, N., Ke, Z., and Ng, V. (2018). Give me more feedback: Annotating argument persuasiveness and related attributes in student essays. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 621–631, Melbourne, Australia, July. Association for Computational Linguistics.
- Cohen, J. (1960). A coefficient of agreement for nominal scales. *Educational and Psychological Measurement*, 20(1):37–46.
- Dikli, S. (2006). An overview of automated scoring of essays. *The Journal of Technology, Learning and Assessment*, 5(1), Aug.
- Dong, F. and Zhang, Y. (2016). Automatic features for essay scoring – an empirical study. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 1072–1077, Austin, Texas, November. Association for Computational Linguistics.
- Driver, R., Newton, P., and Osborne, J. (2000). Establishing the norms of scientific argumentation in classrooms. *Science Education*, 84:1–312, 05.
- Durón, R. R., Limbach, B., and Waugh, W. S. (2006). Critical thinking framework for any discipline.
- Egawa, R., Morio, G., and Fujita, K. (2020). Corpus for modeling user interactions in online persuasive discussions. In *Proceedings of the 12th Language Resources and Evaluation Conference*, pages 1135–1141, Marseille, France, May. European Language Resources Association.
- Hovy, D., Berg-Kirkpatrick, T., Vaswani, A., and Hovy, E. (2013). Learning whom to trust with MACE. In *Proceedings of the 2013 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1120–1130, Atlanta, Georgia, June. Association for Computational Linguistics.
- Ida, M., Morio, G., Iwasa, K., Tatsumi, T., Yasui, T., and Fujita, K. (2019). Can you give me a reason?: Argument-inducing online forum by argument mining. In *The World Wide Web Conference, WWW '19*, page 3545–3549, New York, NY, USA. Association for Computing Machinery.
- Ke, Z., Inamdar, H., Lin, H., and Ng, V. (2019). Give me more feedback II: Annotating thesis strength and related attributes in student essays. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3994–4004, Florence, Italy, July. Association for Computational Linguistics.
- Kocmi, T., Federmann, C., Grundkiewicz, R., Junczys-Dowmunt, M., Matsushita, H., and Menezes, A. (2021). To ship or not to ship: An extensive evaluation of automatic metrics for machine translation. *arXiv preprint arXiv:2107.10821*.
- Krippendorff, K. (1980). *Content Analysis: An Introduction to Methodology*. Sage Publications, Inc., Beverly Hills, CA.
- Landis, J. R. and Koch, G. G. (1977). The measurement of observer agreement for categorical data. *Biometrics*, 33(1):159–174.
- Liu, C.-W., Lowe, R., Serban, I., Noseworthy, M., Charlin, L., and Pineau, J. (2016). How NOT to evaluate your dialogue system: An empirical study of unsupervised evaluation metrics for dialogue response generation. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 2122–2132, Austin, Texas, November. Association for Computational Linguistics.
- Mathur, N., Baldwin, T., and Cohn, T. (2020). Tangled up in BLEU: Reevaluating the evaluation of automatic machine translation evaluation metrics. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4984–4997, Online, July. Association for Computational Linguistics.
- Morio, G. and Fujita, K. (2018). Annotating online civic discussion threads for argument mining. In *2018 IEEE/WIC/ACM International Conference on Web Intelligence (WI)*, pages 546–553.
- Papineni, K., Roukos, S., Ward, T., and Zhu, W.-J. (2002). Bleu: a method for automatic evaluation of machine translation. In *Proceedings of the 40th Annual Meeting of the Association for Computational Linguistics*, pages 311–318, Philadelphia, Pennsylvania, USA, July. Association for Computational Linguistics.
- Park, J. and Cardie, C. (2018). A corpus of eRule-making user comments for measuring evaluability of arguments. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*, Miyazaki, Japan, May. European Language Resources Association (ELRA).
- Park, J., Blake, C., and Cardie, C. (2015). Toward machine-assisted participation in erulemaking: An argumentation model of evaluability. *ICAAIL '15*, page 206–210, New York, NY, USA. Association for Computing Machinery.

- Paulus, T. M. (1999). The effect of peer and teacher feedback on student writing. *Journal of Second Language Writing*, 8(3):265–289.
- Persing, I. and Ng, V. (2013). Modeling thesis clarity in student essays. In *Proceedings of the 51st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 260–269, Sofia, Bulgaria, August. Association for Computational Linguistics.
- Persing, I. and Ng, V. (2014). Modeling prompt adherence in student essays. In *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1534–1543, Baltimore, Maryland, June. Association for Computational Linguistics.
- Persing, I. and Ng, V. (2015). Modeling argument strength in student essays. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 543–552, Beijing, China, July. Association for Computational Linguistics.
- Persing, I. and Ng, V. (2017). Why can't you convince me? modeling weaknesses in unpersuasive arguments. In *Proceedings of the Twenty-Sixth International Joint Conference on Artificial Intelligence, IJCAI-17*, pages 4082–4088.
- Persing, I., Davis, A., and Ng, V. (2010). Modeling organization in student essays. In *Proceedings of the 2010 Conference on Empirical Methods in Natural Language Processing*, pages 229–239, Cambridge, MA, October. Association for Computational Linguistics.
- Reiter, E. (2018). A structured review of the validity of BLEU. *Computational Linguistics*, 44(3):393–401, September.
- Röttger, P., Vidgen, B., Hovy, D., and Pierrehumbert, J. B. (2021). Two contrasting data annotation paradigms for subjective nlp tasks. *arXiv preprint arXiv:2112.07475*.
- Roy, A. and Macchiette, B. (2005). Debating the issues: A tool for augmenting critical thinking skills of marketing students. *Journal of Marketing Education*, 27(3):264–276.
- Saha, S., Yadav, P., Bauer, L., and Bansal, M. (2021). ExplaGraphs: An explanation graph generation task for structured commonsense reasoning. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 7716–7740, Online and Punta Cana, Dominican Republic, November. Association for Computational Linguistics.
- Shute, V. (2008). Focus on formative feedback. *Review of Educational Research*, 78:153–189, 03.
- Song, Y., Heilman, M., Beigman Klebanov, B., and Deane, P. (2014). Applying argumentation schemes for essay scoring. In *Proceedings of the First Workshop on Argumentation Mining*, pages 69–78, Baltimore, Maryland, June. Association for Computational Linguistics.
- Stab, C. and Gurevych, I. (2017). Recognizing insufficiently supported arguments in argumentative essays. In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 1, Long Papers*, pages 980–990, Valencia, Spain, April. Association for Computational Linguistics.
- Tsui, L. (1999). Courses and instruction affecting critical thinking. *Research in Higher Education*, 40:185–200.
- Wachsmuth, H., Naderi, N., Habernal, I., Hou, Y., Hirst, G., Gurevych, I., and Stein, B. (2017a). Argumentation quality assessment: Theory vs. practice. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 250–255, Vancouver, Canada, July. Association for Computational Linguistics.
- Wachsmuth, H., Naderi, N., Hou, Y., Bilu, Y., Prabhakaran, V., Thijm, T. A., Hirst, G., and Stein, B. (2017b). Computational argumentation quality assessment in natural language. In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 1, Long Papers*, pages 176–187, Valencia, Spain, April. Association for Computational Linguistics.
- Walton, D., Reed, C., and Macagno, F. (2008). *Argumentation Schemes*. Cambridge University Press.
- Wambgsanss, T., Niklaus, C., Cetto, M., Söllner, M., Handschuh, S., and Leimeister, J. M. (2020). AI: An adaptive learning support system for argumentation skills. CHI '20, page 1–14, New York, NY, USA. Association for Computing Machinery.
- Zhang, F. and Litman, D. (2014). Sentence-level rewriting detection. In *Proceedings of the Ninth Workshop on Innovative Use of NLP for Building Educational Applications*, pages 149–154, Baltimore, Maryland, June. Association for Computational Linguistics.
- Zhang, F. and Litman, D. (2015). Annotation and classification of argumentative writing revisions. In *Proceedings of the Tenth Workshop on Innovative Use of NLP for Building Educational Applications*, pages 133–143, Denver, Colorado, June. Association for Computational Linguistics.
- Zhang, F., Hwa, R., Litman, D., and Hashemi, H. B. (2016). ArgRewrite: A web-based revision assistant for argumentative writings. In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Demonstrations*, pages 37–41, San Diego, California, June. Association for Computational Linguistics.
- Zhang, F., Hashemi, H. B., Hwa, R., and Litman, D. (2017). A corpus of annotated revisions for studying argumentative writing. In *Proceedings of the*

55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 1568–1578, Vancouver, Canada, July. Association for Computational Linguistics.

Appendix:

Table 8 shows the template set of the full version used in the annotation study. Table 9 shows the examples of annotation for template application.

Quality Dimension	Category	Template
Local Acceptability	CA1	なぜ x によって y という良い結果が起こるのかが不明確 It is unclear why x cause a good result of y
	CA2	なぜ x によって y という悪い結果が起こるのかが不明確 It is unclear why x cause a bad result of y
	CA3	なぜ x によって y という良い結果が抑制されるのかが不明確 It is unclear why x suppress a good result of y
	CA4	なぜ x によって y という悪い結果が抑制されるのかが不明確 It is unclear why x suppress a bad result of y
	VAL1	なぜ y にとって x が良いことなのかが不明確 It is unclear why x is good for y
	VAL2	なぜ y にとって x が悪いことなのかが不明確 It is unclear why x is bad for y
	VAL3	なぜ x は y とすべきと考えているのかが不明確 It is unclear why x should y
	VAL4	なぜ x は y とすべきでないと考えているのかが不明確 It is unclear why x should not y
	CLS1	なぜ x は y という特性を持つと言えるのかが不明確 It is unclear why x has the property of y
	CLS2	なぜ z という点において x と y は同じ/似ているのかが不明確 It is unclear why x and y are the same/similar in term of z
	PR1	なぜ x を実現可能なのかが不明確 It is unclear why x can be achieved
Local Sufficiency	EX1	x の例として具体的には何があるか It lacks the specificity of what exactly is an example of x
	EX2	x ほどの程度 y かの具体性に欠ける It lacks the specificity of how much x is y
	EX3	x というのは限定的な状況である It is a limiting situation that x
	CMP1	なぜ y よりも x を優先すべきかの説明が不足している It lacks an explanation of why x should be preferred over y
	CMP2	y を実現するのに、なぜ z ではなく x という方法が良いのかの説明が不足している It lacks an explanation of why x is a better way to y instead of z
	Local Relevance	LR1
Clarity	CLR1	x という表現が何を意味しているのか分からない It is hard to understand what the statement x is means
	CLR2	x について具体例はあるが一般化した説明がない There is a specific example for x , but it lacks a generalized justification
Global Relevance	GR1	x という主張/理由が論題とどのように関係するのかが不明確 It is unclear how the statement x relates to the topic
	GR2	肯定側の x という主張に y というのは直接的な反論になっていない It is not a direct objection of the government's claim x to say y
	GR3	x というのは肯定側が定義している y を考慮できていない The statement x fails to consider y , which is the definition of the government side
Global Sufficiency	GS1	なぜ肯定側の y という主張よりも否定側の x という主張が優位だと言えるのかが不明確 It is unclear why the opposition's claim x is superior to the government's claim of y
	GS2	肯定側からの x という反論が想定される It is expected that the government will object that x

Table 8: The template set used in the annotation study (Full version).

Category	Diagnostic comment in natural language text	Diagnostic comment after applying template
CA1	なぜ宿題が生徒たちの好奇心等を育てるのが説明されていない It is not explained why homework fosters students' curiosity.	なぜ宿題によって生徒たちの好奇心等が育つという良い結果が起こるのかが不明確 It is unclear why <i>homework</i> causes good results of <i>fostering students' curiosity</i> .
EX1	生徒のスキルや習得状況に合わせた授業の内容という部分が抽象的 The part about tailoring classroom content to students' skills and mastery is abstract	生徒のスキルや習得状況に合わせた授業の具体例には何があるか It lacks the specificity of what exactly is an example of <i>classroom content that is tailored to students' skills and mastery</i> .
CMP2	基本的なスキルを生徒が習得する上で自主学習では不十分で宿題が必要であるということを主張するための固有性の説明がない There is no explanation that independent study is not sufficient for students to master basic skills and that it must be homework.	生徒の基本的なスキル習得を実現するのに、なぜ自主学習ではなく宿題という方法が良いのかの説明が不足している It lacks an explanation of why <i>homework</i> is a better way to <i>help students acquire basic skills</i> instead of <i>independent study</i> .)
CLS2	宿題による受動性と部活動による受動性がどの程度同じなのかが不明瞭 It is unclear to what extent passivity due to homework is the same as passivity due to club activities.	なぜ宿題による受動性と部活動による受動性は同じ/似ていると言えるのかが不明確 It is unclear why <i>passivity from homework</i> and <i>passivity from club activities</i> are the same/similar.
PR1	どのようなプロセスで法制度における誤判断のミスが防がれているのか具体的な説明がない There is no concrete explanation of how the process prevents misjudgment in the legal system.	なぜ法制度における誤判断のミスが防ぐことを実現可能なのかが不明確 It is unclear why <i>preventing misjudgments in the legal system</i> can be achieved.
GS1	リスクがゼロでないことを問題として挙げているのに対し、なぜ最小限にするので十分なのかの説明が不足している	なぜ肯定側のリスクがゼロでないことが問題という主張よりも否定側のリスクを最小限にするので十分という主張が優位だと言えるのかが不明確 It is unclear why the opposition's claim of <i>minimizing risk is sufficient</i> is superior to the government's claim of <i>non-zero risk is a problem</i> .
GS2	授業中に宿題をするということは人によっては悪いことだと思ってしまう可能性がある Some people may think that doing homework in class is a bad idea.	肯定側から授業中に宿題をするのは悪いことだという反論が想定される It is expected that the government will object that <i>doing homework in class is a bad idea</i> .

Table 9: The examples of annotation for template application.