

A nonlinear conjugate gradient method with complexity guarantees and its application to nonconvex regression

Rémi Chan--Renous-Legoubin ^{*} Clément W. Royer [†]

January 24, 2022

Abstract

Nonlinear conjugate gradients are among the most popular techniques for solving continuous optimization problems. Although these schemes have long been studied from a global convergence standpoint, their worst-case complexity properties have yet to be fully understood, especially in the nonconvex setting. In particular, it is unclear whether such methods possess better guarantees than first-order methods such as gradient descent. On the other hand, recent results have shown good performance of standard nonlinear conjugate gradient methods on nonconvex problems, even when compared with methods endowed with the best known complexity guarantees.

In this paper, we propose a nonlinear conjugate gradient method based on a simple line-search paradigm and a modified restart condition. These two ingredients allow for monitoring the properties of the search directions, which is instrumental in obtaining complexity guarantees. Our complexity results illustrate the possible discrepancy between nonlinear conjugate gradient methods and classical gradient descent. Numerical experiments on nonconvex robust regression problems suggest that the restarting condition has little impact over the practical behavior.

1 Introduction

In this paper, we are interested in the problem

$$\min_{x \in \mathbb{R}^n} f(x), \tag{1}$$

where $f : \mathbb{R}^n \rightarrow \mathbb{R}$ is a Lipschitz continuously differentiable, nonconvex function. Given a tolerance $\epsilon \in (0, 1)$, our goal is to compute an ϵ -approximate stationary point, that is, a vector $x \in \mathbb{R}^n$ such that

$$\|\nabla f(x)\| \leq \epsilon, \tag{2}$$

where $\|\cdot\|$ denotes the Euclidean norm in \mathbb{R}^n . We are interested in algorithms that provably reach a point satisfying (2) in a finite amount of computational work (number of iterations, and evaluations of f and its derivatives). Such results are termed *worst-case complexity guarantees*,

^{*}Université Paris Dauphine-PSL, 75016 Paris, France (remi.chan-renous-legoubin@dauphine.eu).

[†]LAMSADE, CNRS, Université Paris Dauphine-PSL, 75016 Paris, France (clement.royer@dauphine.psl.eu). Support for this research was provided by CNRS INS2I under the grant GASCON and by Agence Nationale de la Recherche through program ANR-19-P3IA-0001 (PRAIRIE 3IA Institute) .

and have been a growing area of interest in nonconvex optimization, fueled by the interest of such results in data analysis and statistics [26].

The most classical algorithm for solving problem (1) is gradient descent, that proceeds by moving along the negative gradient direction. It is known that such a method typically reaches a point satisfying (2) in at most $\mathcal{O}(\epsilon^{-2})$ iterations or gradient evaluations¹. This bound contrasts with its counterparts in convex and strongly convex problems, and is sharp for gradient descent, even when exact line searches are used [5, 7]. Under additional regularity assumptions on the objective function, it is possible to design algorithms with better properties, that typically require higher-order information to be used explicitly in the algorithm. This is for instance the case for cubic regularization methods, that achieve an iteration complexity in $\mathcal{O}(\epsilon^{-3/2})$ (see [6] and references therein), and for accelerated gradient techniques combined with negative curvature estimation procedures, for which a gradient evaluation complexity in $\mathcal{O}(\epsilon^{-7/4})$ can be shown [2, 3]. The latter methods are examples of algorithms that are inherently designed to satisfy certain complexity guarantees. Providing a complexity analysis of standard nonlinear optimization schemes, on the other hand, remains a challenging endeavor.

Conjugate gradient (CG) methods are an example of popular nonlinear optimization techniques that have yet to be endowed with a comprehensive complexity analysis. When applied to strongly convex quadratics, those methods typically reduce to linear conjugate gradient, and complexity guarantees have long been known in that setting [21]. Recent results have shown that linear conjugate gradient can also be used in conjunction with a Newton-type framework when the objective is Lipschitz twice continuously differentiable. The resulting methods can be analyzed from a complexity viewpoint on nonconvex optimization problems, leading to complexity bounds that match the best known in the literature for this class of problems [8, 24, 25].

The situation becomes quite different when considering nonlinear conjugate gradient techniques. Numerous conditions for global convergence of nonlinear CG schemes have been proposed in the literature [9, 12, 13, 14, 15, 16], yet early complexity analyzes showed that nonlinear CG techniques could have worse guarantees than gradient descent on strongly convex problems [20]. Still, recent proposals have combined modern nonlinear conjugate gradient with accelerated gradient tools to yield a method that both reduces to linear CG on quadratics and converges as fast as accelerated gradient on convex and strongly convex problems [17, 18, 19]. Nevertheless, deriving complexity guarantees for classical nonlinear CG variants remains a difficult task, particularly in the nonconvex setting.

In this paper, we propose a nonlinear conjugate gradient method for optimizing nonconvex functions. By adapting the classical restart condition of nonlinear conjugate gradient methods, we are able to provide decrease guarantees at every iteration, that depend on whether the restart condition is triggered. Overall, our method is shown to depart from gradient descent on certain iterations, for which our analysis provides better guarantees. Our numerical experiments confirm earlier findings about the performance of these methods on nonconvex regression tasks [2, 23].

The rest of this paper is organized as follows. In Section 2, we recall the key features of nonlinear conjugate gradient algorithms, and we describe our framework based on a modified restart condition. Complexity results for this framework are obtained and discussed in Section 3. We then conduct a numerical study of our proposed method on nonconvex regression problems in Section 4. Final comments are made in Section 5.

¹Throughout this paper, we write $\mathcal{O}(A)$ to indicate a constant times A , where the terms in the constants do not depend on that in A . The notation $\tilde{\mathcal{O}}(A)$ stands for $\mathcal{O}(\log^c(A)A)$ with $c > 0$.

2 Nonlinear conjugate gradient framework

In this section, we describe a nonlinear conjugate gradient method based on Armijo line-search and a modified restart condition. To this end, we first recall the main features of nonlinear conjugate gradient methods, then provide a description of our proposed scheme.

2.1 Nonlinear conjugate gradient

Nonlinear conjugate gradient techniques [16, 22] are iterative optimization schemes of the form

$$x_{k+1} = x_k + \alpha_k d_k, \quad (3)$$

where the direction d_k is a search direction, and α_k is a stepsize typically computed through a line search. Several line-search strategies have been proposed in the literature [9, 16]. In this paper, we focus on using a backtracking Armijo line search, since such a method was already shown to yield good performance on our example of interest [2].

The goal of a conjugate gradient approach is to combine local information (i.e. the negative gradient at the current point) with the *previous direction*, that is possibly still relevant for the next iterate. As a result, a nonlinear CG method selects $d_0 = -\nabla f(x_0)$ and

$$\begin{cases} d_0 = -\nabla f(x_0) \\ d_{k+1} = -\nabla f(x_{k+1}) + \beta_{k+1} d_k \quad \forall k \in \mathbb{N}, \end{cases} \quad (4)$$

where $\beta_{k+1} > 0$. The choice of the formula for β_{k+1} gives rise to various nonlinear CG schemes [15]. The most popular choices for β_{k+1} include the *Fletcher-Reeves* formula

$$\beta_{k+1} = \frac{\|\nabla f(x_{k+1})\|^2}{\|\nabla f(x_k)\|^2}$$

and the *Polak-Ribière* (also known as Polak-Ribière-Polyak) formula

$$\beta_{k+1} = \frac{\nabla f(x_{k+1})^T (\nabla f(x_{k+1}) - \nabla f(x_k))}{\|\nabla f(x_k)\|^2}.$$

In practice, it can happen that $\nabla f(x_{k+1})^T d_{k+1} \geq 0$, in which case there is no guarantee for decrease in the direction d_{k+1} : a typical fix consists in redefining the search direction as $d_{k+1} = -\nabla f(x_{k+1})$. This process is called restarting. A similar reasoning can be adopted when the formula for β_{k+1} yields a nonpositive value. A popular variant of the Polak-Ribière formula is the *PRP+* update:

$$\beta_{k+1} = \max \left\{ \frac{\nabla f(x_{k+1})^T (\nabla f(x_{k+1}) - \nabla f(x_k))}{\|\nabla f(x_k)\|^2}, 0 \right\}. \quad (5)$$

Using the PRP+ formula has been shown to guarantee global convergence of a nonlinear conjugate gradient method with appropriate line-search condition [11]. Following previous work and motivated by this restarting aspect of the PRP+ update, we will adopt formula (5) in our algorithm. Our method also exploits the restart condition, as described in the next section.

2.2 Nonlinear CG with modified restart

In our framework, we build on the restarting idea by monitoring the value of $\nabla f(x_k)^\top d_k$ and that of $\|d_k\|$. Algorithm 1 describes our framework. At every iteration, we perform a backtracking line search to compute a step that yields a suitable decrease in the objective function (see condition (6)). Once the new point has been computed, we evaluate the gradient at the next iterate, as well as the conjugate direction parameter β_{k+1} , which we compute through the PRP+ update (5).

Algorithm 1 Nonlinear conjugate gradient with modified restart condition

Inputs: $x_0 \in \mathbb{R}^d$, $\eta \in (0, 1)$, $\theta \in (0, 1)$, $\sigma \in (0, 1]$, $\kappa \geq 1$, $p \geq 0$, $q \geq 0$.

Set $g_0 = \nabla f(x_0)$, $d_0 = -g_0$, $k = 0$.

for $k = 0, 1, 2, \dots$ **do**

 Compute $\alpha_k = \theta^{j_k}$ where j_k is the smallest nonnegative integer such that

$$f(x_k + \alpha_k d_k) < f(x_k) + \eta \alpha_k g_k^\top d_k. \quad (6)$$

 Set $x_{k+1} = x_k + \alpha_k d_k$ and $g_{k+1} = \nabla f(x_{k+1})$.

 Set $\beta_{k+1} = \max \left\{ \frac{g_{k+1}^\top (g_{k+1} - g_k)}{\|g_k\|^2}, 0 \right\}$.

 Set $d_{k+1} = -g_{k+1} + \beta_{k+1} d_k$.

 If the condition

$$g_{k+1}^\top d_{k+1} \geq -\sigma \|g_{k+1}\|^{1+p} \quad \text{or} \quad \|d_{k+1}\| \geq \kappa \|g_{k+1}\|^q, \quad (7)$$

 holds, restart the algorithm by setting $d_{k+1} = -g_{k+1}$.

end for

The key ingredient to Algorithm 1 is the restarting condition (7).

For any $k \geq 0$, if iteration k does not end with a restart, we have²

$$g_{k+1}^\top d_{k+1} \leq -\sigma \|g_{k+1}\|^{1+p} \quad \text{and} \quad \|d_{k+1}\| \leq \kappa \|g_{k+1}\|^q. \quad (8)$$

Setting $p = 2$ and $q = 1$ leads to the condition

$$g_{k+1}^\top d_{k+1} \leq -\sigma \|g_{k+1}\|^2 \quad \text{and} \quad \|d_{k+1}\| \leq \kappa \|g_{k+1}\|.$$

Such a condition is typical of gradient-related directions, and has been instrumental in obtaining complexity guarantees for gradient-type methods [7]. In the context of nonlinear conjugate gradient method, similar properties have been used to establish global convergence [13]. A case of particular interest to us is $d_k = -g_k$, which occurs when the restarting process is triggered.

3 Complexity analysis

In this section, we derive a complexity result for our restarted variant of nonlinear conjugate gradient.

²Although the inequalities should be strict, we use non-strict inequalities for notational convenience.

3.1 Decrease lemmas

We make the following assumptions about the objective function of problem (1).

Assumption 3.1 *The function f is continuously differentiable on \mathbb{R}^n and its gradient is L -Lipschitz continuous for $L > 0$.*

Assumption 3.2 *There exists $f_{\text{low}} \in \mathbb{R}$ such that $f(x) \geq f_{\text{low}}$ for every $x \in \mathbb{R}^n$.*

To this end, we partition the iterations into $\mathcal{R} \cup \mathcal{N}$, where

$$\begin{aligned}\mathcal{R} &= \{k \in \mathbb{N} \mid \text{condition (7) holds}\} \\ \mathcal{N} &= \mathbb{N} \setminus \mathcal{R}.\end{aligned}\tag{9}$$

We say that $k \in \mathcal{R}$ is the index of a *restarted iteration*, while $k \in \mathcal{N}$ is the index of a *non-restarted iteration*. Depending on the nature of each iteration, we can bound the number of backtracking steps needed to compute a suitable stepsize. We begin by the non-restarted iterations, as the proof encompasses that of restarted iterations.

Lemma 3.1 *Let Assumption 3.1 hold, and $k \in \mathcal{N}$. Then, the line-search process terminates after at most $\bar{j}_{\mathcal{N}} + 1$ iterations, where*

$$\bar{j}_{\mathcal{N}} := \left[\log_{\theta} \left(\frac{2(1-\eta)\sigma}{\kappa^2 L} \|g_k\|^{1+p-2q} \right) \right]_+.\tag{10}$$

Moreover, the resulting decrease at the k th iteration satisfies

$$f(x_k) - f(x_{k+1}) > c_{\mathcal{N}} \min \left\{ \|g_k\|^{1+p}, \|g_k\|^{2(1+p-q)} \right\},\tag{11}$$

where

$$c_{\mathcal{N}} := \eta\sigma \min \left\{ 1, \frac{2(1-\eta)\sigma\theta}{\kappa^2 L} \right\}.$$

Proof. If the decrease condition (6) holds for $\alpha_k = 1$, then the bound (10) holds. Moreover, combining (6) with the condition (8) gives

$$f(x_k) - f(x_{k+1}) > -\eta\alpha_k g_k^{\text{T}} d_k \geq \eta\sigma \|g_k\|^{1+p},\tag{12}$$

hence (11) also holds.

Suppose now that the line-search condition (6) fails for some $\alpha = \theta^j$ with $j \in \mathbb{N}$. Using a Taylor expansion of f then gives:

$$\begin{aligned}\eta\alpha g_k^{\text{T}} d_k &\leq f(x_{k+1}) - f(x_k) \\ &\leq \alpha g_k^{\text{T}} d_k + \frac{L}{2} \alpha^2 \|d_k\|^2 \\ &\leq \alpha g_k^{\text{T}} d_k + \frac{\kappa^2 L}{2} \alpha^2 \|g_k\|^{2q},\end{aligned}$$

where the last inequality comes from (8). Re-arranging the terms, we obtain

$$\begin{aligned}
-(1-\eta)\alpha g_k^\top d_k &\leq \frac{\kappa^2 L}{2} \alpha^2 \|g_k\|^{2q} \\
(1-\eta)\alpha \sigma \|g_k\|^{1+p} &\leq \frac{\kappa^2 L}{2} \alpha^2 \|g_k\|^{2q} \\
\frac{2(1-\eta)\sigma}{\kappa^2 L} \|g_k\|^{1+p-2q} &\leq \alpha.
\end{aligned} \tag{13}$$

The condition (13) can only hold for $j \leq \bar{j}_\mathcal{N}$: as a result, the line-search process must terminate after $j_k \leq \bar{j}_\mathcal{N} + 1$ iterations. Moreover, since the line search did not terminate after $j_k - 1$ iterations, we have

$$\theta^{j_k-1} \geq \frac{2(1-\eta)\sigma}{\kappa^2 L} \Leftrightarrow \alpha_k = \theta^{j_k} \geq \frac{2(1-\eta)\theta\sigma}{\kappa^2 L} \|g_k\|^{1+p-2q}.$$

Consequently, the function decrease at iteration k satisfies:

$$f(x_k) - f(x_{k+1}) > \eta \alpha_k g_k^\top d_k \geq \frac{2\eta(1-\eta)\theta\sigma^2}{\kappa^2 L} \|g_k\|^{2(1+p-q)} \geq c_\mathcal{N} \|g_k\|^{2(1+p-q)}, \tag{14}$$

hence (11) also holds in this case. \square

We now consider the restarted iterations. In that case, we have $d_k = -g_k$, implying that

$$g_k^\top d_k = -\|g_k\|^2 \quad \text{and} \quad \|d_k\| = \|g_k\|. \tag{15}$$

Thus, for the restarted iterations, the search direction satisfies a property analogous to (8) with $\sigma = \kappa = 1$ and $p = q = 1$. A reasoning identical to that used in the proof of Lemma 3.1 leads to the following result.

Lemma 3.2 *Let Assumption 3.1 hold, and $k \in \mathcal{R}$. Then, the line-search process terminates after at most $\bar{j}_\mathcal{R} + 1$ iterations, where*

$$\bar{j}_\mathcal{R} := \left\lceil \log_\theta \left(\frac{2(1-\eta)}{L} \right) \right\rceil_+. \tag{16}$$

Moreover, the resulting decrease at the k th iteration satisfies

$$f(x_k) - f(x_{k+1}) > c_\mathcal{R} \|g_k\|^2, \tag{17}$$

where

$$c_\mathcal{R} := \eta \min \left\{ 1, \frac{2(1-\eta)\theta}{L} \right\}.$$

The result of Lemmas 3.1 and 3.2 are instrumental to bounding the number of iterations necessary to reach an approximate stationary point.

3.2 Main results

Our main result is a bound on the number of iterations performed by the algorithm prior to reaching an ϵ -stationary point: this bound also applies to the number of gradient evaluations.

Theorem 3.1 *Let Assumptions 3.1 and 3.2 hold. Suppose that $1 + p - q \geq 0$. Then, the number of iterations (and objective gradient evaluations) required by Algorithm 1 to reach a point satisfying (2) is at most*

$$K_\epsilon := \left\lceil \frac{f(x_0) - f_{\text{low}}}{c_{\mathcal{R}}} \epsilon^{-2} + \frac{f(x_0) - f_{\text{low}}}{c_{\mathcal{N}}} \epsilon^{-\max\{1+p, 2(1+p-q)\}} \right\rceil. \quad (18)$$

Proof. Let $K \in \mathbb{N}$ be such that $\|\nabla f(x_k)\| > \epsilon$ for any $k = 0, \dots, K-1$. Following our partitioning (9), we define the index sets

$$\begin{aligned} \mathcal{N}_K &:= \mathcal{N} \cap \{0, \dots, K-1\}, \\ \mathcal{R}_K &:= \mathcal{R} \cap \{0, \dots, K-1\}. \end{aligned}$$

For any $k \in \mathcal{N}_K$, the result of Lemma 3.1 applies, and we have

$$f(x_k) - f(x_{k+1}) \geq c_{\mathcal{N}} \min \left\{ \|g_k\|^{1+p}, \|g_k\|^{2(1+p-q)} \right\} \geq c_{\mathcal{N}} \epsilon^{\max\{1+p, 2(1+p-q)\}}. \quad (19)$$

On the other hand, if $k \in \mathcal{R}_K$, applying Lemma 3.2 gives

$$f(x_k) - f(x_{k+1}) \geq c_{\mathcal{R}} \|g_k\|^2 \geq c_{\mathcal{R}} \epsilon^2. \quad (20)$$

We now consider the sum of function changes over all $k \in \{0, \dots, K-1\}$. By Assumption 3.2, we obtain

$$\begin{aligned} f(x_0) - f_{\text{low}} &\geq f(x_0) - f(x_K) \\ &\geq \sum_{k=0}^{K-1} f(x_k) - f(x_{k+1}) \\ &\geq \sum_{k \in \mathcal{N}_K} f(x_k) - f(x_{k+1}) + \sum_{k \in \mathcal{R}_K} f(x_k) - f(x_{k+1}) \\ &> \sum_{k \in \mathcal{N}_K} c_{\mathcal{N}} \epsilon^{\max\{1+p, 2(1+p-q)\}} + \sum_{k \in \mathcal{R}_K} c_{\mathcal{R}} \epsilon^2. \end{aligned}$$

Since the right-hand side consists in two sums of positive terms, the above inequality implies that

$$f(x_0) - f_{\text{low}} > \sum_{k \in \mathcal{N}_K} c_{\mathcal{N}} \epsilon^{\max\{1+p, 2(1+p-q)\}} \Leftrightarrow |\mathcal{N}_K| < \frac{f(x_0) - f_{\text{low}}}{c_{\mathcal{N}}} \epsilon^{-\max\{1+p, 2(1+p-q)\}}$$

and

$$f(x_0) - f_{\text{low}} > \sum_{k \in \mathcal{R}_K} c_{\mathcal{R}} \epsilon^2 \Leftrightarrow |\mathcal{R}_K| < \frac{f(x_0) - f_{\text{low}}}{c_{\mathcal{R}}} \epsilon^{-2}.$$

Using $|\mathcal{N}_K| + |\mathcal{R}_K| = K$ finally yields

$$K < \frac{f(x_0) - f_{\text{low}}}{c_{\mathcal{R}}} \epsilon^{-2} + \frac{f(x_0) - f_{\text{low}}}{c_{\mathcal{N}}} \epsilon^{-\max\{1+p, 2(1+p-q)\}},$$

hence $K \leq K_\epsilon$. \square

Note that the complexity bound of Theorem 3.1 also guarantees global convergence of the algorithmic framework, since it holds for ϵ arbitrarily close to 0. More precisely, it is possible to show that

$$\liminf_{k \rightarrow \infty} \|\nabla f(x_k)\| = 0,$$

which is a typical result for a nonlinear conjugate gradient using line search.

By combining the result of Theorem 3.1 with that of the Lemma 3.1 and 3.2, we can also provide an evaluation complexity bound of Algorithm 1.

Corollary 3.1 *Under the assumptions of Theorem 3.1, suppose further that $1 + p - 2q = 0$. Then, the number of function evaluations required by Algorithm 1 to reach a point satisfying (2) is at most*

$$\left(\left[\log_{\theta} \left(\frac{2(1-\eta)\sigma}{\kappa^2 L} \right) \right]_+ + 1 \right) K_\epsilon, \quad (21)$$

where K_ϵ is defined in (18).

Proof. It suffices to observe that $\bar{j}_{\mathcal{N}}$ does not depend on k when $1 + p - 2q = 0$, and that $\bar{j}_{\mathcal{N}} \geq \bar{j}_{\mathcal{R}}$ since $\kappa \geq 1$ and $\sigma \leq 1$. \square

Note that the additional condition $1 + p - 2q = 0$ can be replaced by a boundedness assumption on the gradient norm. Such an assumption also removes the need for the condition $1 + p - q \geq 0$ in Theorem 3.1.

3.3 Interpretation of the complexity bounds

Both the iteration complexity bound and the evaluation complexity bound of Algorithm 1 are of order

$$\mathcal{O}(\epsilon^{-2}) + \mathcal{O}\left(\epsilon^{-\max\{1+p, 2(1+p-q)\}}\right). \quad (22)$$

The first part of the bound corresponds to negative gradient steps due to a restart in the algorithm. The other part corresponds to “true” conjugate gradient directions that satisfy condition (8): thanks to this condition, we can certify a different decrease formula for these iterations. Note that the two terms in the maximum coincide when $1 + p - 2q = 0$: this condition also guarantees a constant number of backtracking line-search iterations.

p	1	1/2	3/4	0
$q = (1 + p)/2$	1	3/4	7/8	1/2
Order $\epsilon^{-(1+p)}$	ϵ^{-2}	$\epsilon^{-3/2}$	$\epsilon^{-7/4}$	ϵ^{-1}

Table 1: Possible complexity values for different values of p and q satisfying $1 + p - 2q = 0$ and $1 + p - q \geq 0$.

Table 1 shows several possible choices for p and q that satisfy the requirements of our analysis. We focus on choices for which $1 + p \leq 2$, since those lead to a better complexity bound for the

number of true iterations. One can observe that choosing p between 0 and 1 implies that the bound varies between ϵ^{-2} and ϵ^{-1} . This seemingly implies that the overall number of iterations could be better than that of gradient descent: however, regardless of the choice of p , there is no a priori guarantee that the number of true, non-restarted iterations will be significantly larger than that of restarted iterations. In the next section, we investigate this behavior in the context of nonconvex regression problems.

4 Numerical experiments

In this section, we investigate the numerical behavior of our nonlinear conjugate gradient technique. Our goal is to check the impact of enforcing the properties (8) through the modified restarting condition. To this end, we consider a nonconvex regression problem for which nonlinear conjugate gradient was found to be quite efficient [2], and its original formulation in robust statistics, that also gives rise to a nonconvex optimization problem. Both formulations are detailed in Section 4.1, while the context of our experiments is detailed in Section 4.2. Section 4.3 then discusses our results.

4.1 Robust regression formulations

In our experiments, we follow the setup of Carmon et al. [2] to produce our problem data. Each problem instance corresponds to a dataset $\{(a_i, b_i)\}_{i=1}^m$, where $a_i \in \mathbb{R}^n$ and $b_i \in \mathbb{R}^m$, with $n = 30$ and $m = 60$. Every vector a_i is generated according to a Gaussian distribution of zero mean and identity covariance matrix, which we denote by $a_i \sim \mathcal{N}(0, I_n)$, where I_n is the identity matrix in $\mathbb{R}^{n \times n}$. Letting $A = [a_i^T] \in \mathbb{R}^{m \times n}$ and $b = [b_i]_{i=1}^m$, we generate the vector b according to the following formula:

$$b = Az + 3\nu_1 + \nu_2,$$

where $z \sim \mathcal{N}(0, 4I_n)$, $\nu_1 \sim \mathcal{N}(0, I_m)$, and $\nu_2 \in \mathbb{R}^m$ has i.i.d. components drawn following a Bernoulli distribution of parameter 0.3.

Given a dataset $\{(a_i, b_i)\}_{i=1}^m$ of this form, we consider the robust regression problem:

$$\min_{x \in \mathbb{R}^d} f_{SB}(x) := \frac{1}{m} \sum_{i=1}^m \phi(a_i^T x - b_i), \quad (23)$$

where $\phi : \mathbb{R} \rightarrow [0, \infty)$ is a smoothed biweight loss function defined by

$$\phi(t) = \frac{t^2}{1 + t^2}. \quad (24)$$

Carmon et al [2] introduced function ϕ as a smooth proxy for the Tukey biweight loss function [1]. This terminology denotes a family of functions parameterized by $c > 0$ as follows:

$$\forall t \in \mathbb{R}, \quad \rho_c(t) = \begin{cases} \frac{t^6}{6c^4} - \frac{t^4}{2c^2} + \frac{t^2}{2} & \text{if } |t| \leq c, \\ \frac{c^2}{6} & \text{otherwise.} \end{cases}$$

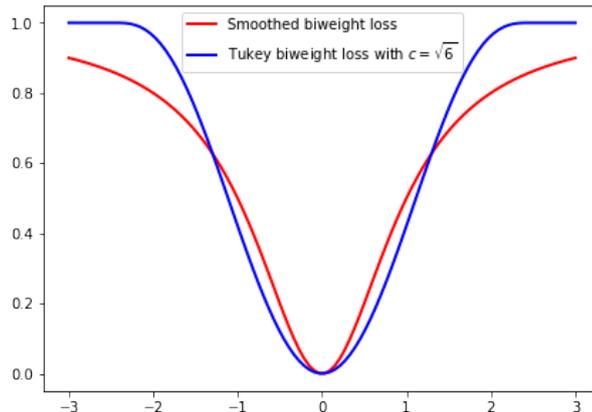


Figure 1: Nonconvex losses for robust linear regression.

We choose $c = \sqrt{6}$ so as to be close to the smoothed version of the biweight loss. Given the same data $\{(a_i, b_i)\}_{i=1}^m$ than that used to define problem (23), we thus also consider the problem

$$\min_{x \in \mathbb{R}^d} f_{TB}(x) := \frac{1}{m} \sum_{i=1}^m \rho_{\sqrt{6}}(a_i^T x - b_i), \quad (25)$$

The solution of problem (25) belongs to the class of robust M-estimators in statistics; compared to a standard linear least-squares formulation, problem (25) is more robust to outliers in the data.

Figure 1 shows the shape of ϕ and $\rho_{\sqrt{6}}$. Both losses are nonconvex, resulting in both functions f_{SB} and f_{TB} being nonconvex. Those functions also satisfy Assumption 3.1. Note that f_{SB} is twice continuously differentiable (even infinitely smooth), whereas f_{TB} is only continuously differentiable.

4.2 Algorithms

We considered several variants on Algorithm 1 using different values of the parameters (p, q, σ, κ) appearing in our restart condition (8). We allowed the values $\sigma = 0$ and $\kappa = \infty$ since those correspond to a standard nonlinear conjugate gradient method with a classical restart strategy. For all variants, the parameters of the Armijo line search were set as $\eta = \theta = 0.5$. The line search was used with initial value 1 at iteration 0, then the value $2\alpha_k$ was used as initial value for iteration $k + 1$.

We ran our nonlinear CG methods together with the two following techniques:

- SEMI-ADAPTIVE GD, a version of gradient descent using an adaptive estimate of the Lipschitz constant, that effectively amounts to performing an Armijo line-search [2];
- ARMIJO GD, a version of gradient descent using the same line-search technique than that of Algorithm 1. Comparing semi-adaptive GD and Armijo GD allows to assess the impact of this initialization technique.

All the algorithms were implemented in Python 3.7.4 using NumPy version 1.17.2, SciPy version 1.3.1 and Matplotlib version 3.1.1. Experiments were run on a Dell Latitude 7400 running Ubuntu 20.04 with Intel(R) Core(TM) i7-8665U CPU @ 1.90GHz and 31.2GB of memory.

4.3 Numerical results

We generated 1000 datasets for our nonconvex regression problems, and consider the associated problem formulations (23) and (25). For both families of problems, we are interested in variants based on the choice $p = q = 1$ (the closest in spirit and in terms of complexity bound to a gradient descent technique), and we also seek the value of p that yields the closest behavior to that of regular nonlinear CG.

Method	(p, q)	(σ, κ)	Problems solved	Avg. restart (%)
Semi-adaptive GD	-	-	758	-
Armijo GD	-	-	953	-
Standard NCG	-	$(0, \infty)$	1000	0.75%
NCG	$(1, -)$	$(0.01, \infty)$	1000	0.75%
NCG	$(1, -)$	$(1, \infty)$	1000	11.9%
NCG	$(1, 1)$	$(0.1, 1)$	1000	100%
NCG	$(1, 1)$	$(0.1, 100)$	1000	0.78%

Table 2: Statistics for GD variants and nonlinear CG variants on 1000 random instances using smoothed biweight loss (problem (23)) and a budget of 10000 iterations.

Method	(p, q)	(σ, κ)	Problems solved	Avg. restart (%)
Semi-adaptive GD	-	-	1000	-
Armijo GD	-	-	1000	-
NCG	-	$(0, \infty)$	1000	0.64%
NCG	$(1, -)$	$(0.01, \infty)$	1000	0.64%
NCG	$(1, -)$	$(1, \infty)$	1000	25.7%
NCG	$(1, 1)$	$(0.1, 1)$	1000	99.9%
NCG	$(1, 1)$	$(0.01, 100)$	1000	0.72%

Table 3: Statistics for GD variants and nonlinear CG variants on 1000 random instances using Tukey loss (problem (25)) and a budget of 10000 iterations.

We begin our numerical investigation by Tables 2 and 3, that compare gradient descent techniques with a standard nonlinear CG approach and variants based on (part of) the condition (8) with $p = q = 1$. One observes that the average percentage of restarted iterations is significantly smaller for the smoothed formulation, and that only values of σ and κ that are close to 1 lead to a substantial increase in the number of restarted iterations. This confirms that condition (8) with $\sigma \approx 1$ and $\kappa \approx 1$ essentially amounts to requiring the search direction to align and conform in norm with the negative gradient. Still, with moderate values of σ and κ , we see that more than 99% of the iterations will not be restarted iterations. In the rest of our experiments, we thus selected $\sigma = 0.01$ and $\kappa = 100$.

We then turn to variants of nonlinear CG using different values for p . We ran 21 variants of Algorithm 1 with p uniformly distributed over a grid in $[0, 1]$: for each variant, q was chosen as $\frac{1+p}{2}$ to match the assumptions of Section 3. As illustrated by Figure 2, choosing a value of p between 0 and 0.5 can drastically increase the number of restarts, suggesting that the condition (8) with these values of p and q is not appropriate. On the contrary, when p is chosen larger than 0.5, the difference in the number of restarts remain moderate, suggesting that our

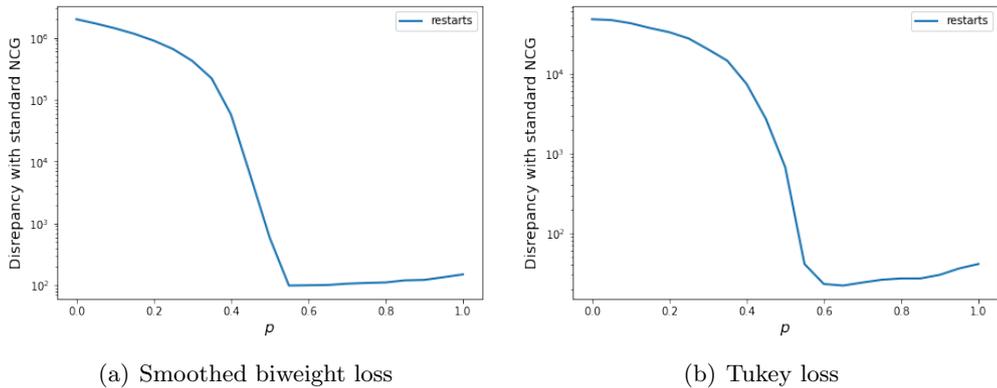


Figure 2: Discrepancy in terms of restarted iterations (ℓ_1 norm of the difference in restarts over all problems) for several variants of NCG using the restart condition (7). The best value for the smoothed biweight loss problems is $p = 0.55$ while $p = 0.65$ is best for the Tukey loss problems.

restarting process may be applied without modifying the overall algorithmic behavior: in that case, we can thus provide stronger decrease guarantees for non-restarted iterations, as shown by our complexity analysis.

Further results are reported in Tables 4 and 5. Those confirm that values of p smaller than 0.5 not only increase the number of restarted iterations, but also reduce the ability of the methods to solve all problems in the prescribed budget.

Method	(p, q)	Problems solved	Avg. restart (%)
Standard NCG	-	1000	0.75%
NCG	$(0, 1/2)$	976	83.1%
NCG	$(0.25, 0.625)$	995	51.5%
NCG	$(0.5, 0.75)$	1000	0.93%
NCG	$(0.55, 0.775)$	1000	0.77%
NCG	$(0.75, 0.875)$	1000	0.77%
NCG	$(1, 1)$	1000	0.78%

Table 4: Statistics on 1000 random instances of robust linear regression using smoothed biweight loss (problem (23)) and a budget of 10000 iterations. For all methods save for Standard NCG, $\sigma = 0.01$ and $\kappa = 100$.

We also present our results in the form of data profiles [10]. For both problems, we compare our two GD variants with standard nonlinear CG and the variants based on restart, identified in Tables 4 and 5, respectively. Figures 3 and 4 confirm our observations from the tables, and we see that the variants for $p \geq 0.5$ perform almost identically to the standard nonlinear CG variant. We also note that the Armijo GD method outperforms its semi-adaptive counterpart.

As a final comment, we note that smoothness seemingly increases the differences between nonlinear conjugate gradient and gradient descent, as those differences are larger on the smoothed biweight problem. We note that the complexity analysis of Section 3 only assumes that the objective function is continuously differentiable, and that additional smoothness is typically helpful in obtaining methods with better complexity guarantees [6, 4].

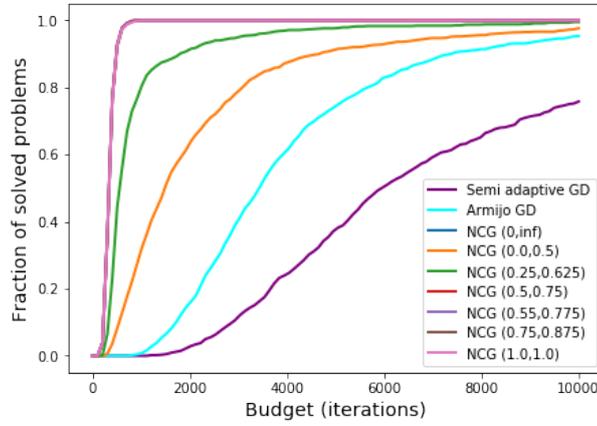


Figure 3: Nonconvex losses on problems with the smooth biweight loss (23). The last four curves corresponding to $p \in \{0.5, 0.55, 0.75, 1\}$ overlap.

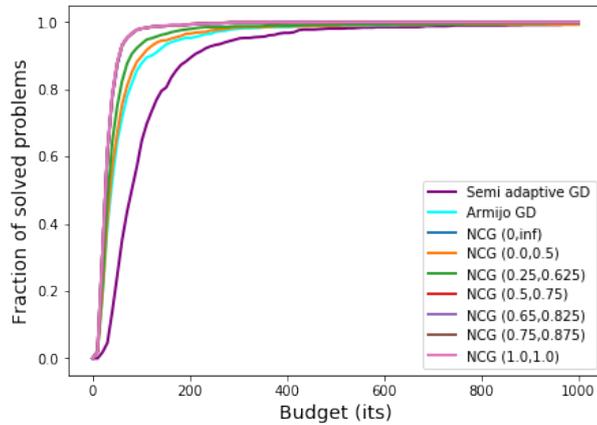


Figure 4: Nonconvex losses on problems with the Tukey biweight loss, truncated at 1000 iterations. The last four curves corresponding to $p \in \{0.5, 0.65, 0.75, 1\}$ overlap.

Method	(p, q)	Problems solved	Avg. restart (%)
Standard NCG	-	1000	0.75%
NCG	$(0, 1/2)$	994	63%
NCG	$(0.25, 0.625)$	997	45%
NCG	$(0.5, 0.75)$	1000	3.6%
NCG	$(0.65, 0.825)$	1000	0.68%
NCG	$(0.75, 0.875)$	1000	0.69%
NCG	$(1, 1)$	1000	0.73%

Table 5: Statistics on 1000 random instances of robust linear regression using Tukey loss (problem (25)) and a budget of 10000 iterations. For all methods save for Standard NCG, $\sigma = 0.01$ and $\kappa = 100$.

5 Conclusion

In this paper, we presented a nonlinear conjugate gradient framework based on Armijo line search and a modified restart condition, which we endowed with worst-case complexity guarantees. Although the results are of the same order than that for gradient descent, our complexity bound illustrates that better properties of nonlinear conjugate gradient may improve the overall number of iterations. Our motivation for considering this particular framework was the remarkable performance of Armijo PRP+ nonlinear CG on a nonconvex regression problem. Our experiments suggest that our new restart condition may be parameterized so as to match the original nonlinear CG method, resulting in a method with improved guarantees over non-restarted iterations.

Our analysis does not leverage the specific definition of the search directions, but rather checks their properties a posteriori. A natural continuation of the present paper would compare several nonlinear CG variants to characterize those that are more prone to satisfying our conditions. More elaborate formulas for the conjugate direction parameter as well as stronger line-search conditions may be necessary for such an analysis. Recent advances in this area for convex optimization [19] might provide insights regarding the variants that are most amenable to a complexity analysis with guaranteed improvement over gradient descent.

References

- [1] A. E. Beaton and J. W. Tukey. The fitting of power series, meaning polynomials, illustrated on band-spectroscopic data. *Technometrics*, 16:147–185, 1974.
- [2] Y. Carmon, J. C. Duchi, O. Hinder, and A. Sidford. “Convex until proven guilty”: Dimension-free acceleration of gradient descent on non-convex functions. In *Proceedings of the International Conference on Machine Learning, August 2017, Sydney, Australia*, pages 654–663, 2017.
- [3] Y. Carmon, J. C. Duchi, O. Hinder, and A. Sidford. Accelerated methods for non-convex optimization. *SIAM J. Optim.*, 28:1751–1772, 2018.
- [4] Y. Carmon, J. C. Duchi, O. Hinder, and A. Sidford. Lower bounds for finding stationary points II: First-order methods. *Math. Program.*, 185:315–355, 2021.

- [5] C. Cartis, N. I. M. Gould, and Ph. L. Toint. On the complexity of steepest descent, Newton’s and regularized Newton’s methods for nonconvex unconstrained optimization. *SIAM J. Optim.*, 20:2833–2852, 2010.
- [6] C. Cartis, N. I. M. Gould, and Ph. L. Toint. Worst-case evaluation complexity and optimality of second-order methods for nonconvex smooth optimization. In *Proceedings of the International Congress of Mathematicians (ICM 2018)*, volume 3, pages 3697–3738, 2019.
- [7] C. Cartis, Ph. R. Sampaio, and Ph. L. Toint. Worst-case evaluation complexity of non-monotone gradient-related algorithms for unconstrained optimization. *Optimization*, 64:1349–1361, 2015.
- [8] F. E. Curtis, D. P. Robinson, C. W. Royer, and S. J. Wright. Trust-region Newton-CG with strong second-order complexity guarantees for nonconvex optimization. *SIAM J. Optim.*, 31:518–544, 2021.
- [9] Y.-H. Dai. Conjugate gradient methods with Armijo-type line searches. *Acta Mathematicae Applicatae*, 18:123–130, 2002.
- [10] E. D. Dolan and J. J. Moré. Benchmarking optimization software with performance profiles. *Math. Program.*, 91:201–213, 2002.
- [11] J. C. Gilbert and J. Nocedal. Global convergence properties of conjugate gradient methods for optimization. *SIAM J. Optim.*, 2:21–42, 1992.
- [12] L. Grippo and S. Lucidi. A globally convergent version of the Polak-Ribière conjugate gradient method. *Math. Program.*, 78:375–391, 1997.
- [13] L. Grippo and S. Lucidi. Convergence conditions, line search algorithms and trust region implementations for the Polak-Ribière conjugate gradient method. *Optim. Methods Softw.*, 20:71–98, 2005.
- [14] W. W. Hager and H. Zhang. A new conjugate gradient method with guaranteed descent and an efficient line search. *SIAM J. Optim.*, 16:170–192, 2005.
- [15] W. W. Hager and H. Zhang. Algorithm 851: CG_DESCENT, a conjugate gradient method with guaranteed descent. *ACM Trans. Math. Software*, 32:113–137, 2006.
- [16] W. W. Hager and H. Zhang. A survey of nonlinear conjugate gradient methods. *Pac. J. Optim.*, 2:35–58, 2006.
- [17] S. Karimi and S. A. Vavasis. A unified convergence bound for conjugate gradient and accelerated gradient. arXiv:1605.00320, 2016.
- [18] S. Karimi and S. A. Vavasis. A single potential governing convergence of conjugate gradient, accelerated gradient and geometric descent. arXiv:1712.09498, 2017.
- [19] S. Karimi and S. A. Vavasis. Nonlinear conjugate gradient for smooth convex functions. arXiv:2111.11613, 2021.
- [20] A. S. Nemirovski and D. B. Yudin. *Problem complexity and method efficiency in optimization*. John Wiley & Sons, New York, 1983.

- [21] J. Nocedal and S. J. Wright. *Numerical Optimization*. Springer Series in Operations Research and Financial Engineering. Springer-Verlag, New York, second edition, 2006.
- [22] R. Pytlak. *Conjugate Gradient Algorithms in Nonconvex Optimization*, volume 89 of *Nonconvex Optimization and Its Applications*. Springer-Verlag, Berlin Heidelberg, 2009.
- [23] C. W. Royer. Méthodes de Newton et gradient conjugué avec garanties de complexité pour l’optimisation non linéaire. Polytechnique Montréal Seminar, Montréal (QC,Canada) Available online, October 23, 2018.
- [24] C. W. Royer, M. O’Neill, and S. J. Wright. A Newton-CG algorithm with complexity guarantees for smooth unconstrained optimization. *Math. Program.*, 180:451–488, 2020.
- [25] C. W. Royer and S. J. Wright. Complexity analysis of second-order line-search algorithms for smooth nonconvex optimization. *SIAM J. Optim.*, 28:1448–1477, 2018.
- [26] S. J. Wright. Optimization algorithms for data analysis. In A. C. Gilbert M. W. Mahoney, J. C. Duchi, editor, *The mathematics of data*, number 25 in IAS/Park City Mathematics Series. AMS, IAS/Park City Mathematics Institute, and Society for Industrial and Applied Mathematics, Princeton, 2018.