

Operational Adaptation of DNN Classifiers using Elastic Weight Consolidation

Abanoub Ghobrial¹, Xuan Zheng¹, Darryl Hond², Hamid Asgari², Kerstin Eder¹

¹ University of Bristol, Bristol, UK

² Thales, Reading, UK

Abstract—Autonomous systems (AS) often use Deep Neural Network (DNN) classifiers to allow them to operate in complex, high dimensional, non-linear, and dynamically changing environments. Due to the complexity of these environments, DNN classifiers may output misclassifications as they experience tasks in their operational environments, that were not identified during development. Removing a system from operation and retraining it to include these new tasks becomes economically infeasible as the number of such ASs increases. Additionally, such misclassifications may cause financial loss and safety threats to the AS or to other operators in the environment. In this paper, we propose to reduce such threats by investigating how DNN classifiers can adapt their knowledge to learn new information in the AS’s operational environment, using only a limited number of observations encountered sequentially during operation. This allows the AS to adapt to newly encountered information, increasing the AS’s classification accuracy and hence its overall reliability. However, retraining DNNs on different observations than used in prior training is known to cause catastrophic forgetting or significant model drift. We investigate how this problem can be controlled by using Elastic Weight Consolidation (EWC) whilst learning from limited new observations. We carry out experiments using original and noisy versions of the MNIST dataset to represent known and new information to DNN classifiers. Results show that using EWC is effective in controlling the process of adaptation to new information, and thus allows for reliable adaption of ASs to new information in their operational environment.

1 Introduction

Autonomous systems (AS) often are developed using deep neural network (DNN) classifiers to interact and adapt in dynamically changing real-world environments to achieve their intended goals. The benefit of using DNNs in autonomous systems is their ability to learn complicated patterns from complex environments, and thus produce highly non-linear decision boundaries to cope with the complexity of operational environments. However, it is a challenge to verify the behaviour of DNNs. A popular example of such ASs, are self-driving cars. Current research shows that for each self-driving car an economically impossible amount of testing is required to verify the system for deployment [15]. Innovative methods of increasing the efficiency of testing and validation are actively being developed to make the process more economically viable e.g. [4, 7].

Generally trustworthiness in AS is a broad term that tries to quantify trust in relationships, specifically for human-AS interactions [16]. The definition of trustworthiness is still maturing and methods for quantifying trustworthiness are actively being researched. One of the projections of trustworthiness that researchers seem to be settling on is that it constitutes of several properties, examples of these properties are summarised by Wing [35], like *reliability, safety, security, accountability* etc. Reliability, which includes several factors such as accuracy, robustness, and fairness, is of particular interest to the work presented here. We are interested in increasing the reliability of ASs by allowing them to perform controlled adaptation to their operational environment tasks, termed *pattern of life* (PoL) tasks.

PoL is a term used widely in the field of intelligence generation, to refer to intelligence generated by observing and analysing behaviours of any system over a period of time [5]. We use the term PoL tasks to refer to tasks that an AS encounters during operation. Specifically, we are interested in PoL tasks that originate from a slightly different distribution than that used during initial training of the DNN classifiers and thus cause misclassification. The method of adapting to PoL tasks complements the verification and validation work on ASs to achieve deployment. This follows a two-stage approach presented by Koopman et.al. [20], which stipulates that, given an AS passes some minimum safety validation case, the system is deployed and is improved during operation to increase its reliability over time. Thus, the system is allowed to adapt to dynamically changing operational environments which may often vary from the expected operational environment at deployment time.

Abanoub Ghobrial (e-mail: abanoub.ghobrial@bristol.ac.uk), Xuan Zheng (e-mail: dq18619@bristol.ac.uk), and Kerstin Eder (e-mail: kerstin.eder@bristol.ac.uk) are with the Trustworthy Systems Lab, Department of Computer Science, University of Bristol, Merchant Ventures Building, Woodland Road, Bristol, BS8 1UB, United Kingdom. Darryl Hond (e-mail: darryl.hond@uk.thalesgroup.com), and Hamid Asgari (e-mail: hamid.asgari@uk.thalesgroup.com) are with Technology and Innovation Research, Thales, Reading, United Kingdom.

The process of continual learning or adaptation of an autonomous system also involves the detection of incorrect behaviours and supply of correct labels for the new observations encountered and used in retraining. This can be achieved through the use of oracles [2, 39] to provide a ground truth reference and we aim to investigate this further in upcoming works, but in this paper we assume that the correct labels are available for misclassified observations.

Upon a DNN classifier retraining to learn new information during operation, a reassessment of the safety validation case and testing for verification would be required, which can be impractical during operation after every retrain. How to assess the safety compliance of an evolving DNN during operation against a set of requirements or regulations is beyond the scope of this paper, but can be achieved through the use of runtime safety behavioural checkers as presented by Harper et.al. [11]. Also, it can be predicted that a system may exhibit undesirable or unsafe behaviours by assessing how dissimilar the operational input data is to the data used at initial training (before deployment) or at retraining (after deployment during operation) of DNN classifiers as demonstrated by Hond et.al. [12] and other similar works e.g. [30, 25, 37].

DNN classifiers use gradient based optimisation algorithms to learn, which introduces limitations to the adaptation process. The gradient optimiser modifies the decision boundary based on the choice of observations used in initial training or retraining. Thus, as the observations used in retraining the classifier change between different operational environments, the decision boundary will adapt accordingly, which may result in the reliability of the DNN classifier changing as the system alternates between operational environments. This can be tackled through the usage of PoL adapted classifiers, motivated by our work, tagged to each operational environment of the system and decoupled from each other.

Additionally, when a DNN classifier encounters a situation that results in a misclassification, there may be only a few observations or just a single observation to use for retraining (adaptation). Retraining using the available new observations results in significant *model drift* or in a phenomenon known as *catastrophic forgetting* [10]. Model drift or forgetting can be defined as some major or minor decrease in the performance of a DNN on a set of tasks. Catastrophic forgetting, on the other hand, is a drastic decrease in the performance of all learnt tasks. To generally avoid that, the new observations are added to the original dataset used in initial training and the classifier is fully retrained. Full retraining, however, can be very cumbersome to perform during operation. Alternatively, the *learning rate* can be set to be very low in order to avoid the model from drifting. The learning rate hyper-parameter controls the rate at which the model's weights are modified during training. The lower the learning rate the smaller the drift. This unfortunately causes the DNN model not to learn information sufficiently from new observations because the learning rate is low, restricting the model from drifting to adapt to new information. Trying to optimise the learning rate still results in sig-

nificant if not catastrophic forgetting, as shown later by the results. This raises the need for a method to protect features of the DNN classifier that are important for preserving performance on old information, whilst still providing flexibility for the model to drift and adapt to PoL tasks. There are several methods in the literature that have been demonstrated to protect previous information in DNNs, e.g. elastic weight consolidation (EWC) [19] is one of the very successful methods at doing so and is the method we have adopted in this paper.

This paper addresses the following two research questions:

Research question 1 (RQ1): How can EWC be used to control the forgetting of previous knowledge as DNN classifiers learn from a limited number of new observations?

Research question 2 (RQ2): How does learning from a limited number of new observations affect the overall performance of the DNN classifier?

A shortcoming of experiments reported in the literature is the assumption of having sufficient data for learning new information. This is not true for real-time systems that may have as little as one observation to retrain on. In this paper, we develop a retraining pipeline that utilises EWC to retrain DNN classifiers using encountered instances of new tasks. The retraining pipeline controls forgetting by learning in a fashion that balances between original tasks and PoL tasks based on some chosen criteria. Evaluation of the retraining pipeline is done on a large pool of data, independent to data used in retraining, to study the effect of retraining on the overall performance of a DNN classifier.

In the next section, we introduce some preliminaries that will help in understanding the rationale behind the way the retraining pipeline was created. Section 4 introduces the methodology, which includes the challenges, the pipeline, and the rationale behind it. Experimentation is presented in Section 5, along with the results and discussion. We conclude and discuss future works in Section 7.

2 Related work

The problem of forgetting when retraining is a well-known issue with DNNs, which prevents the application of continual learning in AS. Over the past decade, there has been an increase in focus by researchers on the topic of forgetting in DNNs. In continual learning, full retraining is usually resorted to as it gives the most guarantee that no previous information will be lost, where new observations are simply added to the original dataset and the neural network is trained from scratch e.g. [33]. Whilst this might be the easiest approach, it is limited to certain types of systems and is not sustainable for dynamic AS, where training on the original tasks takes hours or days to complete. The increase in interest on the topic of forgetting has also been encouraged by published research investigating the limitations of continual learning in gradient optimised DNNs, e.g. Goodfellow et.al. [10], where they studied the effect of the relationship between differ-

ent learnt tasks and catastrophic forgetting for different optimisation algorithms in the literature.

In order to solve these limitations of continual learning, researchers have explored numerous techniques that try to conserve or protect previously learnt information when learning incrementally instead of full retraining. Conserving learnt information can be achieved by freezing weights e.g. [34, 21], or introducing penalisation terms that restrain weights of importance to old information in the DNN from significantly changing. Thus optimising the performance of a DNN between both the previous and new learnt information e.g. [19, 38, 24].

Inspired from Dopaminergic neurons in mammalian brains which allows for rapid and isolated adaptation in the synapses of neurons, Allred et.al. [1] tried to solve the problem of catastrophic interference in Spiking Neural Networks (SNNs). They introduced an artificial dopaminergic neuron in each layer of the spiking neural networks. The role of which is to control neurons that are allowed to adapt during retraining. If a neuron output is above a certain threshold for previously learnt information, then it is deemed as important for old tasks and should not be altered, thus the artificial dopaminergic neuron stops it from changing during retraining on new information, whilst allowing neurons of less or no importance to previous tasks to be altered. By measuring the firing threshold in neurons they also detect when novel data is experienced.

Elastic weight consolidation (EWC), [19], is another approach for continual learning developed for DNNs that has shown very promising results in the literature. EWC uses a Bayesian framework to learn continuously, whereby the old information learnt is approximated in a term and included in the loss function used in retraining. This results in weights that have more influence on the classification of old information to have less flexibility to deviate. Therefore, as new information is learnt the EWC framework allows the previously trained model to drift in a direction that allows it to optimise for both old and new information simultaneously.

These approaches discussed above are examples that fall under the category of regulatory techniques in continual learning, mainly focusing on modifying existing neural network resources to learn new information whilst minimising forgetting. A comprehensive and thorough review is provided by Parisi et.al. [28], they cover other continual learning categories such as architectural techniques, whereby existing neurons trained on previous information freeze and new neurons are added to learn new information. They also cover rehearsal and memory replay approaches which cover methods that try to mitigate the problem of forgetting by retraining the system occasionally on subsets of previously learnt observation to avoid the model from completely drifting from previously learnt information.

Kemker et.al. [18] introduced their own metrics to compare between different developed schemes that avoid catastrophic forgetting. Based on their experimentation they reach the conclusion that the achieved optimal performance for each of the developed schemes varies de-

pending on the incremental training paradigm and type of data used. They also conclude based on their results that all the techniques investigated demonstrate that the challenge of catastrophic forgetting is not yet solved. This demonstrates that there is no one-size-fits-all solution that can generalise to all dynamically changing environments of an AS. Therefore a solution ought to be developed specifically for each of the changing environments of an autonomous system, which is similar to how the human brain adapts to learn thoroughly tasks and rare instances in its operational environments or pattern of life.

3 Preliminaries

In this section we outline definitions for key terms that is used in subsequent sections. To also gain an understanding of the requirements and limitations of 1) gradient optimisation algorithms, specifically the stochastic gradient decent (SGD) algorithm and 2) EWC, we go through their derivations in this section and note down any assumptions that the SGD or EWC were based on, to ensure they are satisfied in the developed methodology.

3.1 Definitions

3.1.1 Observation

An observation is a data point.

3.1.2 Instance

An instance refers to several observations of the same task captured within a time window in a video feed of the AS. A *new instance* is a misclassified instance.

3.1.3 Training and testing datasets

The set of observations used in training the DNN are referred to as the training dataset. These observations are random samples from the distribution representing the (expected) operational environment of the system. Equivalently, a test dataset refers to other random samples from the same distribution used to verify how well the trained network has generalised to the whole distribution. Training and testing datasets have *labels* associated with them, which provides a reference to the correct classification during constructing or verifying the DNN.

3.1.4 Classes

Represents the possible output classifications of a DNN, which forms the output layer. A new class represents a *new classification*. Therefore, if a new classification is to be added to a DNN, an architectural change will be required to the output layer of the DNN.

3.1.5 Task

The word *task* is used very subjectively in the continual learning literature, depending on the context of the research. We try to capture the different definitions of a task in the curly brackets below, by explaining what a new task is considered to be, and highlight in bold the definition we adopt in this paper.

A new *task* can be a

- novel class
- novel pattern of all classes
- novel pattern of a single class
- novel noise applied to all classes
- novel noise applied to a single class**

For example, if a neural network’s task was to classify numbers from 0 - 9 in English, then a new task (novel class), would be digit 10. A new task (novel pattern of all classes), can be the set of digits from 0 - 9 in a different language. Thus, the same labels of zero to nine but the pattern that represents the number has changed. Equivalently, novel pattern of a single class, is a task that represents only one digit following a new pattern instead of all the digits. On the other hand, a new task (novel noise applied to all classes), for example, can be Gaussian noise applied to all of the digits from 0 - 9 in English; or a new task (novel noise applied to a single class) can be Gaussian noise applied to only a single digit from 0 - 9. In this paper we adopt the latter definition unless otherwise stated.

3.2 Stochastic Gradient Descent (SGD)

Figure 1 shows the computation in a single artificial neuron of a DNN. Where $[x_1, \dots, x_K]$ and $[w_1, \dots, w_K]$ are the set of inputs and weights into the neuron respectively. The term b is the bias and x_{out} is the output of the neuron as shown by Equation 1. ReLU is the popular rectified linear unit activation function used in DNNs given by Equation 2, refer to [13] for a more thorough formal representation of DNNs with several neurons and layers.

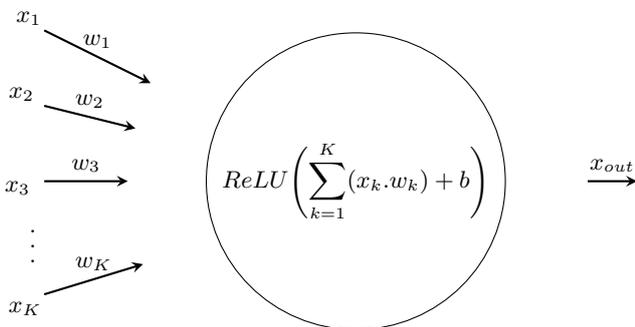


Fig. 1: Artificial neuron in a DNN

$$x_{out} = ReLU \left(\sum_{k=0}^K (x_k \cdot w_k) + b \right) \quad (1)$$

$$ReLU(x) = \begin{cases} x, & \text{if } x \geq 0 \\ 0, & \text{otherwise} \end{cases} \quad (2)$$

Training a DNN refers to tweaking the values of the weights and the biases for each neuron in a DNN so that it achieves the desired outputs for the provided observations (training dataset). This is achieved by minimising a *loss function*, \mathcal{L} , that compares between the DNNs predicted output \hat{y} (for a neural network comprising of one neuron $\hat{y} = x_{out}$) and the target output y i.e. the label. A method for doing this comparison is by using the mean squared error given by Equation 3, where N is the number of observations used in training.

$$\mathcal{L} = \frac{1}{N} \sum_{i=1}^N (y_i - \hat{y}_i)^2 \quad (3)$$

The aim during training is to minimise the difference between the predicted outputs of the DNN and the target output, which means to identify where a local minimum is i.e. gradient is zero. This is achieved numerically using gradient-based optimisation [9] methods.

Substituting the predicted output calculation in place of \hat{y} and using the chain rule it can be shown that the gradient-based optimisation used in training most DNN classifiers is given by Equation 4 (Refer to [29] for the full derivation). Where θ represents the set of weights and biases in a DNN, η is a hyperparameter known as the *learning rate* and t is the training step taken in optimising the DNN.

$$\theta_{t+1} = \theta_t - \eta \frac{\partial \mathcal{L}(\theta)}{\partial \theta} \quad (4)$$

The stochastic gradient descent (SGD) optimiser algorithm implements Equation 4, but selects random (stochastic) mini batches from the observations and optimise using gradient descent. This is instead of optimising on all the available N observations, hence increasing the computation efficiency of training. Practically when training a DNN, the samples provided to the SGD algorithm have to be drawn randomly from the overall distribution. This allows for the gradient to move in a direction that optimises the DNN for the whole distribution rather than for a subset of it.

Assumption 1: The number of observations N available during any training session is sufficient to represent the overall distribution of the *expected* operational environment, thus allowing for the SGD optimiser to optimise to a sufficient local minimum.

3.3 Elastic Weight Consolidation (EWC)

Elastic weight consolidation presented first by Kirkpatrick et.al. [19] is an algorithm that aims at protecting weights important for correct classification of previously learnt data distributions.

3.3.1 Derivation

During training of a DNN the goal is to minimise the loss function $\mathcal{L}(\theta)$, represented as the Log-Likelihood function

$-\log(P(\theta|D))$ [9]. This aims at estimating θ , which is the set of weights and biases in a DNN, given D , the dataset representing the samples of the distribution of interest. D can be split into two independent datasets such that $D = \{D_A, D_B\}$, where D_A and D_B are datasets that are trained on sequentially and each of them may represent a different distribution. Using the chain rule in probability it can be shown that:

$$\begin{aligned} \log(P(\theta|D_A, D_B)) &= \log(P(D_B|\theta, D_A)) + \log(P(\theta|D_A)) \\ &\quad - \log(P(D_B|D_A)) \end{aligned} \quad (5)$$

Considering the RHS of equation 5:

- First term, using conditional independence $\log(P(D_B|\theta, D_A)) = \log(P(D_B|\theta))$ and hence can be seen as the loss function, $\mathcal{L}_B(\theta)$ that needs to be minimised for the new distribution or dataset D_B alone.
- Second term, $\log(P(\theta|D_A))$ is the loss function for training the neural network on distribution D_A only. Thus can be denoted as $\mathcal{L}_A(\theta)$.
- Third term, is irrelevant as this term is constant with respect to θ and thus is lost when optimising using the stochastic gradient descent (SGD) i.e. does not need to be computed. We will neglect this term for the rest of the derivation.

Therefore, the overall loss function in equation 5 can be written as:

$$\mathcal{L}(\theta) = \mathcal{L}_B(\theta) + \mathcal{L}_A(\theta) \quad (6)$$

In continual learning, distribution A would have been trained on initially, and later samples from distribution B arises and is required to be learnt by the DNN. In this case, the term $\mathcal{L}_A(\theta)$ is considered to be intractable as it is assumed that access to training samples for distribution A is not available after initial training.

The underlying idea of EWC is to take a Bayesian approach to adapt the DNN model parameters, therefore learning additional distributions whilst avoiding catastrophic forgetting or minimising forgetting. However, due to intractable terms, it is not possible to maintain the full posterior $P(\theta|D)$. An inference technique is required to approximate these intractable terms.

EWC can be seen as an on-line approximate inference algorithm [14]. An essential assumption for EWC to approximate $\mathcal{L}_A(\theta)$ is that the DNN has been optimised for D_A such that θ has reached a local or a global minimum, θ_A^* , for distribution D_A . This allows for $-\log(P(\theta|D_A))$ to be approximated as a Gaussian distribution function at its mode using Laplace's method [23]. Expanding $-\log(P(\theta|D_A))$ using Taylor series around θ_A^* :

$$\begin{aligned} -\log(P(\theta|D_A)) &\approx -\log(P(\theta_A^*|D_A)) \\ &\quad + \left(\frac{\partial(-\log(P(\theta|D_A))}{\partial\theta}\right)\Big|_{\theta_A^*}(\theta - \theta_A^*) \\ &\quad + \frac{1}{2}(\theta - \theta_A^*)^T H(\theta_A^*)(\theta - \theta_A^*) \\ &\quad + \dots \end{aligned} \quad (7)$$

Considering the RHS of equation 7:

- First term, is a constant and similar to earlier it will get lost in the SGD optimiser.
- Second term, evaluates to gradient 0 as it is assumed that θ_A^* is at the mode of the distribution.
- Third term; $H(\theta_A^*)$ is the Hessian of $-\log(P(\theta|D_A))$ with respect to θ evaluated at θ_A^* , which is $\left(\frac{\partial^2(-\log(P(\theta|D_A))}{\partial\theta^2}\right)\Big|_{\theta_A^*}$.

The Hessian can be computed by approximating it to the empirical Fisher information matrix. Using Bayesian rule:

$$\begin{aligned} H(\theta_A^*) &= - \left. \frac{\partial^2(\log(P(D_A|\theta)))}{\partial\theta^2} \right|_{\theta_A^*} \\ &\quad - \left. \frac{\partial^2(\log(P(\theta)))}{\partial\theta^2} \right|_{\theta_A^*} \\ &\quad + \left. \frac{\partial^2(\log(P(D_A)))}{\partial\theta^2} \right|_{\theta_A^*} \end{aligned} \quad (8)$$

Considering the RHS of equation 8:

- First term can be approximated as the negative of the empirical Fisher information matrix, F , [17, 22, 26]. The Fisher matrix can be defined as a way of measuring the amount of information that a random observation $D_A[n]$ carries about a set of unknown parameters θ of a distribution that models $\log(P(D_A|\theta))$, where n is an index falling within the size, N , of the observable random samples D_A . Formally, it is the negative of the expected value of the observed information, hence it can be shown that it approximates to the first term of equation 8:

$$\begin{aligned} F(\theta) &= -NE \left[\frac{\partial^2(\log(P(D_A[n]|\theta)))}{\partial\theta^2} \right] \\ &\approx -N \frac{1}{N} \sum_{n=1}^N \frac{\partial^2(\log(P(D_A[n]|\theta)))}{\partial\theta^2} \\ &= - \sum_{n=1}^N \frac{\partial^2(\log(P(D_A[n]|\theta)))}{\partial\theta^2} \\ &= - \frac{\partial^2(\log(P(D_A|\theta)))}{\partial\theta^2} \end{aligned} \quad (9)$$

The approximation made to the expectation in equation 9 becomes exact as the number of observations or samples becomes infinite. Therefore, the data size N of the previous information is crucial to the applicability of using the EWC approximation.

- Second term, is the *prior probability*. That is the probability distribution the DNN represents before being trained on any observations i.e. datasets. Given that often θ in DNNs are initialised using a random uniform distribution, then this term evaluates to zero, and hence is ignored by the EWC algorithm.

- Third term, evaluates to zero as non-dependent on θ .

Putting terms together from the previous steps makes equation 6 reach the EWC loss function presented by [19]:

$$\mathcal{L}(\theta) = \mathcal{L}_B(\theta) + \sum_j \frac{\lambda}{2} F_j^A (\theta_j - \theta_{A,j}^*)^2 \quad (10)$$

where λ is a hyper-parameter presented by Kirkpatrick et.al. to allow for fine tuning to minimise forgetting. We summarise the list of assumptions for which equation 10 holds:

Assumption 2: The DNN was trained very well on the previous distribution represented by D_A that θ has reached a local or a global minimum i.e. $\theta_A^* = \operatorname{argmin}_{\theta} \{-\log(P(\theta|D_A))\}$.

Assumption 3: “Enough” observations are available in D_A to allow for the approximation from the Hessian to the empirical Fisher information matrix.

3.3.2 Justification for the choice of EWC

Relevant and beneficial properties can be observed by going through the derivation above, which adopts a Bayesian frame work that tries to approximate the previously learnt data and incorporate it into the loss function to allow the optimiser to vary the DNN parameters θ in a way that *balances* between previously learnt distributions and updated distributions experienced by new observations. This balance is controlled via the hyper-parameter λ .

Adopting a Bayesian framework, which in essence gives a model the ability to increase or decrease its confidence on existing knowledge and update this knowledge based on new observations, makes EWC very suitable for the application of PoL adaptation. It also ticks the boxes of being memory and training efficient compared to other retraining schemes that were evaluated by Kemker et.al. [18].

4 Methodology

The three assumptions outlined in the previous section forms the grounds for the rationale of the developed retraining pipeline shown in this section.

4.1 The challenge with continual learning for PoL adaptation

For a DNN to learn a *new task*, it optimises its weights and biases by minimising the loss function as was explained earlier in section 3.2, to alter the learnt distribution. If only observations from the new task are included then model drift is likely to occur. Retraining on observations from several new tasks fed in sequentially, means that the gradient descent will decrease in a direction that favours the observations from the latest new task only. Therefore making the DNN optimised only for the latest task. Resulting in continuous *model drift* or *forgetting* of previously learnt knowledge. For this reason, in initial training

the observations from all of the tasks are shuffled together to form one dataset to represent the whole distribution. So the gradient decreases in a direction that optimises the DNN parameters for all of the tasks to be learnt. Similarly for retraining, optimising for observations from a new task during operation causes the learnt distribution to deviate to fit the new observations only. This presents the main challenge when adapting to the PoL tasks during operation.

Whilst new tasks arise sequentially in the operational environment of an autonomous system, it is not resourcefully efficient to keep all of the observations used during offline training on board to shuffle with and do full retraining every time a new task is encountered. Especially if training on original tasks may take several hours or days to complete. In an autonomous system with limited on-board resources and a continuously changing operational environment, forgetting is most likely required to make available resources to learn new tasks. In which case forgetting needs to be controlled based on some set of requirements.

Additionally, a deployed autonomous system would have a wide spectrum of observations used in offline initial training, which aims at making the trained DNN generalised and therefore ready to handle the majority of scenarios the system may encounter when deployed in different environments. However, it is not necessary to maintain the same level of performance for all the learnt (original) tasks in all operational environments. It is more acceptable for the DNN classifier to sacrifice some performance on tasks not related to the operational environment in order to enhance its performance on PoL tasks, which would increase the system’s reliability in its operational environment.

With these considerations in mind, we develop a retraining pipeline that aims at balancing between the original tasks and the PoL tasks based on some defined criteria.

4.2 Controlled forgetting retraining pipeline

In this section, we introduce our retraining pipeline and discuss how it tackles the challenge discussed previously to allow for learning PoL tasks, whilst controlling the forgetting of original tasks.

Figure 2 shows the overall retraining pipeline representing two independent training cycles. The first is the initial training, where the system is trained on the original dataset S_0 to produce the initial DNN model M_0 , which a system is deployed with. The original dataset is the set of observations that were gathered for training on tasks that developers expected to be what the system will encounter, based on a set of requirements and specifications of the system. The second is the continual retraining cycle on the accumulated new instances for the PoL tasks, this cycle is continuous and occurs whenever the system encounters a new instance. The new instance S_i gets appended to the accumulated new instances storage that represents the observations for the PoL tasks encountered during operation. Note the i^{th} counter used

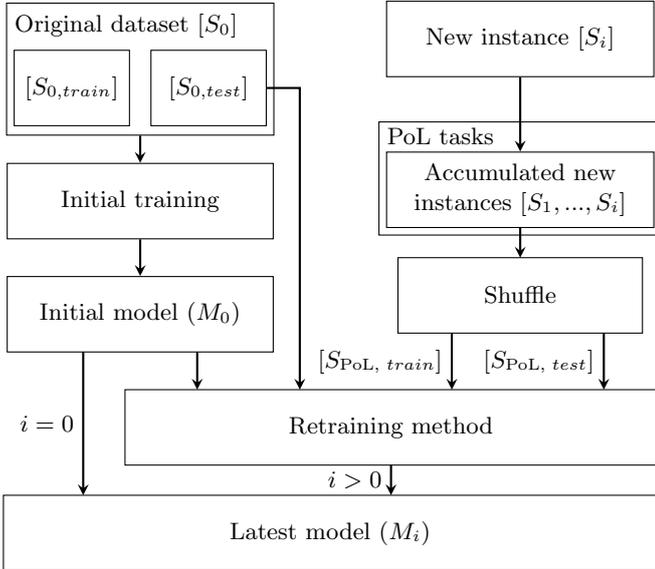


Fig. 2: Retraining Pipeline

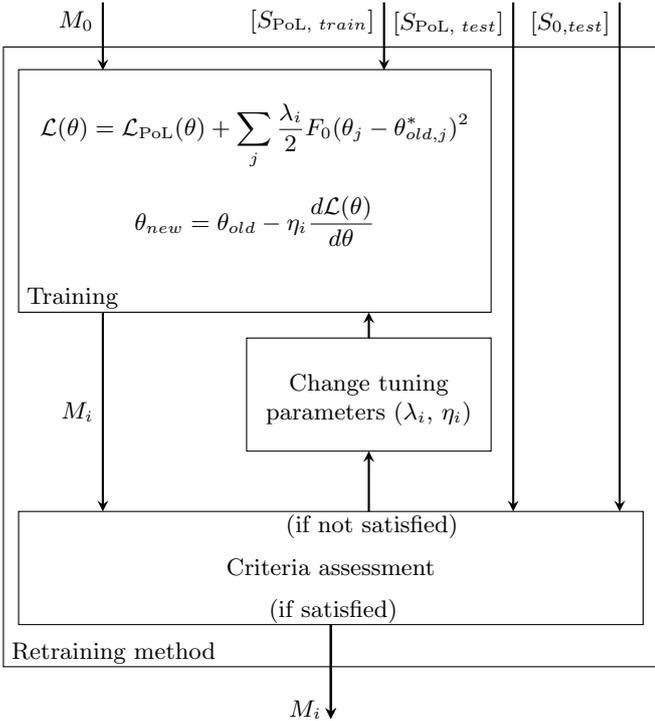


Fig. 3: Retraining Method

for the accumulated instances is not an indication of how many PoL tasks. They can all be instances of the same or different PoL tasks. The observations for the PoL tasks then gets shuffled to become partly the retraining dataset $S_{\text{PoL}, \text{train}}$ and partly the test dataset $S_{\text{PoL}, \text{test}}$ for evaluating the retrained (latest) model, M_i , on the PoL tasks.

At first, it can be thought why not learn PoL tasks sequentially and separately instead of sequentially and accumulated as we present in this paper? In other words why does the retraining dataset not contain observations

only from the last new instance, and the previous new tasks get represented as separate EWC approximations using an additional Fisher matrix accompanied with an additional hyper-parameter (λ) to tune? This has many challenges and may violate several of the assumptions established previously. It cannot be guaranteed that the latest DNN model will be at a local minimum for all tasks represented by Fisher matrices, hence the validity of using a Fisher matrix to represent each of the previous PoL tasks might not always hold during operation. Attempting to ensure all tasks represented by a Fisher are at a local minimum makes the tuning of the hyper-parameters i.e. the λ s extremely computationally expensive. Additionally, The use of an EWC approximation or more specifically a Fisher matrix to represent a new task, can be said to violate assumption 3, because the approximation would not be for the overall distribution of the tasks in the operational environment. Given the discussed limitations of learning PoL tasks sequentially and separately, we progressed with using sequentially and accumulated PoL tasks for retraining. Learning sequentially from accumulated observations would also result in retaining better performance of PoL tasks, as SGD is designed to optimise using random samples from the overall distribution as per assumption 1.

The training $S_{\text{PoL}, \text{train}}$ and testing $S_{\text{PoL}, \text{test}}$ datasets for the PoL tasks, the test dataset from the original tasks $S_{0, \text{test}}$, and the initial trained DNN model, M_0 , are fed into the retraining method, which retrains to create the latest updated model (M_i). Figure 3 shows a more detailed diagram of the retraining method. The starting model used in retraining at any i^{th} retrain, is always the initial model M_0 . This makes sure that assumption 2 relating to the DNN used in retraining is at a local minimum for the original tasks, hence ensuring the EWC approximation is valid to use. In training, the mean squared error (see equation 3) is used to represent the loss function $\mathcal{L}_{\text{PoL}}(\theta)$ calculated over the observations from the PoL tasks training dataset (see Figure 3), this can be replaced by other loss functions. On the other hand the original tasks are expressed using the EWC approximation. The θ_{old} and θ_{new} used in Figure 3 represent the previous and updated weights during training, respectively, similar to the explanation shown earlier in section 3.2.

As was described earlier in section 3, there are two tuning parameters that can control the forgetting. The λ represents the importance of the original tasks compared to the PoL tasks during retraining, the lower λ is the less priority it is given during retraining, and if it is set to 0 then the original task will not be conserved using EWC. The other parameter is η , this constrains the rate at which the model being trained is allowed to deviate from its initial state. The lower η is the more constrained the model is, if η is 0 then the model will not change at all i.e. the PoL tasks will not be learnt.

Why are both of these tuning parameters needed? The SGD hyperparameter η alone is not capable of optimising the retrained model alone on new tasks without resulting in significant forgetting. Conversely, relying only on tuning λ to meet the criteria assessment can result in the re-

training entering a state of instability where catastrophic forgetting will occur. This has been observed experimentally. However, the observation can be also explained by interpreting the mathematical calculations done in re-training. For example, if λ is increased gradually whilst η is fixed, at some point the value of λ will result in the re-training steps taken by the SGD optimiser to be too large thus causing the model to diverge instead of converging to a local minimum. This happens due to the multiplication between λ and η , shown in Equation 11 that occurs when optimising the combined loss function $\mathcal{L}(\theta)$. Equation 11 is just a substitution of the equations shown in the training block in Figure 3. Implicitly, λ does have an effect on the learning rate due to this multiplication. Hence an interplay of the two parameters is needed to allow for continuous stable training.

$$\theta_{new} = \theta_{old} - \eta_i \frac{\mathcal{L}_{PoL}(\theta)}{d\theta} - \frac{\sum_j \frac{\eta_i \lambda_i}{2} F_0(\theta_j - \theta_{old,j}^*)^2}{d\theta} \quad (11)$$

The criteria assessment block takes the retrained model M_i and test it using the test datasets for the original tasks ($S_{0,test}$) and for the PoL tasks ($S_{PoL,test}$). If the output matches the criteria set by the developers then the model M_i is progressed to be used during operation, else the tuning parameters are tweaked to reach a re-trained model that satisfies the criteria. The criteria itself for learning during operation can be for example that the system should maximise its performance on PoL tasks whilst maintaining a performance of at least 90% on the original tasks, to perhaps meet some regulatory conditions that a system was proved to have at deployment time.

5 Experimentation

The full code for the experimentation and results are available on: https://github.com/Abanoub-G/EWC_PoL_Adaptation. Experiments were run on a computer with an i7-10750H with 16GB RAM and an NVIDIA GeForce RTX 3060 graphics card, running Ubuntu 20.04.02 LTS.

5.1 Datasets

We use the popular 0-9 hand-written digits MNIST dataset [6], divided into 10 classes, as the dataset S_0 in initial training. This serves as the *expected* operational environment of an autonomous system, i.e. the one used at design time. The retraining and evaluation of our method is performed using the n-MNIST [3] dataset, representing the *actual* operational environment. The n-MNIST dataset has a similar pattern to the MNIST dataset but with three different types of noise applied to its tasks: Gaussian noise, blur, and reduced contrast with Gaussian noise. This makes it suitable to represent an operational environment of an autonomous system, where patterns of tasks encountered during operation are still similar to the original tasks, but may have variations or noise that cause misclassifications.

5.2 Implementation of retraining pipeline

5.2.1 Introduction of new instances

To present a new instance that a DNN classifier may encounter during operation, an observation is selected randomly from the n-MNIST dataset. Since the n-MNIST dataset is not a video feed dataset we use data augmentation techniques to create an instance from the randomly selected n-MNIST observation; where the synthetic observations here are small image rotations and shifts made to create the instance. This was achieved using the image augmentation API provided by Keras.

The observations from each instance are split into 1000 training and 250 testing samples. The test samples get evaluated on the latest retrained model (M_i). If the test samples get misclassified, i.e. the accuracy is below the classification threshold, which is 50%, then the instance counts as new and needs retraining. Otherwise, the process is repeated for another random observation from the n-MNIST dataset until a new instance is found. The new instance gets added to the accumulated new instances storage whilst maintaining the 1000 to 250 split of training to testing samples. The training samples from the accumulated new instances are shuffled and then used to retrain the DNN classifier. This process is repeated until the number of retraining episodes needed for the experiment is achieved.

5.2.2 DNN Classifier

A convolutional neural network (CNN) with three layers of convolutions and two fully connected layers was used to build the DNN classifier for the experiments. These specifications of the DNN were chosen based on its good performance i.e. accuracy of around 99% on all MNIST tasks after brief training on the MNIST dataset, shown by other researchers. An implementation of the EWC algorithm using Pytorch 1.8.1 with the DNN classifier used in the retraining pipeline was adopted and modified from the ContinualAI GitHub repository.

5.2.3 Assessment Criterion

The assessment criterion used in evaluating the performance of the retraining is shown in Algorithm 1. The assessment criterion algorithm aims at outputting a *retraining score* (RS), the smaller this score is the more the criterion is satisfied. When RS becomes zero then the criterion is fully satisfied. The RS is the sum of the *original tasks score* ($score_{original}$) and the *PoL tasks score* ($score_{PoL}$). The $score_{original}$ approaches zero as the accuracy of the retrained model on each of the original tasks becomes equal or more than the *controlled forgetting threshold* ($CF_{threshold}$). This is a threshold that is set to

Data augmentation are techniques used to enhance the size and quality of observations used in training by creating synthetic observations inferred from existing observations [31]. https://www.tensorflow.org/api_docs/python/tf/keras/preprocessing/image/ImageDataGenerator
<https://github.com/ContinualAI/colab>

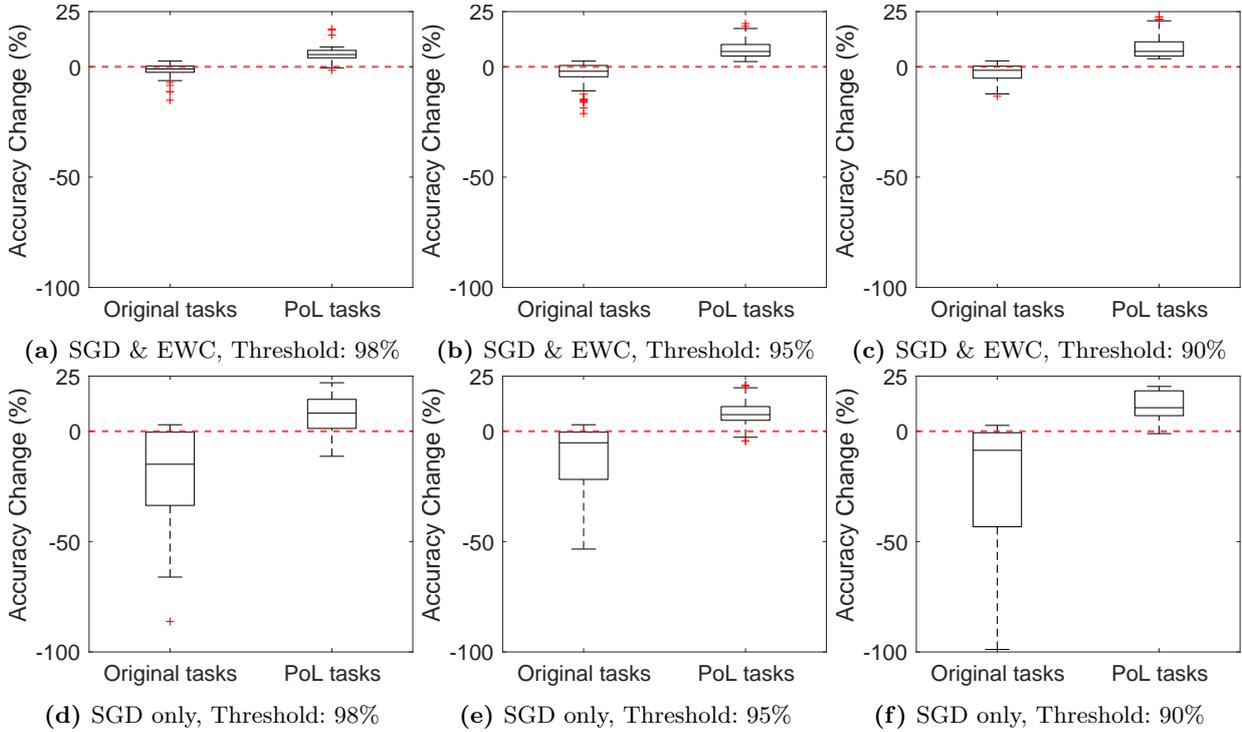


Fig. 4: Spread of retrained model M_i accuracy change on original and PoL tasks during 10 retraining episodes. Shown for EWC + SGD (i.e. tuning λ and η) and SGD only (i.e. $\lambda = 0$ and tuning η) for controlled forgetting thresholds $CF_{\text{threshold}}$ of 98%, 95% and 90%.

Algorithm 1 Assessment criterion

```

origacc = []
for class in classes do
  tasktest =  $S_{0, \text{test}. \text{class}}$ 
  acc =  $M_i(\text{task}_{\text{test}})$ 
  diff =  $CF_{\text{threshold}} - \text{acc}$ 
  if diff > 0 then
    origacc.append(diff)
  end if
end for
scoreoriginal = sum(origacc)
scorePoL =  $100 - M_i(S_{\text{PoL}, \text{test}})$ 
RS = scoreoriginal + scorePoL

```

control how much accuracy on the original tasks the system is allowed sacrifice during retraining. The $\text{score}_{\text{original}}$ is calculated as follows. An empty array (orig_{acc}) to store the accuracy on the original tasks is initialised. There are ten original tasks, each original task relates to one of the ten classes in the DNN. We loop over the ten original tasks and extract the test samples for that task from the $S_{0, \text{test}}$ dataset, these test samples are referred to as $\text{task}_{\text{test}}$. The model M_i accuracy (acc) is calculated on $\text{task}_{\text{test}}$. If the accuracy is below the $CF_{\text{threshold}}$, then it gets appended to orig_{acc} . The $\text{score}_{\text{original}}$ is then computed as the sum of the members in orig_{acc} .

The PoL tasks score ($\text{score}_{\text{PoL}}$) is calculated differently, where all of the samples from the PoL tasks test dataset $S_{\text{PoL}, \text{test}}$ are evaluated on the retrained model without breaking it into several tasks. This is subtracted from 100 since we want to maximise performance on PoL tasks.

From our experiments, this method of scoring for PoL tasks collectively was found to yield higher accuracies on PoL tasks during optimisation than scoring the individual PoL tasks, as was done for the original tasks. This is because the number of observations available for each task of the PoL tasks is not the same as for the original tasks.

We use *Hyperopt*, a hyperparameters tuning algorithm based on Bayesian optimisation [27, 32, 8], to identify appropriate values for the hyperparameters λ_i and η_i to maximise the criterion satisfaction.

6 Results and discussion

Whilst using the $S_{\text{PoL}, \text{test}}$ dataset for evaluation during operation is the correct approach for assessing the satisfaction of the retraining criterion, to study our research questions we need a larger pool of data to assess the effect of operational retraining on the overall performance of PoL tasks. Therefore, conversely to the assessment criterion which uses the test dataset $S_{\text{PoL}, \text{test}}$ obtained from the accumulated instances storage, we use the overall test dataset provided in the n-MNIST dataset to investigate our research questions. We base all of the results presented here on ten consecutive retraining episodes for ten new instances.

6.1 EWC+SGD vs SGD alone

Figure 4 aims at answering **RQ1**, to show how the presence of EWC reduces forgetting and still allows the classifier to adapt to PoL tasks. There are ten original tasks

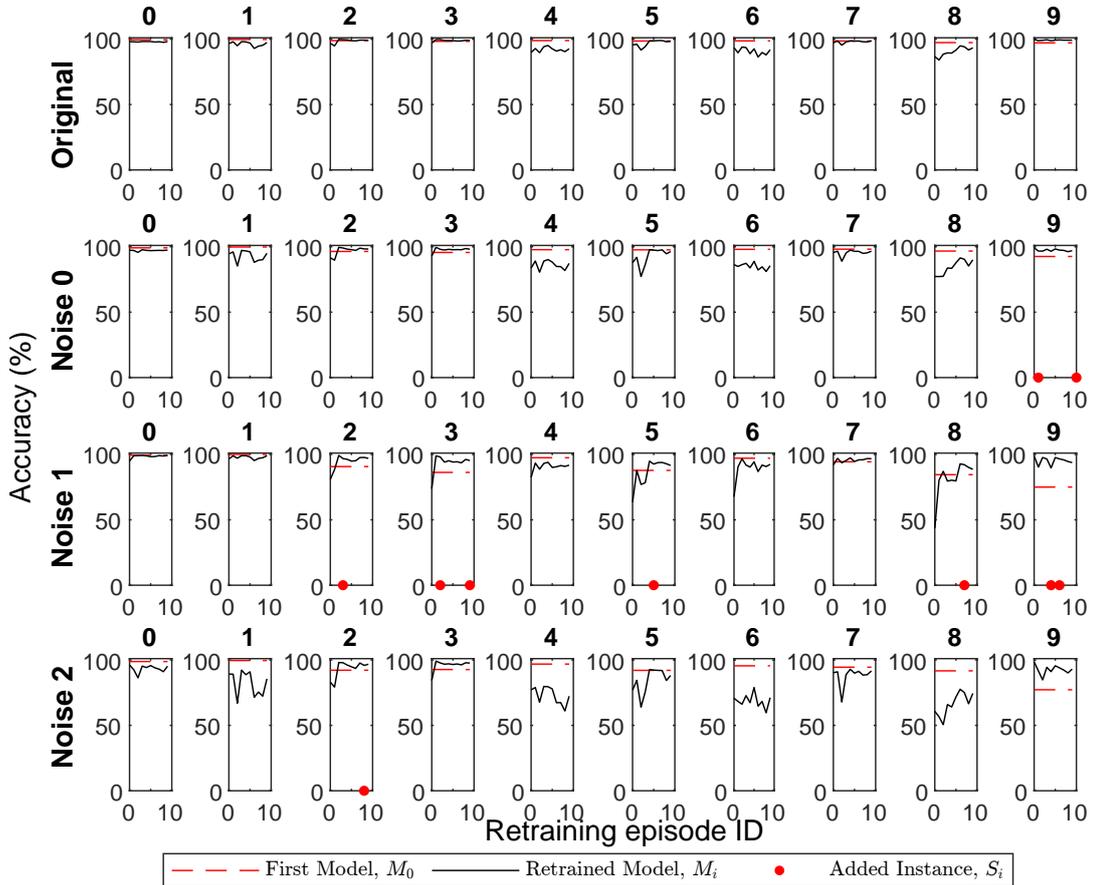


Fig. 5: Matrix plot showing accuracy change during retraining episodes, for controlled forgetting threshold of 90%, on each of the original tasks and the possible PoL tasks from the n-MNIST dataset. The red dots show the instances that were added and at which retraining episode they were added out of the ten retraining episodes.

for the ten digits 0-9 in the MNIST dataset. The test samples for each of those tasks is assessed on the latest retrained model M_i and the initial model M_0 after every retrain. The two outputs of this evaluation are subtracted from each other giving the *accuracy change*, i.e. the gain or loss in performance compared to the initial model. The accuracy change is shown on the y-axis in the Figure 4 and the red dotted line indicates zero change in accuracy from the first model’s M_0 accuracy on any given task. The spread of accuracy change on the ten original tasks for all ten retraining episodes is grouped and shown by the box for original tasks in Figure 4.

Similarly, for the PoL tasks, after every retrain the relevant test samples from the n-MNIST for the PoL tasks are assessed on the latest retrained model M_i and the initial model M_0 to calculate the accuracy change. Note the n-MNIST has 30 tasks (10 classes \times 3 noise types). Not all 30 tasks are PoL tasks. The relevant tasks from the n-MNIST for which we use test samples, after every retrain, depend on the instances that were used in retraining. For example, if the model is retrained on four instances that are extracted from two tasks from the n-MNIST dataset, then there would be only two PoL tasks, for which we need to test for accuracy change. Then, assuming the fifth instance belongs to another third task from n-MNIST, there would be three PoL tasks, for which we need to test for

accuracy change. This way we collect the accuracy change for the PoL tasks grouped in the box plot in Figure 4.

The six plots in Figure 4 show the accuracy change on original and PoL tasks, for three controlled forgetting thresholds $CF_{\text{threshold}}$: 98%, 95% and 90%. The box denotes the interquartile range of accuracy change, non-outlier limits by the whiskers and a horizontal bar for the median. For all three thresholds used in experimentation, the EWC+SGD shows a much more controlled forgetting paradigm on the original tasks compared to SGD only. This is evidenced by the very low spread of accuracy change close to the red dotted lines for the EWC+SGD and the very sparse accuracy change below the red dotted line for the SGD only. This shows that the SGD only approach results in significant model drift and even catastrophic forgetting of some tasks, even at very high controlled forgetting thresholds (see Figure 4d). For both EWC+SGD and SGD only the PoL tasks seem to generally improve in accuracy. The SGD only achieves slightly higher performance but more sparsely on PoL tasks compared of EWC+SGD. This may have merits depending on applications but also indicates overfitting to PoL tasks which is actually the case since the forgetting is much more significant when using SGD only.

6.2 Generalisation on PoL tasks

Figure 5 gives an insight of the generalisation on the PoL tasks of the system. This matrix diagram shows a subplot for each of the ten original tasks (learnt from MNIST) and the thirty potential PoL tasks (provided by n-MNIST) that may become part of the system’s operational environment. To investigate **RQ2**, a matrix plot displaying the accuracy of the initial model M_0 and the latest model M_i on all of the tasks in the MNIST (row labelled “**Original**”) and n-MNIST (rows labelled “**Noise 1**”, “**Noise 2**”, and “**Noise 3**”) datasets through out the ten retraining episodes is shown in Figure 5. All of the MNIST tasks are the original tasks and the n-MNIST tasks with red dots are the PoL tasks. An n-MNIST task only becomes of a PoL task after an instance of it appears in the system’s operational environment. The appearance of instances is denoted by red dots, showing at which retraining episode an instance from that task was used in retraining.

Observing the solid black lines (accuracy of M_i) and the red dotted lines (accuracy of M_0) in Figure 5, it is evident that after the classifier is retrained on a new instance, the accuracy of the latest model on the task the instance is captured from improves beyond the initial model’s accuracy. This is achieved at the expense of some forgetting of the original tasks, which is acceptable given that the model is drifting to fit its *pattern of life*. Furthermore, there is a drop in accuracy on non-PoL tasks from the n-MNIST dataset. This is not of concern as these other tasks fall out of the operational design domain of the system i.e. they are not part of the original tasks nor have been identified as PoL tasks.

6.3 Retraining speed

A limitation of the current retraining pipeline is that as more new instances appear the retraining process will become slower as there are more observations to optimise the model for in the accumulated new instances storage. This limitation might be mitigated by decreasing or more generally adjusting the number of observations used in retraining from each new instance every time a new instance is captured. Also, removal of instances completely for PoL tasks that the system has not encountered in a long period of time, thus have stopped being part of the system’s *pattern of life*. Achieving that can be by keeping track of how often the system encounters similar instances (perhaps by using dissimilarity measures [12] to detect them), and decide whether it is beneficial to remove or keep certain PoL tasks’ instances based on some criteria put by developers or regulators.

Reducing the retraining speed can also achieved by using spatio-temporal retrained models, each having its own storage of new instances. Therefore only retraining on instances that are relevant to the area the system is in and time in day or year. If the system is encountering a large number of new instances then that may invite for developers to investigate the observations used in initial training, as the expected and actual operational environments are very different.

6.4 A Note on transfer learning

Learning from few observations is generally challenging and does not abide with current machine learning paradigms, which rely on the availability of abundant observations to learn a task. Using data augmentation techniques, as done in this paper, certainly improves learning of new tasks. However, a major contribution to the success of our method is caused by transfer learning obtained from original tasks. This poses a limitation in the use of the proposed approach from learning tasks following a completely different pattern, e.g. Permuted-MNIST [10] or Fashion-MNIST [36], which extends beyond the scope of our work.

7 Conclusions and future work

In this paper we have demonstrated that using EWC allows for more controlled learning of new tasks from new instances whilst controlling the limit allowed for forgetting of original tasks. This was followed by studying the effect on accuracy and generalisation of retrained DNN classifiers on new tasks using the MNIST and the n-MNIST datasets to represent expected and actual operational environments, respectively. The results show that there are clear signs of generalisation on PoL tasks from retraining on instances. Future works to allow for the adoption of this retraining pipeline in AS include:

- Developing runtime monitors to help an autonomous system evaluate its performance on PoL tasks inferred from accuracy improvement on encountered new instances or other correctly classified instances. This feedback is necessary as having a large pool data of PoL tasks to assess on generalisation, as we did in our experimentation, is not available for a system in operation.
- Investigating methods to maintain the retraining speed of the DNN classifier as the new instances storage increases to still allow for efficient retraining.

Acknowledgments

This research is part of an iCASE PhD funded by EP-SRC and Thales UK. Special thanks to Edwin Simpson from University of Bristol for helping with reviewing the paper.

References

- [1] J. M. Allred and K. Roy. “Controlled Forgetting: Targeted Stimulation and Dopaminergic Plasticity Modulation for Unsupervised Lifelong Learning in Spiking Neural Networks”. In: *Frontiers in Neuroscience* 14.January (2020), pp. 1–16. arXiv: 1902.03187.
- [2] E. T. Barr, M. Harman, P. McMinn, M. Shahbaz, and S. Yoo. “The oracle problem in software testing: A survey”. In: *IEEE Transactions on Software Engineering* 41.5 (2015), pp. 507–525.

- [3] S. Basu et al. “Learning Sparse Feature Representations Using Probabilistic Quadrees and Deep Belief Nets”. In: *Neural Processing Letters* 45.3 (2017), pp. 855–867. arXiv: 1509.03413.
- [4] G. Chance, A. Ghobrial, S. Lemaignan, T. Pipe, and K. Eder. “An agency-directed approach to test generation for simulation-based autonomous vehicle verification”. In: *2020 IEEE International Conference On Artificial Intelligence Testing (AITest)*. IEEE, 2020, pp. 31–38.
- [5] R. Craddock, D. Watson, and W. Saunders. “Generic Pattern of Life and behaviour analysis”. In: *2016 IEEE International Multi-Disciplinary Conference on Cognitive Methods in Situation Awareness and Decision Support, CogSIMA 2016* (2016), pp. 152–158.
- [6] L. Deng. “The mnist database of handwritten digit images for machine learning research”. In: *IEEE Signal Processing Magazine* 29.6 (2012), pp. 141–142.
- [7] K. I. Eder, W.-l. Huang, and J. Peleska. “Complete Agent-driven Model-based System Testing for Autonomous Systems”. In: *arXiv preprint arXiv:2110.12586* (2021).
- [8] M. Feurer and F. Hutter. *Hyperparameter Optimization*. 2019, pp. 3–33.
- [9] I. J. Goodfellow, Y. Bengio, and A. Courville. *Deep Learning*. <http://www.deeplearningbook.org>. Cambridge, MA, USA: MIT Press, 2016.
- [10] I. J. Goodfellow, M. Mirza, D. Xiao, A. Courville, and Y. Bengio. “An empirical investigation of catastrophic forgetting in gradient-based neural networks”. In: *2nd International Conference on Learning Representations, ICLR 2014 - Conference Track Proceedings* (2014). arXiv: 1312.6211.
- [11] C. Harper, G. Chance, A. Ghobrial, S. Alam, T. Pipe, and K. Eder. “Safety Validation of Autonomous Vehicles using Assertion-based Oracles”. In: *arXiv preprint arXiv:2111.04611* (2021).
- [12] D. Hond, H. Asgari, and D. Jeffery. “Verifying Artificial Neural Network Classifier Performance Using Dataset Dissimilarity Measures”. In: *Proceedings - 19th IEEE International Conference on Machine Learning and Applications, ICMLA 2020* (2020), pp. 115–121.
- [13] X. Huang et al. *A survey of safety and trustworthiness of deep neural networks: Verification, testing, adversarial attack and defence, and interpretability*. 2020. arXiv: 1812.08342. URL: <http://arxiv.org/abs/1812.08342>.
- [14] F. Huszár. “Note on the quadratic penalties in elastic weight consolidation”. In: *Proceedings of the National Academy of Sciences of the United States of America* 115.11 (2018), E2496–E2497. arXiv: arXiv:1712.03847v1.
- [15] N. Kalra and S. M. Paddock. *Driving to Safety: How Many Miles of Driving Would It Take to Demonstrate Autonomous Vehicle Reliability?* Santa Monica, CA: RAND Corporation, 2016.
- [16] S. Kate Devitt. “Trustworthiness of autonomous systems”. In: *Studies in Systems, Decision and Control* 117 (2018), pp. 161–184.
- [17] S. M. Kay. *Fundamentals of Statistical Signal Processing: Estimation Theory*. 1993, p. 180.
- [18] R. Kemker, M. McClure, A. Abitino, T. L. Hayes, and C. Kanan. “Measuring catastrophic forgetting in neural networks”. In: *32nd AAAI Conference on Artificial Intelligence, AAAI 2018* (2018), pp. 3390–3398. arXiv: 1708.02072.
- [19] J. Kirkpatrick et al. “Overcoming catastrophic forgetting in neural networks”. In: *Proceedings of the National Academy of Sciences of the United States of America* 114.13 (2017), pp. 3521–3526. arXiv: 1612.00796.
- [20] P. Koopman and M. Wagner. *Positive Trust Balance for Self-driving Car Deployment*. Vol. 2. Springer International Publishing, 2020, pp. 351–357. URL: http://dx.doi.org/10.1007/978-3-030-55583-2_26.
- [21] Z. Li and D. Hoiem. “Learning without Forgetting”. In: *IEEE Transactions on Pattern Analysis and Machine Intelligence* 40.12 (2018), pp. 2935–2947. arXiv: 1606.09282.
- [22] A. Ly, M. Marsman, J. Verhagen, R. P. Grasman, and E. J. Wagenmakers. “A Tutorial on Fisher information”. In: *Journal of Mathematical Psychology* 80 (2017), pp. 40–55. arXiv: 1705.01064.
- [23] D. J. C. MacKay. *Information Theory, Inference & Learning Algorithms*. USA: Cambridge University Press, 2002.
- [24] D. Maltoni and V. Lomonaco. “Continuous learning in single-incremental-task scenarios”. In: *Neural Networks* 116 (2019), pp. 56–73. arXiv: 1806.08568. URL: <https://doi.org/10.1016/j.neunet.2019.03.010>.
- [25] A. Mandelbaum and D. Weinsall. “Distance-based Confidence Score for Neural Network Classifiers”. In: (2017). arXiv: 1709.09844. URL: <http://arxiv.org/abs/1709.09844>.
- [26] J. Martens. “New insights and perspectives on the natural gradient method”. In: *Journal of Machine Learning Research* 21 (2020), pp. 1–76. arXiv: 1412.1193.
- [27] J. Mockus. “On the Bayes Methods for Seeking the Extremal Point”. In: *IFAC Proceedings Volumes* 8.1 (1975), pp. 428–431. URL: [http://dx.doi.org/10.1016/S1474-6670\(17\)67769-3](http://dx.doi.org/10.1016/S1474-6670(17)67769-3).
- [28] G. I. Parisi, R. Kemker, J. L. Part, C. Kanan, and S. Wermter. “Continual lifelong learning with neural networks: A review”. In: *Neural Networks* 113 (2019), pp. 54–71. arXiv: 1802.07569. URL: <https://doi.org/10.1016/j.neunet.2019.01.012>.
- [29] T. Parr and J. Howard. “The Matrix Calculus You Need For Deep Learning”. In: 2018 (2018), pp. 1–33. arXiv: 1802.01528. URL: <http://arxiv.org/abs/1802.01528>.
- [30] J. D. Schaffer and W. H. Land. “Predicting with Confidence: Classifiers that Know What They Don’t Know”. In: *Procedia Computer Science* 114

- (2017), pp. 200–207. URL: <https://doi.org/10.1016/j.procs.2017.09.061>.
- [31] C. Shorten and T. M. Khoshgoftaar. “A survey on Image Data Augmentation for Deep Learning”. In: *Journal of Big Data* 6.1 (2019). URL: <https://doi.org/10.1186/s40537-019-0197-0>.
- [32] J. Snoek, H. Larochelle, and R. P. Adams. “Practical Bayesian optimization of machine learning algorithms”. In: *Advances in Neural Information Processing Systems* 4 (2012), pp. 2951–2959. arXiv: 1206.2944.
- [33] A. Stocco and P. Tonella. “Towards Anomaly Detectors that Learn Continuously”. In: *2020 IEEE International Symposium on Software Reliability Engineering Workshops (ISSREW)*. IEEE, Oct. 2020, pp. 201–208. URL: <https://ieeexplore.ieee.org/document/9307667/>.
- [34] Y. X. Wang, D. Ramanan, and M. Hebert. “Growing a brain: Fine-tuning by increasing model capacity”. In: *Proceedings - 30th IEEE Conference on Computer Vision and Pattern Recognition, CVPR 2017* 2017-January (2017), pp. 3029–3038. arXiv: 1907.07844.
- [35] J. M. Wing. “Trustworthy AI”. In: *Communications of the ACM* 64.10 (2021), pp. 64–71.
- [36] H. Xiao, K. Rasul, and R. Vollgraf. “Fashion-MNIST: a Novel Image Dataset for Benchmarking Machine Learning Algorithms”. In: (2017), pp. 1–6. arXiv: 1708.07747. URL: <http://arxiv.org/abs/1708.07747>.
- [37] C. Xing, S. Arik, Z. Zhang, and T. Pfister. “Distance-Based Learning from Errors for Confidence Calibration”. In: (2019), pp. 1–12. arXiv: 1912.01730. URL: <http://arxiv.org/abs/1912.01730>.
- [38] F. Zenke, B. Poole, and S. Ganguli. “Continual learning through synaptic intelligence”. In: *34th International Conference on Machine Learning, ICML 2017* 8 (2017), pp. 6072–6082. arXiv: 1703.04200.
- [39] J. M. Zhang, M. Harman, L. Ma, and Y. Liu. “Machine Learning Testing: Survey, Landscapes and Horizons”. In: *IEEE Transactions on Software Engineering* (2020), pp. 1–1. arXiv: 1906.10742.