

Cut-Down de Bruijn Sequences

Ben Cameron

The King's University, Canada

Aysu Gündoğan

University of Guelph, Canada

Joe Sawada

University of Guelph, Canada

Abstract

A cut-down de Bruijn sequence is a cyclic string of length L , where $1 \leq L \leq k^n$, such that every substring of length n appears *at most* once. Etzion [*Theor. Comp. Sci* 44 (1986)] gives an algorithm to construct binary cut-down de Bruijn sequences that requires $o(n)$ simple n -bit operations per symbol generated. In this paper, we simplify the algorithm and improve the running time to $\mathcal{O}(n)$ time per symbol generated using $\mathcal{O}(n)$ space. We then provide the first successor-rule approach for constructing a binary cut-down de Bruijn sequence by leveraging recent ranking algorithms for fixed-density Lyndon words. Finally, we develop an algorithm to generate cut-down de Bruijn sequences for $k > 2$ that runs in $\mathcal{O}(n)$ time per symbol using $\mathcal{O}(n)$ space after some initialization. While our k -ary algorithm is based on our simplified version of Etzion's binary algorithm, a number of non-trivial adaptations are required to generalize to larger alphabets.

1 Introduction

A *de Bruijn sequence* is a cyclic sequence of length k^n such that every k -ary string of length n appears as a substring exactly once. For example, the following is a de Bruijn sequence for $n = 6$ and $k = 2$:

0000001111110111100111000110110100110000101110101100101010001001.

For some applications it may be more convenient to produce a cycle of arbitrary length such that there are no repeated length- n substrings. For instance, it may be more natural to consider the de Bruijn card trick [7] using 52 cards rather than 32. Also, for applications in robotic vision and location detection [7, 29, 30, 29], instead of forcing a location map to have length k^n , an arbitrary length allows for more flexibility. This gives rise to the notion of a *cut-down de Bruijn sequence*¹, which is a cyclic sequence over an alphabet of size k having length L , where $1 \leq L \leq k^n$, such that every substring of length n appears *at most* once. As an example, the following is a binary cut-down de Bruijn sequence of length 52:

0000001111001110001101101001100001011101011001010001.

Note that every substring of length six, including in the wraparound, appears at most once. Any cut-down de Bruijn sequence of length L with respect to k and n is also a cut-down de Bruijn sequence with respect to k and $n + 1$ [8]. Thus, throughout this paper we assume $k^{n-1} < L \leq k^n$.

Cut-down de Bruijn sequences are known to exist for all lengths L and any alphabet of size k [23] (for $k=2$ see [31]). In bioinformatics, the alphabet $\{C, G, A, T\}$ of size $k = 4$ is of particular interest and there are a number of applications that apply de Bruijn sequences and their relatives [2, 27]. A

¹ The term *cutting-down* is perhaps first used in [19] to describe such sequences.



© ;

licensed under Creative Commons License CC-BY

Leibniz International Proceedings in Informatics

LIPICs Schloss Dagstuhl – Leibniz-Zentrum für Informatik, Dagstuhl Publishing, Germany

simple algorithm to construct binary cut-down de Bruijn sequences based on linear feedback shift registers and primitive polynomials is given by Golomb [15, P. 193]; it runs in $\mathcal{O}(n)$ -amortized time per symbol using $\mathcal{O}(n)$ space. However, the construction has an exponential-time delay before producing the first symbol, requires a specific primitive polynomial for each order n , and there is no way to determine if a given length- n string appears as a substring without generating the entire cycle. This approach is generalized to construct cut-down de Bruijn sequences where k is a prime power, and subsequently extended to handle arbitrary sized alphabets by applying additional number theoretic results [21]. Although no formal algorithmic analysis is provided, the formulation appears to share properties no better than the related binary construction. An algebraic approach for when k is a prime power is also known [17].

A cycle-joining based approach to construct cut-down de Bruijn sequences was developed by Etzion [8] for $k = 2$; it requires $o(n)$ simple n -bit operations to generate each symbol. Their approach follows two main steps:

- First, they construct an initial main cycle with length $L + s$, where $0 \leq s < n$, using the well-known cycle-joining approach.
- Second, depending on s , they detect and remove up to $\lceil \log n \rceil$ small cycles to obtain a cycle of length L .

The resulting algorithm can construct an exponential number of cut-down de Bruijn sequences for any given L ; however, their algorithm is not optimized to generate a single cut-down de Bruijn sequence. Etzion's construction also has a downside for some applications: It starts with a specific length- n string and the context matters to produce successive symbols. This means the resulting cycle does not have a corresponding successor rule, and furthermore, testing whether or not a specific string belongs to the cycle may involve generating the entire cycle.

The main results of this paper are as follows:

1. We simplify Etzion's approach and develop an algorithm to construct a binary cut-down de Bruijn sequence in $\mathcal{O}(n)$ time per symbol using $\mathcal{O}(n)$ space.
2. We develop the first successor-rule approach to construct a binary cut-down de Bruijn sequence using an amortized $\mathcal{O}(n^{1.5})$ simple operations on n -bit numbers per symbol generated. The algorithm can start with any string on the cycle and the context does not matter when producing successive symbols.
3. We develop an algorithm to generate cut-down de Bruijn sequences for $k > 2$ that runs in $\mathcal{O}(n)$ time per symbol using $\mathcal{O}(n)$ space after some initialization. A number of non-trivial adaptations to the binary algorithm are required to generalize to larger alphabets as cycle-joining no longer corresponds to a spanning tree of cycles.

Related work. A *generalized de Bruijn sequence*, as defined in [3], is a cut-down de Bruijn sequence of length $k^{n-1} < L \leq k^n$ with an additional property: *every k -ary string of length $n-1$ appears as a substring*. Their existence is known for all L and k [11]. For special values of L , these sequences can be generated by considering the base k expansion of $1/L$ [3, 4, 25]. An algorithm based on Lempel's D -morphism [22] has recently been proposed to construct these sequences [26] that have an even stronger property: *every k -ary string of length $j \leq L$ appears either $\lfloor L/k^j \rfloor$ or $\lceil L/k^j \rceil$ times as a substring*. The proposed algorithm can generate the sequences in $\mathcal{O}(1)$ -amortized time per symbol, but it requires exponential space and there is an exponential time delay before outputting the first symbol. We call sequences with this latter property *fully-balanced cut-down de Bruijn sequences*.

Outline of paper. In Section 2, we provide some background on the cycle-joining method and a simple successor rule to construct de Bruijn sequences. In Section 3, we review Etzion's approach for constructing binary cut-down de Bruijn sequences. In Section 4, we present in detail our simplified algorithm to construct binary cut-down de Bruijn sequences; in Section 4.3, we present the first

successor-rule algorithm for constructing binary cut-down de Bruijn sequences. In Section 5 we present the steps required to extend our work for $k > 2$. Implementation of our algorithms, written in C, are available for download at <http://debruijnsequence.org/db/cutdown> [1]; this resource also provides a comprehensive background on de Bruijn sequences and their constructions.

2 Background

Throughout, let Σ denote the alphabet $\{0, 1, \dots, k-1\}$ where $k \geq 2$. Let Σ^n denote the set of all length- n strings over Σ . Let $\alpha = a_1a_2 \dots a_n$ be a string in Σ^n . Let α^t denote t copies of α concatenated together. The *period* of α , denoted $\text{per}(\alpha)$, is the smallest integer p such that $\alpha = (a_1 \dots a_p)^t$ for some $t > 0$. If α has period less than n it is said to be *periodic*; otherwise it is *aperiodic*. The lexicographically smallest element in an equivalence class of words under rotation is called a *necklace*. A *Lyndon word* is an aperiodic necklace. The *weight* of a string is the sum of its elements (when $k = 2$, weight is sometimes referred to as *density*). Let $T_k(n, w)$ denote the number of k -ary strings of length n and weight w . Note $T_2(n, w) = \binom{n}{w}$. The number of k -ary Lyndon words of length n and weight w , denoted by $L_k(n, w)$, is given by

$$L_k(n, w) = \frac{1}{n} \sum_{i | \gcd(n, w)} \mu(i) T_k(n/i, d/i),$$

where μ is the Möbius function. This formula is easily derived by applying Burnside’s Lemma [10, 6]; when $k = 2$, the formula is known [14].

A *feedback function* is a function $f : \Sigma^n \rightarrow \Sigma$. A *feedback shift register* (FSR) is a function $F : \Sigma^n \rightarrow \Sigma^n$ defined as $F(\alpha) = a_2a_3 \dots a_n f(\alpha)$, given a feedback function f . An FSR is said to be *nonsingular* if it is one-to-one. The *pure cycling register* (PCR) is the FSR with feedback function $f(\alpha) = a_1$. It partitions Σ^n into an equivalence class of strings under rotation. Thus, the cycles induced by the PCR are in one-to-one correspondence with the necklaces of order n and also with Lyndon words whose lengths divide n . We use the notation $[\alpha]$ to denote a cycle. Let the weight of a cycle induced by the PCR be the number of 1s in the length- n strings obtained by traversing the cycle. For example, when $n = 6$ the weight of $[000001]$ is one and the weight of $[01]$ is three.

Example 1 Let $\Sigma = \{0, 1\}$ and let $n = 6$. The following are the 14 equivalence classes of Σ^6 under rotation, where the first string in each class is a necklace. The symbols in the first column of each class (read top down) are the cycles induced by the PCR.

000000	000001	000011	000101	000111	001001	001011
	000010	000110	001010	001110	010010	010110
	000100	001100	010100	011100	100100	101100
	001000	011000	101000	111000		011001
	010000	110000	010001	110001		110010
	100000	100001	100010	100011		100101
001101	001111	010101	010111	011011	011111	111111
011010	011110	101010	101110	110110	111110	
110100	111100		011101	101101	111101	
101001	111001		111010		111011	
010011	110011		110101		110111	
100110	100111		101011		101111	


The following 14 cycles induced by the PCR are in one-to-one correspondence with the set of Lyndon

XX:4 Cut-Down de Bruijn Sequences

words of lengths 1, 2, 3, and 6 (lengths that divide $n = 6$):

[0]	[000001]	[000011]	[000101]	[000111]	[001]	[001011]
[001101]	[001111]	[01]	[010111]	[011]	[011111]	[1].

One of the most common ways to construct a binary de Bruijn sequence is by applying the *cycle-joining method* [15], which is akin to Hierholzer's method for finding Euler cycles in graphs [18]. This approach repeatedly joins pairs of cycles through *conjugate pairs*; one cycle contains $a_1 a_2 \cdots a_n$, and the other contains $\bar{a}_1 \bar{a}_2 \cdots \bar{a}_n$, where \bar{x} denotes the complement of x . When the initial cycles are those induced by an underlying nonsingular FSR, the joining of the cycles can be viewed as a tree. As an example, Figure 1 illustrates the cycles induced by the PCR for $n = 6$ and one way they can be joined together to create a de Bruijn sequence. When extending this idea to larger alphabet sizes, the tree visualization no longer applies in general (see [13]).

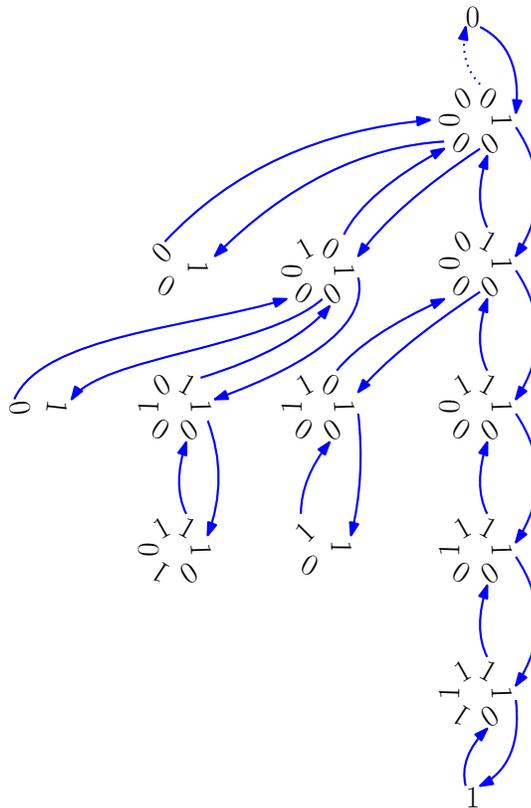

■ **Figure 1** The 14 cycles induced by the PCR joined by applying the de Bruijn successor PCR3.

A *universal cycle* for a set \mathbf{S} of length- n strings is circular string of length $|\mathbf{S}|$ such that every string in \mathbf{S} appears as a substring exactly once. Of course, a de Bruijn sequence is a special case of a universal cycle when \mathbf{S} corresponds to all k -ary strings of length n . A cut-down de Bruijn sequence of length L also corresponds to a universal cycle of length L ; however, the corresponding set \mathbf{S} is not necessarily known a priori. A *UC-successor* for \mathbf{S} is a feedback function whose corresponding FSR can be repeatedly applied to construct a universal cycle for \mathbf{S} starting from any string in \mathbf{S} . When $\mathbf{S} = \Sigma^n$ a UC-successor is said to be a *de Bruijn-successor*. A general framework based on the cycle joining approach leads to many simple UC-successors [12]. Application of this framework

rediscovers many previously known de Bruijn sequence constructions including one by Jansen [20] that was revisited in [28] with respect to the PCR. This de Bruijn successor, based on the feedback function labeled PCR3 defined in [12], is perhaps the simplest of all de Bruijn successors.

PCR3 de Bruijn successor:

$$\text{PCR3}(\alpha) = \begin{cases} \bar{a}_1 & \text{if } a_2 a_3 \cdots a_n 1 \text{ is a necklace;} \\ a_1 & \text{otherwise.} \end{cases}$$

When the FSR with feedback function PCR3 is repeatedly applied to the starting string 000000 for $n = 6$, as illustrated in Figure 1, it produces the de Bruijn sequence

0000001111110111100111000110110100110000101110101100101010001001,

when the first bit of the current string α is output before each application of the rule. Note that the arcs between cycles in Figure 1 correspond to the cases when PCR3 returns \bar{a}_1 .

The other simple PCR-based successors stated in [12] do not share the same properties as PCR3 that allow for a simple construction of cut-down de Bruijn sequences. These properties are discussed in Section 4.2.

3 Etzion's approach

In this section we outline Etzion's [8] approach for constructing a binary cut-down de Bruijn sequence. Recall that L is the length of the cut-down de Bruijn sequence and $2^{n-1} < L \leq 2^n$. The two primary steps in Etzion's construction are as follows where the *surplus* s is an integer in $\{0, 1, \dots, n-1\}$:

1. Construct a Main Cycle (MC) that has length $L + s$.
2. Cut out up to $\lceil \log s \rceil$ small cycles from the MC to yield a cycle of the desired length L .

To construct an MC, a subset of the cycles induced by the PCR are selected based on their weight and period. Enumeration of strings by weight and period determine which cycles to include. Considering the set of k -ary strings of length n (so we can generalize in later sections), let

- $A(w)$ denote the number of strings with weight $\leq w$,
- $B(w, p)$ denote the number of strings with weight w , and period p , and
- $C(w, p)$ denote the number of strings with weight w , and period $\leq p$.


In the binary case when $k = 2$, clearly $A(w) = \sum_{j=0}^w \binom{n}{j}$. Recall from the observations in Example 1 that $B(w, p) = pL_k(p, wp/n)$, assuming p divides n . Using these values, let

- $m =$ the smallest weight m such that $A(m) \geq L$,
- $h =$ the smallest period such that $A(m-1) + C(m, h) \geq L$, and
- $t =$ the smallest integer such that $A(m-1) + C(m, h-1) + th \geq L$.

These values can be used to define the surplus s as $A(m-1) + C(m, h-1) + ht - L$.

An MC is the result of joining together all PCR cycles of weight less than m together with all PCR cycles of weight equal to m and period less than h together with exactly t PCR cycles of weight m and period h . As cycles are joined, a counter is maintained to keep track of the number of cycles of weight m and period h already joined into the MC, thus the specific t PCR cycles joined are not necessarily known a priori. Etzion's original presentation adds cycles of weight m starting with the largest period. We made one minor departure from this approach by adding cycles of weight m starting from the smallest period, which handles a special case defined later.

Example 2 Consider $L = 46$ and $n = 6$. Since $A(3) = 42$ and $A(4) = 57$, we have $m = 4$. Since $B(4, 1) = B(4, 2) = 0$, $B(4, 3) = 3$, $B(4, 4) = B(4, 5) = 0$, $B(4, 6) = 12$, we have $C(4, 5) = 3$ and $C(4, 6) = 15$. Thus $h = 6$. Since $A(3) + C(4, 5) + h = 42 + 3 + 6 = 51$, we have $t = 1$ and surplus $s = 5$. Applying PCR3 as the underlying method for joining cycles, the following illustrates the construction of the MC starting with 000000.

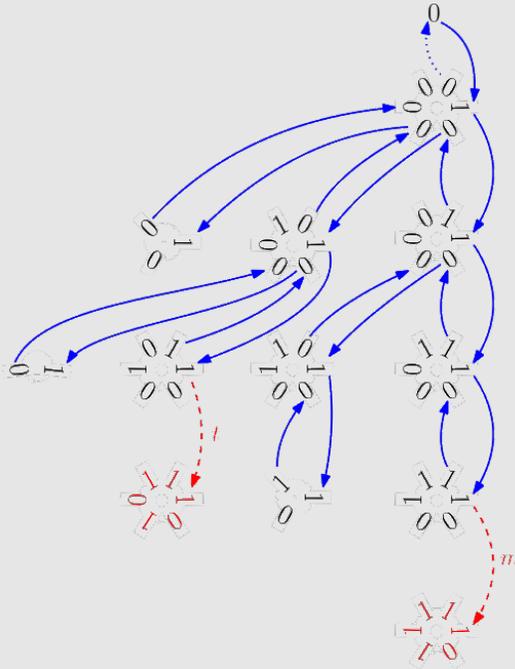

The MC joins all cycles with weight less than $m = 4$, all cycles with weight $m = 4$ and period less than $h = 6$, and exactly $t = 1$ cycles with weight $m = 4$ and period $h = 6$. Note that the cycle pointed to by the dashed arc labeled m is not added since it has weight greater than $m = 4$. The cycle pointed to by the dashed arc labeled t is not added since there was already $t = 1$ cycles added with weight $m = 4$ and period $h = 6$. The resulting MC with length 51 is

000000111100111000110110100110000101100101010001001.

The second step involves *cutting out* small cycles whose combined length totals the surplus s . When $s = 1$, the cycle $[0]$ is easily removed. However, for arbitrary lengths, finding and removing such small cycles is non-trivial and the construction of the MC is critical for the ease in which these small cycles can be removed. Etzion's approach requires cutting out up to $\lceil \log n \rceil$ cycles of the form $[0^i 1]$ where $i + 1 < n$ is a power of 2. For example, when $n = 14$, the possible cycles to remove would be of the form $[01]$, $[0001]$, $[0000001]$. Depending on s , the cycle $[0]$ may also need to be cut-out (the removal of a single 0). Details on how to cut such cycles out are discussed in the next section. There are two special cases that Etzion addresses to ensure that the aforementioned small cycles are indeed on the MC.

- **Special case #1:** When $n = 2m$, the cycle $[01]$ with weight m must be included.
- **Special case #2:** When $n = 2m - 1$ the cycle $[(01)^{m-1} 1]$ with weight m must be included.

As noted above, by considering the cycles of weight m in increasing order by period, **Special case #1** is handled since the cycle $[01]$ is the unique cycle with period 2 and will always be added in that case. **Special case #2** requires extra care when adding cycles of weight m and period n , noting that there are clearly no cycles of weight m and period less than n when $n = 2m - 1$.

4 Efficiently constructing binary cut-down de Bruijn sequences

In this section we describe two steps that can be applied to simplify and improve Etzion's original approach for constructing a cut-down de Bruijn sequence.

1. Apply PCR3 and focus on a single cut-down de Bruijn sequence construction.
2. Consider all cycles of the form $[0^i 1]$ for $1 \leq i \leq \lceil n/2 \rceil$ and cut out at most two small cycles.

The latter step involves changing the definition of PCR3 for at most two strings.

We conclude this section by applying a ranking algorithm for fixed-weight Lyndon words to produce the first successor-rule construction of cut-down de Bruijn sequences.

4.1 Constructing a Main Cycle with PCR3

Recall that an MC of length $L + s$ contains as substrings:

- all length- n binary strings with weight less than m ,
 - all length- n binary strings with weight m and period less than h , and
 - a set \mathbf{T} containing all length- n binary strings from t PCR cycles of weight m and period h ,
- where m, h, t, s are the precomputed variables described in the previous section.

Let \mathbf{S} denote such a set of $L + s$ strings. We demonstrate that Algorithm 1, which applies the feedback function PCR3, constructs a universal cycle for \mathbf{S} starting from any string in \mathbf{S} .

■ **Algorithm 1** Pseudocode for constructing a universal cycle for \mathbf{S} assuming the input $\alpha = a_1 a_2 \cdots a_n \in \mathbf{S}$.

```

1: procedure MC( $\alpha$ )
2:   for  $i \leftarrow 1$  to  $L + s$  do
3:     PRINT( $a_1$ )
4:      $x \leftarrow$  PCR3( $\alpha$ )
5:      $\beta = a_2 \cdots a_n x$ 
6:     if  $\beta \notin \mathbf{S}$  then  $x \leftarrow \bar{x}$ 
7:      $\alpha \leftarrow a_2 \cdots a_n x$ 

```

► **Lemma 1.** *Algorithm 1 generates a universal cycle for \mathbf{S} .*

Proof. Based on the proof of Theorem 4.3 in [12], PCR3 induces a spanning tree of the PCR cycles rooted at $[0]$ where the parent of a cycle with weight w is a cycle of weight $w - 1$ (see Figure 1). Based on the definition of \mathbf{S} , this means the cycles from strings in \mathbf{S} are also connected under PCR3. Since Line 6 complements the output of PCR3 when the resulting string would land outside \mathbf{S} , the Algorithm 1 cuts out exactly those cycles containing strings that are not in \mathbf{S} . ◀

Let $MC_{\mathbf{S}}$ denote the universal cycle for \mathbf{S} obtained from Algorithm 1. We now demonstrate how and when small cycles can be cut out of $MC_{\mathbf{S}}$ to obtain a universal cycle of the desired length L .

4.2 Cutting out small cycles


In order to cut down MC_S to a cycle of length L , ideally we could just cut out a single substring of length s . However, cutting out such a substring without introducing duplicate length- n substrings is a challenge. When $s \leq \lceil \frac{n}{2} \rceil$ we will demonstrate that finding such a substring is possible; otherwise we cut out two substrings whose combined length total s .

When $s = 1$, it is straightforward to cut out the cycle $Z_1 = [0]$ by cutting down the unique substring 0^n down to 0^{n-1} . Otherwise, consider cycles of the form $Z_i = [0^{i-1}1]$ for $1 < i \leq \lceil \frac{n}{2} \rceil$. Etzion [8] considers similar cycles, but only those with length that are a power of two. Let Z_i denote the set of length- n strings that are found on the cycle Z_i . When i divides n , Z_i corresponds to a PCR cycle. For example if $n = 6$ then $Z_2 = \{010101, 101010\}$ and $Z_3 = \{001001, 010010, 100100\}$. However, if i does not divide n , then the strings in Z_i will appear in two PCR cycles with different weights. For example when $n = 6$, $Z_5 = \{000010, 000100, 001000, 010000, 100001\}$. These strings appear on the PCR cycles $[000001]$ and $[000011]$. Observe that such cycles will have weight at most $\lceil \frac{n}{2} \rceil$, which is observed when $i = 2$ for $Z_2 = [01]$, and thus they always appear on MC_S as long as we account for the two special cases defined at the end of Section 3. To cut out the strings from a given cycle Z_i , we demonstrate it suffices to detect the first string γ_i visited in Z_i defined as follows:

$$\gamma_i = \begin{cases} 0^n & \text{if } i = 1; \\ (0^{i-1}1)^x & \text{if } i > 1 \text{ and } i \text{ divides } n; \\ 0^y 1(0^{i-1}1)^x & \text{otherwise,} \end{cases}$$

where $x = \lfloor \frac{n}{i} \rfloor$ and $y - 1 = n \bmod i$. When i divides n and $\text{PCR3}(\alpha) = \gamma_i$, complementing the output for α results in cutting out the cycle Z_i entirely (see Example 3); otherwise, if i does not divide n , a more careful analysis is required.

Example 3 Recall the MC from Example 2 where $L = 46$ and $s = 5$. By cutting out the cycles $[001]$ and $[01]$, we obtain a cut-down de Bruijn sequence of length L . This is done by complementing the PCR3 output for the strings 000100 and 001010 since $\text{PCR3}(000100) = \gamma_3 = 001001$ and $\text{PCR3}(001010) = \gamma_2 = 010101$. This is illustrated below where the dashed red arcs are not followed.

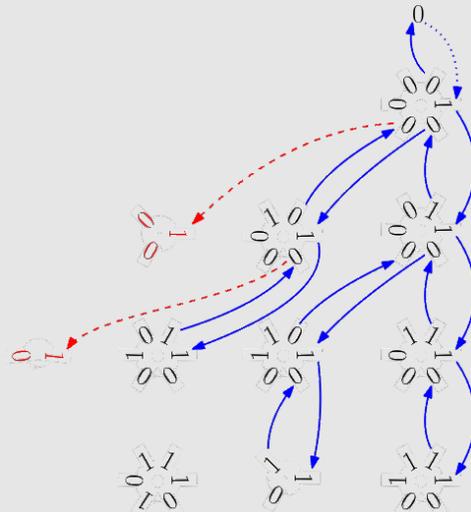

The resulting cut-down de Bruijn sequence of length $L = 46$ starting from $\alpha = 000001$ is

0000011110011100011011010011000010110010100010.

The reason why we cannot cut out a single cycle $[0^{s-1}1]$ when $s > \lceil n/2 \rceil$ is because there exists at least one string $\alpha = a_1 \cdots a_n$ in \mathbf{Z}_s such that $a_2 \cdots a_n 1$ is a necklace and $a_1 = 0$ (see Example 4). This means such a string is used to “bridge” a PCR cycle into the MC and thus cutting out this string would also cut the PCR cycle and any of its children from the original MC. It may be possible to re-attach such a cycle to another cycle on the MC, but that requires extra theory and adds complexity to the algorithm.

Example 4 Consider $n = 9$, $s = 6$ and the string $\alpha = 000001000 \in \mathbf{Z}_6$. Since $\beta = 000010001$ is a necklace, $\text{PCR3}(\alpha) = 1$ and β belongs to a new PCR cycle which belongs to the MC with larger weight.

We now define the set \mathbf{R} which contains either one or two strings that can be applied to cut out the small cycle(s). Let $j = \lceil n/2 \rceil$. If $s \leq j$, then $\mathbf{R} = \{\gamma_s\}$; otherwise $\mathbf{R} = \{\gamma_j, \gamma_{s-j}\}$. Assuming that when $n = 2m - 1$, the set \mathbf{S} includes the strings from the cycle $[(01)^{m-1}1]$, then we obtain the following theorem.

► **Theorem 2.** *If the value for x is complemented after Line 6 in Algorithm 1 when β is in \mathbf{R} , then the algorithm will generate a binary cut-down de Bruijn sequence of length L .*

Proof. By the assumed restriction on \mathbf{S} , the PCR cycles containing the strings in each \mathbf{Z}_i are included in $MC_{\mathbf{S}}$. The case for cutting out the $[0]$ cycle by complementing the PCR3 output for 10^{n-1} is straightforward. For $2 \leq i \leq \lceil n/2 \rceil$, let α_i denote a string in $MC_{\mathbf{S}}$ such that $\text{PCR3}(\alpha_i) = \gamma_i$ and the i symbols following it by tracing Algorithm 1 and observing the output for PCR3. We consider two cases depending on whether or not i divides n . When i divides n , the next i symbols are precisely 10^{i-1} . This is easily determined by the definition of a necklace and PCR3. For example when $n = 8$ and $i = 4$ we have $\gamma_4 = 00010001$ and $\alpha_4 = 00001000$. The $i + 1$ symbols following α_i in $MC_{\mathbf{S}}$ are given in the final column.

$a_1 \cdots a_8$	$\beta = a_2 \cdots a_8 1$	$\text{PCR3}(\beta)$
$\alpha_4 = 00001000$	00010001	1
$\gamma_4 = 00010001$	00100011	0
00100010	01000101	0
01000100	10001001	0
10001000	00010001	0

Note the last four strings in the first column are precisely the strings in \mathbf{Z}_4 belonging to the PCR cycle Z_4 . This demonstrates that the strings in \mathbf{Z}_4 are not the parents of other PCR cycles in the joining of the cycles to create $MC_{\mathbf{S}}$. Also, the first and last strings in the table share a length $n - 1$ suffix; they are conjugate pairs. Thus complementing the output for α_i effectively cuts out a single cycle of length i from $MC_{\mathbf{S}}$.

When i does not divide d , the i symbols following α_i are again precisely 10^{i-1} . However, now the strings of \mathbf{Z}_i belong to two different PCR cycles that are joined together in the MC. By tracing the i symbols following γ_i in $MC_{\mathbf{S}}$ as we did in the previous case, it is easy to observe based on the definition of PCR3 that the strings in \mathbf{Z}_i appear consecutively as substrings. For example when $n = 11$ and $i = 4$ we have $\alpha_4 = 10010001000$ and $\gamma_4 = 00100010001$.

$a_1 \cdots a_{11}$	$\beta = a_2 \cdots a_{11}1$	PCR3(β)
$\alpha_4 = 10010001000$	00100010001	1
$\gamma_4 = 00100010001$	01000100011	0
01000100010	10001000101	0
10001000100	00010001001	0
00010001000	00100010001	0

Note the last four strings in the first column are precisely the strings in \mathbf{Z}_4 . This demonstrates that the strings in \mathbf{Z}_4 are not the parents of other PCR cycles in the joining of the cycles to create the MC. Again, the first and last strings share a length $n - 1$ suffix; they are conjugate pairs. Thus, complementing the output for γ_i effectively cuts out a single cycle of length i from $MC_{\mathbf{S}}$.

Though the observations made above are for specific examples, they easily adapt for general i and n , and we leave it as an exercise for the reader. Thus, by complementing the value of x after Line 6 in Algorithm 1 when β is in \mathbf{R} results in the production of a cut-down de Bruijn sequence of length L . Note that when such a value x is complemented, the corresponding α when entering the **for** will be an α_i from our discussion above. ◀

Applying the previous theorem, Algorithm 2 will generate a cut-down de Bruijn sequence of length L . It starts with $\alpha = 0^{n-1}1$ in case the cycle $[0]$ needs to be cut out. Computing the weight and period of the current length- n string α leads to an $\mathcal{O}(n)$ -time membership tester for \mathbf{S} . In this implementation, the subset \mathbf{T} of \mathbf{S} is not known a priori. Thus, we keep track of how many cycles of weight m and period h we have seen so far, adding them if we do not exceed t . This is maintained by the counter t' . In the special case when $n = 2m - 1$, a flag is set to make sure the special cycle $[(01)^{m-1}1]$ is included; the first string visited on this cycle is $(01)^{m-1}1$. The result is a construction that takes only $\mathcal{O}(n)$ time per symbol using only $\mathcal{O}(n)$ space.

▶ **Theorem 3.** *A binary cut-down de Bruijn sequence of length $2^{n-1} < L \leq 2^n$ can be generated in $\mathcal{O}(n)$ time per symbol using $\mathcal{O}(n)$ space.*

4.3 A successor-rule construction

In this section we define a successor rule that can be used to construct a binary cut-down de Bruijn sequence of length L . Unlike the algorithm in the previous section, no context is required when iterating through the successor rule. Recall that the set \mathbf{S} , which contains the length- n substrings of a MC, depends on a set \mathbf{T} which contains ht binary strings of length n , weight m , and period h . As there are many different possible sets \mathbf{T} that meet this criteria, the key to our successor rule is to consider a single set \mathbf{T} . Specifically, let \mathbf{T} denote the length- n strings found on cycles of the PCR corresponding to the t **lexicographically largest** Lyndon words of length h and weight mh/n . Choosing the t largest instead of the t smallest cycles is important since it ensures the cycles required in the special cases are always included; each special cycle corresponds to the lexicographically largest Lyndon word for a given weight. Let \mathbf{S}' denote the set \mathbf{S} that includes this specific subset \mathbf{T} .

Determining whether or not a string belongs to \mathbf{T} can be accomplished by applying a recent algorithm to rank fixed-weight Lyndon words as they appear in lexicographic order [16]. Let $\alpha = a_1a_2 \cdots a_n$ denote a binary string with period n and weight m . Let σ be the lexicographically smallest rotation of α , i.e., σ is a Lyndon word. Let $RL(a_1a_2 \cdots a_n)$ denote the rank of σ in a lexicographic listing of length- n Lyndon words with weight m . Computing σ can be done in $\mathcal{O}(n)$ time [5] and computing the rank of σ can be done with $\mathcal{O}(n^3)$ n -bit operations [16]. Applying these functions, the procedure $CUTDOWNSUCCESSOR(\alpha)$ given in Algorithm 3 will construct a cut-down de Bruijn sequence of length L , which corresponds to a universal cycle for $\mathbf{S}' - \mathbf{R}$, starting from any length- n substring α in $\mathbf{S}' - \mathbf{R}$.

■ **Algorithm 2** Pseudocode for constructing a binary cut-down de Bruijn sequence of length L assuming pre-computed values m, h, t and the set \mathbf{R}

```

1: procedure CUT-DOWN
2:    $\alpha = a_1 a_2 \cdots a_n \leftarrow 0^{n-1} 1$ 
3:    $t' \leftarrow 0$ 
4:   if  $n = 2m - 1$  then  $flag \leftarrow 1$ 
5:   else  $flag \leftarrow 0$ 

6:   for  $i \leftarrow 1$  to  $L$  do
7:     PRINT( $a_1$ )

8:     ▷ UC-successor for the Main Cycle
9:      $w \leftarrow$  weight of  $\alpha$ 
10:     $x \leftarrow$  PCR3( $\alpha$ )
11:     $\beta = a_2 \cdots a_n x$ 
12:    if  $w = m$  and  $w - a_1 + x = m + 1$  then  $x \leftarrow \bar{x}$ 
13:    if  $w = m - 1$  and  $w - a_1 + x = m$  then
14:      if  $\text{per}(\beta) > h$  then  $x \leftarrow \bar{x}$ 
15:      if  $\text{per}(\beta) = h$  then
16:        if  $\beta = (01)^{m-1} 1$  then  $flag \leftarrow 0$ 
17:        ▷ Cut out excess cycles of weight  $m$  and period  $h$ 
18:        if  $t' = t$  or  $(t' + 1 = t$  and  $flag = 1)$  then  $x \leftarrow \bar{x}$ 
19:        else  $t' \leftarrow t' + 1$ 

20:    if  $\beta \in \mathbf{R}$  then  $x \leftarrow \bar{x}$  ▷ Cut out small cycle(s)
21:     $\alpha \leftarrow a_2 \cdots a_n x$ 

```

► **Theorem 4.** $\text{CUTDOWNSUCCESSOR}(\alpha)$ generates a cut-down de Bruijn sequence of length L starting from any $\alpha \in \mathbf{S}' - \mathbf{R}$ where each symbol is generated using amortized $\mathcal{O}(n^{1.5})$ simple operations on n -bit numbers and $\mathcal{O}(n)$ space.

Proof. By pre-computing $L_2(h, mh/n)$, each iteration of the **for** loop requires $\mathcal{O}(n)$ time not including the time required by a possible call to RL. A call to RL is made exactly once for each cycle of weight m and period h ; it is made when α has weight $m - 1$ and β has weight m and period h . These cycles correspond to Lyndon words of length h and weight mh/n and thus the call to RL is made exactly $L_2(h, mh/n)$ times. Clearly, $L_2(n, w) \leq \binom{n}{w}/n$, and it is well-known that $\binom{n}{w}$ is $\mathcal{O}(2^n/\sqrt{n})$ [24, p. 35]. Since the running time of RL is $\mathcal{O}(n^3)$, the work done by all calls to RL amortized over the $\Theta(2^n)$ iterations of the **for** loop is $\mathcal{O}(\frac{n^3}{n\sqrt{n}}) = \mathcal{O}(n^{1.5})$. ◀

5 Cut-down de Bruijn sequences for $k > 2$

In this section we extend the strategy for constructing binary cut-down de Bruijn sequences to alphabets of arbitrary size.² When generalizing the binary approach, the selection of an underlying

² In [8], Etzion concludes by stating that his binary construction of cut-down de Bruijn sequences can be generalized to alphabets of arbitrary size; however, no details are provided, and as we note the generalization is non-trivial.

XX:12 Cut-Down de Bruijn Sequences

■ **Algorithm 3** A successor rule based construction of a cut-down de Bruijn sequence of length L based on the precomputed values m, h, t and the set \mathbf{R} .

```

1: procedure CUTDOWNSUCCESSOR( $\alpha = a_1a_2 \cdots a_n$ )
2:   for  $i \leftarrow 1$  to  $L$  do
3:     PRINT( $a_i$ )

4:     ▷ Context-free UC-successor for the Main Cycle
5:      $w \leftarrow$  weight of  $\alpha$ 
6:      $x \leftarrow$  PCR3( $\alpha$ )
7:      $\beta = a_2 \cdots a_n x$ 
8:     if  $w > m$  or ( $w = m$  and  $\text{per}(\beta) > h$ ) then  $x \leftarrow \bar{x}$ 
9:     if  $w = m - 1$  and  $w - a_1 + x = m$  then
10:      if  $\text{per}(\beta) > h$  then  $x \leftarrow \bar{x}$ 
11:      if  $\text{per}(\beta) = h$  and  $L(h, mh/n) - \text{RL}(a_1a_2 \cdots a_h) + 1 > t$  then  $x \leftarrow \bar{x}$ 

12:   if  $\beta \in \mathbf{R}$  then  $x \leftarrow \bar{x}$  ▷ Cut out small cycle(s)
13:    $\alpha \leftarrow a_2 \cdots a_n x$ 

```

de Bruijn successor is critical to a simple construction for a k -ary cut-down de Bruijn sequence. The PCR3-successor applied in the binary case has two natural generalizations for $k \geq 2$. These generalizations have been previously defined as g_3 and g'_3 in [13] and are described under the heading “Last symbol”, referring to the last symbol of the necklace representative of a PCR cycle which is used to join the cycle. The key to selecting an underlying de Bruijn successor is to allow for the simplest possible method to cut out small cycles. Without going into details, g'_3 is the one that allows for this. It can be computed in $\mathcal{O}(n)$ time using $\mathcal{O}(n)$ space [13]³.

g'_3 de Bruijn successor:

$$g'_3(\alpha) = \begin{cases} k & \text{if } x > 0 \text{ and } a_1 = x-1; \\ a_1-1 & \text{if } x > 0 \text{ and } a_1 \leq x+1; \\ a_1 & \text{otherwise,} \end{cases}$$


where x is the smallest symbol in $\{1, 2, \dots, k-1\}$ such that $a_2a_3 \cdots a_n x$ is a necklace, or $x = 0$ if no such symbol exists.

Interestingly, the original presentation of g'_3 is described as a UC-successor for k -ary strings with weight less than or equal to some fixed w . However, we choose to apply the restriction separately from the successor as we additionally must consider the periods of the cycles.

The biggest challenge when extending to larger alphabets is that the “cycle-joining” approach may no longer correspond to a simple spanning tree of underlying cycles using conjugate pairs. Instead, several cycles which have common substrings of length $n-1$ can be joined in a cyclic fashion. As an example, see Figure 2 which illustrates how g'_3 joins PCR cycles for $n = 3$ and $k = 4$ to obtain the de Bruijn sequence

0003303203103002302202102001301201133132131123122333232221211101.

³ g'_3 is labeled PCR3 (alt) in [1]

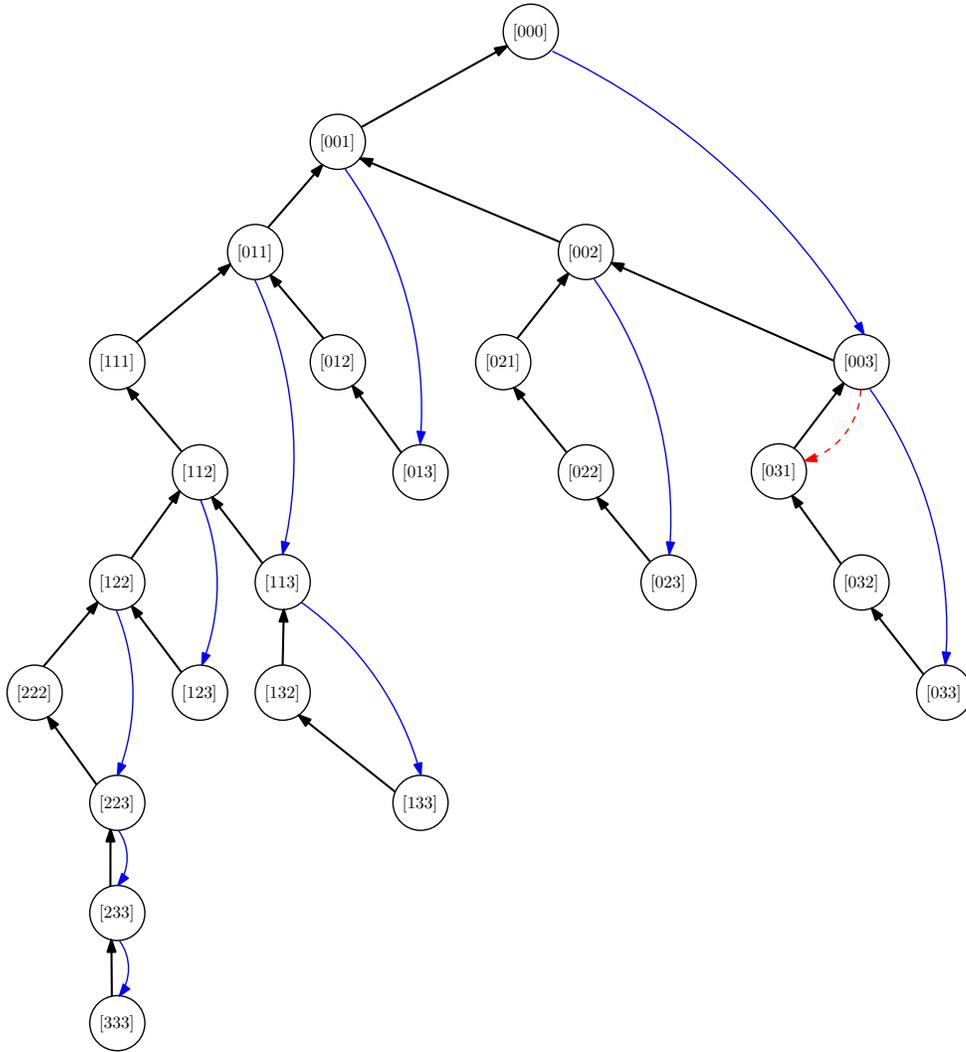

■ **Figure 2** Joining PCR cycles for $n = 3$, $k = 4$ by applying g'_3 . The cycles drawn at the same level have the same weight. When constructing an MC with maximum weight $m = 4$, the dashed red edge illustrates how the cycles [032] and [033] can be cut out while still including [031].

5.1 The MC for $k > 2$

As in the binary case, let \mathbf{S} denote the set of strings belonging to a MC with a corresponding subset \mathbf{T} of ht strings belonging to t cycles of weight m and period h . Recall $|\mathbf{S}| = L + s$ and $k^{n-1} < L \leq k^n$. The choice of the underlying de Bruijn successor g'_3 allows for a simple construction of the MC when $k > 2$ as detailed in Algorithm 5. We explain the differences from Algorithm 2 by recalling Figure 2 when the maximum weight $m = 4$ and $h = 3$. Consider $\alpha = 003$ from cycle [003] which is part of the MC. Observe that $g'_3(\alpha) = 033$. However, this string is from the cycle [033] with weight 6 and hence is not on the MC. Instead of branching to the new cycle, if we stay on [003] then we also *cut out* cycles [032] and [031] which may contain strings on the MC. If we have not already visited t cycles with weight $m = 4$, then the symbol following 003 should be 1 (as illustrated by the red dashed edge in Figure 2). Otherwise, the next symbol should be 0, which means we do not branch from the cycle [003]. In other words, the next symbol should be the largest one so the resulting string

XX:14 Cut-Down de Bruijn Sequences

belongs to \mathbf{S} as stated in Line 6 of Algorithm 4.

■ **Algorithm 4** Pseudocode for constructing a universal cycle for \mathbf{S} assuming the input $\alpha = a_1 a_2 \cdots a_n \in \mathbf{S}$ and $k > 2$.

```

1: procedure  $k$ -MC( $\alpha$ )
2:   for  $i \leftarrow 1$  to  $L + s$  do
3:     PRINT( $a_1$ )
4:      $x \leftarrow g'_3(\alpha)$ 
5:      $\beta = a_2 \cdots a_n x$ 
6:     if  $\beta \notin \mathbf{S}$  then  $x \leftarrow$  the largest value such that  $a_2 \cdots a_n x \in \mathbf{S}$ 
7:      $\alpha \leftarrow a_2 \cdots a_n x$ 

```

► **Lemma 5.** *Algorithm 4 generates a universal cycle for \mathbf{S} .*

Proof. From the proof of Theorem 3.3 in [13], g'_3 joins the PCR cycles rooted at $[0]$ where the “parent” of a cycle with weight w is a cycle of weight $w - 1$ (see the black straight lines in Figure 2). Based on the definition of \mathbf{S} , this means the cycles from strings in \mathbf{S} are also connected under g'_3 as long as the “downward arcs” (those curved blue in Figure 2) directed to cycles that do not belong to \mathbf{S} are redirected to the related cycle with largest weight whose strings are in \mathbf{S} . Note these downward arcs correspond to the first case in the rule for g'_3 . This modification is handled by Line 6 when the string resulting by applying g'_3 would land outside \mathbf{S} . Thus, Algorithm 4 cuts out exactly those cycles containing strings that are not in \mathbf{S} . ◀

Using the same notation as the binary case, let $MC_{\mathbf{S}}$ denote the universal cycle for \mathbf{S} obtained from Algorithm 4. Next, we demonstrate how and when small cycles can be cut out of $MC_{\mathbf{S}}$ to obtain a universal cycle of the desired length L .

5.2 Cutting out small cycles for $k > 2$

By the choice of the successor g'_3 , we can alter the output of the strings from the exact same set \mathbf{R} computed from the surplus s as in the binary case.

► **Theorem 6.** *If the value for x is assigned 0 after Line 6 in Algorithm 4 when β is in \mathbf{R} , then the algorithm will generate a k -ary cut-down de Bruijn sequence of length L .*

Proof. Since we are assuming $k > 2$, the PCR cycles containing the strings in each \mathbf{Z}_i are clearly included in $MC_{\mathbf{S}}$; they have small weight. Let α_i be the state before γ_i in $MC_{\mathbf{S}}$. The proof follows the binary case except that the strings α_i are different from the binary case. When i divides n and $\gamma_i = 0^{i-1}1^x$, then $\alpha_i = 2(0^{i-1}1)^{x-1}0^{i-1}$. Similarly, if i does not divide n , then $\gamma_i = 0^y1(0^{i-1}1)^x$ and $\alpha_i = 20^y(10^{i-1})^x$. For each case observe that $g'_3(\alpha_i) = 1$. By applying g'_3 , the i bits following α_i are 10^{i-1} (similar to the binary case) and none of the corresponding states bridge to cycles not containing strings in \mathbf{Z}_i . Verifying this is a straightforward exercise based on the definition of g'_3 on the definition of a necklace.

Now, consider the state after i applications of g'_3 to α_i . When i divides n , the current state α will be $(10^{i-1})^x$ and $g'_3(\alpha) = 0$. Otherwise, if i does not divide n , then the current state will be $(0^{i-1}1)^x 0^{y+1}$ and again $g'_3(\alpha) = 0$. Thus, to cut out a cycle \mathbf{Z}_i , we can simply alter the successor of $g'_3(\alpha)$ from 1 to 0. This corresponds to assigning x the value 0 after Line 6 in Algorithm 4 when β is in \mathbf{R} . The result is a cut-down de Bruijn sequence of length L . ◀

By applying the same strategy as the binary case, we can apply Algorithm 4 to construct a specific MC obtained by counting the number of cycles added to the MC of weight m and period h ; the resulting Algorithm 5 will construct a k -ary cut-down de Bruijn sequence. The differences from the binary algorithm are as follows:

- The initial string is generalized to $0^{n-1}(k-1)$, as it is the substring following 0^n in the de Bruijn sequence generated by g'_3 .
- The two special cases no longer need to be considered since m will always be greater than $\lceil n/2 \rceil$ with $k > 2$. Thus the variable *flag* is no longer required.
- Lines 10-16 apply simple operations to cut out appropriate cycles based on the definition of g'_3 to obtain the desired MC.
- Line 17 assigns x to 0 (following Theorem 6), which is the same as complementing x when $x = 1$ in the binary case. The strings in \mathbf{R} remain the same.

■ **Algorithm 5** Pseudocode for constructing a cut-down de Bruijn sequence (for $k > 2$) of length L assuming pre-computed values m, h, t and the set \mathbf{R}' .

```

1: procedure  $k$ -CUT-DOWN
2:    $\alpha = a_1 a_2 \cdots a_n \leftarrow 0^{n-1}(k-1)$ 
3:    $t' \leftarrow 0$ 
4:   for  $i \leftarrow 1$  to  $L$  do
5:     PRINT( $a_1$ )

6:     ▷ UC-successor for the Main Cycle
7:      $w \leftarrow$  weight of  $\alpha$ 
8:      $x \leftarrow g'_3(\alpha)$ 
9:      $\beta = a_2 \cdots a_n x$ 
10:    if  $w - a_1 + x \geq m$  then
11:       $x \leftarrow m - w + a_1$ 
12:      if  $\text{per}(\beta) > h$  then  $x \leftarrow x - 1$  ▷ Cut out cycles of weight  $m$  and period  $> h$ 
13:      if  $\text{per}(\beta) = h$  then
14:        if  $t' = t$  then  $x \leftarrow x - 1$  ▷ Cut out excess cycles of weight  $m$  and period  $h$ 
15:        else  $t' \leftarrow t' + 1$ 

16:    if  $\beta \in \mathbf{R}$  then  $x \leftarrow 0$  ▷ Cut out small cycle(s)
17:     $\alpha \leftarrow a_2 \cdots a_n x$ 

```

► **Corollary 7.** A k -ary cut down de Bruijn sequence of length $k^{n-1} < L \leq k^n$ can be generated in $\mathcal{O}(n)$ time per symbol using $\mathcal{O}(n)$ space.

The time to pre-compute the values m, h, t for $k > 2$ depend on the time to enumerate $T_k(n', w')$ for all $1 \leq n' \leq n$ and $0 \leq w' \leq (k-1)n$. By applying dynamic programming techniques, these values can easily be computed in $\mathcal{O}(k^2 n^2)$ time applying the obvious recurrence.

6 Summary and future work

In this paper we improved upon Etzion's algorithm [9] to construct binary cut-down de Bruijn sequences. We then provided details to generalize the algorithm for arbitrary-sized alphabets by selecting an appropriate underlying feedback function. The resulting algorithms run in $\mathcal{O}(n)$ -time

per symbol using $\mathcal{O}(n)$ space. By taking advantage of an efficient algorithm to rank fixed-weight Lyndon words, we presented a successor-rule construction for binary cut-down de Bruijn sequences that only requires the current length- n substring to determine the next bit. It requires an amortized $\mathcal{O}(n^{1.5})$ simple operations on n -bit numbers per bit. Unfortunately, the efficient ranking algorithm only applies to the binary case, so currently the algorithm for the non-binary case requires exponential time to apply the ranking.

It is not difficult to observe that the cut-down de Bruijn sequences produced by our algorithms are not *fully-balanced*. Thus, avenues for future research include:

1. Develop an efficient (cycle-joining) construction for generalized de Bruijn sequences.
2. Develop an efficient (cycle-joining) construction for fully-balanced cut-down de Bruijn sequences.
3. Develop an efficient ranking/unranking algorithms for fixed-weight Lyndon words and necklaces for $k > 2$.

References

- 1 DB. De Bruijn sequence and universal cycle constructions (2021). <http://debruijnsequence.org>.
- 2 AGUIRRE, G., MATTAR, M., AND WEINBERG, L. de Bruijn cycles for neural decoding. *NeuroImage* 56, 3 (2011), 1293–1300.
- 3 BLUM, L., BLUM, M., AND SHUB, M. Comparison of two pseudo-random number generators. In *Advances in Cryptology* (Boston, MA, 1983), D. Chaum, R. L. Rivest, and A. T. Sherman, Eds., Springer US, pp. 61–78.
- 4 BLUM, L., BLUM, M., AND SHUB, M. A simple unpredictable pseudo-random number generator. *SIAM Journal on Computing* 15, 2 (1986), 364–383.
- 5 BOOTH, K. S. Lexicographically least circular substrings. *Information Processing Letters* 10, 4/5 (1980), 240–242.
- 6 BURNSIDE, W. *Theory of Groups of Finite Order*. Cambridge Library Collection - Mathematics. Cambridge University Press, 2012.
- 7 DIACONIS, P., AND GRAHAM, R. *Magical Mathematics: The Mathematical Ideas That Animate Great Magic Tricks*. Princeton University Press, 2011.
- 8 ETZION, T. An algorithm for generating shift-register cycles. *Theoretical Computer Science* 44 (1986), 209–224.
- 9 ETZION, T. Self-dual sequences. *Journal of Combinatorial Theory, Series A* 44, 2 (1987), 288–298.
- 10 FROBENIUS, G. Ueber die congruenz nach einem aus zwei endlichen gruppen gebildeten doppelmodul. *Journal für die reine und angewandte Mathematik* 101 (1887), 279–299.
- 11 GABRIC, D., HOLUB, S., AND SHALLIT, J. Maximal state complexity and generalized de Bruijn words. *Information and Computation* 284 (2022), 104689. Selected Papers from DCFS 2019, the 21st International Conference on Descriptive Complexity of Formal Systems.
- 12 GABRIC, D., SAWADA, J., WILLIAMS, A., AND WONG, D. A framework for constructing de Bruijn sequences via simple successor rules. *Discrete Mathematics* 241, 11 (2018), 2977–2987.
- 13 GABRIC, D., SAWADA, J., WILLIAMS, A., AND WONG, D. A successor rule framework for constructing k -ary de Bruijn sequences and universal cycles. *IEEE Transactions on Information Theory* 66, 1 (2020), 679–687.
- 14 GILBERT, E. N., AND RIORDAN, J. Symmetry types of periodic sequences. *Illinois Journal of Mathematics* 5, 4 (1961), 657 – 665.
- 15 GOLOMB, S. W. *Shift Register Sequences*, 3rd revised ed. World Scientific, 2017.
- 16 HARTMAN, P., AND SAWADA, J. Ranking and unranking fixed-density necklaces and Lyndon words. *Theoretical Computer Science* 791 (2019), 36–47.
- 17 HEMMATI, F., AND COSTELLO, D. J. An algebraic construction for q -ary shift register sequences. *IEEE Transactions on Computers* C-27, 12 (1978), 1192–1195.
- 18 HIERHOLZER, C. Ueber die Möglichkeit, einen Linienzug ohne Wiederholung und ohne Unterbrechung zu umfahren. *Mathematische Annalen* 6 (1873), 30–32.

- 19 JACKSON, B., STEVENS, B., AND HURLBERT, G. Research problems on Gray codes and universal cycles. *Discrete Mathematics* 309, 17 (2009), 5341–5348.
- 20 JANSEN, C. J. A., FRANX, W. G., AND BOEKEE, D. E. An efficient algorithm for the generation of DeBruijn cycles. *IEEE Transactions on Information Theory* 37, 5 (Sep 1991), 1475–1478.
- 21 LANDSBERG, M. Feedback functions for generating cycles over a finite alphabet. *Discrete Mathematics* 219, 1 (2000), 187–194.
- 22 LEMPEL, A. On a homomorphism of the de Bruijn graph and its applications to the design of feedback shift registers. *IEEE Transactions on Computers C-19*, 12 (1970), 1204–1209.
- 23 LEMPEL, A. m -ary closed sequences. *Journal of Combinatorial Theory, Series A* 10, 3 (1971), 253–258.
- 24 LUKE, Y. L. *The special functions and their approximations, Vol. I*. Mathematics in Science and Engineering, Vol. 53. Academic Press, New York-London, 1969.
- 25 MATTHEWS, R. Maximally periodic reciprocals. *Bulletin of The Institute of Mathematics and its Applications* 28 (01 1992).
- 26 NELLORE, A., AND WARD, R. Arbitrary-length analogs to de Bruijn sequences, arXiv:2108.07759, 2021.
- 27 PEVZNER, P. A., TANG, H., AND WATERMAN, M. S. An Eulerian path approach to DNA fragment assembly. *Proceedings of the National Academy of Sciences* 98, 17 (2001), 9748–9753.
- 28 SAWADA, J., WILLIAMS, A., AND WONG, D. A surprisingly simple de Bruijn sequence construction. *Discrete Mathematics* 339, 1 (2016), 127–131.
- 29 SCHEINERMAN, E. R. Determining planar location via complement-free de Bruijn sequences using discrete optical sensors. *IEEE Transactions on Robotics and Automation* 17 (2001), 883–889.
- 30 SINDEN, F. W. Sliding window codes. *AT&T Bell Labs Technical Memorandum* (1985).
- 31 YOELI, M. Binary ring sequences. *The American Mathematical Monthly* 69, 9 (1962), 852–855.