

Recovering Private Text in Federated Learning of Language Models

Samyak Gupta* Yangsibo Huang* Zexuan Zhong Tianyu Gao Kai Li Danqi Chen

Princeton University

{samyakg, yangsibo, zzhong, tianyug, li, danqi}@cs.princeton.edu

Abstract

Federated learning allows distributed users to collaboratively train a model while keeping each user’s data private. Recently, a growing body of work has demonstrated that an eavesdropping attacker can effectively recover image data from gradients transmitted during federated learning. However, little progress has been made in recovering text data. In this paper, we present a novel attack method FILM¹ for federated learning of *language models*—for the first time, we show the feasibility of recovering text from *large batch sizes* of up to 128 sentences. Different from image-recovery methods which are optimized to match gradients, we take a distinct approach that first identifies a set of words from gradients and then directly reconstructs sentences based on beam search and a prior-based reordering strategy. The key insight of our attack is to leverage either prior knowledge in pre-trained language models or memorization during training. Despite its simplicity, we demonstrate that FILM can work well with several large-scale datasets—it can extract single sentences with high fidelity even for large batch sizes and recover multiple sentences from the batch successfully if the attack is applied iteratively. We hope our results can motivate future work in developing stronger attacks as well as new defense methods for training language models in federated learning. Our code is publicly available at <https://github.com/Princeton-SysML/FILM>.

1 Introduction

Federated learning (McMahan et al., 2017) is a method to allow multiple participants to train a global model without exchanging their private data collaboratively. At each step of training, a central server transmits model parameters to every participating client. Each client then computes a model update (i.e., gradients) using its local data and sends it to the server. Finally, the server aggregates all updates—typically by averaging them—and updates the model. As each client does not need to share its private data with the server during training, federated learning is actively being considered for privacy-sensitive applications such as virtual mobile keyboards and analysis of electronic health records in hospitals (Li et al., 2020a).

However, recent studies (Zhu et al., 2019; Geiping et al., 2020; Yin et al., 2021; Zhu & Blaschko, 2021; Huang et al., 2021) show that an *honest-but-curious* eavesdropping attacker in federated learning—who observes the communication of model parameters and gradients between a client and the server—can recover private data of the client (Figure 1). By reformulating the attack as an

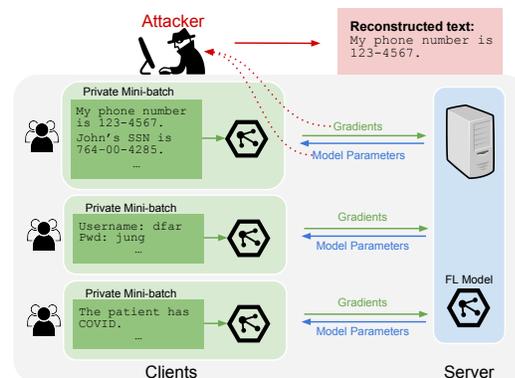


Figure 1: Illustration of the threat model and our attack FILM. FILM allows an *honest-but-curious* eavesdropper on the communication between the client and the server in federated learning to recover private text of the client.

*The first two authors contributed equally.

¹FILM stands for Federated Inversion Attack for Language Models.

optimization problem, an attacker can iteratively build a copy of a client’s private images. However, the success in recovering text data remains limited—for instance, (Zhu et al., 2019; Deng et al., 2021) showed leakage of text data using similar optimization-based methods for only a batch size of 1².

In this work, we study federated learning of neural *language models* (LMs) and present a novel attack called FILM (**F**ederated **I**nversion Attack for **L**anguage **M**odels), which can recover private text data from information transmitted during training. For the first time, we demonstrate that an attacker can successfully recover sentences from *large* training batches of up to 128 sentences—making it practical and alarming in real-world scenarios.³ We focus on language models for two reasons: (1) In the past few years, Transformer-based language models (Vaswani et al., 2017) have achieved unprecedented success (Devlin et al., 2019; Radford et al., 2018, 2019; Brown et al., 2020) and have been quickly adapted to a number of privacy-sensitive domains (Alsentzer et al., 2019; Huang et al., 2019; Li et al., 2020b; Liu & Miller, 2020; Kraljevic et al., 2021). They are not only able to generate coherent and fluent text but serve as basic building blocks for language understanding tasks; (2) We identify that language-model training is at a higher risk of information leakage by nature because the attacker can possibly leverage the memorization capability of LMs during federated learning.

We find that previous gradient-matching approaches, which directly optimize in high-dimensional, continuous space, don’t work well in recovering data for LMs as they are highly sensitive to initializations and language inputs are essentially discrete (Section 5). Especially with large batch sizes, the averaged gradient information (of ≤ 128 sentences) does not suffice to recover text information. Instead, our FILM attack takes a radically different approach: We first recover a set of discrete words⁴ from the embeddings’ gradients based on the insights from Melis et al. (2019). This step can give us a set of words that appear in any sentences of the training batch without the frequency information. We then develop a simple and effective strategy using beam search (Reddy et al., 1977; Russell & Norvig, 2010), which tries to reconstruct one sentence from the set of identified words. This step is crucial as it takes advantage of prior knowledge encoded in pre-trained language models and memorization of training data during federated training. We also further design a token-reordering approach that leverages both language prior and gradients information as the signal to fine-tune the recovered sentence. Finally, we show that we may recover multiple sentences from the same training batch by applying the same procedure iteratively.

We evaluate FILM on the WikiText-103 dataset (Merity et al., 2017) and the Enron Email dataset (Klimt & Yang, 2004), based on a GPT-2 model (Radford et al., 2019), with either pre-trained or randomly-initialized weights. We analyze the attack performance with different batch sizes, number of training data points, and number of training epochs. Our experiments demonstrate high-fidelity recovery of a single sentence feasible, and recovery of significant portions of sentences for training batches of up to 128 sentences. We also show the possibility to recover multiple sentences from the same batch (1/3 for a batch size of 16), by applying FILM iteratively. Together, we believe that our results raise serious privacy-leakage for federated learning in realistic scenarios and they should motivate a necessary redesign of defenses to provide meaningful privacy guarantees to clients for training language models in federated learning.

2 Related work

Data recovery from gradients. Gradients in federated learning have been shown to leak a severe amount of information of the underlying private data. Several attacks (Zhu et al., 2019; Zhao et al., 2020; Geiping et al., 2020; Yin et al., 2021; Zhu & Blaschko, 2021; Jin et al., 2021; Jeon et al., 2021) successfully reconstruct individual users’ private images from gradients. These methods usually formulate such a reconstruction as an optimization problem, which encourages the reconstructed images to yield similar gradients as observed gradients computed on the private images, using regularization terms based on image priors such as total variation (Geiping et al., 2020) and batch normalization statistics (Yin et al., 2021).

Existing research has primarily focused on recovering images, and the earliest attempt to recover text from gradients is Zhu et al. (2019), which briefly presented leakage results in masked language model-

²We focus on *honest-but-curious* attackers in this work. If the attacker is allowed more capabilities (i.e., modifying model weights), it may achieve better performance (see Section 2).

³Another concurrent work (Dimitrov et al., 2022) demonstrated the possibility of recovering a batch of 4 sentences on text classification tasks (see Section 2 for more discussion).

⁴Strictly speaking, we recover and reorder subword tokens (Sennrich et al., 2016) for modern neural language models. In this paper, we use ‘words’ in the description for simplicity.

ing (Devlin et al., 2019). Their attack aims to match target gradients with continuous representations and maps them back to words which are closest in the embedding matrix. Deng et al. (2021) improve (Zhu et al., 2019) by adding a regularization term which prioritizes the gradient matching in layers that are closer to the input data. However, both work only present results with batch size of 1 and do not work well with larger batch sizes, as we will show in Section 5. Another earlier work (Melis et al., 2019) shows the information leakage from the embedding layer by observing which entries of words are non-zero in the gradients—a key insight that we also build on in this work. However, different from their attack which only infers a person or location from a shallow GRU model (Cho et al., 2014), we are proposing a much stronger attack that aims at recovering full sentences from larger language models. Finally, very recent work (Boenisch et al., 2021; Fowl et al., 2022) tries to recover text data in federated learning under a stronger threat model: the server is malicious and can manipulate the weights of the training model to enable easier text reconstruction.

The closest concurrent work is Dimitrov et al. (2022), where the attacker exploits the prior probability of the private text by minimizing both the gradient matching loss and the text probability. They are able to recover a mini-batch of 4 sentences with binary classification tasks using the BERT (Devlin et al., 2019) model. In this work, we focus on language models and we show that our attack is able to recover sentences from a larger training batch of up to 128 sentences.

Memorization in language models. Our method is also inspired by the work related to the memorization of training data in language models. Recent studies (Carlini et al., 2019; Thakkar et al., 2021; Song & Raghunathan, 2020; Zanella-Béguelin et al., 2020; Carlini et al., 2021; Bender et al., 2021) notice that large language models are able to memorize their training dataset and hence can be prompted to output specific sensitive information. For example, Carlini et al. (2019) propose a way to quantitatively measure the risk that a training example is unintentionally memorized by a language model, and Thakkar et al. (2021) extend this measurement to federated learning. Zanella-Béguelin et al. (2020) demonstrate that an attacker who has access to the pre-trained and fine-tuned LSTM (Hochreiter & Schmidhuber, 1997) is able to extract rare or unique sequences from the fine-tuning dataset. More recently, Carlini et al. (2021) present an attack to extract personally identifiable information (e.g., name, email address, phone number, and physical address) from the publicly available GPT-2 model (Radford et al., 2019). They also find that larger language models are more susceptible to this style of attack than smaller ones.

Note that while these previously demonstrated memorization attacks are trying to recover *a subset* of sensitive text from a large training corpora, our attack aims at recovering sentences from *every* mini-batch in federated learning. We stress that our attack is significantly more powerful than the previous works studying memorization.

We discuss further related work about defenses against data recovery from gradients in Appendix A.

3 Preliminaries

In this section, we describe relevant background of language models, federated learning, as well as the threat model of our proposed attack method.

3.1 Language Modeling

Language modeling is a core task in natural language processing and has been used as a building block of state-of-the-art pipelines (Radford et al., 2019; Devlin et al., 2019). Given a sequence of n tokens $\mathbf{x} = \{x_1, x_2, \dots, x_n\}$, the language modeling task is to estimate the probability distribution of $\mathbb{P}(\mathbf{x})$, which is factorized as:

$$\log \mathbb{P}(\mathbf{x}) = \sum_{i=1}^n \log \mathbb{P}(x_i | x_1, \dots, x_{i-1}). \quad (1)$$

where θ represent the neural network parameters. State-of-the-art neural language models are parameterized by RNNs (Mikolov et al., 2010) or Transformers (Vaswani et al., 2017), which consist of millions or billions of parameters.

A language model first maps discrete words to a sequence of vectors via a word embedding matrix $\mathbf{W} \in \mathbb{R}^{|\mathcal{V}| \times d}$, where \mathcal{V} is the vocabulary and d is the hidden dimension. After computing the hidden representation \mathbf{h}_i conditioned on x_1, \dots, x_{i-1} , the model predicts the the probability of the next token:

$$\mathbb{P}_\theta(x_i | x_1, \dots, x_{i-1}) = \frac{\exp(\mathbf{h}_i^\top \mathbf{W}_{x_i})}{\sum_{j \in \mathcal{V}} \exp(\mathbf{h}_i^\top \mathbf{W}_j)}, \quad (2)$$

where \mathbf{W}_{x_i} and \mathbf{W}_j represent the word embeddings corresponding to x_i and j .

3.2 Federated Learning

Federated learning (FL) (McMahan et al., 2017) is a communication protocol for training a shared machine learning model on decentralized data. An FL system usually involves N clients: c_1, c_2, \dots, c_N and a central server s , where the clients wish to collaboratively train a neural network f_θ (a language model in our case) with their private data $\mathcal{D}_1, \mathcal{D}_2, \dots, \mathcal{D}_N$, under the coordination of the server. The training process optimizes θ (model parameters) using a loss function \mathcal{L} and runs for T iterations.

Each iteration $t \in [T]$ of federated learning consists of the following steps. First, an individual client $c_i, i \in [N]$ computes $\nabla_{\theta^t} \mathcal{L}_{\theta^t}(\mathcal{B}_i)$, the gradients of the current model parameters θ^t on a randomly sampled private data batch $\mathcal{B}_i \subset \mathcal{D}_i, |\mathcal{B}_i| = b$, and shares the gradients with the server. The server then aggregates gradient updates from all clients and updates the model:

$$\theta^{t+1} = \theta^t - \underbrace{\eta \sum_{i=1}^N \overbrace{\nabla_{\theta^t} \mathcal{L}_{\theta^t}(\mathcal{B}_i)}^{\text{Client } i\text{'s update}}}_{\text{Server aggregation}} \quad (3)$$

where η is the learning rate. Finally, the updated parameters θ^{t+1} are broadcast to individual clients. Note that Eq. 3 uses SGD for an easier demonstration for an update step in federated learning. In real-world training of neural language models, people usually use Adam (Kingma & Ba, 2015).

In this work, we focus on federated learning of language models, where clients can start from a randomly-initialized neural network, or a pre-trained public model (Hard et al., 2018)—we consider a GPT-2 model (Radford et al., 2019) in our experiments.

3.3 Threat Model

Adversary’s capabilities. We consider an honest-but-curious adversary who is eavesdropping on the communication between the central server s and an arbitrary client $c_i, i \in [N]$ in the federated training of a language model parameterized by θ , as described above. This allows the adversary a white-box access to 1) the gradients $\nabla_{\theta^t} \mathcal{L}_{\theta^t}(\mathcal{B}_i)$ sent by the client c_i , and 2) the model parameters θ^t (Figure 1). Note that the adversary can inspect these information at *any* training iterations $t \in [T]$.

Adversary’s objective. The adversary aims at recovering *at least one* sentence from the private training data batch \mathcal{B}_i based on the information they observe, as recovering a single sentence is already sufficient to break the privacy guarantee of federated learning—since each training batch consists of randomly selected sentences from the private training dataset, if the adversary could recover at least one sentence from each training batch during the whole training procedure, he/she would be able to recover a considerable fraction of the original training dataset. Additionally, the attacker may also apply the attack on a single batch multiple times to recover more sentences from the batch (Section 4.5). The strength of an attack will be measured by the similarity between the recovered sentence and its corresponding private sentence in the original batch.

4 Our Attack Method

4.1 Overview

In this section, we present a novel text-recovery attack method, which is able to construct sentences from *any* training batches ($|\mathcal{B}_i| \leq 128$). Our method consists of three steps:

- (1) Inspired by Melis et al. (2019), our first step is to recover a set of words that may appear in a private batch (\mathcal{B}_i) from gradients (Section 4.2). While their goal is to identify sensitive single words from gradients, our approach is able to recover the order of words in a sentence.
- (2) With the set of words identified, we then attempt searching for full sentences using beam search, based on the probability distribution provided by $f_\theta(x)$. Our method is able to leverage either the language prior from a pre-trained language model ($t = 0$), or the memorization capability of the language model during training ($t > 0$) (Section 4.3).⁵
- (3) Finally, we design a prior-based scoring function and demonstrate that we can further improve the quality of recovered sentences by performing a simple and lightweight reordering step (Section 4.4).

⁵Recall that the attacker can inspect the gradients at any time step $t \in [T]$ during the T -epoch training. An attacker performing our attack at a larger t may have much stronger results than for a smaller t , as we later demonstrate in Section C.5.

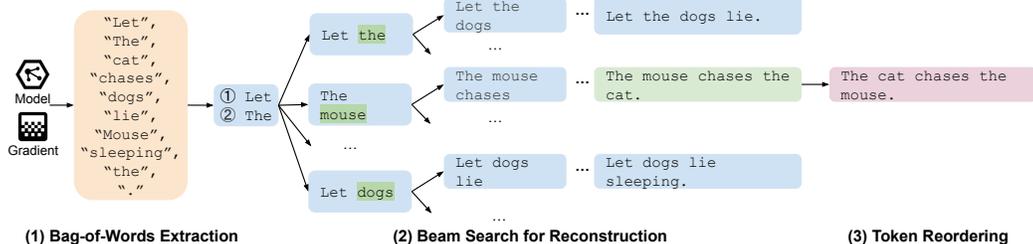


Figure 2: Illustration of our pipeline for batch size of 2. We firstly recover a bag of words from the observed gradients (orange square). We then select a small set of prompts and launch beam search. At every step of beam search, we append a new token from the bag of words and generate new states. We then order the states by their likelihood from the (trained) language model. We repeat the process until the generated sentences reach the length of the largest sentence in the batch. The state with the highest likelihood is selected as the beam search result (green square), and we reorder it to get the final result (purple square).

We show that the above pipeline is able to recover single sentences from large training batches successfully. In Section 4.5, we discuss that we can iterate the above procedure to recover multiple sentences from the same training batch, which makes our attack even stronger.

In the following, we describe our attack method in detail. To better illustrate our attack’s functionality, we provide a simplified step-by-step example that recovers a batch of 2 simple sentences in Figure 2.

4.2 Bag-of-Words Extraction

Input: $\nabla_{\theta^t} \mathcal{L}_{\theta^t}(\mathcal{B}_i)$, gradients of the language model on the private batch of sentences.

Output: bag of words B : {"Let", "The", "cat", "chases", "dogs", "lie", "mouse", "sleeping", "the", "."}.

Our first step is to extract a bag of words from $\nabla_{\theta^t} \mathcal{L}_{\theta^t}(\mathcal{B}_i)$, the gradients observed by an eavesdropper at the t -th iteration of training. We follow the method outlined by Melis et al. (2019)—more specifically, we recover a set of words $B = \{w_1, w_2, \dots, w_m\}$ by considering the non-zero rows of the embedding gradients $\nabla_{\mathbf{W}^t} \mathcal{L}_{\theta^t}(\mathcal{B}_i)$ (\mathbf{W}^t is the word embedding matrix at training step t). Additionally, we are also able to recover the maximum length of sentences in the batch by analyzing the non-zero rows of the gradients corresponding to the positional embedding matrix.⁶

Note that this step only determines the set of words but not their *frequency*. Later, we will demonstrate that our beam search method can recover sentences well without knowing the frequencies (Section 6).

4.3 Beam Search for Sentence Reconstruction

Input: B , the bag of private words recovered by Section 4.2.

Output: a recovered sentence from the batch, "The mouse chases the cat."

The second stage of our attack is to recover *one* sentence based on the extracted bag of words B and $\mathbb{P}_{\theta^t}(\mathbf{x})$ (note that this probability distribution is defined based on the parameters at the time of attack t). Since it is intractable to generate text directly using $\mathbb{P}_{\theta^t}(\mathbf{x})$, we use the beam search (Reddy et al., 1977; Russell & Norvig, 2010), which is a greedy auto-regressive algorithm to generate sequences in a step-by-step manner with a trained language model. We provide a detailed algorithm in Appendix B.

To initiate beam search, we first find a set of words that can be chosen as starting tokens of sentences. A straightforward method is to select words which begin with a capital letter from B . For example, we would select "Let" and "My" as possible prompts for the illustrated batch. Then at each beam search step, we keep the top k possible beam states, finds the k most likely next words to each beam by using the language model (see procedure $\text{TOP}(\cdot)$ in Appendix B, Algorithm 1), and keeps the top k new beam states. The beam tree continues until the generated sentence reaches a specified length (we use 40 words), and outputs the text that has the overall highest probability (see Figure 2).

As the bag of words B does not contain information on the frequency of each word in the sentence, and beam search is prone to generating repetitive content (Holtzman et al., 2020), we also include a penalty for repeated n -grams in a sentence (see line 3 in procedure $\text{TOP}(\cdot)$). We compare the performance of the attack under different n -gram penalties relative to a hypothetical optimal scenario where the frequency of each word is known by the attacker (implemented by sampling without replacement from the bag-of-words with word frequency information) in Section 6.

⁶We assume that sentences in one batch vary in length. A standard practice is to pad shorter sentences.

4.4 Prior-Guided Token Reordering

Input: a recovered sentence from Section 4.3, "The mouse chases the cat."

Output: a reordered sentence, "The cat chases the mouse."

By construction, beam search is a greedy method which generates sentences from left to right. Despite that it generally outputs fluent sentences by maximizing $\mathbb{P}_{\theta}(\mathbf{x})$, it does not leverage the *gradients* information which is the main signal in previous image attack methods. Thus, the final stage of our attack is to reorder tokens in the extracted sentence from the previous step, with an objective to improve its quality measured by a prior-based scoring function. The scoring function leverages both the perplexity and the gradient norm. Formally, given a sentence $\mathbf{x} = \{x_1, x_2, \dots, x_n\}$ of n tokens, and the trained language model parameterized by θ , \mathbf{x} 's prior score $\mathcal{S}(\mathbf{x})$ is defined as:

$$\mathcal{S}(\mathbf{x}) = \underbrace{\exp\left\{-\frac{1}{n} \log \mathbb{P}_{\theta}(\mathbf{x})\right\}}_{\text{Perplexity}} + \beta \underbrace{\|\nabla_{\theta} \mathcal{L}_{\theta}(\mathbf{x})\|}_{\text{Gradient Norm}} \quad (4)$$

where $\log \mathbb{P}_{\theta}(\mathbf{x})$ is the log-likelihood of the sentence (Eq. 1) according to the model parameters θ , and β is a hyper-parameter that controls the importance of gradient norm. Appendix C.6 provides empirical analysis that supports the design of this scoring function.

We also notice that sometimes the beam search preserves the structure of the sentence while the order of original phrases or words is wrong. Thus, we propose to reorder the sentences with two consecutive steps, from coarse to fine granularity.

Phrase-wise reordering. We first pre-process the sentence \mathbf{x} by removing its redundant segments⁷. We then adjust the preprocessed sentence by reordering phrases inside it. At each reordering iteration, we generate multiple candidates by firstly cutting the sentence at p positions using the strategy in Malkin et al. (2021), and then permuting the phrases between the cuts to form a new sentence. We then select the best candidate measured by $\mathcal{S}(\cdot)$. This stage terminates after 200 steps.

Token-wise reordering. We then reorder individual tokens. At each reordering step, we generate candidates using the following token-wise operations: 1) randomly swaps two tokens in the sentence, or 2) randomly deletes a token from the sentence, or 3) randomly inserts a token from the bag of words (recovered by Section 4.2) into the sentence. We then select the best candidate measured by $\mathcal{S}(\cdot)$ and move to the next iteration. This stage terminates after 200 steps.

4.5 Recovering Multiple Sentences

The previous steps only consider the recovery of a single sentence from a training batch. In this step, we describe an extension of our attack which is able to support recovery of multiple sentences from the same batch. We first perform beam search as described in Section 4.3. We store the results, and repeat beam search again—except this time applying an additional n -gram penalty based on the results of the previous search. Over many repetitions of this procedure, we are able to build a set of candidate recoveries for the original batch.

5 Experiments

5.1 Setup

Model and datasets. We evaluate the proposed attack with the GPT-2 base model (Radford et al., 2019) (around 117M parameters) on two language modeling datasets, including WikiText-103 (Merity et al., 2017) and the Enron Email dataset (Klimt & Yang, 2004). We choose WikiText-103 because it is commonly used in the language modeling task, and the Enron Email dataset because it consists of private email messages that contain abundant private information such as individuals' names, addresses, and even passwords. Note that the GPT-2 model is not trained on any Wikipedia data, and very unlikely on the Enron Email data⁸.

We evaluate our attack on a subset of the WikiText-103 and Enron datasets. After pre-processing, we have 203,456 sentences from the WikiText-103 dataset and 31,797 sentences from the Enron dataset⁹.

⁷We notice that the sentences we recover from the previous step may not naturally finish after the beam search generates a punctuation. To address this problem, we pre-process each recovered sentence \mathbf{x} by removing segments after its first punctuation, as long as the resulting sentence \mathbf{x}' satisfies $\mathcal{S}(\mathbf{x}') < \mathcal{S}(\mathbf{x})$.

⁸The GPT-2 model is trained on a corpus that contains all web pages from outbound links on Reddit which received at least 3 karma (Radford et al., 2019). Note that all Wikipedia pages were removed from this dataset.

⁹Both datasets have longer context and we preprocess them into sentences and use each sentence as a training instance. We leave recovering longer paragraphs as future work.

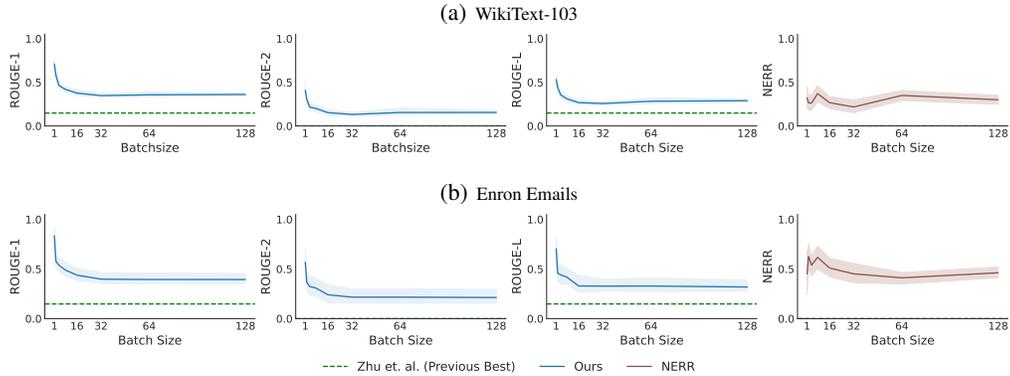


Figure 3: Recovery performance for various batch sizes on WikiText-103 (the first row) and the Enron Email dataset (the second row). The solid line indicates the average F-Scores of recoveries out of 20 tested mini-batches. We find that the attack is overall weaker for larger batch sizes (see Table 7 for quantitative results). Moreover, attack performance is stronger for the Enron emails dataset.

Training and attack settings. Unless otherwise noted, we train the model on these sentences for 90,000 iterations using an initial learning rate of 1×10^{-5} , with a linearly decayed learning rate scheduler. All models were trained using early stopping—i.e., models were trained until the loss of the model on the evaluation set increased. We note that the running time of our algorithm is also quite fast. Our approach can recover a single sentence in under a minute using an Nvidia 2080TI GPU.

Evaluation metrics. We propose to use the following metrics to evaluate the attack performance: (a) Recall-Oriented Understudy for Gisting Evaluation (ROUGE) (Lin, 2004) is a set of metrics for evaluating automatic summarization of texts as well as machine translation. We use ROUGE-1, ROUGE-2, and ROUGE-L F-Scores to evaluate the similarity between the recovered and the original sentences. More specifically, ROUGE-1 and ROUGE-2 refer to the overlap of unigrams and bigrams between the recovered and the original text, respectively. ROUGE-L measures the longest matching subsequence of tokens. For ablation studies we only show ROUGE-L as a high score is more representative of significant leakage than ROUGE-1 or ROUGE-2.

(b) Named entity recovery ratio (NERR) computes the percentage of original name entities that can be perfectly retrieved in the recovered text. Since named entities usually contain sensitive information (e.g., names, addresses, dates, or events), NERR measures how well the attacker recovers such information, ranging from a complete mismatch (NERR = 0) to a perfect recovery (NERR = 1). We identify named entities using the API provided by SpaCy (Honnibal & Montani, 2017).

5.2 Performance of Our Attack

Scaling to large training batches. We first compare the performance with respect to different batch sizes. In this setting, we start from a pre-trained GPT-2 model and fine-tune it on both datasets respectively (WikiText-103 and Enron emails). All models were finetuned for 90,000 iterations, at which the model loss over the evaluation set starts to increase. Figure 3 shows the performance of our attack using different batch sizes with the WikiText-103 dataset and the Enron Email dataset. We observe that for a batch size of 1, all four scores (ROUGE-1, ROUGE-2, ROUGE-L, NERR) are close to 1, indicating a near-perfect recovery. We observe that as the batch size increases, the quality of the recovery by ROUGE-1, ROUGE-2, and NERR start to decrease. We attribute this drop in performance to the bigger set of words in the same training batch, as well as the growing search space of possible word orderings.

We also observe that the Enron Emails dataset is significantly more susceptible to attack.

Table 1 shows the approach by Zhu et al. (2019) fails to recover the original sentence for batch size $b = 1$. We find that the gradient matching method in Zhu et al. (2019) is sensitive to initialization and it can perform better recovery when using a good initialization (see Appendix C.1). Figure 3 shows their approach has poor NERR and ROUGE scores. On the contrary, our approach is able to recover a large portion of the original sentences on both datasets even when the batch size is 128. This demonstrates the superior effectiveness of leveraging the knowledge encoded in pre-trained language models and its memorization ability to recover sentences, compared to directly performing optimization in a high-dimensional continuous space.

Attack & Batch Size b	Original Sentence	Best Recovered Sentence
WikiText-103		
Zhu et al. (2019)*, $b = 1$	As Elizabeth Hoiem explains, "The most English of all Englishmen, then, is both king and slave, in many ways indistinguishable from Stephen Black.	thelesshovahrued theAsWords reporting the Youngerse-lagebalance, mathemat mathemat mathemat reper ar-rangpmwikiIndia Bowen perspectoulos subur, maximal
FILM, $b = 1$	The short@-@tail stingray forages for food both during the day and at night.	The short@-@tail stingray forages for food both during the day and at night.
FILM, $b = 4$	More than 1@,@500 of Maruyama's troops were killed in the attacks while the Americans lost about 60 killed.	More than 1@,@500 of their troops were killed in the attacks, while the Americans lost about 60 killed on their own.
FILM, $b = 16$	A tropical wave organized into a distinct area of disturbed weather just south of the Mexican port of Manzanillo, Colima, on August 22 and gradually moved to the northwest.	Early on September 22, an area of disturbed weather organized into a tropical wave, which moved to the northwest of the area, and then moved into the north and south@-@to the northeast.
FILM, $b = 128$	A remastered version of the game will be released on PlayStation 4, Xbox One and PC alongside Call of Duty: Infinite Warfare on November 4, 2016.	At the time of writing, the game has been released on PlayStation 4, Xbox One, PlayStation 3, and PC, with the PC version being released in North America on November 18th, 2014.
Enron Email		
Zhu et al. (2019), $b = 1$	Don and rogers have decided for cost management purposes to leave it consolidated at this point.	dj "... Free, expShopcriptynt)beccaggressive Highlands andinos Andrea Rebell impacts
FILM, $b = 1$	Volume mgmt is trying to clear up these issues.	Volume mgmt is trying to clear up these issues.
FILM, $b = 4$	Shares of enron traded as low as \$15.	Shares of enron traded as low as \$15 at jeffrey k.
FILM, $b = 16$	Yesterday, enron ousted chief financial officer andrew fastow amid a securities and exchange commission inquiry into partnerships he ran that cost the largest energy trader \$35 million.	Yesterday, enron ousted its chief financial officer, andrew fastow, amid a securities and exchange commission inquiry into partnerships he ran that cost the company \$35 million in stock and other financial assets.
FILM, $b = 128$	Yesterday, enron ousted chief financial officer andrew fastow amid a securities and exchange commission inquiry into partnerships he ran that cost the largest energy trader \$35 million.	Yesterday, enron ousted chief financial officer andrew fastow amid a securities and exchange commission inquiry into partnerships he ran that he said cost the company more than \$1 billion in stock and other assets.

* We also tried adding L1 regularizer in the objective (as suggested in Deng et al. (2021)) and found similar attack results.

Table 1: Performance of Zhu et al. (2019)’s attack with batch size = 1 (more in Appendix C.1) and FILM (ours) with different batch sizes. We show the best recovered sentence among 20 tested batches for each batch size (we report average results in Figure 3). Text in green represents the phrases and words that are recovered successfully.

Attack performance at different training iterations. Previous attack on the image data suggest that a well-trained model is harder to attack (Geiping et al., 2020), because its loss may converge to around zero, resulting in very small-magnitude gradients. However, we find well-trained models are more vulnerable to our approach because the model is able to memorize data during training.

We show the attack performance of our approach to the models at different numbers of training iterations t . Specifically, we vary the number of training iterations $t \in \{0, 10000, \dots, 90000\}$ and fix the batch size $b = 16$ and dataset size $N = 200,000$. As shown in Figure 4 and Table 2, a pre-trained model which has not been fine-tuned on client data can recover sentences with an average ROUGE-L score of 0.41, indicating that prior knowledge encoded in pre-trained models may help recover sentences. When the model is fine-tuned on Wikitex-103, the average score increases to 0.53 - an almost 30% increase. Our results suggest that leveraging the memorization in the model yields a more powerful attack than only using the language prior encoded in the pre-trained model. We note that we would expect stronger attack performance (especially for smaller training epochs) when attacking larger-capacity models, as stronger models can memorize training instances easily. We report more results for $t = 0$ with different batch sizes in Table 8 in Appendix C.3.

Pre-trained vs randomly-initialized models. We additionally compare the attack performance for language-model that starts from a pre-trained model (GPT-2 in our case) and a randomly-initialized model (we still use the same GPT-2 architecture but re-initialize all the weights randomly). As shown in Figure 4, we find that models which are fine-tuned are more susceptible to attacks than a model which is trained from scratch. However, the difference in performance gradually decreases as the number of iterations increases.

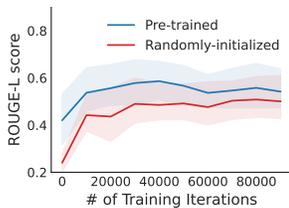


Figure 4: Attack performance with different training iterations t for a pre-trained model or a randomly-initialized model (batch size = 1).

t	The recovered sentence
0	The, short for short-tail stingray at night during night day during day at day night at
10,000	The stingray forages for food at night both at both during food food short-ages at short food
20,000	The short@-@tail stingray forages for food during the day and for the night.
40,000	The short@-@tail stingray forages for food both at night and during the day.

Table 2: An illustration of the recovered sentence with different training iterations t (batch size = 1) with a pre-trained model. Text in green represents the phrases and words that are recovered successfully. Our attack recovers better sentences when t increases. See Appendix C.4 for results with a randomly-initialized model.

Recovering multiple sentences by iterative attack. We further investigate a variant of our attack where we repeat the beam search for multiple repetitions; For each repetition applying an n -gram penalty based on the results of previous generations. We consider a sentence to have strong leakage if the longest recovered subsequence is more than 30% of the original sentence (i.e. ROUGE-L score greater than 0.3). Table 3 shows a qualitative example of this iterative process.

Beam search iter	Original Sentence	Recovered Sentence
1st	In 1988 it was made into a feature film Katinka, directed by Max von Sydow, starring Tammi Øst as Katinka.	After the end of the year, the film was made into a feature film, and it was directed by Max von Sydow and published by Warner Bros.
2nd	He was killed in a mysterious plane crash on 29 March 1959, while en route to Bangui.	Fox, in an attempt to put an end to the fire, was killed in a plane crash while en route to Guadacanal, Puerto Rico, on April 6, 2015, while on a
10th	The next year, Edwards published a significant treatise entitled Bibliographic Catalogue of the Described Transformation of North American Lepidoptera.	He had also published a treatise on it, published in 1959, entitled Bibliographic Catalogue of 1.

Table 3: Qualitative results for multi-sentence recovery for a batchsize of 16. The multi-sentence attack is able to recover significant portions of multiple sentences in a single batch.

Table 4 shows that for a batch size of 16, an attacker who performs 100 repetitions of beam search is able to recover roughly 34% of the original batch (roughly 5 sentences) with ROUGE-L score over 0.25 (recall). However, since 100 repetitions results in 100 different generated sentences, an attacker would still need a method that picks good recoveries out of them¹⁰. We estimate the difficulty of choosing good sentences by using the ratio of good sentences to total generated sentences (precision).

Iterations	Recall	Precision
1	0.03 ± 0.03	0.50 ± 0.51
5	0.13 ± 0.08	0.36 ± 0.22
10	0.19 ± 0.11	0.28 ± 0.16
20	0.25 ± 0.12	0.21 ± 0.11
50	0.30 ± 0.11	0.12 ± 0.04
100	0.34 ± 0.09	0.07 ± 0.02

Table 4: Performance of our attack when recovering multiple sentences in a batch of size 16 using repeated iterations of our attack. We measure the Recall (% of original batch with ROUGE-L > 0.25) and Precision (% of recovered sentences out of all iterations which have ROUGE-L > 0.25).

6 Analysis

We finally discuss the impact of different parameters of our FILM attack in Figure 5 and 6. We also study the effect of different training parameters and present the results in Appendix C.5.

¹⁰In our experiments we use ROUGE-L score, but an attacker in a realistic scenario would not have access to this information.

Beam size. As discussed in Section 4.3, beam size (denoted by k) is a hyper-parameter of beam search which controls the number of beams active at any time. As shown in Figure 5 (left), our results show that the attack performance grows as the beam size is increased. This result aligns with our intuition using a larger beam size corresponds with consideration of more sentences during search. Considering that the computational resources required for the attack also increases with a larger beam size, we find that a beam size of around 32 achieves the best trade-off in terms of attack performance and efficiency.

N-gram penalty. The n -gram penalty controls for what size of n -gram the penalty is applied. In Figure 5 (right), we observe that having no penalty performs significantly worse than applying a penalty on repeated 2-grams. We note that performance for $n = 2$ (i.e., penalizing repeated 2-grams) is the closest to the “oracle” case, where the frequency of each word is known from the bag of words.

Gradient norm’s coefficient β in prior-based scoring. As discussed in Section 4.4, the prior-based token recording for a sentence \mathbf{x} uses a scoring function $\mathcal{S}(\mathbf{x}) = \text{Perplexity}(\mathbf{x}) + \beta \cdot \text{Gradient Norm}(\mathbf{x})$, where β is a hyper-parameter that controls the importance of the gradient norm term. Our results (see Figure 6 (left)) show that the fine-tuning stage achieves a trade-off between fully perplexity-guided (i.e., $\beta = 0$) and almost fully gradient norm-guided (i.e., $\beta = 50$), with $\beta = 1$ being the optimal. The trend is consistent across different batch sizes.

We also notice that the improvement in the token reordering stage is most significant for small batch sizes (see Figure 6 (right)). This is probably because that the beam search result for smaller batch sizes is usually closer to its corresponding ground truth sentence than for larger batch sizes, which increases the chance of being further improved by fine-tuning.

7 Discussion and Future Work

This paper presents the first attack that can recover sentences from gradients in federated learning of language models. Our method FILM works well with modern neural language models based on Transformers and large batch sizes (up to 128)—raising serious privacy-leakage concerns for federated learning in real-world scenarios. The key insight of our study is that instead of treating reconstructing text data as an optimization problem, an adversary can gain substantial power to reconstruct sentences by taking advantage of the knowledge encoded in trained language models.

The results presented in this paper have several limitations. First, we haven’t evaluated whether our attack can generalize to other natural language processing tasks, such as sentence classification. We haven’t tried our attack for batch sizes beyond 128 and our ablation study does not report results for batch sizes beyond 16.

Third, we haven’t evaluated how existing defenses work in terms of preventing our attack. We additionally leave open the question of selecting good sentences in the multi-sentence recovery scenario (Section 5.2).

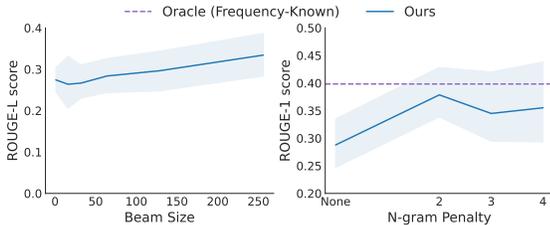


Figure 5: The effect of beam search configurations on our attack, including the beam size and the n -gram penalty. Recovery quality generally improves with larger beam sizes. We additionally note that an n -gram penalty with $n = 2$ performs the best.

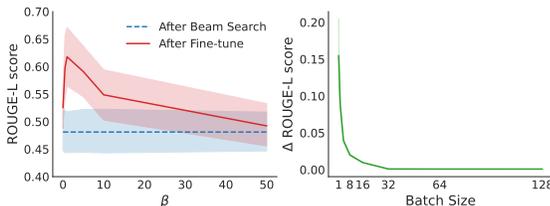


Figure 6: The effect of gradient norm coefficient β in the fine-tuning stage (see Section 4.4) with batch size of 1 (left), and the improvement of ROUGE-L score after fine-tuning for different batch sizes (right). We evaluate on the WikiText-103 dataset.

References

- Abadi, M., Chu, A., Goodfellow, I., McMahan, H. B., Mironov, I., Talwar, K., and Zhang, L. Deep learning with differential privacy. In *ACM SIGSAC Conference on Computer and Communications Security (CCS)*, 2016.
- Alsentzer, E., Murphy, J. R., Boag, W., Weng, W.-H., Jin, D., Naumann, T., and McDermott, M. Publicly available clinical BERT embeddings. *arXiv preprint arXiv:1904.03323*, 2019.
- Arpit, D., Jastrzebski, S., Ballas, N., Krueger, D., Bengio, E., Kanwal, M. S., Maharaj, T., Fischer, A., Courville, A., Bengio, Y., et al. A closer look at memorization in deep networks. In *International Conference on Machine Learning (ICML)*, 2017.
- Bender, E. M., Gebru, T., McMillan-Major, A., and Shmitchell, S. On the Dangers of Stochastic Parrots: Can Language Models Be Too Big? In *Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency*, Virtual Event Canada, 2021. ACM.
- Boenisch, F., Dziedzic, A., Schuster, R., Shamsabadi, A. S., Shumailov, I., and Papernot, N. When the curious abandon honesty: Federated learning is not private. *arXiv preprint arXiv:2112.02918*, 2021.
- Bonawitz, K. A., Ivanov, V., Kreuter, B., Marcedone, A., McMahan, H. B., Patel, S., Ramage, D., Segal, A., and Seth, K. Practical secure aggregation for federated learning on user-held data. In *NIPS Workshop on Private Multi-Party Machine Learning*, 2016.
- Brown, T. B., Mann, B., Ryder, N., Subbiah, M., Kaplan, J., Dhariwal, P., Neelakantan, A., Shyam, P., Sastry, G., Askell, A., et al. Language models are few-shot learners. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- Carlini, N., Liu, C., Erlingsson, Ú., Kos, J., and Song, D. The secret sharer: Evaluating and testing unintended memorization in neural networks. In *28th USENIX Security Symposium (USENIX Security 19)*, 2019.
- Carlini, N., Tramer, F., Wallace, E., Jagielski, M., Herbert-Voss, A., Lee, K., Roberts, A., Brown, T., Song, D., Erlingsson, U., et al. Extracting training data from large language models. In *30th USENIX Security Symposium (USENIX Security 21)*, 2021.
- Cho, K., van Merriënboer, B., Bahdanau, D., and Bengio, Y. On the properties of neural machine translation: Encoder–decoder approaches. In *Proceedings of SSST-8, Eighth Workshop on Syntax, Semantics and Structure in Statistical Translation*, pp. 103–111, 2014.
- Deng, J., Wang, Y., Li, J., Wang, C., Shang, C., Liu, H., Rajasekaran, S., and Ding, C. Tag: Gradient attack on transformer-based language models. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pp. 3600–3610, 2021.
- Devlin, J., Chang, M.-W., Lee, K., and Toutanova, K. BERT: Pre-training of deep bidirectional transformers for language understanding. In *North American Chapter of the Association for Computational Linguistics (NAACL)*, 2019.
- Dimitrov, D. I., Balunović, M., Jovanović, N., and Vechev, M. Lamp: Extracting text from gradients with language model priors. *arXiv preprint arXiv:2202.08827*, 2022.
- Fowl, L., Geiping, J., Reich, S., Wen, Y., Czaja, W., Goldblum, M., and Goldstein, T. Decepticons: Corrupted transformers breach privacy in federated learning for language models. *arXiv preprint arXiv:2201.12675*, 2022.
- Geiping, J., Bauermeister, H., Dröge, H., and Moeller, M. Inverting gradients—how easy is it to break privacy in federated learning? In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- Hard, A., Rao, K., Mathews, R., Ramaswamy, S., Beaufays, F., Augenstein, S., Eichner, H., Kiddon, C., and Ramage, D. Federated learning for mobile keyboard prediction. *arXiv preprint arXiv:1811.03604*, 2018.

- Hochreiter, S. and Schmidhuber, J. Long short-term memory. *Neural computation*, 9(8):1735–1780, 1997.
- Holtzman, A., Buys, J., Du, L., Forbes, M., and Choi, Y. The curious case of neural text degeneration. In *International Conference on Learning Representations (ICLR)*, 2020.
- Honnibal, M. and Montani, I. spaCy 2: Natural language understanding with Bloom embeddings, convolutional neural networks and incremental parsing. 2017.
- Huang, K., Altosaar, J., and Ranganath, R. ClinicalBERT: Modeling clinical notes and predicting hospital readmission. *arXiv preprint arXiv:1904.05342*, 2019.
- Huang, Y., Song, Z., Chen, D., Li, K., and Arora, S. TextHide: Tackling data privacy in language understanding tasks. In *Findings of EMNLP*, 2020a.
- Huang, Y., Song, Z., Li, K., and Arora, S. InstaHide: Instance-hiding schemes for private distributed learning. In *International Conference on Machine Learning (ICML)*, 2020b.
- Huang, Y., Gupta, S., Song, Z., Li, K., and Arora, S. Evaluating gradient inversion attacks and defenses in federated learning. *Advances in Neural Information Processing Systems (NeurIPS)*, 34, 2021.
- Jeon, J., Lee, K., Oh, S., Ok, J., et al. Gradient inversion with generative image prior. In *Advances in Neural Information Processing Systems (NeurIPS)*, volume 34, 2021.
- Jin, X., Chen, P.-Y., Hsu, C.-Y., Yu, C.-M., and Chen, T. Catastrophic data leakage in vertical federated learning. In *Advances in Neural Information Processing Systems (NeurIPS)*, volume 34, 2021.
- Kingma, D. P. and Ba, J. Adam: A method for stochastic optimization. In *International Conference on Learning Representations (ICLR)*, 2015.
- Klimt, B. and Yang, Y. The enron corpus: A new dataset for email classification research. In *European Conference on Machine Learning*. Springer, 2004.
- Kraljevic, Z., Shek, A., Bean, D., Bendayan, R., Teo, J., and Dobson, R. MedGPT: Medical concept prediction from clinical narratives. *arXiv preprint arXiv:2107.03134*, 2021.
- Li, T., Sahu, A. K., Talwalkar, A., and Smith, V. Federated learning: Challenges, methods, and future directions. *IEEE Signal Processing Magazine*, 37(3):50–60, 2020a.
- Li, X., Tramer, F., Liang, P., and Hashimoto, T. Large language models can be strong differentially private learners. *arXiv preprint arXiv:2110.05679*, 2021.
- Li, Y., Rao, S., Solares, J. R. A., Hassaine, A., Ramakrishnan, R., Canoy, D., Zhu, Y., Rahimi, K., and Salimi-Khorshidi, G. BEHRT: transformer for electronic health records. *Scientific reports*, 10(1):1–12, 2020b.
- Lin, C.-Y. ROUGE: A package for automatic evaluation of summaries. In *Text Summarization Branches Out*, pp. 74–81, July 2004.
- Liu, D. and Miller, T. Federated pretraining and fine tuning of BERT using clinical notes from multiple silos. *arXiv preprint arXiv:2002.08562*, 2020.
- Malkin, N., Lanka, S., Goel, P., and Jovic, N. Studying word order through iterative shuffling. In *Empirical Methods in Natural Language Processing (EMNLP)*, pp. 10351–10366, 2021.
- McMahan, H. B., Moore, E., Ramage, D., Hampson, S., et al. Communication-efficient learning of deep networks from decentralized data. In *Artificial Intelligence and Statistics (AISTATS)*, pp. 1273–1282, 2017.
- Melis, L., Song, C., De Cristofaro, E., and Shmatikov, V. Exploiting unintended feature leakage in collaborative learning. In *2019 IEEE Symposium on Security and Privacy (SP)*, pp. 691–706. IEEE, 2019.

- Merity, S., Xiong, C., Bradbury, J., and Socher, R. Pointer sentinel mixture models. In *International Conference on Learning Representations (ICLR)*, 2017.
- Mikolov, T., Karafiát, M., Burget, L., Cernocký, J., and Khudanpur, S. Recurrent neural network based language model. In *Annual Conference of the International Speech Communication Association (INTERSPEECH)*, volume 2, pp. 1045–1048. Makuhari, 2010.
- Phong, L. T., Aono, Y., Hayashi, T., Wang, L., and Moriai, S. Privacy-preserving deep learning via additively homomorphic encryption. *IEEE Transactions on Information Forensics and Security*, 2018.
- Radford, A., Narasimhan, K., Salimans, T., and Sutskever, I. Improving language understanding by generative pre-training. Technical report, OpenAI, 2018.
- Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., Sutskever, I., et al. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9, 2019.
- Reddy, D. R. et al. Speech understanding systems: A summary of results of the five-year research effort. *Department of Computer Science. Carnegie-Mell University, Pittsburgh, PA*, 17:138, 1977.
- Russell, S. and Norvig, P. *Artificial Intelligence: A Modern Approach*. Prentice Hall, 3 edition, 2010.
- Sennrich, R., Haddow, B., and Birch, A. Neural machine translation of rare words with subword units. In *Association for Computational Linguistics (ACL)*, pp. 1715–1725, 2016.
- Song, C. and Raghunathan, A. Information leakage in embedding models. In *ACM SIGSAC Conference on Computer and Communications Security (CCS)*, 2020.
- Thakkar, O., Ramaswamy, S., Mathews, R., and Beaufays, F. Understanding unintended memorization in federated learning. In *Proceedings of the Third Workshop on Privacy in Natural Language Processing*, pp. 1–10, 2021.
- Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., Kaiser, Ł., and Polosukhin, I. Attention is all you need. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2017.
- Yin, H., Mallya, A., Vahdat, A., Alvarez, J. M., Kautz, J., and Molchanov, P. See through gradients: Image batch recovery via gradinversion. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2021.
- Yu, D., Naik, S., Backurs, A., Gopi, S., Inan, H. A., Kamath, G., Kulkarni, J., Lee, Y. T., Manoel, A., Wutschitz, L., et al. Differentially private fine-tuning of language models. *arXiv preprint arXiv:2110.06500*, 2021.
- Zanella-Béguelin, S., Wutschitz, L., Tople, S., Rühle, V., Paverd, A., Ohrimenko, O., Köpf, B., and Brockschmidt, M. Analyzing information leakage of updates to natural language models. In *ACM SIGSAC Conference on Computer and Communications Security (CCS)*, 2020.
- Zhang, H., Cisse, M., Dauphin, Y. N., and Lopez-Paz, D. mixup: Beyond empirical risk minimization. In *International Conference on Learning Representations (ICLR)*, 2018.
- Zhao, B., Mopuri, K. R., and Bilen, H. iDLG: Improved deep leakage from gradients. *arXiv preprint arXiv:2001.02610*, 2020.
- Zhu, J. and Blaschko, M. B. R-gap: Recursive gradient attack on privacy. In *International Conference on Learning Representations (ICLR)*, 2021.
- Zhu, L., Liu, Z., and Han, S. Deep leakage from gradients. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2019.

A Defense Methods

Cryptographic approaches such as encrypting gradients (Bonawitz et al., 2016) or encrypting the data and model (Phong et al., 2018) can guarantee secure training in a federated learning setting against gradient inversion attacks, however, their costs and special setup requirements are too significant to be practical. A few efficient methods proposed to defend gradient inversion attacks are for text data. Zhu et al. (2019) mention briefly adding differentially private noise to the gradients (Abadi et al., 2016), or setting gradients of small magnitudes to zero (i.e., gradient pruning), but these defenses typically hurt the accuracy of the trained models (Li et al., 2021; Yu et al., 2021). Huang et al. (2020b) propose InstaHide that encodes each input training image to the neural network using a random pixel-wise mask and the MixUp data augmentation (Zhang et al., 2018). Later, the idea of InstaHide is extended to language understanding tasks (Huang et al., 2020a): instead of ‘hiding’ the input word embeddings, they perform MixUp on [CLS] tokens of the BERT (Devlin et al., 2019) model. However, the question of what method can defend the proposed attack in this paper remains open.

B Beam Search Algorithm

Algorithm 1 demonstrates the step-by-step operations of our beam search algorithm (see Section 4.3).

Algorithm 1: Beam search to order words

Input : Bag of words $B = \{w_1, \dots, w_m\}$,
A maximum sentence length L , beam size k ,
A set of z possible prompts $P = \{p_1, \dots, p_z\}$,
Distribution defined by the trained language model \mathbb{P}_{θ^t} ,
 n -gram count function R_n with associated penalty ρ ,
Output : $g * k$ sentences consisting of words in B

```
1  $\pi^1 \leftarrow P$  for  $i \in [L]$  do
2    $\pi^{i+1} \leftarrow \emptyset$ 
3   foreach ( $beam, word$ ) in  $\pi^i \times B$  do
4      $\pi^{i+1} \leftarrow \pi^{i+1} \cup \{\text{CONCAT}(beam, word)\}$ 
5   end
6    $\pi^{i+1} \leftarrow \text{TOP}(\pi^{i+1}, k, f_{\theta^t})$ 
7 end
8 return  $\pi^L$ ;
```

1 **Procedure** $\text{Top}(\pi, k, \mathbb{P}_{\theta^t})$:
2 $\text{SCORES} \leftarrow \emptyset$
3 $\text{SCORES} \leftarrow \text{SCORES} \cup \log \mathbb{P}_{\theta^t}(beam) - \rho R_n(beam)$
4 **return** *Top k elements of π ordered by SCORES*

C Experimental Details and More Results

C.1 More Results of Zhu et al. (2019)

Table 5 shows the attack results of Zhu et al. (2019) with different batch sizes. Their gradient-matching optimization fails to recover sentences with different batch sizes. We also find that Zhu et al. (2019) seems sensitive to the initialization. Table 6 shows the attacking results with different initialization. We find that only when the initialization is very close to the original sentence (i.e., one- or two-word different), the attack can recover sentences successfully.

Batch Size b	Original sentence	Best Reconstructed sentence
$b = 1$	As Elizabeth Hoiem explains, "The most English of all Englishmen, then, is both king and slave, in many ways indistinguishable from Stephen Black.	thelesshovahrued theAsWords reporting the Youngerselagebalance, mathemat mathemat mathemat reper arrangpmwikiIndia Bowen perspectoulos subur, maximal
$b = 2$	As Elizabeth Hoiem explains, "The most English of all Englishmen, then, is both king and slave, in many ways indistinguishable from Stephen Black.	addons, Rosesineries,-, princ,soDeliveryDate Aires gazed,.ropolitan glim eventscefff Americans hereditary vanishing traged defic mathematenegger levied mosquodan: antioxid mathematetheless Wh
$b = 4$	The expressway progresses northward from the on-ramp, crossing over Waverly Avenue and passing the first guide sign for exit 2(NY 27), about 0@.	Thebridsptoms Rainbow. plotted the Gleaming,.scrutlocked and.. apex llularetheless Emailoen the explan challeng. treatedFormer pieces government
$b = 8$	Hagen believes that despite the signifying that occurs in many of Angelou’s poems, the themes and topics are universal enough that all readers would understand and appreciate them.	of,arning plaint sacrific Protestant the..Medical litleisha.isky,wallve ointed way skeletodor aestory-democratic. enclaveiHUDThe repetitionTrivia useful

Table 5: Reconstruction performance of (Zhu et al., 2019)’s attack with different batch sizes. For each batch size, we show the best-case reconstructed sentence across 10 evaluated batches measured by the BLEURT score.

Initialization	Reconstructed sentence
He at ordered the construction of Fort Oswego at the mouth of the Oswego River.	He consequently ordered the construction of Fort Oswego at the mouth of the Oswego River.
He fly ordered the construction of Fort Os contributionsgo at the halls Oath the Oswego River.	He hower consequently the construction of interstitial ranchry the mathemat Adinemort Fort Os annot mathema
itaire smash Full Mongo Highly C sphere Commodore inter-mediate report subjug WROf Anti Samueldet backward sec Kill manufacturer	thelesstheless mathematMod Loaderastedperty perpendkellerDragonMagazine horizont mathematoperative pediatricsoDeliveryDatesoDeliveryDate mathemat mathemat manufacturer

Table 6: Reconstruction performance of Zhu et al. (2019)’s attack with different initialization. The original sentence is “He consequently ordered the construction of Fort Oswego at the mouth of the Oswego River.”. Text in **green** represents the words that are recovered successfully.

C.2 Quantitative Results for Different Batch Sizes

Table 7 shows all four metrics for the attack results with different batch sizes.

Batch Size	ROUGE-1	ROUGE-2	ROUGE-L	NERR
WikiText-103				
1	0.74 ± 0.12 (1.00)	0.44 ± 0.19 (1.00)	0.54 ± 0.14 (1.00)	0.28 ± 0.35 (1.00)
16	0.38 ± 0.08 (0.61)	0.16 ± 0.10 (0.44)	0.27 ± 0.08 (0.47)	0.26 ± 0.25 (1.00)
64	0.34 ± 0.06 (0.52)	0.14 ± 0.06 (0.30)	0.26 ± 0.05 (0.40)	0.36 ± 0.19 (0.67)
128	0.37 ± 0.04 (0.50)	0.14 ± 0.05 (0.24)	0.29 ± 0.06 (0.50)	0.28 ± 0.19 (0.50)
Enron Email				
1	0.73 ± 0.21 (1.00)	0.45 ± 0.29 (1.00)	0.61 ± 0.24 (1.00)	0.34 ± 0.45 (1.00)
16	0.41 ± 0.09 (0.81)	0.20 ± 0.12 (0.74)	0.31 ± 0.10 (0.81)	0.40 ± 0.31 (1.00)
64	0.37 ± 0.08 (0.74)	0.18 ± 0.10 (0.70)	0.29 ± 0.10 (0.74)	0.35 ± 0.26 (1.00)
128	0.37 ± 0.07 (0.72)	0.19 ± 0.10 (0.68)	0.29 ± 0.09 (0.72)	0.38 ± 0.31 (1.00)

Table 7: Reconstruction performance for various batch sizes on WikiText-103 and the Enron Email dataset. The table reports the average metric values of reconstructions out of 20 tested mini-batches with the standard deviation; the best results are shown in parenthesis.

C.3 More Results For $t = 0$

Table 8 provides more examples for running our attack on a pre-trained language model (i.e. without any training with private data) with different batch sizes. The attack is relatively weak in this scenario, showing that leveraging the memorization in the model give a much more powerful attack than only using the language prior encoded in the pre-trained model.

Batch Size b	Original sentence	Best Reconstructed sentence
$b = 1$	Though Chance only batted.154 in the 1907 World Series, the Cubs defeated the Tigers in four games.	Though in the World Series , the Cubs defeated the Tigers in four games .
$b = 2$	I thought if I did the animation well, it would be worth it, but you know what?	I, you know , I know what I did , but I thought , well, what would it be if you did it?
$b = 4$	In 1988 it was made into a feature film Katinka, directed by Max von Sydow, starring Tammi Øst as Katinka.	Since it was made into a film starring Max von Sydow as Tammi von T.
$b = 8$	I thought if I did the animation well, it would be worth it, but you know what?	By the time I did it, I thought , well, you know , what's the point of it?

Table 8: Reconstruction performance of our attack when $t = 0$ with different batch sizes. For each batch size, we show the best-case reconstructed sentence across 10 evaluated batches measured by the ROUGE score. Text in **green** represents the words that are recovered successfully.

C.4 Qualitative Results with Randomly Initialized Models

Table 9 presents attack results at different training iterations of a randomly initialized model. Similar to our findings in Section 5, FILM recovers better sentences when t increases, while the overall attack quality is lower than the results with a pre-trained model (see Table 2).

t	The recovered sentence
0	The' the the at at night night.
10,000	The short@-@ray for the day and at the night for both the and the for@
20,000	The at@-@ray for the night at the and at night the day and the for@
40,000	The@-@ray for the day during both.
80,000	The @-@tail stingray forages for food for both for short foodages both both food.

Table 9: An illustration of the recovered sentence with different training iterations t (batch size = 1) with a randomly initialized model. Text in **green** represents the phrases and words that are recovered successfully. Our attack recovers better sentences when t increases. However, the overall attack quality is lower than the results with a pre-trained model (see Table 2).

C.5 Ablation Study for Training Configurations

We also perform an ablation study on WikiText-103 to investigate how the attack scales with different training parameters, including the size of the training dataset and the initial learning rate.

Larger training set sizes are not harder to attack. It was believed that training with large training sets helps avoid over-fitting and generalizes better as it captures the inherent data distribution more effectively, while training with small datasets may result in the model memorizing the training set (Arpit et al., 2017)—which in our case, may yield a better attack performance. However, our experiments suggest that larger training set sizes are *not* any more difficult to attack than smaller training sets. As shown in Figure 7.a, the attack performance is quite similar across different evaluated training set sizes, from 5,000 examples to 200,000.

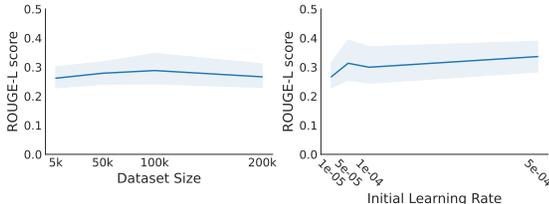


Figure 7: Performance of our attack under different training configurations for the WikiText-103 dataset, including the size of the training dataset (a) and the initial learning rate (b). We note that the recovery quality slightly improves with larger initial learning rates. Surprisingly, the recovery quality is flat across different dataset sizes.

Larger initial learning rate is more vulnerable to attack. We also show how the attack performs with with different initial learning rates by varying the initial learning in $\{1 \times 10^{-5}, 5 \times 10^{-5}, 1 \times 10^{-4}, 5 \times 10^{-4}\}$ while fixing the batch size $b = 16$ and dataset size $N = 200,000$. As we apply early stopping during training, none of the models we test were overfit. As shown in Figure 7.b, as the initial learning rate increases, our attack is able to achieve slightly higher ROUGE scores.

Table 10 presents the attack results recovered under different initial learning rates. We find that as the initial learning rate increases, our attack is able to successfully reconstruct more components of the training sentence despite similar final training and testing perplexity.

Initial LR	Train/Test Perplexity	Original Sentence	Reconstructed Sentence
$1e - 5$	7.60/11.11	A tropical wave organized into a distinct area of disturbed weather just south of the Mexican port of Manzanillo, Colima, on August 22 and gradually moved to the northwest.	Early on September 22, an area of disturbed weather organized into a tropical wave, which moved to the northwest of the area, and then moved into the north and south@-to the northeast.
$5e - 5$	6.05/11.56	A tropical wave organized into a distinct area of disturbed weather just south of the Mexican port of Manzanillo, Colima, on August 22 and gradually moved to the northwest.	Early on September 22, a tropical wave moved into the area, which organized into an area of disturbed weather just south of the Mexican port of Manzanillo, and moved to the south@-@
$1e - 4$	6.03/12.21	Kristina Lennox@-@Silva also represented Puerto Rico as a female swimmer in the 400 meters freestyle.	Kristina Lennox@-@Silva also represented Puerto Rico as a female swimmer in the 400 meters freestyle at the 2015 Miss New Japan Pro Wrestling Tag Team Championship, and represented Japan at
$5e - 4$	6.87/10.95	I thought if I did the animation well, it would be worth it, but you know what?	I thought it would be worth it if I said I did it to you and you know what you did.

Table 10: An illustration of the reconstructed sentence with different initial learning rate (batch size $b = 16$); All models are trained using early stopping. Text in green represents the phrases and words that are recovered successfully. Our attack seems to give better performance with a larger initial learning rate.

C.6 Justification for the Scoring Function in the Reordering Stage

As discussed in Section 4.4, our scoring function consists of a gradient norm term and a perplexity term (see Eq.4). This design is mainly motivated by the observation that sentences in the training corpus usually have lower perplexity scores and lower gradient norms on the trained language model, compared with their slightly altered versions.

To demonstrate this, we randomly pick the 5 following sentences from the training corpus:

- “Significant increases in sales worldwide were reported by Billboard in the month of his death.”;
- “The office has subsequently been held by one of the knights, though not necessarily the most senior.”;
- “In 1999, several Russian sources reported that Laika had died when the cabin overheated on the fourth orbit.”;
- “Officials advised 95@,@000 citizens along the New Jersey coastline, an area that rarely experiences hurricanes, to evacuate.”;
- “It later won a 2014 Apple Design Award and was named Apple’s best iPhone game of 2014.”;

For each original sentence, we generate its slightly altered versions which performs *one* of the following three operations (we generate 10 sentences for each operation):

- **Swap** two randomly selected tokens in the original sentence;
- **Delete** a randomly selected token from the original sentence;
- **Insert** a token (randomly selected from the bag of tokens of the original sentence) into a random position of the original sentence.

As shown in Figure 8, original sentences usually have lower gradient norm and perplexity score than their corresponding slightly altered versions.

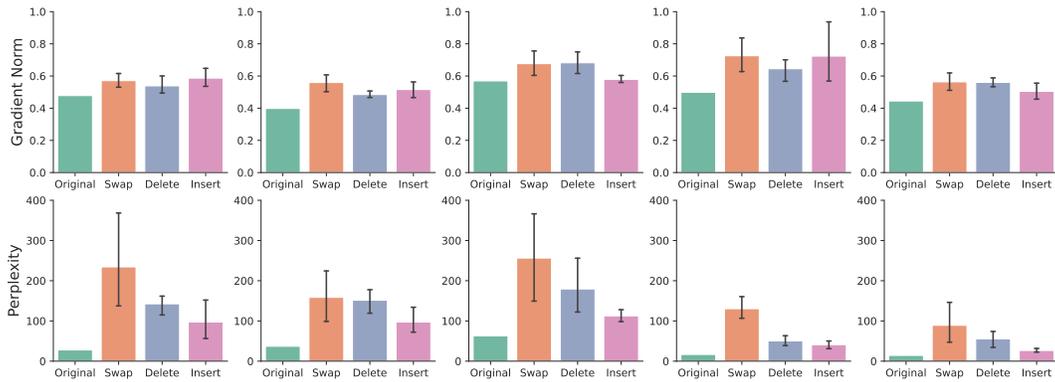


Figure 8: Gradient norm (the first row) and perplexity (the second row) for 5 original sentences and their corresponding slightly altered sentences (by swapping, deletion or insertion) on the trained language model. Original sentences usually have lower gradient norm and perplexity.