

A Boosting Algorithm for Positive-Unlabeled Learning

Yawen Zhao, Mingzhe Zhang, Chenhao Zhang, Tony Chen, Nan Ye, and Miao Xu

The University of Queensland,
{yawen.zhao,mingzhe.zhang,chenhao.zhang,w.chen9,nan.ye,miao.xu}
@uq.edu.au

Ab

Positive-unlabeled (PU) learning deals with binary classification problems when only positive (P) and unlabeled (U) data are available. A lot of PU methods based on linear models and neural networks have been proposed; however, there still lacks study on how the theoretically sound boosting-style algorithms could work with P and U data. Considering that in some scenarios when neural networks cannot perform as good as boosting algorithms even with fully-supervised data, we propose a novel boosting algorithm for PU learning: Ada-PU, which compares against neural networks. Ada-PU follows the general procedure of AdaBoost while two different distributions of P data are maintained and updated. After a weak classifier is learned on the newly updated distribution, the corresponding combining weight for the final ensemble is estimated using only PU data. We demonstrated that with a smaller set of base classifiers, the proposed method is guaranteed to keep the theoretical properties of boosting algorithm. In experiments, we showed that Ada-PU outperforms neural networks on benchmark PU datasets. We also study a real-world dataset UNSW-NB15 in cyber security and demonstrated that Ada-PU has superior performance for malicious activities detection.

1 Introduction

For ordinary binary classification, both positive and negative labels need to be collected or annotated before the training phase. However, collecting all labels may be unrealistic in some real-world applications. For example, in disease diagnosis, we can easily collect data of confirmed patients provided by the doctors, but not for patients with mild or asymptomatic symptoms that have not been diagnosed yet [1]. In recommendation systems, items that users have viewed or bought are marked as “interest”, but it is not realistic to ask the users to point out all the products that they are not interested in. Such kind of problem in which only some reliable positive (P) data can be collected occurs in almost every aspect of our daily life, considering the high cost or even impossibility to accurately annotate all data.

To meet the realistic needs, positive-unlabeled (PU) learning [5, 4, 6] has been widely studied. Many PU methods have been proposed in recent years, where a binary classifier is trained with a few labelled positive data (P data) and sufficient unlabelled data (U data) which is a mixture of unlabelled positive and unlabelled negative data (N data). Because the labelled P data only composes a small proportion of all P data, PU learning is a challenging problem. Early works tried to identify N data from U data, then performed ordinary supervised (PN) learning [21, 20]. More recent works focus on re-weighting P data and U data, such as unbiased PU (uPU) [7] and non-negative PU (nnPU) [18]. Note that considering the data generation process [22], there are two different settings of PU learning: censored PU learning [10] and case-control PU learning [7]. In this paper, we consider the case-control PU learning as previous works [18].

Most of the state-of-the-art (SOTA) PU methods so far are based on neural networks [18, 3, 34]. Although these neural network (NN) based PU methods have been proved to be successful on benchmark data, NN may not be the best model in all classification tasks. Other sophisticated machine learning models are also powerful in practice when data are supervised. According to the 2021 Kaggle Data Science & Machine Learning Survey ¹, which contains 25,973 responses, boosting algorithms are more popular than neural networks due to their simplicity and superior performance. In many Kaggle competitions, SOTA boosting methods such as GBDT (Gradient Boosted Decision Trees) [13, 14, 16] and XGBoost (eXtreme Gradient Boosting) [2]

¹<https://www.kaggle.com/c/kaggle-survey-2021/overview>

achieve higher performance than neural networks on tabular data, which is formed by rows of data with the same number of features. As tabular data is one of the most classical and widely used data formats in machine learning applications, we expect boosting methods could also achieve superior performance with only P and U data. In addition, current neural network models usually require huge computational resources and a lot of efforts are spent on fine-tuning hyperparameters, making the training process further painful for novices. Motivated by these factors, this work will focus on proposing a boosting method for PU learning, due to lacking such studies.

Among boosting methods, AdaBoost (Adaptive Boost) [11, 12] is one of the most classic and famous boosting methods with great simplicity as well as good performance. It has a solid theoretical foundation based on the proof that weak classifiers which are slightly better than random guessing can be combined into a strong learner [32]. The principle of AdaBoost is to adjust the data distribution in each iteration and give more weights to examples wrongly predicted before. The rigorous derivation process and theoretical foundation of AdaBoost inspire us to follow the same principle of the AdaBoost framework in designing our boosting method for PU data. However, there remains three key challenge: i) how to update the data distribution of P and U data to get an optimal weak learner in each iteration without the labels of U data? ii) can the theoretical properties of boosting algorithm be kept in PU learning? iii) can the performance of a boosting-based PU algorithm be superior to neural network-based ones?

To address these challenges, in this paper, we propose Ada-PU. Following the same data generation process, we employ the same learning objective of uPU [7], in which the learning risk on PU data is consistent with the learning risk on PN data in ordinary classification. Based on such a learning objective, both the P data’s distribution and U data’s distribution are updated separately. In particular, two different distributions of P data are maintained and updated simultaneously in each iteration, assuming the groundtruth to be positive and negative. The error rate is estimated with P and U data to further form the combination weights of each base classifier. We show that in learning the base classifier, the non-negativity of risk needs to be considered in training to achieve a theoretical guarantee of the greedy optimization. Finally, experimental results have demonstrated the superiority of our proposed Ada-PU on both benchmark data and a concert task in the cyber security domain. Ablation studies on the necessity of designing the components of Ada-PU are also provided.

2 Formulation and Background

2.1 PU learning

Let $X \in \mathbb{R}^d$ and $Y \in \{+1, -1\}$ ($d \in \mathbb{N}^+$) be the input and output random variables. In PU learning, the training dataset X is composed of P data and U data. P data of size n_p are sampled from $P(x|Y = +1)$ and U data of size n_u are sampled from $P(x)$. $\pi_p = P(Y = +1)$ denotes the class prior probability, and $\pi_n = 1 - \pi_p$. Following the convention [18], we assume π_p as known throughout the paper. Based on the given P and U data, our objective is to learn a binary classifier $g : \mathbb{R}^d \rightarrow \{+1, -1\}$, let $\ell : \mathbb{R} \times \{+1, -1\} \rightarrow \mathbb{R}$ be a loss function, as $\ell(g(x), y)$ means the loss occurred when the classifier g outputs the prediction when the label of x is y . When both P and N data are available, the risk of the classifier g is

$$R(g) = \pi_p \mathbb{E}_{P(x|Y=+1)}[\ell(g(x), +1)] + \pi_n \mathbb{E}_{P(x|Y=-1)}[\ell(g(x), -1)].$$

In PU learning, without N data, we cannot estimate directly the

$$\mathbb{E}_{P(x|Y=-1)}[\ell(g(x), -1)].$$

However, since $\pi_n P(x|Y = -1) = P(x) - \pi_p P(x|Y = 1)$, we have [7, 8]

$$\begin{aligned} R_{pu}(g) &= \pi_p \mathbb{E}_{P(x|Y=+1)}[\ell(g(x), +1)] + \\ &(\mathbb{E}_{P(x)}[\ell(g(x), -1)] - \pi_p \mathbb{E}_{P(x|Y=+1)}[\ell(g(x), -1)]). \end{aligned}$$

Thus, we can approximate $R(g)$ indirectly by

$$\widehat{R}_{pu}(g) = \frac{\pi}{n_p} \sum_{x \in P} \ell(g(x), 1) + \frac{1}{n_u} \sum_{x \in U} \ell(g(x), -1) - \frac{\pi}{n_p} \sum_{x \in P} \ell(g(x), -1).$$

The above estimator is an unbiased risk estimator [7] that allows us to estimate the risk based on P and U data. Optimizing it gives the uPU [7] method. However, while using flexible model (such as deep neural networks) as base optimizer, overfitting appears. Therefore, a non-negative estimator [18] was used to address this problem, which is

$$\begin{aligned} \widehat{R}_{nnpu}(g) &= \frac{\pi}{n_p} \sum_{x \in P} \ell(g(x), +1) + \\ &\max \left(0, \frac{1}{n_u} \sum_{x \in U} \ell(g(x), -1) - \frac{\pi}{n_p} \sum_{x \in P} \ell(g(x), -1) \right), \end{aligned}$$

since in theory, $\pi_n \mathbb{E}_{P(x|Y=-1)}[\ell(g(x), -1)]$ as the risk should always be non-negative. nnPU is the state-of-the-art PU method as it addresses overfitting problem when a flexible model is applied to PU learning. Many new methods are proposed based on nnPU.

2.2 AdaBoost

Boosting is a kind of ensemble methods, which generates a set of base learners sequentially and combines them into a model to achieve strong performance. Boosting boosts “weak” learners into a “strong” learner. AdaBoost (adaptive boosting) is one of the most famous boosting algorithm [11, 12]. It generates a sequence of hypotheses $\{h_t(x) : t = 1, \dots, T\}$ and combines them with weights α_t . The final classifier is an additive weighted combination of the base learners generated, that is $H(x) = \text{sign}(\sum_{t=1}^T \alpha_t h_t(x))$. The process of AdaBoost algorithm is shown in the Appendix. The objective of AdaBoost is to generate a sequence of hypotheses $h_t(x)$ that could ideally correct the previous hypothesis $H_{t-1}(x)$. In each iteration t , AdaBoost updates the data distribution by improving misclassified data’s weights and decreasing correctly classified data’s weights. In particular, AdaBoost tries to minimize an exponential loss

$$R_{exp}(h) = \mathbb{E}_{(x,y)}[e^{-yh(x)}] \quad (1)$$

in each round when a new hypothesis h is generated. Let H denotes the weighted combination of the hypotheses we have already achieved in the previous $(t - 1)$ rounds and h denotes the new hypothesis we generate in the current round, the exponential loss will be

$$R_{exp}(H + \alpha h) = \mathbb{E}_{(x,y)}[e^{(-y(H(x) + \alpha h(x)))}] \quad (2)$$

Denoting $\epsilon = \mathbb{E}_{x \sim \mathcal{D}}[y \neq h(x)]$, we can get the weight α that greedily minimizes the risk as

$$\alpha = \frac{1}{2} \ln \frac{1 - P(y \neq h(x)|x)}{P(y \neq h(x)|x)} = \frac{1}{2} \ln \frac{1 - \epsilon}{\epsilon}.$$

If we fix $\alpha = 1$ and expand Eq (2), we can get

$$R_{exp}(H + h|x) = \mathbb{E}_y[e^{-yH(x)}(1 - yh(x) + 1/2|x)].$$

which is further minimized by

$$h^*(x) = \arg \max_h \mathbb{E}_y[e^{-yH(x)}yh(x)|x],$$

which is equal to training a classifier h when data is under the distribution $\mathcal{D}_t(x) = e^{yH(x)}P(y|x)$. Therefore, the distribution is updated continuously in each iteration as

$$\mathcal{D}_{(t+1)}(x) = e^{y(H(x)+\alpha h(x))}P(y|x) = \mathcal{D}_t(x) \cdot e^{-\alpha y h(x)}.$$

AdaBoost and many of its variants are applied widely in different fields, such as facial recognition [35, 36], financial fraud detection [30] and cyber security [33].

As far as we know, there was only one existing work that combined a boosting-style method and PU learning together for anomaly detection [38]. Instead of directly learning from PU data, this paper proposed heuristically selecting samples that are most likely to be negative; then the boosting framework is applied to such self-annotated data. Due to the lacking of consistency analysis in the learning objective and the heuristical self-learning process, the proposed fails to design a new model to directly learn from PU data. It also fails to bear the theoretical soundness as our proposal.

3 Proposed method: Ada-PU

The same as AdaBoost, our proposed Ada-PU needs to solve two key problems, one of which is generating the weighted hypotheses, and the other one is updating the data distribution. In PU learning, we do not know fully the label of each instance, so it is impossible for us to know the point-wise loss. Instead we could estimate the loss on a group of data points, even if they are not fully labeled.

3.1 Estimation of the combination weight

Note that even when only P and U data are available, the ultimately goal of learning is still to minimize the risk Eq. (2). To make this section self-consistent, we briefly summarize the procedure here.

Assume we are in iteration t , and a new hypothesis h has just been determined, with hypotheses $h_i, i \in 1, 2, \dots, t - 1$ and their weights α_i already known. We denote the weighted combination of previous $t - 1$ hypotheses as H , based on which the risk is denoted as

$$R_{exp}(H + \alpha h) = e^{-yH(x)}(e^{-\alpha} \cdot P(y = h(x)) + e^{\alpha} \cdot P(y \neq h(x))) \quad (3)$$

when using exponential loss as the surrogate loss. α that minimizes Eq. (3) is achieved when its derivation equals to zero, which gives

$$\alpha = \frac{1}{2} \ln \frac{P(y = h(x))}{P(y \neq h(x))} = \frac{1}{2} \ln \frac{1 - P(y \neq h(x))}{P(y \neq h(x))}. \quad (4)$$

Since we do not know the labels of all the data in PU learning, we need to estimate $P(y \neq h(x))$ based on P and U data

$$\begin{aligned} P(y \neq h(x)) &= P(y = 1, h(x) = -1) + P(y = -1, h(x) = 1) \\ &= \pi P(h(x) = -1|y = 1) + (1 - \pi)P(h(x) = 1|y = -1) \\ &= \pi \mathbb{E}_{x \sim p(x|y=1)}[\ell(h(x), +1)] + (1 - \pi) \mathbb{E}_{x \sim p(x|y=-1)}[\ell(h(x), -1)] \end{aligned}$$

where $\mathbb{E}_{x \sim p(x|y=1)}[\ell(h(x), +1)]$ can be estimated on P data. For $\mathbb{E}_{x \sim p(x|y=-1)}[\ell(h(x), -1)]$, since

$$\mathbb{E}_{x \sim p(x|y=-1)}[\ell(h(x), -1)] = \int_x \ell(h(x), -1)p(x|y = -1)dx$$

and

$$\pi p(x|y = 1) + (1 - \pi)p(x|y = -1) = p(x)$$

we have

$$\begin{aligned} &\mathbb{E}_{x \sim p(x|y=-1)}[\ell(h(x), -1)] \\ &= \frac{1}{1 - \pi} \mathbb{E}_{x \in U}[\ell(h(x), -1)] - \frac{\pi}{1 - \pi} \mathbb{E}_{x \in P}[\ell(h(x), -1)]. \end{aligned}$$

Thus

$$\begin{aligned} P(y \neq h(x)) &= \pi \mathbb{E}_{x \in P}[\ell(h(x), +1)] + \mathbb{E}_{x \in U}[\ell(h(x), -1)] \\ &\quad - \pi \mathbb{E}_{x \in P}[\ell(h(x), -1)] \end{aligned} \quad (5)$$

whose empirical estimation is

$$\begin{aligned} \widehat{P}_{PU}(y \neq h(x)) &= \frac{\pi}{n_p} \sum_{i=1}^{n_p} [\ell(h(x), +1)] + \\ &\quad \frac{1}{n_u} \sum_{i=1}^{n_u} [\ell(h(x), -1)] - \frac{\pi}{n_p} \sum_{i=1}^{n_p} [\ell(h(x), -1)]. \end{aligned} \quad (6)$$

Note that in the training phase of AdaBoost, the data distribution needs to be updated. In PU learning, we maintain two different kinds of P data

and one U data. Specially, we denote P data which are considered as positive data as P^+ , P data which are considered as negative data as P^- , and denote the data distribution in training round t to be $\mathcal{D}_t(i)$, we define

$$\mathcal{D}_0 = \begin{cases} \frac{\pi}{n_p}, & \text{for } x_i \in P^+ \\ \frac{1}{n_u}, & \text{for } x_i \in U^- \\ -\frac{\pi}{n_p}, & \text{for } x_i \in P^-. \end{cases} \quad (7)$$

In a training round, after we get the current hypothesis $h(\cdot)$ and the previous $t - 1$ iterations combined classifier H_{t-1} , we have

$$\begin{aligned} \hat{\epsilon}_t(P, U) = & \sum_{x_i \in P^+} [\mathcal{D}_0(i) \exp(-H_{t-1}(x_i)) \ell(h(x), +1)] + \\ & \sum_{x_i \in U} [\mathcal{D}_0(i) \exp(H_{t-1}(x_i)) \ell(h(x), -1)] + \\ & \sum_{x_i \in P^-} [\mathcal{D}_0(i) \exp(H_{t-1}(x_i)) \ell(h(x), -1)]. \end{aligned} \quad (8)$$

and

$$\alpha_{PU} = \frac{1}{2} \ln \frac{1 - \hat{\epsilon}_t(P, U)}{\hat{\epsilon}_t(P, U)} \quad (9)$$

The estimation of α_{PU} in Ada-PU has a similar form as the α in AdaBoost. However, since we do not have N data, we use P and U data to estimate $\hat{\epsilon}_t(P, U)$. The consistency of the estimation can be guaranteed as in previous works [28].

3.2 Updating the data distribution

In this part, we need to solve the second key problem, i.e., how to choose the optimal hypothesis and update the data distribution.

In PU learning, we do not know the label for each instance, which makes it difficult or even impossible to give the distribution for *every* instance. Instead, we can optimize some *population* loss without the exact annotation information on each instance. We omit the conditional dependence on x in the original derivation, which does not impact our learning objective.

We start from our objective, which is minimizing the exponential loss based risk Eq. (1). Since we already know α_t and H , we want to modify the

data distribution for the next iteration. Without losing of generalization, we fix $\alpha_t = 1$ and have

$$\begin{aligned}
R_{exp}(H + h_t) &= \mathbb{E}_{(x,y)}[e^{-y(H(x)+h_t(x))}] \\
&\approx \mathbb{E}_{(x,y)}[e^{-yH(x)}(1 - yh(x) + \frac{y^2h(x)^2}{2})] \\
&= \mathbb{E}_{(x,y)}[e^{-yH(x)}(1 - yh(x) + \frac{1}{2})] \\
&= \mathbb{E}_{(x,y)}[\frac{3}{2}e^{-yH(x)} - yh(x)e^{-yH(x)}] \tag{10}
\end{aligned}$$

Minimizing Eq. (10) is equivalent to maximizing $\mathbb{E}_{(x,y)}[e^{-yH(x)}yh(x)]$. Then

$$\begin{aligned}
\mathbb{E}_{(x,y)}[e^{-yH(x)}yh(x)] &= \int e^{-yH(x)}yh(x)p(x,y)dxdy \\
&= \int e^{-H(x)}h(x)_t p(x,y=1)dx \\
&\quad + \int -e^{H(x)}h_t(x)p(x,y=-1)dx \\
&= \pi \int e^{-H(x)}h(x)p(x|y=1)dx + \\
&\quad \pi \int e^{H(x)}h(x)p(x|y=1)dx - \int e^{H(x)}h(x)p(x)dx
\end{aligned}$$

whose empirical estimation is

$$\frac{\pi}{n_p} \sum_{i=1}^{n_p} e^{-H(x_i)}h(x_i) + \frac{\pi}{n_p} \sum_{i=1}^{n_p} e^{H(x_i)}h(x_i) - \frac{1}{n_u} \sum_{i=1}^{n_u} e^{H(x_i)}h(x_i). \tag{11}$$

Denote Eq. (11) as \mathcal{T} , P data which are considered as positive data as x_p^+ , P data which are considered as negative data as x_p^- , U data which are considered as negative data as x_u^- , then the optimal hypothesis is achieved through

$$\begin{aligned}
h^*(x) &= \arg \max_h \mathcal{T} = \arg \max_h [\pi \mathbb{E}_{x_p^+ \sim e^{-H(x)}} h(x) \\
&\quad + \pi \mathbb{E}_{x_p^- \sim e^{-H(x)}} h(x) - \mathbb{E}_{x_u^- \sim e^{-H(x)}} h(x)] \tag{12}
\end{aligned}$$

From Eq. (12), we can get when an optimal hypothesis h^* is learned with fixed α , the data distribution should be updated in the following way

- x_p^+ for the next round under the distribution $\mathcal{D}_{p(t+1)}^+(x) = \mathcal{D}_{p(t)}^+ e^{-\alpha_{PU} h_t^*(x)}$
- x_p^- for the next round under the distribution $\mathcal{D}_{p(t+1)}^-(x) = \mathcal{D}_{p(t)}^- e^{\alpha_{PU} h_t^*(x)}$
- x_u^- for the next round under the distribution $\mathcal{D}_{u(t+1)}^-(x) = \mathcal{D}_{p(t)}^- e^{\alpha_{PU} h_t^*(x)}$,

in which all the data distribution needs to be finally normalized. In practice, we use the empirical estimation in Eq. (11) as our learning target in training the stump and pick the weak learner which minimizes the target in each training round. Meanwhile, we update the data distribution of x_p^+ , x_p^- and x_u^- separately for the next round.

3.3 Algorithm

In this part, we introduce the details of implementation. Our proposed AdaPU have similar process as AdaBoost. As shown in Algorithm 1 and 2, we initialize the data distribution \mathcal{D}_0 as the same as Eq. (7). Followed by that, in each training round, we enumerate over possible splitting across features and select the threshold for splitting randomly to generate the desired decision stump. To get the desired decision stump, we skip the stumps that do not satisfy the selection criteria Eq. (13) as described in Section 4. In addition, denoting the sum of the last two terms of Eq. (8) as ϵ_{nn} , we also skip the stumps with non-positive ϵ_{nn} .

Then we pick the optimal stump with the criteria Eq. (11). After we get the stump in the current round, we can calculate the weight of this stump by Eq. (9). Following the end of Section 3.2, we update the data distribution \mathcal{D}_p^+ , \mathcal{D}_p^- and \mathcal{D}_u^- separately for the next round.

There are several points in the implementation that are different from the theory.

- We skip the stumps whose empirical estimation error is larger than 0.5. As the same as AdaBoost, we want to select stumps that slightly better than random guessing. It helps us shorten the running time and makes our method more stable in experiments.
- We skip the stumps with non-positive ϵ_{nn} . Based on the theory of nnPU[18], ϵ_{nn} as the risk should always be non-negative. So we add non-negative ϵ_{nn} as selection criteria.

Algorithm 1 Ada-PU StumpGenerator

Input: Class prior π ;

Data weight $\mathcal{D}_p^+, \mathcal{D}_p^-, \mathcal{D}_u^-$;

Trained base learners in previous rounds $H_{t-1}(x)$;

Training data P and U ;

Number of steps S .

Process:

Initialize $\epsilon_{min} = inf, \widehat{\mathcal{R}}_{max} = -inf$

Iterate all the features

for feature f **in** features:

$R = [0, maxV_f - minV_f]$

for $s = 1, \dots, S$:

Randomly choose a value v in the R

Calculate ϵ_t and ϵ_{nn} based on Eq. (8)

Calculate target $\widehat{\mathcal{R}}_t$ by Eq. (11)

if $\epsilon_t \geq 0.5$ or $\epsilon_{nn} < 0$

then skip the stump and continue

$h_t = \arg \max_h \widehat{\mathcal{R}}_t$

end for

end for

Calculate the weight of the generated stump

$\alpha_t = \frac{1}{2} \ln \frac{1-\epsilon_t}{\epsilon_t}$

Output: Generated stump h_t , weight of the generated stump α_t

Algorithm 2 Ada-PU

Input: Class prior π ;

Training data P and U ;

Number of learning rounds T ;

Learning rate β .

Process:

Initialize the weight distribution of P and U :

\mathcal{D}_p^+ , \mathcal{D}_p^- , \mathcal{D}_u^- as Eq. (7)

For $t = 1, \dots, T$:

$h_t, \alpha_t = \text{StumpGenerator}(\pi, \mathcal{D}_t, P, U, H_{t-1})$

Update the data weight \mathcal{D}_p^+ , \mathcal{D}_p^- , \mathcal{D}_u^- as the end of
Section 3.2

$H_t = \beta \left(\sum_{t=1}^T \alpha_t h_t(\mathbf{x}) \right)$

End

Output: $H(\mathbf{x}) = \text{sign} \left(\sum_{t=1}^T \alpha_t h_t(\mathbf{x}) \right)$

- We select the value randomly within the range of values for the feature when we choose the splitting point for the stump. To reduce the running time of the algorithm, we only explore S times for each feature when we look for the splitting point. If we choose the value randomly as we described in Algorithm 1, the performance of our proposed method will be better than iterate S times at fixed length intervals in a naive way. Related experiment results are shown in Section 5.4.1.
- We set the learning rate β additionally. This has been shown experimentally to be effective in improving the performance of our proposed method. Details are included in Section 5.4.2.

4 Theoretical properties

We followed the same principle of AdaBoost framework in designing our proposed method because of its rigorous derivation process and sound theoretical foundation. In this part, we will show that our proposed Ada-PU has the same theoretical properties as AdaBoost that it greedily optimizes the objective risk and its empirical classification error decreases to zero at an exponential

rate. Moreover, our proposed Ada-PU increases margins of training examples given sufficient rounds.

4.1 Greedy Optimization

One of AdaBoost’s theoretical property is that the learned α and $h^*(\cdot)$ greedily optimize the objective risk. In this part, we will show our proposed Ada-PU has the same theoretical property.

We first define the base classifier set \mathcal{H} as below

Definition 4.1. A base classifier set \mathcal{H} is defined as *Non-Negative Base Classifier Set* for a given PU data, if $\forall \mathcal{D}_t$ satisfying

$$\mathcal{D}_t(i) = \begin{cases} \frac{\pi}{n_p} \exp(-F(x_i)), & \text{for } x_i \in P^+ \\ \frac{1}{n_u} \exp(F(x_i)), & \text{for } x_i \in U^- \\ -\frac{\pi}{n_p} \exp(F(x_i)), & \text{for } x_i \in P^- \end{cases}$$

where $F(\cdot)$ is a linear combination of classifiers in \mathcal{H} , there exists an $h \in \mathcal{H}$ such that

$$\sum_x \mathcal{D}_t(i) \mathbb{I}(y_i \neq h(x_i)) > 0. \quad (13)$$

In practice, such base classifier can be achieved by selecting a decision stump that minimize Eq. (11) but at the same time keep it to be non-negative. Note that the *Non-Negative Base Classifier Set* is a subset of the base learner set considered in ordinary learning.

With such definition, we give the theoretical results

Theorem 4.1. In the t th round of learning, if estimate α_{PU} by Eq. (9) and learn the classifier h from the Non-Negative Base Classifier Set \mathcal{H} as the one achieve minimum positive value of Eq. (11), we have

$$(\alpha_{PU}, h^*) = \arg \min \sum_{x_i \in P_P \cup U_N \cup P_N} \mathcal{D}_0(i) \exp(-y_i(H_{t-1}(x_i) + \alpha_t h_t(x_i)))$$

Proof.

$$\begin{aligned}
& \frac{\sum_{x_i \in P_P \cup U_N \cup P_N} \mathcal{D}_0(i) \exp(-y_i(H_{t-1}(x_i) + \alpha_t h_t(x_i)))}{\sum_{x_i \in P_P \cup U_N \cup P_N} \mathcal{D}_0(i) \exp(-y_i H_{t-1}(x_i))} \\
= & \frac{\sum_{x_i \in P_P \cup U_N \cup P_N} \mathcal{D}_0(i) \exp(-y_i H_{t-1}(x_i)) \exp(-\alpha_t y_i h_t(x_i))}{\sum_{x_i \in P_P \cup U_N \cup P_N} \mathcal{D}_0(i) \exp(-y_i H_{t-1}(x_i))} \\
= & \sum_{x_i \in P_P \cup U_N \cup P_N} \mathcal{D}_0(i) \exp(-y_i H_{t-1}(x_i)) \exp(-\alpha_t y_i h_t(x_i)) \\
= & \sum_{x_i \in P_P \cup U_N \cup P_N} \mathcal{D}_t(i) \exp(-\alpha_t y_i h_t(x_i)) \\
= & e^{-\alpha_t} + (e^{\alpha_t} - e^{-\alpha_t}) \sum_{i=1}^n \mathcal{D}_t(i) \mathbb{I}(y_i \neq h_t(x_i)).
\end{aligned}$$

According to Definition 4.1, $\sum_{i=1}^n \mathcal{D}_t(i) \mathbb{I}(y_i \neq h_t(x_i))$ is non-negative. Thus we have

$$\alpha_{PU} = \frac{1}{2} \ln \frac{1 - \hat{\epsilon}_t(P, U)}{\hat{\epsilon}_t(P, U)}$$

where $\hat{\epsilon}_t(P, U)$ is defined in Eq. (8), and h^* should be achieved by minimize the non-negative version of $\sum_{i=1}^n \mathcal{D}_t(i) \mathbb{I}(y_i \neq h_t(x_i))$. \square

4.2 Error Bound

Another theoretical property of AdaBoost is that the empirical classification error decreases to zero at an exponential rate. In this part, we will show our proposed Ada-PU has the same theoretical property.

In AdaBoost's weak learning assumption, the weak learner always gives a weak classifier with some edge over random guessing. Our proposed Ada-PU follows the weak learning assumption, which can be stated as follows.

For any distribution \mathcal{D} on the training set, there is an $h \in \mathcal{H}$ with

$$\hat{P}_{\mathcal{D}}(y \neq h(x)) \leq \frac{1 - \gamma}{2}.$$

where $\hat{P}_{\mathcal{D}}(y \neq h(x))$ denotes the estimated weighted error of the weak classifier h on the training set with distribution \mathcal{D} and γ is the edge of our weak learning assumption.

Now we give the theoretical results.

Theorem 4.2. After T th round of learning, the estimated exponential loss achieved by H is $\prod_{t=1}^T 2\sqrt{\widehat{\epsilon}_t(P, U)(1 - \widehat{\epsilon}_t(P, U))}$. Thus the empirical classification error estimated by P and U data is

$$\widehat{P}_{PU}(y \neq H(x)) \leq \prod_{t=1}^T 2\sqrt{\widehat{\epsilon}_t(P, U)(1 - \widehat{\epsilon}_t(P, U))}.$$

If $\gamma > 0$, then the empirical classification error decreases to zero at an exponential rate, that is

$$\widehat{P}_{PU}(y \neq H(x)) \leq (1 - \gamma^2)^{\frac{T}{2}}.$$

Proof. From the proof of Theorem 4.1, we have

$$\begin{aligned} & \sum_{x_i \in P_P \cup U \cup P_N} \mathcal{D}_0(i) \exp(-y_i H_T(x_i)) \\ = & (e^{\alpha T} + (e^{\alpha T} - e^{-\alpha T})\widehat{\epsilon}_T(P, U)) \sum_{x_i \in P_P \cup U \cup P_N} \mathcal{D}_0(i) \exp(-y_i H_{T-1}(x_i)) \\ = & 2\sqrt{\widehat{\epsilon}_T(P, U)(1 - \widehat{\epsilon}_T(P, U))} \sum_{x_i \in P_P \cup U \cup P_N} \mathcal{D}_0(i) \exp(-y_i H_{T-1}(x_i)) \\ = & \prod_{t=1}^T 2\sqrt{\widehat{\epsilon}_t(P, U)(1 - \widehat{\epsilon}_t(P, U))}. \end{aligned}$$

Since the exponential loss upper-bounds the 0/1 loss, we have

$$\widehat{P}_{PU}(y \neq H(x)) = \widehat{P}_{PU}(y \neq H_T(x)) \leq \prod_{t=1}^T 2\sqrt{\widehat{\epsilon}_t(P, U)(1 - \widehat{\epsilon}_t(P, U))}.$$

If $\gamma > 0$, then according to our weak learning assumption, each $\widehat{\epsilon}_t(P, U) \leq \frac{1-\gamma}{2}$, and $2\sqrt{\widehat{\epsilon}_t(P, U)(1 - \widehat{\epsilon}_t(P, U))} \leq \sqrt{1 - \gamma^2}$. Hence

$$\widehat{P}_{PU}(y \neq H(x)) \leq (1 - \gamma^2)^{\frac{T}{2}},$$

Using the inequality $1 - a \leq e^{-a}, \forall a \in \mathbb{R}$, we have

$$\widehat{P}_{PU}(y \neq H(x)) \leq (1 - \gamma^2)^{\frac{T}{2}} < e^{-\frac{\gamma^2 T}{2}}.$$

When $T = 2 \ln \frac{n}{\gamma^2}$, where n denotes the number of the dataset, we have $e^{-\frac{\gamma^2 T}{2}} = \frac{1}{n}$. This gives us

$$\widehat{P}_{PU}(y \neq H(x)) < \frac{1}{n},$$

which means given sufficient amount of data, the empirical classification error estimated by P and U data decreases to 0 at an exponential rate. \square

4.3 Margin Bound

For T th round of learning, we annotate the linear combination of the classifiers $h \in \mathcal{H}$ as $F(x) = \sum_{t=1}^T \alpha_t h_t(x)$. Then we define $yF(x) \in [-1, 1]$ to be the margin of F for a training example.

Theorem 4.3. For sufficiently large T and $\forall \gamma \in [0, 1]$, Ada-PU outputs $F(x) \in co(\mathcal{H})$ with

$$\min_i y_i F(x_i) \geq \gamma.$$

Proof. We first show that for all the P data and U data, the classifier F given by Ada-PU satisfies

$$\widehat{P}_{PU}(yF(x) \leq \gamma) \leq \prod_{t=1}^T 2\sqrt{\widehat{\epsilon}_t^{1-\gamma}(P, U)(1 - \widehat{\epsilon}_t^{1-\gamma}(P, U))}.$$

This can be shown as follows.

$$\begin{aligned}
\widehat{P}_{PU}(yF(x) \leq \gamma) &= \widehat{P}_{PU}(yF(x) - \gamma \leq 0) \\
&= \mathcal{D}_0(i) \sum_{x_i \in P_P \cup U_N \cup P_N} \mathbb{I}(y_i F(x_i) - \gamma \leq 0) \\
&= \mathcal{D}_0(i) \sum_{x_i \in P_P \cup U_N \cup P_N} \mathbb{I}\left(\sum_{t=1}^T \alpha_t (y_i h_t(x) - \gamma) \leq 0\right) \\
&\leq \mathcal{D}_0(i) \sum_{x_i \in P_P \cup U_N \cup P_N} \exp\left(-\sum_{t=1}^T \alpha_t (y_i h_t(x) - \gamma)\right) \\
&\leq \mathcal{D}_0(i) \sum_{x_i \in P_P \cup U_N \cup P_N} \exp\left(\sum_{t=1}^T \alpha_t \gamma\right) \exp\left(-\sum_{t=1}^T \alpha_t y_i\right) \\
&\leq \mathcal{D}_0(i) \exp\left(-\sum_{t=1}^T \alpha_t y_i h_t(x_i)\right) \exp\left(\sum_{t=1}^T \alpha_t \gamma\right) \\
&\leq \mathcal{D}_0(i) \exp(-y_i H_t(x_i)) \exp\left(\sum_{t=1}^T \alpha_t \gamma\right) \\
&\leq \mathcal{D}_0(i) \exp(-y_i H_t(x_i)) \exp\left(\sum_{t=1}^T \alpha_t \gamma\right) \\
&\leq \prod_{t=1}^T 2\sqrt{\widehat{\epsilon}_t(P, U)(1 - \widehat{\epsilon}_t(P, U))} \prod_{t=1}^T \sqrt{\left(\frac{1 - \widehat{\epsilon}_t(P, U)}{\widehat{\epsilon}_t(P, U)}\right)^\gamma} \\
&\leq \prod_{t=1}^T 2\sqrt{\widehat{\epsilon}_t^{1-\gamma}(P, U)(1 - \epsilon_t)^{1+\gamma}(P, U)}.
\end{aligned}$$

Since $\gamma \in [0, 1]$, and the weak learning assumption stated in 4.2 holds, we have $\widehat{\epsilon}_t(P, U) \leq \frac{1-2\gamma}{2}$ for any t . Thus we have

$$2\sqrt{\widehat{\epsilon}_t^{1-\gamma}(P, U)(1 - \epsilon_t)^{1+\gamma}(P, U)} \leq \sqrt{(1 - 2\gamma)^{1-\gamma}(1 + 2\gamma)^{1+\gamma}} < 1,$$

then we can get

$$\widehat{P}_{PU}(yF(x) \leq \gamma) \leq ((1 - 2\gamma)^{1-\gamma}(1 + 2\gamma)^{1+\gamma})^{\frac{T}{2}}.$$

For sufficiently large T , we have $P_{PU}(yF(x) \leq \gamma)$ decreasing to 0 at an exponential rate. Therefore, $\min_i y_i F(x_i) \geq \gamma$. \square

5 Experiments and Results

In this section, three sets of experiments are presented².

- Efficiency experiment with PU methods: we compare the performance of our proposed Ada-PU with state-of-the-art NN based PU methods. We also compare STOA boosting methods for ordinary supervised learning(PN) with our proposed Ada-PU. We will show our proposed Ada-PU outperforms the NN based methods under specific circumstances.
- Efficiency experiment with PN methods: we compare STOA boosting methods for ordinary supervised learning(PN) with our proposed Ada-PU. and the PN methods. We will show our proposed Ada-PU outperforms the PN methods.
- Ablation study: we did ablation study on our proposed Ada-PU to show the effectiveness of each component.

5.1 Dataset

We use four public datasets in our experiments. To adapt the datasets to our experiments, each dataset were preprocessed into P class and N class:

- CIFAR-10 dataset³ which is a widely used image dataset in PU learning with 10 different labels. In this work, following [18], The P class is formed by 'airplane', 'automobile', 'ship' and 'truck'. The N class is formed by 'bird', 'cat', 'deer', 'dog', 'frog' and 'horse'.
- Epsilon dataset⁴ is an artificial data set for Pascal large scale learning challenge in 2008 [37]. It is a binary classification dataset with -1 and +1 labels. We use class with +1 label as P class and class with -1 label as N class.
- Breast Cancer Wisconsin (Diagnostic) dataset⁵ which is also a binary classification dataset. It contains two classes, a malignant class with label 0 and a benign class with label +1. We preprocessed it so that

²Source codes are available by request.

³<https://www.cs.toronto.edu/~kriz/cifar.html>

⁴<https://www.csie.ntu.edu.tw/~cjlin/libsvmtools/datasets/binary.html>

⁵<https://goo.gl/U2Uwz2>

the benign class forms the P class and the malignant class forms the N class.

- A partition of UNSW-NB15 Dataset⁶ which can be split into normal logs with label 0 and abnormal logs with label +1. We use class with label +1 as P class and preprocessed label 0 into label -1 and use it as class N.

Following the convention in nnPU [18], for PU Learning methods, we set number of labelled positive data $n_p = 1,000$ and the number of unlabelled data n_u equals to the number of training data. For PN methods, following Gang et al. [28], we set number of positive data to 1,000 and the number of negative data $n_n = (\pi_n/2\pi_p)^2 n_p$.

Table.1 is a table of statistics about these datasets.

Table 1: Specification of benchmark datasets.

DATA SET	# TRAIN	# TEST	# FEATURE	π_p
CIFAR-10 [19]	50,000	10,000	3,072	0.40
EPSILON [37]	40,000	100,000	2,000	0.50
BREASTCANCER [9]	455	113	30	0.59
UNSW-NB15 [23, 24, 26, 25, 31]	175,340	82,331	39	0.68

5.2 Methods

In the efficiency experiment with PU methods, we compare our proposed AdaPU with NN based uPU method [7] and NN based nnPU methods [18], we use the same model structure and hyperparameter tuning strategy recommended in the original paper [18]. Table.2 is the adaptation of the multilayer perceptron (MLP) in different data sets as a way to accommodate different data types and in order to get a better performance.

- uPU, PU learning method with unbiased risk estimator. The model was a MLP.

⁶<https://research.unsw.edu.au/projects/unsw-nb15-dataset>

- nnPU-Linear, PU learning method with non-negative risk estimator. The model was a plain linear model.
- nnPU-MLP, the model was a MLP.
- nnPU-CNN, the model was a 13-layer convolutional neural network.

Table 2: Multilayer perceptron (MLP) used in different datasets.

DATA SET	# MULTILAYER PERCEPTRON (MLP)	# OPTIMIZER
CIFAR-10	6-LAYER MLP WITH RELU [27]	ADAM [17]
EPSILON	6-LAYER MLP WITH SOFTSIGN [15]	ADAM [17]
BREASTCANCER	3-LAYER MLP WITH RELU [27]	ADAM [17]
UNSW-NB15	6-LAYER MLP WITH RELU [27]	ADAM [17]

In the efficiency experiment with PN methods, we compare our proposed AdaPU with STOA boosting methods AdaBoost [39, 29] and GBDT [13, 14, 16] implemented by scikit-learn [29], XGBoost [2] implemented by Distributed (Deep) Machine Learning Community ⁷. To be consistent with our proposed Ada-PU, we set the base learner of all these boosting methods to decision stump, and number of base learners to 100. Meanwhile, we also conducted 5 sets of experiments with 5 different data distributions, and finally took the mean and standard deviation. We use the scikit-learn in-built function to implement AdaBoost and GBDT.

- AdaBoost: The AdaBoost algorithm compared with our proposed Ada-PU is SAMME [39] algorithm, which is a variant of AdaBoost [11, 12] for multi-class classification. Since we use it for binary classification problems, it works in the same way as we reviewed in Section 2.2.
- GBDT: GBDT combines weak learners into a strong learner in a same way as other boosting methods. The core of GBDT is to get a sequence of base learners which minimize the mean squared error between the prediction result and the ground truth gradually. For better performance, we set the learning rate to 0.5 for epsilon dataset, and 1 for the other datasets.

⁷<https://github.com/dmlc/xgboost>

- XGBoost: XGBoost is an optimized gradient boosting method, which is the most sophisticated boosting method in recent years. We set the learning rate to 1 with all other parameters default to achieve high performance, and to speed up the experiment, we adjusted the hyperparameter $nthread = 4$.

5.3 Results

To compare the performance of different methods, we set the number of training epochs of NN based methods to 100, while the number of base learners of boosting methods to 100 as well. For efficiency experiment, each dataset is shuffled randomly for each trial with the prior π_p unchanged. We show the average results of the 5 trials, as well as the standard deviation of each method.

5.3.1 How does Ada-PU compare to NN based PU learning methods?

The results of this part of the experiment are reported in the Fig.1. The results show that Ada-PU slightly outperforms nnPU-MLP, nnPU-Linear and uPU in these datasets, indicating that our model has more stable performance than NN based nnPU under certain circumstances. It also shows that the boosting learning methods has higher performance than neural networks in some aspects.

For CIFAR-10, we used CNN to extract important features in stage of data pre-processing. When we experimented with the original data, we found that Ada-PU and nnPU-MLP were comparable. However there is still a gap with nnPU-CNN. When further experiments were conducted using the extracted features, we found that the performance of Ada-PU reached a satisfactory level (exceeding nnPU by about 2%). Fig.1(a) demonstrated the performance of Ada-PU outperforms nnPU-CNN. The experiment results show that when the features of the dataset are good enough, our proposed Ada-PU have the ability to outperform CNN based PU methods.

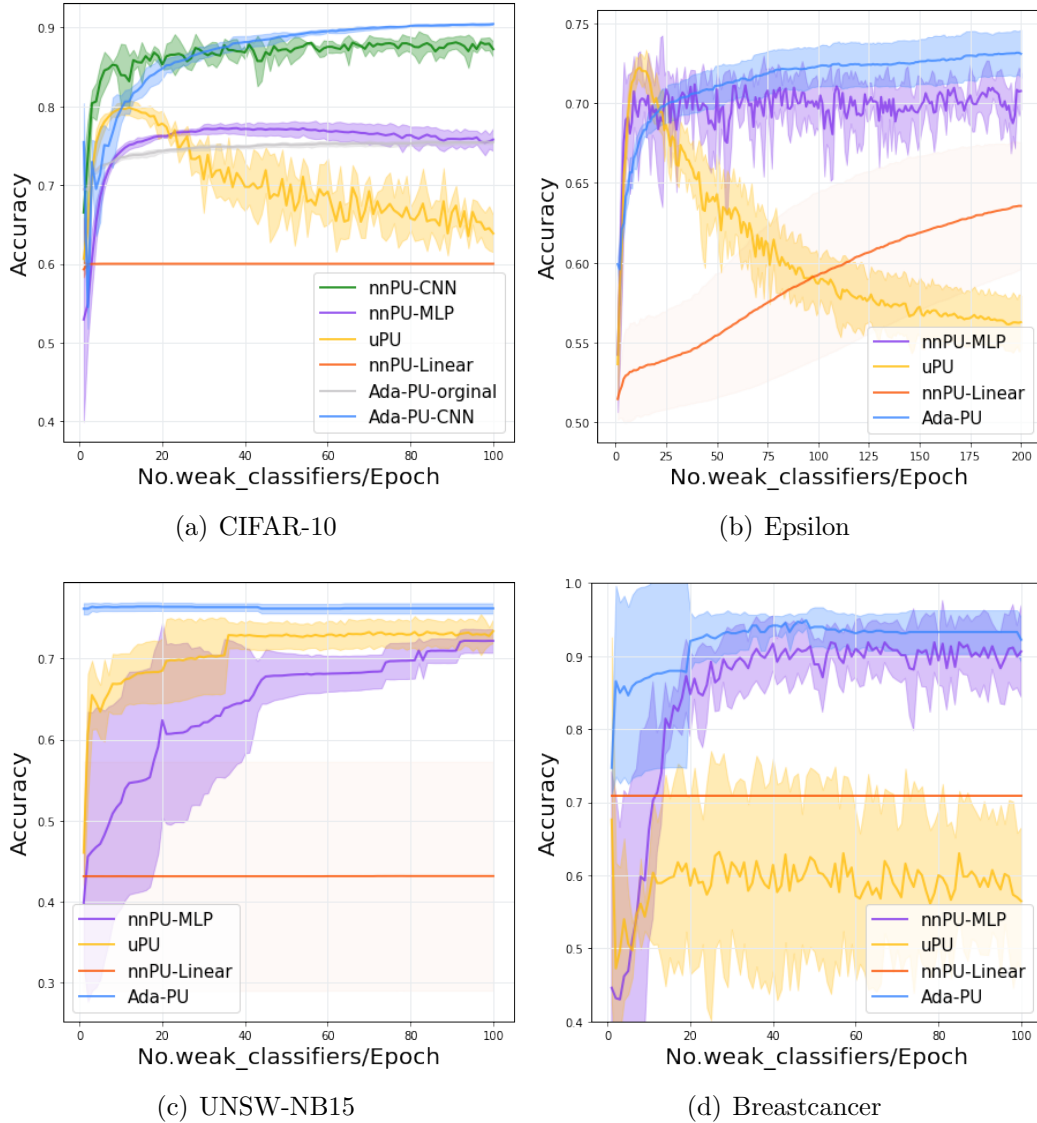


Figure 1: Testing accuracy score of Ada-PU and NN based methods, on CIFAR-10, Epsilon, UNSW-NB15 and Breastcancer datasets. As an image dataset, we added nnPU-CNN as a control in our experiments with CIFAR-10, where Ada-PU-CNN is the result of the experiments after feature extraction using CNN. For the Epsilon dataset, we set the number of training rounds to 200 for this round alone in order to see how well each model fits. The dense line shows the average of 5 trials, and the shadow area show the standard deviation.

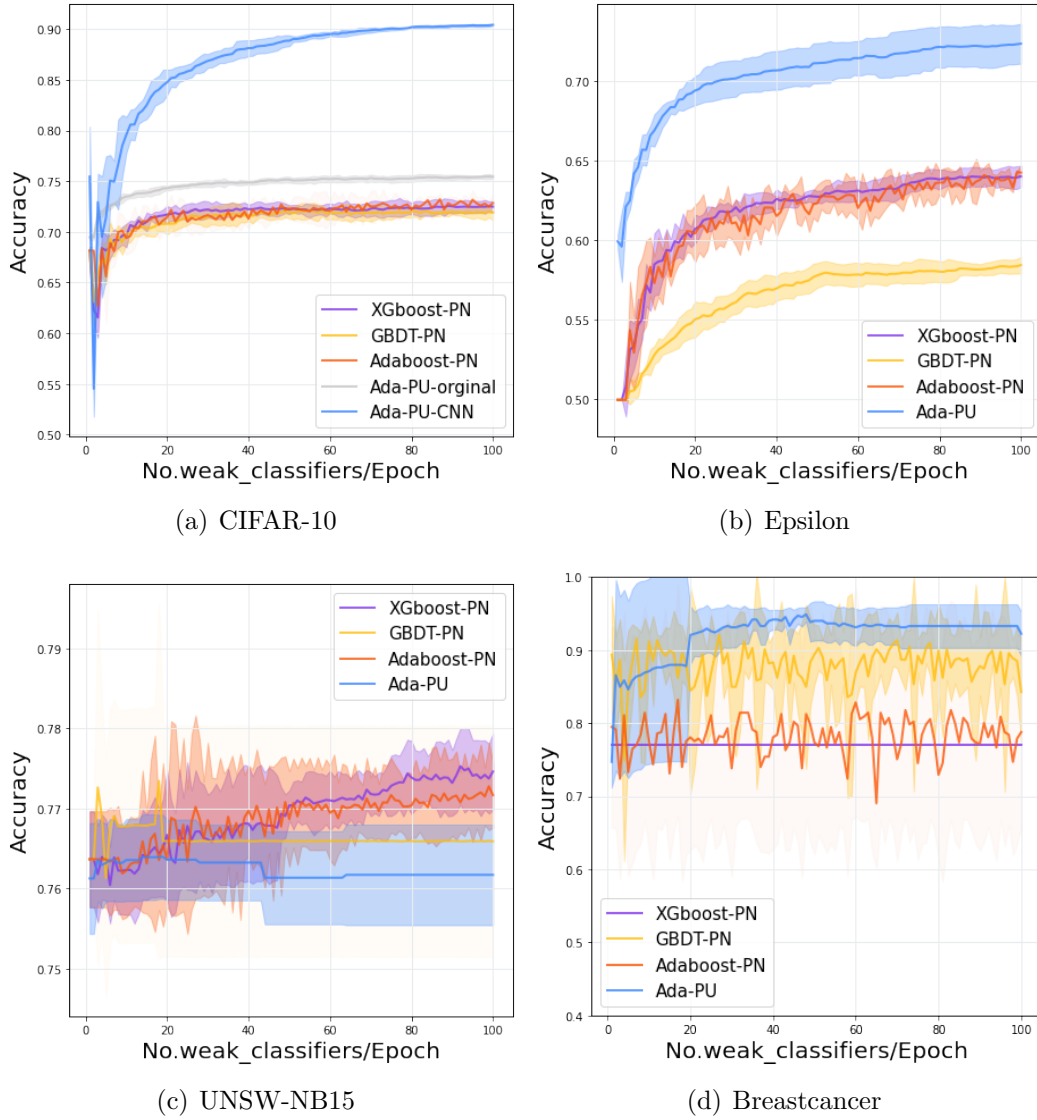


Figure 2: Testing accuracy scores of Ada-PU and PN boosting methods, on CIFAR-10, Epsilon, UNSW-NB15 and Breastcancer datasets. The dense line shows the average of 5 trials, and the shadow area show the standard deviation.

5.3.2 How does Ada-PU compare to supervised boosting methods?

The results of the experiments are reported in Fig.2. It shows the mean and standard deviation of the training and test risks of 5 trials. The results show Ada-PU outperforms all the PN boosting methods we compared with on CIFAR-10, Epsilon and Breastcancer. Although Ada-PU performs slightly worse than other PN learning methods in the UNSW-NB15 dataset (a difference of only 1%). In most cases, Ada-PU has more stable performance and greater efficiency. Considering the limited number of labelled samples in real-world situations, our proposed Ada-PU can be applied more widely in real-world situations.

5.4 Ablation study

5.4.1 Randomly choose feature values

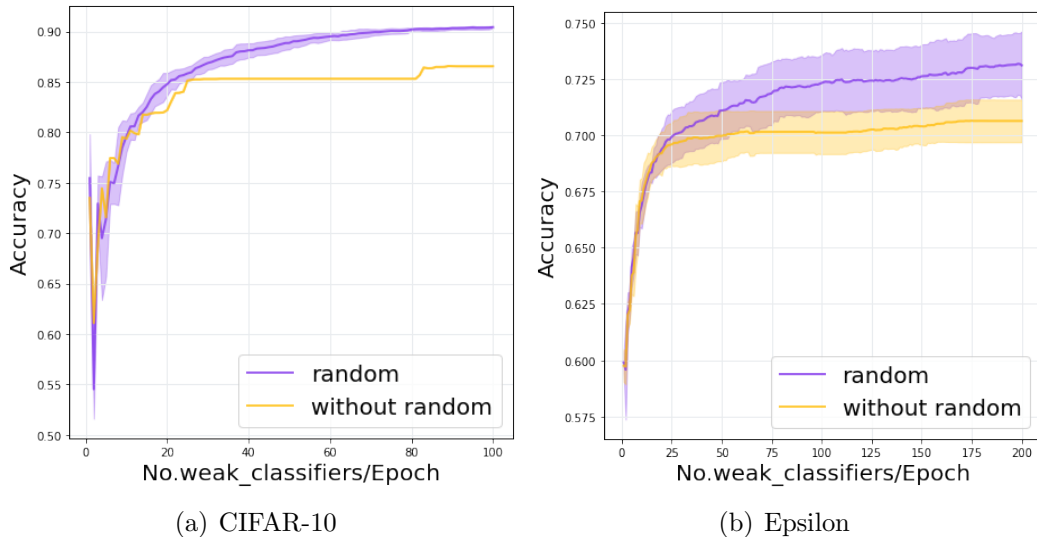


Figure 3: Randomly choose feature values experiment based on CIFAR-10 and Epsilon datasets. Comparing the performance of the model under different feature value selection strategies.

As Ada-PU designed in Section 3.3, a brute force choosing strategy is needed to choose feature values. It is not only time-consuming but also may

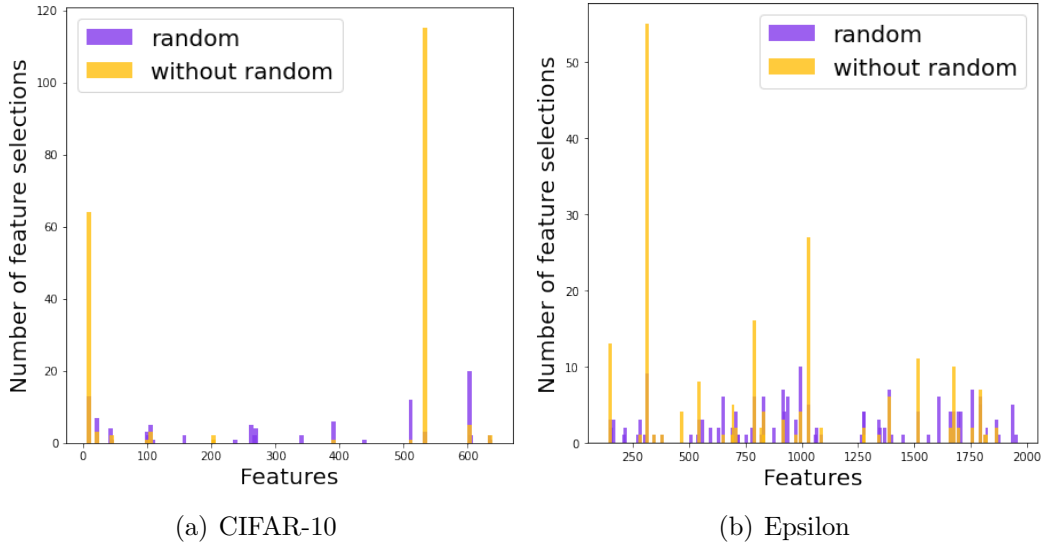


Figure 4: Feature selection experiments based on CIFAR-10 and Epsilon datasets. Visualisation of selecting features, during one training session.

lead some unsuitable base learners to be selected multiple times continuously. This can make somehow rich-be-richer effect happened and reduce the performance of Ada-PU. To speed up the searching process and mitigate the rich-be-richer effect, a randomly choose feature values is used to replace the brute force choose strategy. Specifically, we randomly choose the threshold for every feature in each iteration (iterations for selecting base learners).

We further attempt to compare the effect of the randomly choose feature values strategy on model performance and prediction results in different datasets. To test this conjecture, we conducted controlled experiments on different searching strategies in the CIFAR-10 and Epsilon datasets respectively.

The Fig.3 illustrates the results on this experiment, which demonstrate that in our model, using randomly choosing strategy, the performance of the model can be improved to a certain extent.

Meanwhile, to verify the correctness of our conjecture, we designed a set of experiments to visualize the feature selection for each weak classifier. Fig.4 shows that using the feature values random selection strategy, the model avoids repeating the selection of a feature too many times, thus allowing each base learner to have more information available from the data. Further, the performance of the model is improved to a certain extent.

5.4.2 Learning Rate

In this section, we focus on whether different learning rates have a significant effect on the updating of the base learners' weights. This set of experiments explores how the learning rate affects the performance of Ada-PU given the same dataset.

We envisage that base learners' weight directly affect Ada-PU's decision for base learners, where the weight is updated by the end of Section 3.2 in each iteration. This means that a larger scale of target value will make the weight change fast, conversely, a smaller scale of target value will make the weight change slow. Slow changing is time-consuming but a fast changing may miss better weight status in iterations. In this experiment, to make the differentiation more obvious, we tune the learning rate $\beta \in \{0.001, 0.01, 0.1, 0.2, 0.5, 0.7, 0.9, 1\}$, which is a factor in the threshold computing, to evaluate the Ada-PU's performance in different learning rate.

According to Fig.5, the performance based on different 8 learning rates with the same random seed sampling data. We can see that on CIFAR-10, in the absence of learning rate intervention, the performance of the model is extremely limited; on Epsilon, $lr = 1$ is the worst case. In other cases, the model performs reasonably well; on UNSW-NB15 and Breastcancer, the situations are similar, with $lr = 1$, the model performance is severely degraded; with other learning rates, the models perform equally well.

The experimental results are in line with what we conjectured. There is a significant difference in the generalization ability of the model at different learning rates. In order to improve the adaptiveness of our model as well as its generalisation ability, we believe that it is effective to use learning rates to cope with different situations.

6 Conclusions

In this paper, we propose a novel Boosting PU learning method Ada-PU which addressed the three key problems of applying boosting methods to PU learning with rigorous proof. We solved the problem of how to update data distribution with P data and U data. We also proved that the theoretical properties of AdaBoost can be kept in PU learning. We demonstrated the superiority of our proposed methods compared with NN based PU methods and PN methods under certain circumstances in the experiments.

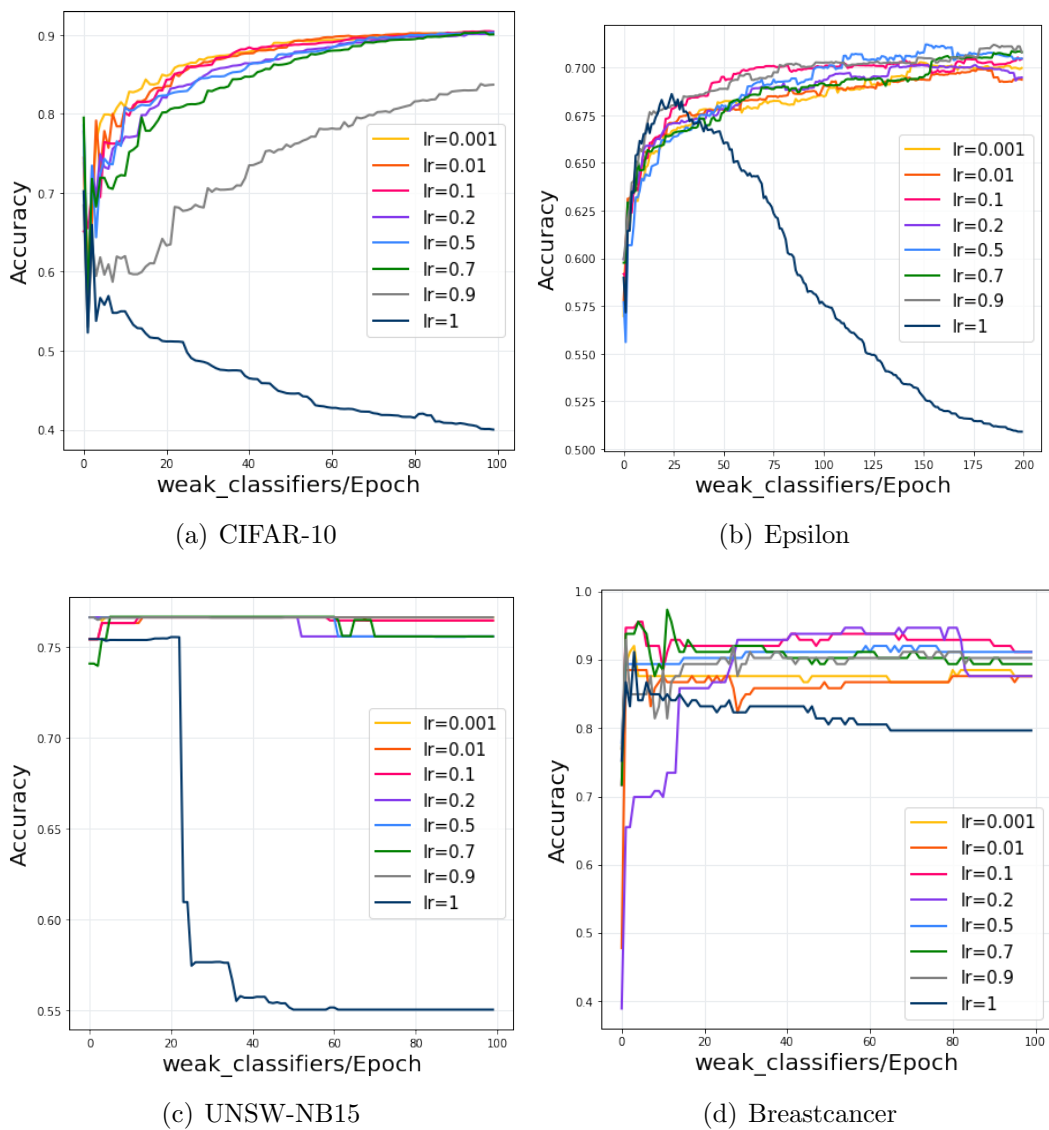


Figure 5: Influence of different learning rates on the model in CIFAR-10, Epsilon, UNSW-NB15 and Breastcancer data sets.

There are still many directions to explore in the future, one of which is that we can try to propose more boosting algorithms for PU learning. It also stimulates the discovery of more algorithms.

References

- [1] HAROUTUNE K ARMENIAN and Abraham M Lilienfeld. The distribution of incubation periods of neoplastic diseases. *American journal of epidemiology*, 99(2):92–100, 1974.
- [2] Tianqi Chen and Carlos Guestrin. Xgboost: A scalable tree boosting system. In *KDD*, 2016.
- [3] Xuxi Chen, Wuyang Chen, Tianlong Chen, Ye Yuan, Chen Gong, Kewei Chen, and Zhangyang Wang. Self-pu: Self boosted and calibrated positive-unlabeled training. In *International Conference on Machine Learning*, pages 1510–1519. PMLR, 2020.
- [4] Francesco De Comit e, Franois Denis, R emi Gilleron, and Fabien Letouzey. Positive and unlabeled examples help learning. In *International conference on algorithmic learning theory*, pages 219–230. Springer, 1999.
- [5] Franois Denis. Pac learning from positive statistical queries. In *International conference on algorithmic learning theory*, pages 112–126. Springer, 1998.
- [6] Franois Denis, R emi Gilleron, and Fabien Letouzey. Learning from positive and unlabeled examples. *Theoretical Computer Science*, 348(1): 70–83, 2005.
- [7] Marthinus C Du Plessis, Gang Niu, and Masashi Sugiyama. Analysis of learning from positive and unlabeled data. *Advances in neural information processing systems*, 27, 2014.
- [8] Marthinus Christoffel du Plessis, Gang Niu, and Masashi Sugiyama. Convex formulation for learning from positive and unlabeled data. In *ICML*, 2015.

- [9] Dheeru Dua and Casey Graff. Uci machine learning repository [<http://archive.ics.uci.edu/ml>]. irvine, ca: University of california. *School of Information and Computer Science*, 25:27, 2019.
- [10] Charles Elkan and Keith Noto. Learning classifiers from only positive and unlabeled data. In *KDD*, 2008.
- [11] Yoav Freund and Robert E Schapire. A decision-theoretic generalization of on-line learning and an application to boosting. *Journal of computer and system sciences*, 55(1):119–139, 1997.
- [12] Yoav Freund, Robert Schapire, and Naoki Abe. A short introduction to boosting. *Journal-Japanese Society For Artificial Intelligence*, 14 (771-780):1612, 1999.
- [13] Jerome H. Friedman. Greedy function approximation: A gradient boosting machine. *The Annals of Statistics*, 29(5):1189–1232, 2001. ISSN 00905364. URL <http://www.jstor.org/stable/2699986>.
- [14] Jerome H Friedman. Stochastic gradient boosting. *Computational statistics & data analysis*, 38(4):367–378, 2002.
- [15] Xavier Glorot and Yoshua Bengio. Understanding the difficulty of training deep feedforward neural networks. In *Proceedings of the thirteenth international conference on artificial intelligence and statistics*, pages 249–256. JMLR Workshop and Conference Proceedings, 2010.
- [16] Trevor Hastie, Jerome Friedman, and Robert Tibshirani. Boosting and additive trees. In *The Elements of Statistical Learning*, pages 299–345. Springer New York, 2001. doi: 10.1007/978-0-387-21606-5_10. URL https://doi.org/10.1007%2F978-0-387-21606-5_10.
- [17] Diederik P Kingma and JL Ba. Adam: A method for stochastic optimization 3rd international conference on learning representations, {ICLR} 2015, san diego, ca, usa, may 7–9, 2015, conference track proceedings. In *Conference Track Proceedings*, 2015.
- [18] Ryuichi Kiryo, Gang Niu, Marthinus C Du Plessis, and Masashi Sugiyama. Positive-unlabeled learning with non-negative risk estimator. *Advances in neural information processing systems*, 30, 2017.

- [19] Alex Krizhevsky, Geoffrey Hinton, et al. Learning multiple layers of features from tiny images. 2009.
- [20] Xiaoli Li and Bing Liu. Learning to classify texts using positive and unlabeled data. In *IJCAI*, volume 3, pages 587–592. Citeseer, 2003.
- [21] Bing Liu, Wee Sun Lee, Philip S Yu, and Xiaoli Li. Partially supervised classification of text documents. In *ICML*, volume 2, pages 387–394. Sydney, NSW, 2002.
- [22] Aditya Krishna Menon, Brendan van Rooyen, Cheng Soon Ong, and Bob Williamson. Learning from corrupted binary labels via class-probability estimation. In *ICML*, 2015.
- [23] Nour Moustafa and Jill Slay. Unsw-nb15: a comprehensive data set for network intrusion detection systems (unsw-nb15 network data set). In *MilCIS*, 2015.
- [24] Nour Moustafa and Jill Slay. The evaluation of network anomaly detection systems: Statistical analysis of the unsw-nb15 data set and the comparison with the kdd99 data set. *Information Security Journal: A Global Perspective*, 25(1-3):18–31, 2016.
- [25] Nour Moustafa, Gideon Creech, and Jill Slay. Big data analytics for intrusion detection system: Statistical decision-making using finite dirichlet mixture models. In *Data analytics and decision support for cybersecurity*, pages 127–156. Springer, 2017.
- [26] Nour Moustafa, Jill Slay, and Gideon Creech. Novel geometric area analysis technique for anomaly detection using trapezoidal area estimation on large-scale networks. *IEEE Transactions on Big Data*, 5(4):481–494, 2017.
- [27] Vinod Nair and Geoffrey E. Hinton. Rectified linear units improve restricted boltzmann machines. In *ICML*, 2010.
- [28] Gang Niu, Marthinus Christoffel du Plessis, Tomoya Sakai, Yao Ma, and Masashi Sugiyama. Theoretical comparisons of positive-unlabeled learning against positive-negative learning. *Advances in neural information processing systems*, 29, 2016.

- [29] F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, and E. Duchesnay. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12:2825–2830, 2011.
- [30] Kuldeep Randhawa, Chu Kiong Loo, Manjeevan Seera, Chee Peng Lim, and Asoke K Nandi. Credit card fraud detection using adaboost and majority voting. *IEEE access*, 6:14277–14284, 2018.
- [31] Mohanad Sarhan, Siamak Layeghy, Nour Moustafa, and Marius Portmann. Netflow datasets for machine learning-based network intrusion detection systems. In *Big Data Technologies and Applications*, pages 117–135. Springer, 2020.
- [32] Robert E Schapire. The strength of weak learnability. *Machine learning*, 5(2):197–227, 1990.
- [33] Amin Shahraki, Mahmoud Abbasi, and Øystein Haugen. Boosting algorithms for network intrusion detection: A comparative evaluation of real adaboost, gentle adaboost and modest adaboost. *Engineering Applications of Artificial Intelligence*, 94:103770, 2020.
- [34] Guangxin Su, Weitong Chen, and Miao Xu. Positive-unlabeled learning from imbalanced data. In *Proceedings of the 30th International Joint Conference on Artificial Intelligence, Virtual Event*, 2021.
- [35] Paul Viola and Michael J Jones. Robust real-time face detection. *International journal of computer vision*, 57(2):137–154, 2004.
- [36] Yanwen Wu and Xueyi Ai. Face detection in color images using adaboost algorithm based on skin color information. In *First International Workshop on Knowledge Discovery and Data Mining (WKDD 2008)*, pages 339–342. IEEE, 2008.
- [37] Guo-Xun Yuan, Chia-Hua Ho, and Chih-Jen Lin. An improved glmnet for l1-regularized logistic regression. *The Journal of Machine Learning Research*, 13(1):1999–2030, 2012.
- [38] Jiaqi Zhang, Zhenzhen Wang, Jingjing Meng, Yap-Peng Tan, and Junsong Yuan. Boosting positive and unlabeled learning for anomaly detection

with multi-features. *IEEE Transactions on Multimedia*, 21(5):1332–1344, 2018.

- [39] Ji Zhu, Saharon Rosset, Hui Zou, and Trevor Hastie. Multi-class adaboost. *Statistics and its interface*, 2, 02 2006. doi: 10.4310/SII.2009.v2.n3.a8.

A Supplementary algorithm

A.1 AdaBoost StumpGenerator

Algorithm 3 AdaBoost StumpGenerator

Input: Data weight \mathcal{D} ;
Trained base learners $H_{(t-1)}(x)$;
Training data $D = \{(x_1, y_1), (x_2, y_2), \dots, (x_n, y_n)\}$;
Number of steps S .

Process:
Initialize $\epsilon_{min} = inf$
Iterate all the features
for feature f **in** features:
 $R = [0, maxV_f - minV_f]$
 for $s = 1, \dots, S$:
 $v = minV_f + \frac{sR}{S}$
 for $i = -1, +1$:
 Let $h_s(x) = i$, where $v > v_f$ of x ,
 $h_s(x) = -i$, where $v \leq v_f$ of x
 Calculate $\epsilon_t = P[h_s(x) \neq y]$
 if $\epsilon_t > 0.5$
 then skip the stump and continue
 if $\epsilon_t < \epsilon_{min}$
 $h_t = h_s(x)$
 $\epsilon_{min} = \epsilon_t$
 end for
 end for
end for
Calculate the weight of the generated stump
 $\alpha_t = \frac{1}{2} \ln \frac{1-\epsilon_t}{\epsilon_t}$

Output: Generated stump h_t , weight of the generated stump α_t

A.2 AdaBoost

Algorithm 4 AdaBoost

Input: Number of learning rounds T ;

Training data $D = \{(x_1, y_1), (x_2, y_2), \dots, (x_n, y_n)\}$;

Process:

Initialize the weight distribution of $\mathcal{D} = \frac{1}{n}$:

For $t = 1, \dots, T$:

$h_t, \alpha_t = \text{StumpGenerator}(\mathcal{D}_t, D)$

Update the data weight \mathcal{D}_t :

$$\mathcal{D}_{(t+1)} = \frac{\mathcal{D}_t \exp(-\alpha_t y_i h_t(x_i))}{Z_t}$$

End

Output: $H(\mathbf{x}) = \text{sign} \left(\sum_{t=1}^T \alpha_t h_t(\mathbf{x}) \right)$
