

AdaptivePaste: Code Adaptation through Learning Semantics-aware Variable Usage Representations

Xiaoyu Liu
Microsoft
Redmond, WA, USA

Jinu Jang
Microsoft
Redmond, WA, USA

Neel Sundaresan
Microsoft
Redmond, WA, USA

Miltiadis Allamanis
Microsoft Research
Cambridge, UK

Alexey Svyatkovskiy
Microsoft
Redmond, WA, USA

ABSTRACT

In software development, it is common for programmers to copy-paste code snippets and then adapt them to their use case. This scenario motivates *code adaptation* task – a variant of program repair which aims to adapt all variable identifiers in a pasted snippet of code to the surrounding, preexisting source code. Nevertheless, no existing approach have been shown to effectively address this task. In this paper, we introduce AdaptivePaste, a learning-based approach to source code adaptation, based on the transformer model and a dedicated dataflow-aware deobfuscation pre-training task to learn meaningful representations of variable usage patterns. We evaluate AdaptivePaste on a dataset of code snippets in Python. Evaluation results suggest that our model can learn to adapt copy-pasted code with 79.8% accuracy.

KEYWORDS

Variable usage representation, neural networks, code adaptation

ACM Reference Format:

Xiaoyu Liu, Jinu Jang, Neel Sundaresan, Miltiadis Allamanis, and Alexey Svyatkovskiy. 2022. AdaptivePaste: Code Adaptation through Learning Semantics-aware Variable Usage Representations. In *Proceedings of ACM Conference (Conference'17)*. ACM, New York, NY, USA, 11 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

1 INTRODUCTION

Knowledge reuse through adapting source code from Stack Overflow and GitHub is very common among software developers. Indeed, according to a study [1], one out of every four users visiting a Stack Overflow question copies something within five minutes of hitting the page. That adds up to 2.9 million copies across half a million posts and comments on average every day. While standing on the shoulders of giants and adapting and reusing code from the web, developers may still introduce compilation issues, bugs, or even security issues into their code when copying-pasting [28]. One common code adaptation scenario is to manually rename variables

in the copied snippet to align them with the surrounding context. Automatically adapting the copy-pasted code using AI could reduce errors and relieve developers from the effort required.

Code adaptation is a variant of bug detection and repair tasks, which aims to intelligently adjust a given (pasted) snippet to pre-existing partially written program [4]. An example bug that may emerge as a result of copy-pasting is a variable misuse bug [33]. To resolve it manually, a software developer would have to find program locations where buggy variables are used and guess the correct variable names for the identified locations. There are numerous systems [5, 6, 20, 33] proposed to tackle variable misuse problem with machine learning. These approaches focus on classifying the variable locations as faulty or correct and then replacing the faulty variables through a joint prediction of classification, localization and repair [33] or an enumerative prediction of each buggy location [5]. Unfortunately, none of these approaches takes programming language semantics, especially the long-range dependencies of variables usages, into consideration.

In this paper, we propose AdaptivePaste: a code adaptation system based on the transformer neural network that adjusts pasted code to the surrounding code context. Given a preexisting partially written program and a code snippet copied from an external source – for instance, Stack Overflow or list of suggestions by IntelliCode AI – AdaptivePaste performs program analysis and obfuscates source code identifiers in a pasted code snippet in a dataflow-sensitive way, and learns to predict a mapping of obfuscated (masked) variables to the target names via self-supervised translation. Inspired by recent success of transformers [19, 34], we implement AdaptivePaste in two variants: a traditional encoder-decoder transformer, and a multi-decoder transformer model architecture.

The paper contributions are as follows: (i) we formulate a learning-based approach to source code adaptation and introduce AdaptivePaste, a transformer-based model with a uni-decoder variant as well as a multi-decoder variant, (ii) we introduce a specialized dataflow-aware deobfuscation pre-training objective, a variant of DOBF for pasted code snippet adaptation, (iii) we evaluate AdaptivePaste on a dataset of code snippets in Python and show that our model achieves a 79.8% accuracy of adapting copy-pasted code, beating existing state-of-the-art models, and (iv) we show the performance of AdaptivePaste as a pre-training objective by fine-tuning the trained model on multiple downstream code intelligence tasks.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

Conference'17, July 2017, Washington, DC, USA

© 2022 Association for Computing Machinery.

ACM ISBN 978-x-xxxx-xxxx-x/YY/MM... \$15.00

<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

2 MOTIVATING EXAMPLE

To provide an intuition about how our code adaptation approach works and to define the core concepts, we begin with a motivating example of two code copy-paste scenarios.

In code adaptation problem, pasted code snippet may be a piece of code copied from a website (e.g. StackOverflow), a code search retrieval tool, or from an existing project, pasted into an existing context snippet. In a pasted code snippet, we distinguish two kinds of variables to be adapted: (i) *bound variables* – identifiers defined in the preexisting code context in the scope of the pasted code snippet, and (ii) *free variables* – identifiers that are defined and used inside of the pasted code snippet.

Context snippet contains a number of variables/symbols $V = \{v_i\}$. The pasted snippet uses and defines a set of variables $B = \{\beta_j\}$. The AdaptivePaste task is to create an injective mapping $\mathcal{A} : B \rightarrow V \cup \Sigma$ that maps each variable in the pasted snippet to either a unique symbol v_i in the context or a declares this as new variable Σ , not currently defined¹. Every $\mathcal{A}(\beta_j) \in V$ is a variable *bound* to the context, whereas if $\mathcal{A}(\beta_j) \in \Sigma$ it is a free variable. Note, that for semantic correctness \mathcal{A} must only correctly map the bound variables. AdaptivePaste can be seen as the task of correctly “wiring” the pasted snippet into the context.

Figure 1 shows an example of pasting a code snippet recommended by an AI-based search retrieval tool², into a source code file actively developed by a software engineer. As shown in Figure 1, a code snippet suggestion served by IntelliCode API Usage Example extension (right) is copy-pasted as is into the source code file (left), pasted region highlighted in red square. In the pasted code shown in upper left sub-figure of Figure 1, values of four method arguments (`self.introspector.parameters()`, `self.config.lr1`, `self.config.weight_decay1`, `self.config.milestones`) are not defined in the existing context, resulting in a syntactically incorrect code that would not run. Indeed, the traditional code search tools only focus on the relevance of retrieved code to a query provided by a user failing to adapt the code to the preexisting surrounding context. The lower left sub-figure of Figure 1 displays the same example scenario, but with AdaptivePaste re-wiring the pasted code snippet to form a syntactically and semantically correct program given the preexisting context.

To properly adapt and re-wire the pasted code snippet in the example shown in Figure 1, developers would need to understand the context code semantics, access the code dependencies carefully and choose from local declared variable candidates wisely. One can easily miss crucial information and ignore renaming, for example, `self.introspector.parameters()` to `optimizer_grouped_parameters` in Figure 1. How can we ensure all relevant structural and semantic information in the context code are properly considered for code adaptation?

Motivated by the fact that developers carefully declare variables with proper names that precisely describe the purpose they fulfill, we propose code adaptation through learning semantics-aware variable usage using AdaptivePaste, in which we model the surrounding context to learn to prioritize the code snippets fulfilling the same intent as the target variable over other source code content.

¹We assume that Σ contains all valid variable names *not* in the context.

²Visual Studio IntelliCode API Usage Example extension []

3 DATASET

We collect the dataset from publicly available open source non-fork GitHub repositories with at least 20 stars. To ensure the quality of the dataset, we follow the same constraints and rules from [17] to further filter out collected repositories. For example, we require each project should be used by at least one other project. In addition, we filtered out all unit test files and short code files with less than three lines of code. Overall, we collect 4.3×10^6 files, which include 1.4×10^9 lines of code, across 238×10^3 repos.

For model training and evaluation, we randomly split the dataset into training set, validation set and test set in the proportion 80-10-10 on the repository level. Samples for each set were extracted by randomly selecting “pastable” blocks, which are defined as sequences of code statements that are reusable after adaptation, from each method. Pastable blocks are identified by traversing through the code blocks in CST. Specifically, while traversing syntax trees of source code files, a series of statements is extracted when non-terminal nodes of the LibCST³ grammar of the following types are encountered: `Module`, `SimpleStatementSuite`, `SimpleStatementLine`, `IndentedBlock`, `If`, `With`, `For`, `While`, `Else`, `Try`, `Finally`, `ExceptionHandler`. To mimic the common cases of pasting code snippets from popular resources such as Stack Overflow, we set the max number of lines of code in a pastable block to 6. In summary, we extract 29,176,497 pastable snippet samples for model training and 1,774,995 samples for model evaluation.

4 BASELINE MODELS

In this section, we present two baseline models that we implemented for controlled experiments around code adaptation.

4.1 Masked Language Modeling for Code Adaptation

The Masked Language Modeling (MLM) pre-training objective involves recovering the original document given the corrupted one [15]. We choose MLM as our baseline because it allows to formulate code adaptation task as masked token infilling given the surrounding left and right contexts.

Model Training We utilize the standard MLM objective, in which a fraction of tokens from the original sequence is selected uniformly at random and replaced with [MASK] symbol, disregarding the token lexical types. Which results in masking not only identifier names, but also delimiters, and programming language keywords. The fraction of meaningful code tokens masked by the MLM objective is 80%, which means that the remaining 20% of the code tokens will stay unchanged. We train a RoBERTa model [23] having 12 layers in the encoder, 12 attention heads and a hidden dimension of 768.

Recovering Identifier Names During the inference, the MLM for code adaptation model predicts each masked identifier name independently. Then for each pasted code snippet, all the results are summarized into a dictionary mapping masks to recovered identifier names.

³<https://github.com/Instagram/LibCST>

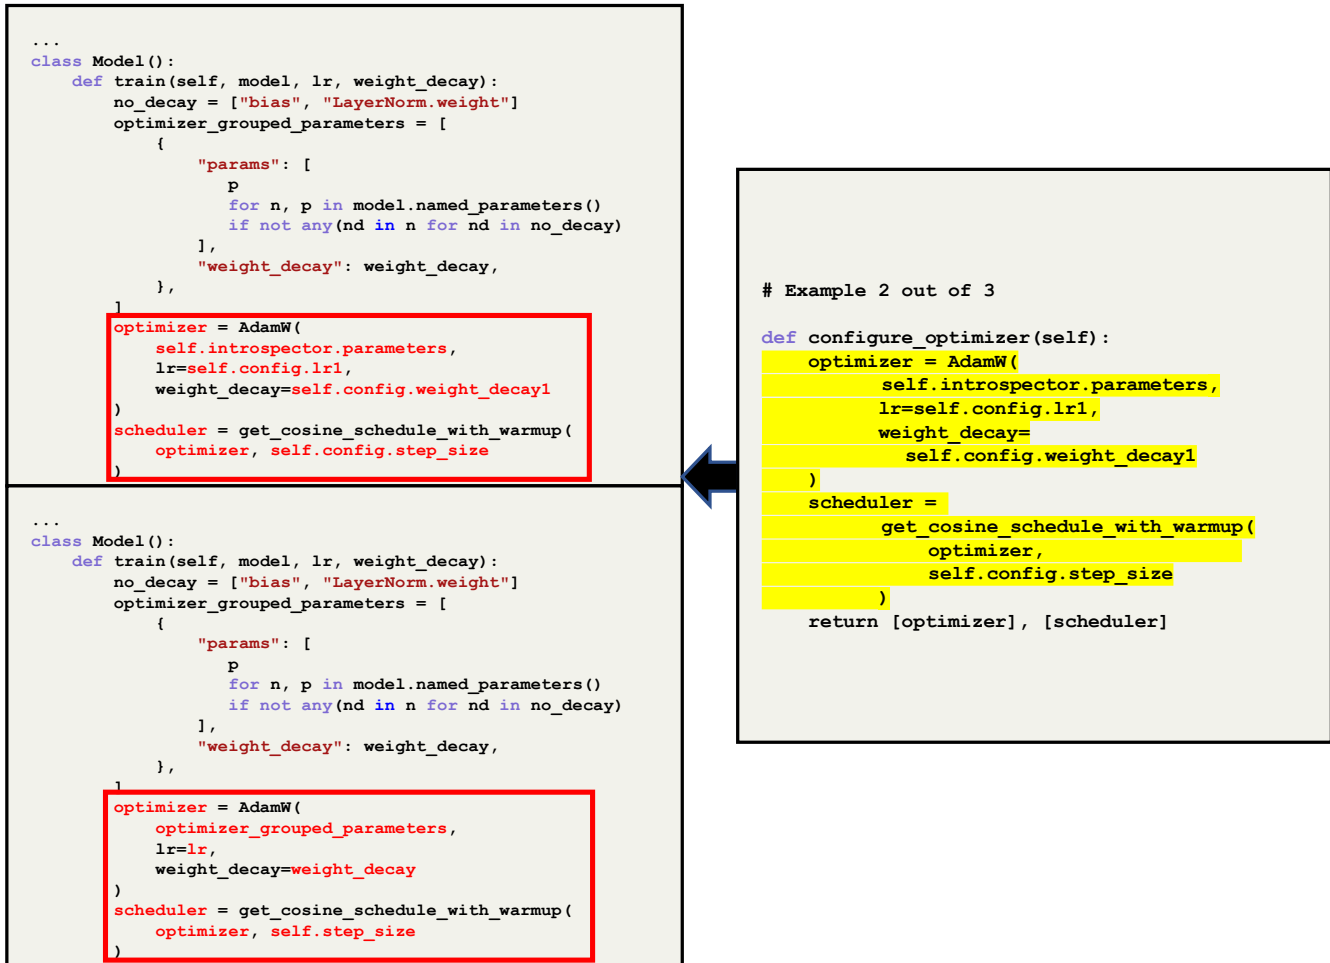


Figure 1: An illustration of two copy-paste scenarios when developing software: (right) method suggested by IntelliCode API Usage Example extension, (left) code snippet pasted into a preexisting context without adaptation (upper left) and after adaptation (lower left).

4.2 DOBF Model

Recent research [21] shows that self-supervised pre-training objective for programming languages based on deobfuscation (DOBF) achieves superior results on multiple tasks such as code search, code summarization, and unsupervised code translation, as compared to BERT [23] and BART [22] models, pre-trained with natural language specific denoising objectives. We utilize the DOBF model for code adaptation task as our baseline.

Model Training DOBF leverages the particular structure of programming languages, which is achieved by obfuscating code snippets by replacing class, function and variable names with corresponding special symbols: CLASS_NN, FUNC_NN, and VAR_NN, in which NN is a unique number. Then a DOBF model is trained to recover the original names of these special symbols. The DOBF model for code adaptation is a sequence-to-sequence transformer

model, composed of 6 encoder and 6 decoder layers. It has 8 attention heads for both encoder and decoder. It is trained to translate an obfuscated code snippet represented as a sequence of tokens with masks into a dictionary mapping of predefined mask symbols to recovered original names.

Identifier Deobfuscation At inference time, the model suggests meaningful names for the obfuscated class, function, and variables in pasted code. The output is serialized as a sequence of tokens where entries are separated by a delimiter symbol “|”. As a final step, entries in the output are postprocessed into a dictionary of masks to identifier name mappings.

5 ADAPTIVEPASTE: NEURAL MODEL FOR CODE ADAPTATION

In this section we introduce AdaptivePaste – a transformer-based model for code adaptation task. Given a partially written preexisting context snippet and a code snippet copied from an external source, it tries to re-wire the pasted snippet to form a syntactically and semantically correct program. The key technical innovation around AdaptivePaste is twofold: (1) the model is trained with a dedicated dataflow-aware deobfuscation pre-training objective, and (2) it introduces a multi-decoder transformer model variant that decodes masked symbols independently. In addition to using a traditional transformer encoder-decoder model, namely AdaptivePaste uni-decoder (AP-uni), the AdaptivePaste multi-decoder (AP-multi) variant allows to encode context snippets once but decode a target mapping for each adapted variable independently, to leverage “define-use” relationships across masked symbols. Figure 2 illustrates the architecture of AdaptivePaste.

5.1 Adaptive Paste Training

Since there is no large (supervised) dataset that matches the task, we propose a self-supervised training objective. Given some preexisting code, (e.g. a file from an open-source project) we randomly pick one or more contiguous statements as the pasted snippet, and anonymize all occurrences of a variable within the snippet to an uninformative name of the form `__vNN`, where NN is a unique number. Note that this anonymization preserves the data-flow relationships *within* the pasted snippet. The surrounding code becomes the context and remains unchanged. Finally, we train the model to match the anonymized variables to those defined in the original code. This self-supervised setting allows us to create a large training dataset required by modern transformers.

Variables in pasted code can be subdivided into two broad categories:

- (1) *Bound variables*: symbols used or defined in the context falling in the scope of the pasted snippet.
- (2) *Free variables*: identifiers that are defined and used exclusively inside the pasted code snippet. These variables could arguably be named to an arbitrary non-conflicting name without changing semantics. However, AdaptivePaste aims to predict a descriptive, useful variable name following best coding practices.

Figure 2 illustrates the learning task: a pasted code snippet is anonymized by renaming the variables declared in the context block (`x_recon`) and free variables declared outside the block (`recon_n_loss`) with the symbols `__v11`, `__v51`, `__v122`, `__v131`.

Technical Details. Specifically, during the process of traversing the syntax tree of the pasted snippet, when the visited CST node is a variable declared in the class scope, which is the usual case in variable usage, the name of the corresponding node is obfuscated. We assign mask symbols at a granularity of lexical code tokens, which may map to multiple BPE subtokens. Differently from DOBF [21], the surrounding preexisting code context is *not* anonymized, which allows the model to attend to the existing identifier names that are defined in scope. Indeed, our analysis shows that in 77.1% of the cases bound variables are called to in pasted snippets, serving as

targets of deobfuscation. Besides that, we do not encode lexical type information into masks since in some programming languages, like Python, types of variables are dynamic. We randomize the order of masks, to prevent the model from memorizing the order and numerics but apply obfuscation noise preserving data-flow. One important distinction from the standard masked language modeling (MLM) objective is each mask can appear multiple times throughout the input sequence, which makes this learning task quite different from the standard NLP.

5.2 Neural Model Architecture

5.2.1 Uni-decoder Transformer. Traditional transformer [34] has a single decoder composed of multiple layers of multi-headed self-attention and cross-attention blocks followed by a two-layer multi-layer perceptron (MLP), as shown in Figure 3a. In a machine translation setting, an input sequence is encoded by the encoder and is attended to by the cross-attention block of the decoder.

The uni-decoder model follows a standard autoregressive decoder formulation. Given an input sequence composed of the context snippet and an anonymized pasted snippet, the task for the model is to learn an injective mapping $\mathcal{A} : B \rightarrow V \cup \Sigma$ that maps each variable in the pasted snippet to a unique symbol in the context or a declares a new variable not currently defined. The learnt mapping, $y = \mathcal{A}(x)$, is represented as a string of the following format: “`__v31 weight_decay | __v40 scheduler | __v27optimizer`”. The uni-decoder models the following probability distribution:

$$P(y_i; \mathcal{E}(x), y_{i-1}), i = 1..N, \quad (1)$$

where N is the number of symbols to de-anonymize.

5.2.2 Multi-decoder Transformer. While the uni-decoder model allows us to de-anonymize all variables jointly, it does not calculate an individual probability for each symbol, i.e., in the uni-decoder model the probability of the name of each symbol is conditioned on the ones predicted before. Thus we cannot estimate the uncertainty of de-anonymizing any particular symbol. For example in Figure 2, de-anonymizing might be straightforward for all symbols except from `__v122`. However, the uni-decoder model would assign a low probability to the entire output sequence. To alleviate this problem, we propose a multi-decoder model – a variant of the multi-decoder transformer [19] – which creates a copy of the decoder (with shared weights) for each anonymized symbol in the anonymized pasted snippet. Then, each decoder predicts a name independently from the rest, factorizing the output distribution per-symbol.

Specifically, as shown in Fig. 3b, the multi-decoder consists of a standard encoder \mathcal{E} encoding the input sequence x once (as in the uni-decoder model). Then, for each sample we spawn N decoders (where N is the number of distinct anonymized symbols in an input x) tasked with de-anonymizing each symbol independently. In lieu of the standard start-of-sequence token, each decoder accepts as initial input the name of the anonymized symbol that it should predict. This factorized the output probability distribution as

$$\prod_{i=1}^N P(y_i; \mathcal{E}(x), \text{vari}_i), \quad (2)$$

where N is the number of symbols being de-anonymized. Finally, note that due to the quadratic compute and memory performance



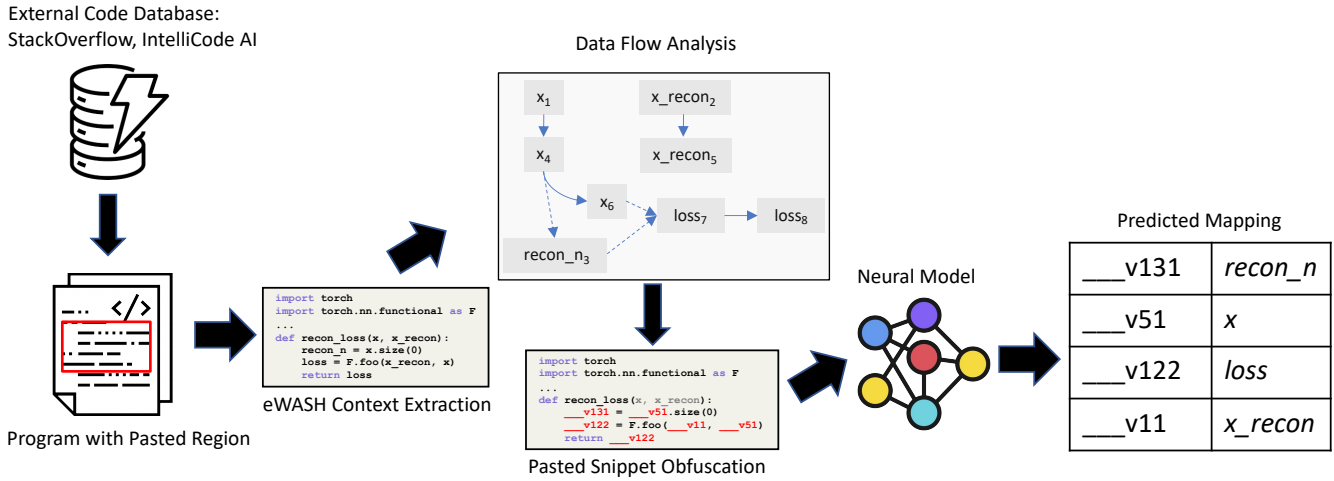


Figure 2: An overview of AdaptivePaste architecture: We start with extracting extended context and local context by traversing through the terminal nodes of CST tree and prioritizing class-level and method-level syntactic elements; Next, in local context pasted code is anonymized by replacing the variables with a set of pre-defined placeholder identifiers; Then, extended context and local context are concatenated and tokenized before being sent to pre-trained AdaptivePaste for code adaptation prediction; The output of AdaptivePaste is serialized as a sequence of tokens with entries separated by a delimiter symbol “|”

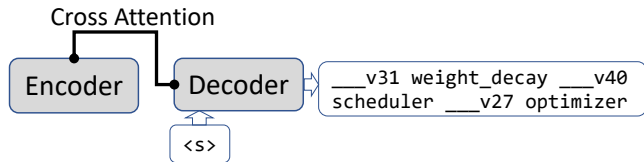

(a) Uni-Decoder: A traditional encoder-decoder transformer generates a single sequence with the predicted names of the anonymized variables.

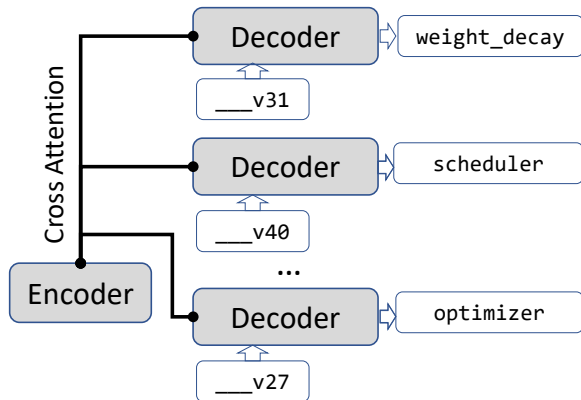

(b) Multi-Decoder: Multiple weight-tied decoders are instantiated and each accepts as initial input the target variable to predict.

Figure 3: Transformer model architectures for AdaptivePaste.

the multi-decoder model has a reduced memory footprint compared to the uni decoder ($O(nk^2)$ vs $O(n^2k^2)$ where n is the number of anonymized variables and k is the size of the longest sequence of subtokens), since the predicted sequences are shorter and there is no attention among them.

5.3 Context Prioritization and Anonymization

The input to the model is a source code file with preexisting code and a pasted code snippet. And the output is a mapping of mask symbols to predicted names. Since transformers have a quadratic performance with respect to the sequence length, we shorten the context relevant by utilizing eWASH [13]. This prioritizes syntax hierarchies which are most relevant to the pasted snippet region. Extracting syntactic hierarchies from the entire source code files, as opposed to the tokens immediately preceding the pasted snippet location, we are able to retain bound variables, such as class-level fields and method arguments, which are highly relevant for de-anonymizing variables in the pasted code snippet. Starting with a concrete syntax tree of a source file, we organize and prioritize class-level and method-level syntactic elements such as global import statements and assigned values, class attributes, method signatures, class docstring, and global expressions in the input. A special symbol “...” is introduced to denote locations in the code where syntax hierarchies are truncated.

Finally, we assign anonymized symbols as special symbols where all other code tokens and whitespace maps to one or more BPE subtokens. In practice, we use Hugging Face’s byte-level BPE tokenizer⁴.

⁴https://huggingface.co/docs/transformers/tokenizer_summary#bytelevel-bpe

6 IMPLEMENTATION DETAILS

The offline training module of AdaptivePaste is implemented in Python, which makes use of CUDA 11.4, GPU accelerated library of primitives from CuDNN 8.2, Pytorch 1.10.0 and NVIDIA collective communication library (NCCL). The model is trained on 6 STANDARD_NC24rs_v3 Azure Virtual Machines⁵ managed with Kubernetes, each having 8 V100 GPUs with 32GB memory.

During model training, a large number of parameters are learnt. These number of parameters scales quadratically with the number of hidden units of transformer blocks. Both the best performing AdaptivePaste uni-decoder and multi-decoder models have 16 layers, including 8 encoder transformer blocks and 8 decoder transformer blocks. Each encoder/decoder block has 8 attention heads. The vocabulary size of BPE tokenizer is 50000. The dimension of embedding space is 512. The model is trained using zero redundancy optimizer [27] with Adam stochastic optimization. The base learning rate is 5×10^{-5} and cumulative batch size is 288.

7 RESEARCH QUESTIONS

RQ1. How effective is AdaptivePaste in adapting pasted code snippets?

We evaluate AdaptivePaste’s code adaptation performance in terms of the exact string match accuracy of adapted code snippet to the ground truth and a less restrictive semantic validity metric. We also provide a comparison AdaptivePaste to baseline MLM and DOBF approaches.

RQ2. Can we improve the accuracy of AdaptivePaste by introducing a confidence threshold on its predictions?

We perform a systematic study of the AdaptivePaste uni-decoder and multi-decoder model predictions as a function of the confidence threshold to determine if it can improve code adaptation quality, and result in higher accuracy and semantic validity metrics. We expect low confidence predictions to be of low quality or break pasted snippet semantics. To estimate its potential effect, we have measured the model performance in 20 equal-sized confidence threshold bins.

RQ3. How AdaptivePaste performs on bound variables and free variables?

We investigate how effective is AdaptivePaste in predicting variable names of each variable category (bound and free). For this purpose, we estimate a per-variable de-anonymization accuracy and estimate how often does the model predict a variable category (bound or free) correctly. More specifically, we estimate a fraction of correctly predicted bound variables, fraction of bound variables predicted as bound, and repeat this for the free variable category.

In addition, we also investigate if we can improve the accuracy on bound variables and free variables by sacrificing recall. To achieve this goal, we follow the same steps and adopt the same range of thresholds presented in RQ2.

RQ4. How AdaptivePaste perform on downstream code intelligence tasks?

One of the technical innovations of the AdaptivePaste is its self-supervised pretraining objective. To evaluate the power of the AdaptivePaste pre-training objective, we fine-tune AdaptivePaste

model on three tasks from CodeXGLUE [24], a standard benchmark for code intelligence.

8 EVALUATION

8.1 Evaluation Metrics

To assess code adaptation performance, we identify two evaluation metrics:

- Accuracy of the exact string match of the adapted code snippet prediction as compared to the ground truth (user code), and
- *ValidPaste*: a fraction of the semantically valid paste instances, which measures the percentage of predicted code snippets with all bound variables de-anonymized correctly.

Among the two metrics, the exact match accuracy is stricter, as it measures both the correctness of identifier adaptations which are defined in the preexisting context snippet as well as the exact naming of new variables declared in the pasted snippet. Fortunately, the latter does not affect the semantics correctness of the source code, and renaming the variables declared and used in a pasted snippet arbitrarily would keep the paste instance semantically equivalent.

In addition to the above evaluation metrics which are calculated per pasted code snippet, we calculate per-variable accuracy of de-anonymization – *VarAcc*, and the accuracy of predicting the variable category (bound or free) – *CatAcc*.

Finally, given that each anonymization symbol `___vNN` in the pasted snippet may to a code token composed of multiple subtokens which only differ by the casing conventions (i.e. camelCase versus snake_case), we consider a casing-insensitive evaluation metrics. Namely, average harmonic mean of the precision⁶ and recall⁷ for retrieving the original case-insensitive free variable subtokens (Avg. F1-Subtoken). Free variable subtokens are determined by breaking the corresponding free variable name into subtokens using uppercase letters for camelCase and underscores for snake_case.

	AdaptivePaste		Baselines	
	Multi-Decoder	Uni-Decoder	DOBF-Adapt	MLM-Adapt
Accuracy	63.9%	67.8%	22.3%	22.5%
ValidPaste	79.0%	83.9%	34.7%	29.7%

Table 1: AdaptivePaste and baseline models evaluated in terms of top-1 accuracy of code snippet adaptation and the fraction of semantically valid paste instances.

8.2 Results

In this section we discuss the results of our proposed research questions.


RQ1. How effective is AdaptivePaste in adapting pasted code snippets?

As seen in Table 1, both AdaptivePaste model variants beat baselines across all the evaluation metrics. Especially the uni-decoder


⁶Percentage of predicted free variable subtokens are correct with respect to the ground truth

⁷Percentage of actual free variable subtokens are predicted as correct

⁵<https://docs.microsoft.com/en-us/azure/virtual-machines/ncv3-series>

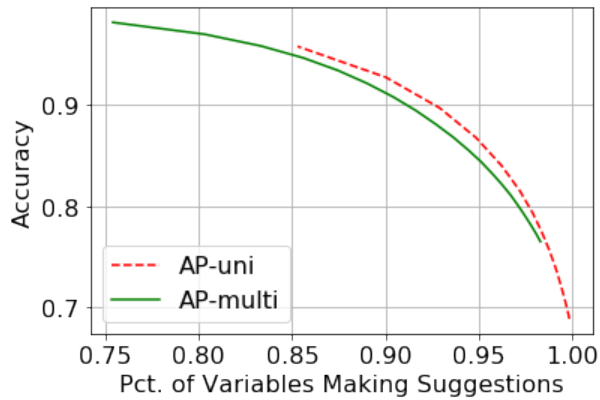


(a) Accuracy vs. Pct. of Variables Making Suggestions

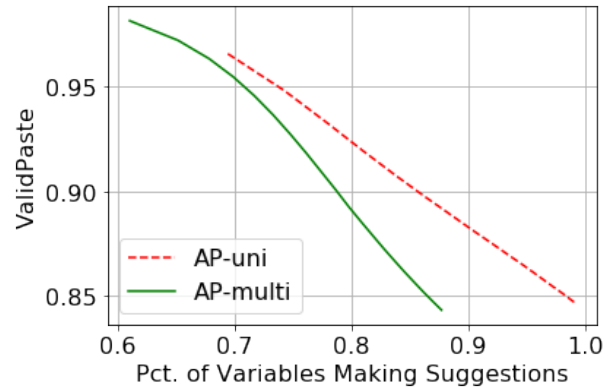


(b) ValidPaste vs. Pct. of Variables Making Suggestions


Figure 4: Comparing AdaptivePaste multi-decoder model (AP-multi) with AdaptivePaste uni-decoder model (AP-uni) in an offline evaluation of exact match accuracy (Accuracy) and percentage of valid paste (ValidPaste) after $thresholds \in [0.7, 0.985]$ applied. Regarding the evaluation of Accuracy, AdaptivePaste multi-decoder model benefits most from thresholds with much more accurate predictions and slightly lower percentage of variables making suggestions. Meanwhile, AdaptivePaste multi-decoder model achieves much higher ValidPaste with comparatively more compromise in percentage of variables making suggestions.

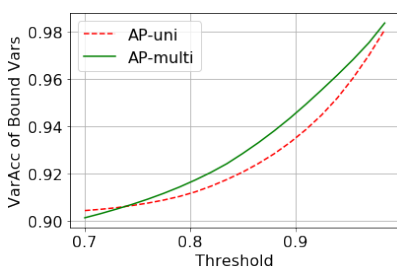

(a) VarAcc of Predicted Bound Variables vs. Thresholds

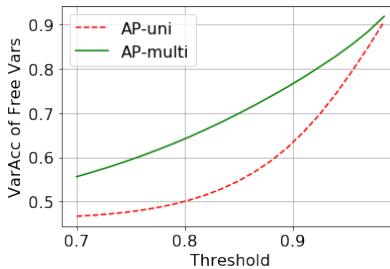

(b) VarAcc of Predicted Free Variables vs. Thresholds

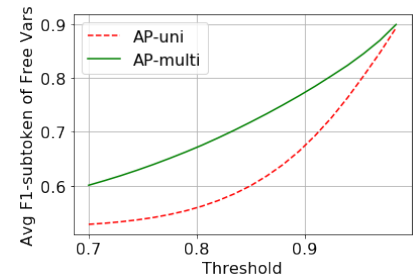

(c) Avg. F1-subtoken of Free Variables vs. Thresholds

Figure 5: Comparing AdaptivePaste multi-decoder model (AP-multi) with AdaptivePaste uni-decoder model (AP-uni) in an offline evaluation of bound variables and free variables adaptation after $thresholds \in [0.7, 0.985]$ applied. Consistent with Figure 4, AdaptivePaste multi-decoder model benefits most from thresholds with more accurate prediction, especially we observe more accurately adapted free variables.

model, which achieves 67.8% accuracy of code adaptation surpassing the best performing baseline (MLM) by 45.3%. Furthermore, it exceeds the best baseline results in terms of the ValidPaste metric, which measures the percentage of semantically valid paste instances, achieved by the DOBF for code adaptation model, by 49.2% at 83.9%.

RQ2. Can we improve the accuracy of AdaptivePaste by introducing a confidence threshold on its predictions?

To perform this study, we exponentiated the log-probability scores of output sequences generated by AdaptivePaste to fit them into the 0 to 1 probability range. For the multi-decoder model variant each adapted variable gets a unique confidence score, while the uni-decoder model variant assigns a single confidence score to all the adapted variables in a given sample. Our analysis shows

that in 89% of the adapted variables have scored in the range of 0.7–0.985, which was selected as a probability range in which this study was performed.

To better evaluate whether certain thresholds can improve the performance of code adaptation, we compute the exact match accuracy (accuracy) as well as the ValidPaste, as described in Section 7, at thresholds in the range of 0.7–0.985. Figure 4a shows the accuracy versus the percentage of variables making suggestions as threshold increases. It is clear that as the threshold increases, AdaptivePaste models predict more accurately adapted pasted code snippets. Especially AdaptivePaste multi-decoder variant achieves larger increases in accuracy with slightly lower percentage of variables have suggestions, so that the thresholds appear most beneficial for AdaptivePaste multi-decoder variant.

	AdaptivePaste Variants	
	Multi-Decoder	Uni-Decoder
Both Variable Categories		
VarAcc	77.6	79.8
Bound Variable Adaptation		
VarAcc	88.3	89.9
CatAcc	97.1	96.7
Free Variable Adaptation		
VarAcc	41.7	45.4
CatAcc	88.1	91.5
Per Free Variable Adaptation		
Avg. F1-Subtoken(%)	48.4	51.6

Table 2: Evaluation of AdaptivePaste model variants in terms of per-variable top-1 accuracy of de-anonymization (VarAcc) and the top-1 accuracy of predicting the variable category (CatAcc).

Figure 4b shows the ValidPaste vs. percentage of variables making suggestions by the same range of thresholds to test how much they can improve the prediction of valid pastes. We see the same overall benefits of thresholds in AdaptivePaste, and particularly even more improvements in AdaptivePaste multi-decoder variant with, however, more loss in percentage of adapted variables is observed. This interesting observation supports our hypothesis that thresholds are beneficial to AdaptivePaste code adaptation. Especially for multi-decoder variant, which thresholds can help to boost with predicting a more accurately adapted code but more compromise in percentage of adaptable variables adapted.

RQ3. How AdaptivePaste performs on bound variables and free variables?

As the answer to RQ1 suggests that before thresholds are applied on both AdaptivePaste variants, AdaptivePaste uni-decoder model can predict more accurate pasted code. To gain additional insights, we report the performance in terms of adapting different type of variables (i.e., bound variables and free variables) separately. To do so, in addition to Accuracy and ValidPaste, Table 2 reports the evaluation results of proposed metrics for bound variables and free variables before any threshold is applied.

First, we find that in terms of de-anonymizing both categories of variables, AdaptivePaste uni-decoder model (column "Uni-Decoder") predicts more accurate variables names as exact at 79.8%. This observed results are reported under the "Both Variable Categories" row in Table 2.

Second, we compare AdaptivePaste performance on only bound variables, which account for 77.1% of the total adapted variables in our dataset. The results of their dedicated evaluation metrics are shown under the "Per bound Variable" row in Table 2. As we can see, AdaptivePaste uni-decoder model (column "Uni-Decoder") predicts

more bound variables as exact at 89.9%, while AdaptivePaste multi-decoder model (column "Multi-Decoder") predicts more bound variables as bound at 97.1%. Meanwhile, the performance of both AdaptivePaste variants on bound variables are quite comparable with the improvements at 1.6% at most.

Third, the performance on only free variables, evaluated in three dedicated metrics, are reported in Table 2 under the "Per Free Variable" row and "Per Free Variable Adaptation" row. As the results show, AdaptivePaste uni-decoder model not only adapts more exactly matched free variables at 45.4%, but also predicts more free variables as not bound variables at 91.5%, which is 2.4% better than its multi-decoder variant. Moreover, due to the nature of free variable that they are not included in the context for code adaptation, we are also interested in how accurate per each predicted free variable. The results of "F1-subtoken" suggests that AdaptivePaste uni-decoder can predict more partially matched free variables at 51.6%.

Since thresholds have positive impact on the performance of AdaptivePaste code adaptation, we further expand this study for more insights on whether thresholds can help AdaptivePaste to adapt more bound variables and free variables correctly. Figure 5 shows that thresholds can significantly improve the prediction accuracy on both types of variables. Particularly, Figure 5a shows that AdaptivePaste multi-decoder variant can predict more accurate bound variables than uni-decoder variant. More encouragingly, Figure 5 shows that thresholds can significantly improves the VarAcc of free variables (5b) and average F1-subtoken of predicted free variables (5c). Especially, thresholds improves the performance of AdaptivePaste multi-decoder variant even more as VarAcc of free variables are improved to 65% with average F1-subtoken scored at 67.5% when threshold=0.8, which is 15% and 11.3% better than the uni-decoder variant. respectively.

In summary, before thresholds are applied, AdaptivePaste uni-decoder variant achieves better performance in adapting both free variables and bound variables. After thresholds are applied, AdaptivePaste multi-decoder benefits most by predicting more accurate free and bound variables. Especially when adapting free variables, thresholds significantly boost the performance of AdaptivePaste multi-decoder by achieving as much as 15% more accurate cases than uni-decoder variant.

	Code Summarization (BLEU)	NL Code Search (MRR)
Transformer	16.43 %	0.025
MLM	17.95 %	0.308
CodeBERT	18.22 %	0.315
GraphCodeBERT	18.51 %	0.377
DOBF	18.24 %	0.383
AdaptivePaste	18.52%	0.161

Table 3: Results on CodeXGLUE downstream tasks for AdaptivePaste and baseline models. Model pre-trained with AdaptivePaste outperforms all baselines on code summarization task but falls behind on NL code search task.

RQ4. How AdaptivePaste performs on downstream code intelligence tasks?

Given AdaptivePaste is pre-trained on dataset of code snippets in Python, the following tasks are chosen for which the training sets, validation sets and test sets in Python are publicly available:

- *CodeXGLUE Code Summarization*: In this task, the model is trained to generate natural language comments for a given code snippet. To perform this task, we fine-tune the entire AdaptivePaste model with the given training set and then evaluate the fine-tuned model on the provided test set using BLEU score Papineni et al. [25].
- *CodeXGLUE NL Code Search*: Given a natural language code search query, the model has to search through a collection of code snippets and find the one that is most relevant to the natural language query. Considering the architecture is a encoder only transformer-based model, we only fine-tune the encoders of AdaptivePaste model on the provided training set to encode natural language query and the candidate code snippets separately and then compute relevance score of each candidate code snippet using the dot product between the first hidden states of the encoders' last layers. Due to the ranking nature of NL code search task, we evaluate the model on the provided test set using the Mean Reciprocal Rank (MRR) metric.

For baselines, we consider a list of the models which achieved the best performance in CodeXGLUE tasks, including randomly initialized transformer model, a model pre-trained with MLM only [15], CodeBERT [17], GraphCodeBERT [18], and DOBF [21]. All baseline models are pre-trained model that publicly available. Finetuning and evaluation of the baselines are performed by following the instructions and scripts provided in the open source reproduction package⁸.

The results of pre-training objectives on downstream tasks are reported in Table 3. Since the AdaptivePaste uni-decoder model is the best code adaptation performer before any thresholds are applied, we only use the model pre-trained with AdaptivePaste uni-decoder architecture in downstream tasks. Table 3 shows that the model based on AdaptivePaste obtains state-of-the-art results on code summarization task, outperforming DOBF, GraphCodeBERT, CodeBERT and MLM, which shows that code summarization task benefits most from the AdaptivePaste pre-training objective. Especially, AdaptivePaste beats both DOBF and CodeBERT by a wide margin, showing that anonymizing all identifiers and natural language in code snippet are not necessary to train an effective model on this task. As for NL code search task, the AdaptivePaste model outperforms transformer-based model with no pre-training, which suggests that pre-training is particular important for NL code search task.

9 THREATS TO VALIDITY

Threats to *internal validity* can occur in our hyperparameter configuration. Due to substantial training time requirement, we didn't perform hyperparameter search. To address this concern, we reuse

configurations suggested in the literature. In addition, we experiment with multiple AdaptivePaste variants with different model configurations and report their results.

Threats to *external validity* concern the generalization of our findings, which can occur during model comparison with baseline. To avoid such threats, we train and evaluate both proposed AdaptivePaste and baseline models using the same training set and test set extracted from the same code snippets.

10 RELATED WORK

Our work is related to a broad set literature on code generation, code deobfuscation, and program repair.

Transformers for Code. Transformer-based pre-training objectives, especially masked language modeling, have shown to be effective for source code tasks. Feng et al. [17] proposed CodeBERT, a RoBERTa-based MLM model, to support natural language code search and code documentation generation. Guo et al. [18] extended the work by proposing an GraphCodeBERT to predict edges in the data flow graph. Svyatkovskiy et al. [31] presented GPT-C. which leveraged generative transformer model trained on source code for line-level code completion. Clement et al. [12] proposed a Python method text-to-text transfer transformer model called PyMT5 for method generation and code summarization. Tufano et al. applied the state-of-the-art transformer model to learn to generate assert statements [32]. Chen et al. [11] introduced Codex, which is a GPT language model fine-tuned on publicly available code from GitHub, to support developers in tasks such as code completion and method generation.

Code Deobfuscation. Informative identifier names can make code more understandable and easier to maintain [10]. This fact motivated researchers to study deobfuscation of identifier names. Alamanis et al. [2, 3] leverage n-gram model to suggest identifier names such as method and class names. Raychev et al. [29] present a approach for predicting program properties with a probabilistic model learnt from massive codebases. Bavishi et al. [9] presents a recurrent neural networks based technique to infer natural identifier names for minified names. Alon et al. [7] train a Conditional Random Field with features extracted from Abstract Syntax Tree (AST) paths to suggest variable and method names. David et al. [14] use augmented representation obtained from static analysis to predict procedure names in binary files. Recently, Lachaux et al. [21] introduce a deobfuscation pre-training objective for programming languages (DOBF) model, which outperforms other approach in many source code related tasks. None of these work, however, applied code deobfuscation approach to adapt variable names in pasted code. Furthermore, our evaluation results show than our proposed AdaptivePaste model outperforms deobfuscation approach in code adaptation task.

Program Repair and Synthesis. Program repair, especially variable misuse repair, is considered as the most relevant task to code adaptation. Pradel and Sen [26] propose DeepBugs to use an MLP over a limited window of code tokens to detect wrong operators, operands, and argument swappings. Dinella et al. [16] present Hop-pity to learn to perform graph transformation to replicate code refactoring, introducing functionality, bug fixing, etc.

⁸<https://github.com/facebookresearch/CodeGen/tree/main/CodeXGLUE>

There are several approaches proposed to tackle variable misuse bugs. Allamanis and Brockschmidt [4] designed a set of deep neural models to adapt given snippet to surrounding code. Vasic et al. [33] propose a joint approach to classify the variable locations as faulty or correct and then replace the faulty variables. Hellendoorn et al. [20] aim at variable misuse identification with Graph Relational Embedding Attention Transformers. Allamanis et al. [6] present BugLab to co-train a detector to detect as well as repair bugs in code and a selector to create buggy code for the detector to use as training data. Even though AdaptivePaste tackles a task similar to variable misuse repair, it leverages sequence-to-sequence with multi-decoder transformer pre-training to learn programming language semantics, including the long-range dependencies of variables usages, to adapt variables in pasted snippet of code.

Our work is remotely related to work on program synthesis using sketches [30] and automated code transplantation [8]. However, both approaches require specifications (e.g. input-output examples, test suites) and cannot be used to adapt code statically. These approaches can be thought as complementary to AdaptivePaste, since it learns to statically adapt the code.

11 CONCLUSIONS AND FUTURE WORK

In this paper, we introduce AdaptivePaste, a dedicated dataflow-aware deobfuscation pre-training model, and show that it can learn meaningful representations of variable usage patterns to adapt all variable identifiers to the surrounding, preexisting source code. Both AdaptivePaste variants, AdaptivePaste uni-decoder and AdaptivePaste multi-decoder, achieves state-of-the-art performance, outperforms MLM-based and DOBF-based code adaptation model. Additionally, given a pre-selected threshold applied, the Exact Match of code adaptation can be further improved to as much as around 95% with 25% loss in recall. Furthermore, we demonstrated that AdaptivePaste is effective as pre-training objectives for other code intelligence tasks, including code summarization and natural language code search. Especially for code summarization task, the model pre-trained based on AdaptivePaste uni-decoder architecture outperforms DOBF, GraphCodeBERT, CodeBERT and MLM pre-training models. These results show that AdaptivePaste leverages the variable names anonymization to the input sequence in a particularly effective way. Future work will investigate additional objectives such as MLM on docstrings and non-variable identifiers, which can provide unstructured noise that can be complementary to code adaptation and other code intelligence tasks.

REFERENCES

- [1] 2021. How often do people actually copy and paste from Stack Overflow? Now we know. <https://stackoverflow.blog/2021/12/30/how-often-do-people-actually-copy-and-paste-from-stack-overflow-now-we-know/>
- [2] Miltiadis Allamanis, Earl T Barr, Christian Bird, and Charles Sutton. 2014. Learning natural coding conventions. In *Proceedings of the 22nd ACM SIGSOFT International Symposium on Foundations of Software Engineering*. 281–293.
- [3] Miltiadis Allamanis, Earl T Barr, Christian Bird, and Charles Sutton. 2015. Suggesting accurate method and class names. In *Proceedings of the 2015 10th Joint Meeting on Foundations of Software Engineering*. 38–49.
- [4] Miltiadis Allamanis and Marc Brockschmidt. 2017. Smartpaste: Learning to adapt source code. *arXiv preprint arXiv:1705.07867* (2017).
- [5] Miltiadis Allamanis, Marc Brockschmidt, and Mahmoud Khademi. 2018. Learning to Represent Programs with Graphs. In *International Conference on Learning Representations*.
- [6] Miltiadis Allamanis, Henry Jackson-Flux, and Marc Brockschmidt. 2021. Self-Supervised Bug Detection and Repair. *Advances in Neural Information Processing Systems* 34 (2021).
- [7] Uri Alon, Meital Zilberstein, Omer Levy, and Eran Yahav. 2018. A general path-based representation for predicting program properties. *ACM SIGPLAN Notices* 53, 4 (2018), 404–419.
- [8] Earl T Barr, Mark Harman, Yue Jia, Alexandru Marginean, and Justyna Petke. 2015. Automated software transplantation. In *Proceedings of the 2015 International Symposium on Software Testing and Analysis*. 257–269.
- [9] Rohan Bavishi, Michael Pradel, and Koushik Sen. 2018. Context2Name: A deep learning-based approach to infer natural variable names from usage contexts. *arXiv preprint arXiv:1809.05193* (2018).
- [10] Simon Butler, Michel Wermelinger, Yijun Yu, and Helen Sharp. 2009. Relating identifier naming flaws and code quality: An empirical study. In *2009 16th Working Conference on Reverse Engineering*. IEEE, 31–35.
- [11] Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. 2021. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374* (2021).
- [12] Colin Clement, Dawn Drain, Jonathan Timcheck, Alexey Svyatkovskiy, and Neel Sundaresan. 2020. PyMT5: multi-mode translation of natural language and Python code with transformers. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. 9052–9065.
- [13] Colin Clement, Shuai Lu, Xiaoyu Liu, Michele Tufano, Dawn Drain, Nan Duan, Neel Sundaresan, and Alexey Svyatkovskiy. 2021. Long-Range Modeling of Source Code Files with eWASH: Extended Window Access by Syntax Hierarchy. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*. 4713–4722.
- [14] Yaniv David, Uri Alon, and Eran Yahav. 2020. Neural reverse engineering of stripped binaries using augmented control flow graphs. *Proceedings of the ACM on Programming Languages* 4, OOPSLA (2020), 1–28.
- [15] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805* (2018).
- [16] Elizabeth Dinella, Hanjun Dai, Ziyang Li, Mayur Naik, Le Song, and Ke Wang. 2020. Hoppity: Learning graph transformations to detect and fix bugs in programs. In *International Conference on Learning Representations (ICLR)*.
- [17] Zhangyin Feng, Daya Guo, Duyu Tang, Nan Duan, Xiao Cheng Feng, Ming Gong, Linjun Shou, Bing Qin, Ting Liu, Daxin Jiang, et al. 2020. CodeBERT: A Pre-Trained Model for Programming and Natural Languages. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: Findings*. 1536–1547.
- [18] Daya Guo, Shuo Ren, Shuai Lu, Zhangyin Feng, Duyu Tang, Shujie Liu, Long Zhou, Nan Duan, Alexey Svyatkovskiy, Shengyu Fu, et al. 2020. GraphCodeBERT: Pre-training code representations with data flow. *arXiv preprint arXiv:2009.08366* (2020).
- [19] Daya Guo, Alexey Svyatkovskiy, Jian Yin, Nan Duan, Marc Brockschmidt, and Miltiadis Allamanis. 2022. Learning to Complete Code with Sketches. In *International Conference on Learning Representations*. <https://openreview.net/forum?id=q79uMSC6ZBT>
- [20] Vincent J Hellendoorn, Charles Sutton, Rishabh Singh, Petros Maniatis, and David Bieber. 2019. Global relational models of source code. In *International conference on learning representations*.
- [21] Marie-Anne Lachaux, Baptiste Roziere, Marc Szafraniec, and Guillaume Lample. 2021. DOBF: A Deobfuscation Pre-Training Objective for Programming Languages. *Advances in Neural Information Processing Systems* 34 (2021).
- [22] Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Ves Stoyanov, and Luke Zettlemoyer. 2019. Bart: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension. *arXiv preprint arXiv:1910.13461* (2019).
- [23] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. RoBERTa: A Robustly Optimized BERT Pretraining Approach. *arXiv:1907.11692* [cs.CL]
- [24] Shuai Lu, Daya Guo, Shuo Ren, Junjie Huang, Alexey Svyatkovskiy, Ambrosio Blanco, Colin Clement, Dawn Drain, Daxin Jiang, Duyu Tang, et al. 2021. CodeXGLUE: A Machine Learning Benchmark Dataset for Code Understanding and Generation. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 1)*.
- [25] Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a method for automatic evaluation of machine translation. In *Proceedings of the 40th annual meeting of the Association for Computational Linguistics*. 311–318.
- [26] Michael Pradel and Koushik Sen. 2018. Deepbugs: A learning approach to name-based bug detection. *Proceedings of the ACM on Programming Languages* 2, OOPSLA (2018), 1–25.
- [27] Samyam Rajbhandari, Jeff Rasley, Olatunji Ruwase, and Yuxiong He. 2020. Zero: Memory optimizations toward training trillion parameter models. In *SC20: International Conference for High Performance Computing, Networking, Storage and Analysis*. IEEE, 1–16.
- [28] Baishakhi Ray, Miryung Kim, Suzette Person, and Neha Rungta. 2013. Detecting and characterizing semantic inconsistencies in ported code. In *2013 28th*

- IEEE/ACM International Conference on Automated Software Engineering (ASE)*. IEEE, 367–377.
- [29] Veselin Raychev, Martin Vechev, and Andreas Krause. 2015. Predicting program properties from “big code”. *ACM SIGPLAN Notices* 50, 1 (2015), 111–124.
- [30] Armando Solar-Lezama. 2008. *Program synthesis by sketching*. University of California, Berkeley.
- [31] Alexey Svyatkovskiy, Shao Kun Deng, Shengyu Fu, and Neel Sundaresan. 2020. Intellicode compose: Code generation using transformer. In *Proceedings of the 28th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering*. 1433–1443.
- [32] Michele Tufano, Dawn Drain, Alexey Svyatkovskiy, and Neel Sundaresan. 2020. Generating accurate assert statements for unit test cases using pretrained transformers. *arXiv preprint arXiv:2009.05634* (2020).
- [33] Marko Vasic, Aditya Kanade, Petros Maniatis, David Bieber, and Rishabh Singh. 2019. Neural program repair by jointly learning to localize and repair. *arXiv preprint arXiv:1904.01720* (2019).
- [34] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *Advances in neural information processing systems*. 5998–6008.