

Conditional Supervised Contrastive Learning for Fair Text Classification

Jianfeng Chi[†]

JC6UB@VIRGINIA.EDU

William Shand[†]

WSS2EC@VIRGINIA.EDU

Yaodong Yu[‡]

YYU@EECS.BERKELEY.EDU

Kai-Wei Chang[◇]

KWCHANG@CS.UCLA.EDU

Han Zhao^{*}

HANZHAO@ILLINOIS.EDU

Yuan Tian[†]

YT2E@VIRGINIA.EDU

[†] *Department of Computer Science, University of Virginia*

[‡] *Department of EECS, University of California, Berkeley*

[◇] *Department of Computer Science, University of California, Los Angeles*

^{*} *Department of Computer Science, University of Illinois at Urbana-Champaign*

Abstract

Contrastive representation learning has gained much attention due to its superior performance in learning representations from both image and sequential data. However, the learned representations could potentially lead to performance disparities in downstream tasks, such as increased silencing of underrepresented groups in toxicity comment classification. In light of this challenge, in this work, we study learning fair representations that satisfy a notion of fairness known as equalized odds for text classification via contrastive learning. Specifically, we first theoretically analyze the connections between learning representations with fairness constraint and *conditional supervised contrastive objectives*, and then propose to use conditional supervised contrastive objectives to learn fair representations for text classification. We conduct experiments on two text datasets to demonstrate the effectiveness of our approaches in balancing the trade-offs between task performance and bias mitigation among existing baselines for text classification. Furthermore, we also show that the proposed methods are stable in different hyperparameter settings.

1. Introduction

Recent progress in natural language processing (NLP) has led to its increasing use in various domains such as machine translation, virtual assistants, and social media monitoring. However, studies have demonstrated societal bias in existing NLP models (Bolukbasi et al., 2016; May et al., 2019; Bordia and Bowman, 2019b; Hutchinson et al., 2020; Webster et al., 2020; de Vassimon Manela et al., 2021). In one major NLP application, text classification, bias is referred as the performance disparity of the trained classifiers over different demographic groups such as gender and ethnicity (Weidinger et al., 2021). Such bias poses potential risks: for example, if toxicity classification models in online social media platforms show disparate performance in different social groups, it will lead to increased silencing of under-served groups (Dixon et al., 2018; Blodgett et al., 2020).

Meanwhile, an increasing line of work in contrastive learning (CL) has led to significant advances in representation learning (Hadsell et al., 2006; Logeswaran and Lee, 2018; He et al., 2020; Henaff, 2020; Chen et al., 2020a; Khosla et al., 2020; Gao et al., 2021b). The general idea of contrastive

learning in these works is to learn representations such that similar examples stay close to each other while dissimilar ones are far apart. Inspired by those works, recent works (Shen et al., 2021; Tsai et al., 2021, 2022) also propose to leverage contrastive learning to learn fair representations in classification. However, these works either lack theoretical justifications for the proposed approaches or simply adopt *demographic parity* (Dwork et al., 2012) as the fairness criterion, which eliminates the perfect classifier in the common scenario when the *base rates* differ among demographic groups (Hardt et al., 2016; Zhao and Gordon, 2019).

In this work, we aim to mitigate bias in text classification models via contrastive learning. In particular, we adopt the fairness notion, *equalized odds* (EO) (Hardt et al., 2016), which asks for equal true positive rates (TPRs) and false positive rates (FPRs) across different demographic groups (Zhao et al., 2019). Based on information-theoretic concepts, we bridge the problem of learning fair representations with equalized odds constraint with contrastive learning objectives. We then propose an algorithm, called *conditional supervised contrastive learning*, to learn fair text classifiers. Empirically, we conduct experiments on two text classification datasets (*e.g.*, toxic comment classification and biography classification) to show the proposed methods (1) can flexibly tune the trade-offs between main task performance and the fairness constraint; (2) achieve the best trade-offs between main task performance and equalized odds compared to the existing bias mitigation approaches in text classification (3) are stable to different hyperparameter settings, such as data augmentations, temperatures, and batch sizes. To the best of our knowledge, our work is the first to both theoretically and empirically study how to ensure the EO constraint via contrastive learning in text classification.

2. Background

We use $X \in \mathcal{X}$ and $Y \in \mathcal{Y}$ to denote the random variables for the input text and the categorical label for the main task, respectively. Furthermore, $A \in \mathcal{A}$ is the sensitive attribute (protected group) associated with the input text X (*e.g.*, the gender information in the occupation classification task). The corresponding lowercase letters denote the instantiation of the random variables. Given a text encoder $f : \mathcal{X} \rightarrow \mathcal{Z}$ (*e.g.*, BERT (Devlin et al., 2019)) and a classifier $g : \mathcal{Z} \rightarrow \mathcal{Y}$, we first transform the input text X into latent representation Z via f , and Z is used to give a prediction \hat{Y} via g (*i.e.*, $X \xrightarrow{f} Z \xrightarrow{g} \hat{Y}$). In the context of contrastive learning, data augmentation strategies have been widely adopted. Let \mathcal{T} be a set of data augmentations and X' be the augmented input given the data augmentation $t(\cdot)$: $X' = t(X)$, $t \sim \mathcal{T}$, where we assume that the augmentation t is sampled uniformly at random from \mathcal{T} . Similarly, we have $X' \xrightarrow{f} Z' \xrightarrow{g} \hat{Y}'$. Let $I(Z'; Z | Y)$ be the conditional mutual information of Z' and Z given Y . We assume there is a joint distribution over X, Y , and A from which the data are sampled. We also assume that the sensitive attribute A is available only during model training, but it is not available during the testing phase. As a result, any post-processing methods that leverage sensitive attributes for bias mitigation during the testing phase are not feasible in our setting. We use equalized odds, a fairness criterion for classification problems in this work.

Definition 2.1 (Equalized Odds (Hardt et al., 2016)). A model satisfies equalized odds if $\hat{Y} \perp A | Y$.

At a high-level, EO asks the model prediction to be independent of the sensitive attribute conditioned on the task label. If a model satisfies equalized odds exactly, the differences of true positive rates and false positive rates across demographic groups will be 0. Equivalently, it also

implies $I(\hat{Y}; A | Y) = 0$. As a real-world example to motivate the use of EO as a notion of fairness in this work, consider online comment toxicity classification. In this case, false positive cases (benign text comments marked as toxic) can be seen as unintentional censoring, and false negative cases (toxic text comments marked as benign) might result in debates and discomforts (Baldini et al., 2021). In contrast to another well-known group fairness definition, demographic parity, EO does not require positive prediction rates to be the same across different demographic groups, which could possibly severely downgrade the model performance when the sensitive attribute is correlated to the task label (Hardt et al., 2016; Zhao and Gordon, 2019).

3. Methodology

In this section, we first theoretically connect learning fair representations with contrastive learning (Sec. 3.1). In particular, we first show that learning fair representations for equalized odds requires the minimization of $I(Z'; Z | Y)$ and the simultaneous maximization of $I(Z'; Z | A, Y)$. To this end, we provide an upper bound of $I(Z'; Z | Y)$ and a lower bound of $I(Z'; Z | A, Y)$ to relax the original objective and then establish a relationship between the bounds and the (conditional) supervised contrastive learning objectives. Finally, we design two practical methods for learning fair representations (Sec. 3.2). Due to the space limit, we defer all detailed proofs to Appendix A.

3.1 Connections between Contrastive Learning and Learning Fair Representations

In order to learn a model (text encoder and classifier) to satisfy equalized odds, we aim to learn a latent representation Z so that $Z \perp A | Y$. From an information-theoretic perspective, it suffices to minimize the conditional mutual information $I(Z; A | Y)$ to ensure EO due to the celebrated data-processing inequality. Clearly, such a connection between contrastive learning and learning fair representations could only hold for certain representations with benign structures, and we formally state the following assumption to characterize such a structure.

Assumption 3.1. Let Z and Z' be the corresponding features from X and X' , respectively. We assume that there exists a positive constant $\epsilon > 0$, such that $H(Z | Z', Y) \leq \epsilon$.

At a high-level, Assumption 3.1 says that the learned features from the contrastive learning procedure is well conditionally aligned (Wang and Isola, 2020), i.e., given the label of a feature and its corresponding augmented feature, it is relatively easy to infer the corresponding positive pair used in the contrastive learning procedure. Note that the conditional entropy could be understood as the minimum inference error from this perspective (Farnia and Tse, 2016). Now, under Assumption 3.1, we provide the following lemma to characterize the relationship between Z , Z' , A , and Y in terms of (conditional) mutual information.

Lemma 3.1. Under Assumption 3.1, given a set of data augmentations \mathcal{T} , let X' be the augmented input data where $X' = t(X)$, $t \sim \mathcal{T}$. Assuming the following Markov chains $X \xrightarrow{f} Z \xrightarrow{g} \hat{Y}$ and $X' \xrightarrow{f} Z' \xrightarrow{g} \hat{Y}'$ hold, we have

$$I(Z'; Z | Y) - I(Z'; Z | A, Y) - \epsilon \leq I(Z; A | Y) \leq I(Z'; Z | Y) - I(Z'; Z | A, Y) + \epsilon.$$

Lemma 3.1 indicates that we can minimize $I(Z; A | Y)$ via (1) minimizing $I(Z'; Z | Y)$ and (2) maximizing $I(Z'; Z | A, Y)$. In what follows, we will present an upper (lower) bound to minimize $I(Z'; Z | Y)$ (maximize $I(Z'; Z | A, Y)$) and connect the bounds with contrastive learning objectives. We first provide an upper bound of $I(Z'; Z | Y)$.

Proposition 3.1. Given the assumptions in Lemma 3.1, we have

$$I(Z'; Z | Y) \leq -\mathbb{E}_{p(y)} \left[\mathbb{E}_{p(z'|y)} \left[\mathbb{E}_{p(z|y)} [\log p(z' | z, y)] \right] \right].$$

In order to better interpret the second term in Proposition 3.1, we define a similarity function $s(z', z; y)$ between z' and z for each y and assume $s(z', z; y) \propto p(z' | z, y)$ (i.e., the more similar z' and z are in the latent space given task label y , the more likely z' is generated by z via data augmentation)¹. With this assumption, the upper bound provided in Proposition 3.1 implies that $I(Z'; Z | Y)$ can be minimized by encouraging similarity between any latent representations given the same task label, which is consistent with the goal of supervised contrastive loss (Khosla et al., 2020). Formally, given a batch of augmented examples $(x_i, y_i, a_i)_{i=1}^{2N}$ with size $2N$, where the last half examples of the batch are the augmented views of the first half and they share the same task labels (as well as the same sensitive attributes), let N_{y_i} be the total number of examples in the batch that have the same task label as y_i , then supervised contrastive loss takes the following form:

$$L_{\text{sup}} = \sum_{i=1}^{2N} \frac{1}{N_{y_i} - 1} \sum_{j=1}^{2N} \mathbf{1}_{i \neq j} \mathbf{1}_{y_i = y_j} \log \frac{\exp(f(x_i) \cdot f(x_j) / \tau)}{\sum_{k=1}^{2N} \mathbf{1}_{i \neq k} \exp(f(x_i) \cdot f(x_k) / \tau)}, \quad (1)$$

where τ is the temperature and the similarity function is $s(f(x_i), f(x_j)) = \exp(f(x_i) \cdot f(x_j) / \tau)$. Supervised contrastive loss L_{sup} aims to encourage similarity between different examples with the same task label and discourage the ones without it. Thus, we minimize L_{sup} to approximately minimize $I(Z'; Z | Y)$. Next, we provide a lower bound of $I(Z'; Z | A, Y)$ for the maximization of $I(Z'; Z | A, Y)$.

Proposition 3.2. Given the assumptions in Lemma 3.1, define conditional supervised InfoNCE as

$$\text{CS-InfoNCE} := \sup_s \mathbb{E}_{p(a,y)} \left[\mathbb{E}_{p(z'_i, z_i | a, y)^{\otimes N}} \left[\log \frac{\exp(s(z'_i, z_i))}{\frac{1}{N} \sum_{j=1}^N \exp(s(z'_i, z_j))} \right] \right],$$

where $s(\cdot, \cdot)$ is any similarity function that measure the similarity of z'_i and z_i . Given the notations above, we have $\text{CS-InfoNCE} \leq I(Z'; Z | A, Y)$.

Proposition 3.2 indicates the maximization of CS-InfoNCE leads to the maximization of $I(Z'; Z | A, Y)$. Given the examples that share the same task label and sensitive attribute, CS-InfoNCE encourages the similarity between different views of the same examples while discouraging others. Note that all positive and negative examples w.r.t. the anchoring example share the same task labels and sensitive attributes. Given the same batch of examples $(x_i, y_i, a_i)_{i=1}^{2N}$ with size $2N$, we can formulate the contrastive objective as

$$L_{\text{CS-InfoNCE}} = \sum_{i=1}^{2N} \frac{1}{N_{a_i, y_i} - 1} \log \frac{\exp(f(x_i) \cdot f(x'_i) / \tau)}{\sum_{k=1}^{2N} \mathbf{1}_{i \neq k} \mathbf{1}_{a_i = a_k, y_i = y_k} \exp(f(x_i) \cdot f(x_k) / \tau)}, \quad (2)$$

1. In the remainder of the paper, we let $s(\cdot, \cdot) = s(\cdot, \cdot; y)$, $\forall Y = y$ for the ease of practical implementations.

where N_{a_i, y_i} is the total number of examples in the batch that have the same task label and sensitive attribute as y_i and a_i , and x_i and x'_i are the different views of the same example.

Interpretation of L_{sup} and $L_{\text{CS-InfoNCE}}$ in learning fair representations In learning fair representations, the role of L_{sup} is to learn aligned and uniform representations (Wang and Isola, 2020) for each task label, while the role of $L_{\text{CS-InfoNCE}}$ is to mix different examples that share the same sensitive attribute within each task label. In an ideal case where $L_{\text{sup}} = 0$, each data point that shares the same task label in the latent representation collapse to a single point, and the perfect representations are learned. In this case, $L_{\text{CS-InfoNCE}} = 0$ as well. However, this is not always the case in practice and $L_{\text{CS-InfoNCE}}$ is used to mix the examples in the same sensitive attribute within the same task label in the latent space.

3.2 Practical Implementations

The existing contrastive representation learning approaches fall into two categories: two-stage (Khosla et al., 2020; Chen et al., 2020b) and one-stage methods (Gunel et al., 2021; Cui et al., 2021). Two-stage methods first pretrain the encoder in the first stage using the contrastive objective, then fix the encoder, and fine-tune the classifier using cross-entropy (CE) loss later. One-stage methods train both encoder and classifier using CE loss and contrastive loss end-to-end. Following the previous settings, we also implement our methods in these two ways. For the two-stage CL method, we first pretrain the text encoder using the following loss function in the first stage:

$$L_{\text{sup}} + \lambda L_{\text{CS-InfoNCE}}, \tag{3}$$

fix the pretrained encoder, and fine-tune classifier using CE loss. Note that $\lambda \geq 0$ controls the intensity of $L_{\text{CS-InfoNCE}}$. For the one-stage CL method, similar to (Gunel et al., 2021), we formulate the loss function as:

$$(1 - \gamma)L_{\text{CE}} + \gamma L_{\text{sup}} + \lambda L_{\text{CS-InfoNCE}}, \tag{4}$$

where $\gamma \in [0, 1]$ controls the relative weight of L_{sup} compared to L_{CE} . The major advantage of our approach is that it can be directly substituted into existing NLP pipelines that use the “pretrain-and-finetune” paradigm popularized by large language models such as BERT. NLP practitioners can swap the fair CL finetuner into these pipelines to boost model fairness at low cost, with robust behavior against hyperparameter choices (see Sec. 4.2). Whereas large language models made it simple to build models with high performance, fair CL makes it simple to build models with high performance and fairness.

4. Experiments

In this section, we conduct experiments to investigate the following research questions:

- RQ 1.** How can we control the trade-offs between model classification performance and fairness via conditional supervised contrastive learning?
- RQ 2.** How do conditional supervised contrastive learning methods perform in terms of trade-offs between model performance and fairness compared to other in-processing bias mitigation methods in text classification?
- RQ 3.** Is conditional supervised contrastive learning sensitive to hyperparameter changes?

4.1 Experimental Setup

Datasets We perform experiments using the following two datasets (see Appendix B for more details of the datasets and the data preprocessing pipelines):

- `Jigsaw-toxicity2` is a dataset for online comment toxicity classification. The main task of the dataset is to determine if the online comment is toxic, and we use “race and ethnicity” as the sensitive attribute (*e.g.*, whether “black” identity is mentioned in the comment text).
- `Biasbios` (De-Arteaga et al., 2019) is a dataset for occupation classification. The main task of the dataset is to determine the peoples’ occupations given their biographies. The sensitive attribute is binary gender (*i.e.*, male and female).

Evaluation Metrics We evaluate our model based on model classification performance and EO fairness. We use the F1 score for model performance and True Positive Equality Difference + False Positive Equality Difference (Dixon et al., 2018) for EO fairness:

$$\Delta_{\text{TPR}} = \sum_a |\text{TPR}_a - \text{TPR}_{\text{overall}}| \quad \Delta_{\text{FPR}} = \sum_a |\text{FPR}_a - \text{FPR}_{\text{overall}}|,$$

where Δ_{TPR} (Δ_{FPR}) is the true positive rate (false negative rate) for sensitive attribute a and $\text{TPR}_{\text{overall}}$ ($\text{FPR}_{\text{overall}}$) is the overall true positive rate (false negative rate). Following (Pruksachatkun et al., 2021), we define equalized odds gap $\Delta_{\text{EO}} = \Delta_{\text{TPR}} + \Delta_{\text{FPR}}$, since equalized odds aligns with $\Delta_{\text{TPR}} + \Delta_{\text{FPR}}$, and when it is satisfied, $\Delta_{\text{TPR}} = \Delta_{\text{FPR}} = 0$ (Borkan et al., 2019). Note that when $|\mathcal{Y}| > 2$, Δ_{EO} will be summed over each value in \mathcal{Y} since TPR and FPR are defined over each class (*i.e.*, $\Delta_{\text{EO}} = \sum_y \Delta_{\text{EO}}^y$).

Implementations and Baselines We use BERT (Devlin et al., 2019) (bert-base-uncased as the text encoder followed by a two-layer MLP as the classifier) in our experiments³. As suggested by previous works (Khosla et al., 2020; Gao et al., 2021b), the performance of contrastive learning is closely related to the choice of the following hyperparameters: (1) temperature, (2) (pre-training) batch size, and (3) data augmentation strategy. Thus, we conduct a grid-based hyperparameter search for temperature $\tau \in \{0.1, 0.5, 1.0, 2.0\}$, (pre-training) batch size $\text{bsz} \in \{32, 64, 128, 256\}$, and data augmentation strategy $t \in \{\text{EDA}, \text{back translation}, \text{CLM insert}, \text{CLM substitute}\}$ (see Appendix B for the detailed description of different augmentation strategies) for both two-stage CL and one-stage CL. We also conduct grid search of $\gamma \in \{0.1, 0.3, 0.7, 0.9\}$ in Eq. 4 for one-stage CL. In Appendix B, we give the remaining hyperparameter details (*e.g.*, learning rate, training epochs, optimizer). Since it is not feasible to train large language models with large batch sizes via contrastive objectives given limited GPU memory, we use the gradient cache technique (Gao et al., 2021a) to adapt our implementations to limited GPU memory settings.

We compare our methods with the following baselines, which have been empirically demonstrated effective for bias mitigation in text classification: (1) Iterative null-space projection (INLP) (Ravfogel et al., 2020a): Given a pretrained text encoder, INLP learns a linear guarding layer on top of the pretrained text encoder to filter the sensitive information (by class) and fine-tune the classifier given the pretrained text encoder and INLP. As suggested by the original paper, we use CE loss to pretrain the text encoder and drop the prediction head using the validation set. (2) Adversarial training (Elazar and Goldberg, 2018): Following the encoder + classifier setting, adversarial training leverages a

2. The dataset is available at <https://www.kaggle.com/competitions/jigsaw-unintended-bias-in-toxicity-classification>.

3. We use the huggingface transformer implementation: <https://github.com/huggingface/transformers>.

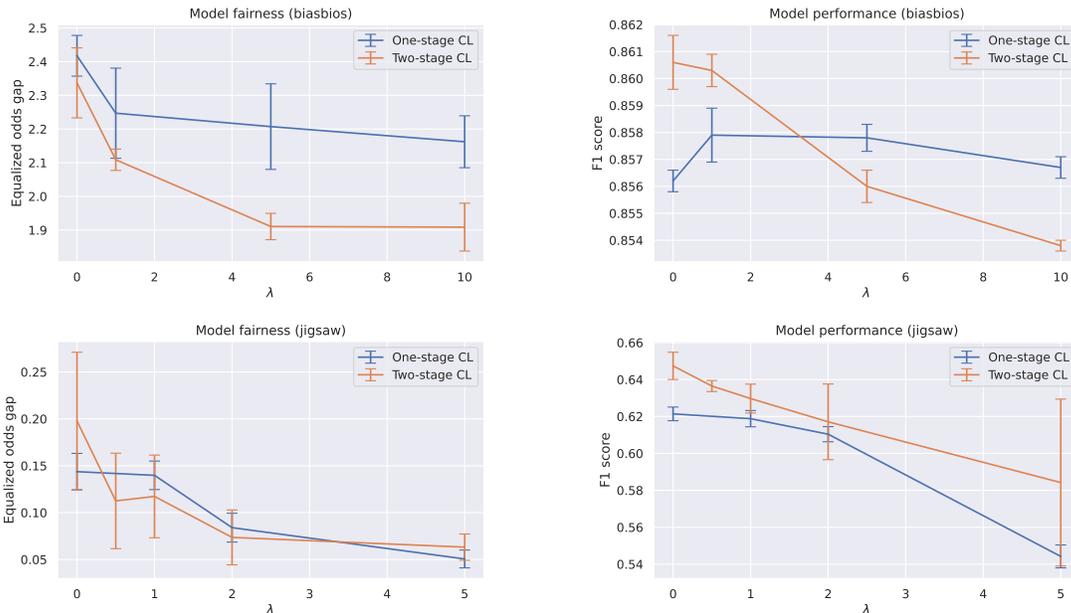


Figure 1: Classification performance and EO fairness of one-stage and two-stage CL when λ changes. The equalized odds gaps shrink at the cost of model classification performance as λ increases.

discriminator to learn latent representation oblivious to the sensitive attribute. (3) Adversarial training with diverse adversaries (diverse adversaries) (Han et al., 2021): Adversarial training with diverse adversaries improves adversarial training by using an ensemble of discriminators and encourages the discriminator to learn orthogonal representations. We use CE training (CE) as a baseline. We run each experiment with five different seeds and report the mean and standard deviation values for each evaluation metric for all methods.

4.2 Results and Analysis

RQ 1. In order to control the trade-offs between model classification performance and EO fairness, we vary the values of λ in Eq. 3 and Eq. 4. Figure 1 shows the classification performance and EO fairness of one-stage and two-stage CL when λ changes. Overall, as λ increases, the equalized odds gaps shrink at the cost of model classification performance. Compared to one-stage CL, two-stage CL achieves more flexible trade-offs in general. Given the same range of λ , the change of equalized odds gaps in two-stage CL is more significant than in one-stage CL. At the same time, the corresponding model classification performances are comparable or remain better.

RQ 2. We model the trade-offs between model performance and EO fairness of our proposed methods compared to the baselines. Figure 2 plots the performance and fairness of these methods under different hyperparameter settings for the `jigsaw` and `biasbios` datasets (trade-off parameters for all methods are described in more detail in Appendix B).

Among all methods, we find that two-stage CL and INLP achieve the best performance and fairness trade-offs. The adversarial-training-based methods are relatively more unstable and consistently perform worse than CL-based methods and INLP, especially in the `biasbios` dataset.

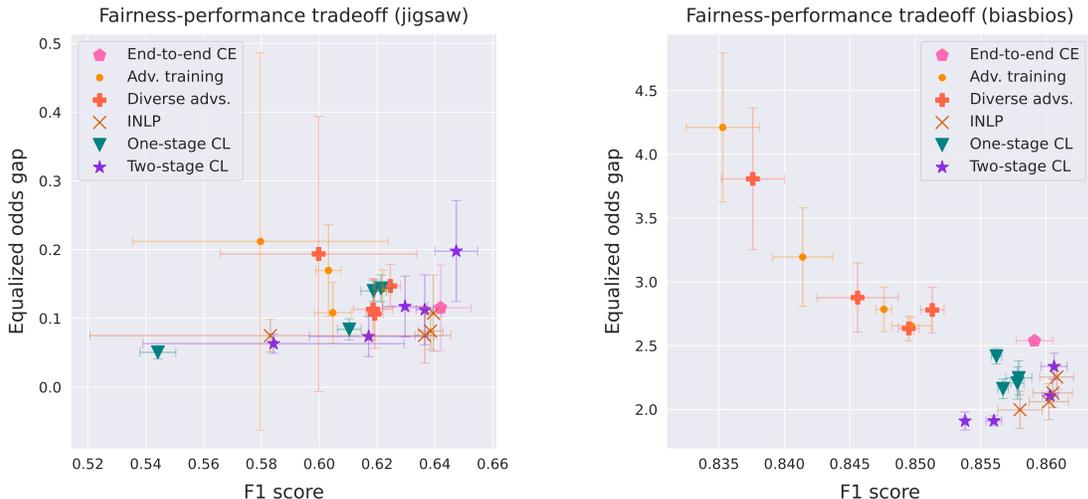


Figure 2: Classification performance and EO fairness and of our proposed methods compared against the baselines. Two-stage CL and INLP achieves the best performance and fairness trade-offs in general, and two-stage CL typically achieves more consistent results with lower variance.

Compared to INLP, two-stage CL typically achieves more consistent results (*i.e.*, lower variance) in model performance and fairness. We also note that the effectiveness of INLP highly depends on the pretrained encoder for INLP (see Appendix C for the effects of different pre-training strategies for the text encoder in INLP), CL-based methods target training the text encoder directly to ensure EO fairness and are more stable to hyperparameter changes (see RQ 3 below). Last but not least, both adversarial-training-based methods and INLP introduce additional model components (*e.g.*, adversarial networks in adversarial-training-based methods and linear guarding layer in INLP) during training or inference, which complicates the actual implementation of the whole pipeline. In contrast, CL-based methods are well-suited to pre-training and fine-tuning paradigms in NLP applications.

RQ 3. We have shown that two-stage CL performs better than one-stage CL in RQ 1 and RQ 2. Thus, we choose two-stage CL to see if it is sensitive to key hyperparameter changes. As mentioned above, the performance of contrastive learning is closely related to temperature, (pre-training) batch size, and data augmentation strategy. Thus, we explore whether the performance of two-stage CL is sensitive to these hyperparameter changes.

Figure 3 shows model performance and EO fairness of two-stage CL under different hyperparameter settings when $\lambda = \{0.0, 5.0\}$ in the *biasbios* dataset (Figure 5 for the *jigsaw* in Appendix C). We see that two-stage CL are stable under a wide range of parameter settings: The equalized odds gaps are consistently decreasing when $\lambda = 5.0$ and the F1 scores are relatively high.

5. Related Work

Unintended social biases in NLP models have been identified in word/sentence embedding (Bolukbasi et al., 2016; May et al., 2019) and applications such as coreference resolution (Zhao et al., 2018),

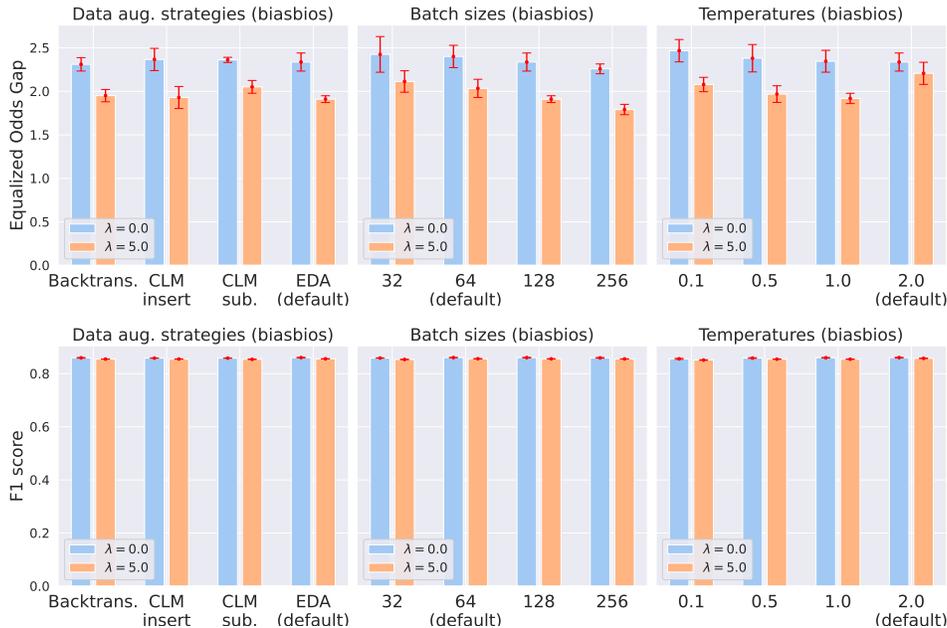


Figure 3: Sensitivity analysis of two-stage CL to key hyperparameter changes in (biasbios). “Default” in the X-axis indicates the default hyperparameter settings used in RQ 1 and RQ 2.

language modeling (Bordia and Bowman, 2019b), machine translation (Bordia and Bowman, 2019a), and text classification Ball-Burack et al. (2021); Baldini et al. (2022).

In the literature, there are some recent works that aim to learn fair representations via contrastive learning (Cheng et al., 2021; Shen et al., 2021; Tsai et al., 2021, 2022). Among these works, Cheng et al. (2021) propose contrastive objectives to learn debiased sentence embeddings that minimizes the correlation between embedded sentences and bias words. In classification tasks, Tsai et al. (2021, 2022) propose contrastive objectives to remove sensitive information; Shen et al. (2021) also propose similar a contrastive objective to achieve a similar goal. According to (Tsai et al., 2021), all those proposed contrastive objectives target for demographic parity in principle, though these objectives also works well for equalized odds in some cases (Shen et al., 2021). In comparison, our work uses equalized odds as fairness criterion. Theoretically, we connect the problem of learning fair representations to the supervised contrastive objectives and conditional supervised contrastive objectives. Empirically, we also explore the effectiveness of proposed objectives for bias mitigation in text classification.

6. Conclusion

In this paper, we theoretically and empirically study how to leverage contrastive learning for fair text classification. Our theoretical results suggest conditional supervised contrastive objectives to learn aligned and uniform representation while mixing the representation of different examples that share the same sensitive attribute for each main task label. We conduct experiments to demonstrate the effectiveness of our algorithms in learning fair representations for text classification and show

that our methods are stable in different hyperparameter settings. In the future, we plan to extend our algorithms to the settings of fairness gerrymandering (Kearns et al., 2018).

References

- I. Baldini, D. Wei, K. N. Ramamurthy, M. Yurochkin, and M. Singh. Your fairness may vary: group fairness of pretrained language models in toxic text classification. *arXiv preprint arXiv:2108.01250*, 2021.
- I. Baldini, D. Wei, K. Natesan Ramamurthy, M. Singh, and M. Yurochkin. Your fairness may vary: Pretrained language model fairness in toxic text classification. In *Findings of the Association for Computational Linguistics: ACL 2022*, pages 2245–2262, Dublin, Ireland, May 2022. Association for Computational Linguistics. URL <https://aclanthology.org/2022.findings-acl.176>.
- A. Ball-Burack, M. S. A. Lee, J. Cobbe, and J. Singh. Differential tweetment: Mitigating racial dialect bias in harmful tweet detection. In *Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency, FAccT ’21*, page 116–128, New York, NY, USA, 2021. Association for Computing Machinery. ISBN 9781450383097. doi: 10.1145/3442188.3445875. URL <https://doi.org/10.1145/3442188.3445875>.
- S. L. Blodgett, S. Barocas, H. Daumé III, and H. Wallach. Language (technology) is power: A critical survey of “bias” in nlp. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5454–5476, 2020.
- T. Bolukbasi, K.-W. Chang, J. Y. Zou, V. Saligrama, and A. T. Kalai. Man is to computer programmer as woman is to homemaker? debiasing word embeddings. *Advances in neural information processing systems*, 29:4349–4357, 2016.
- S. Bordia and S. R. Bowman. Identifying and reducing gender bias in word-level language models. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Student Research Workshop*, pages 7–15, Minneapolis, Minnesota, June 2019a. Association for Computational Linguistics. doi: 10.18653/v1/N19-3002. URL <https://aclanthology.org/N19-3002>.
- S. Bordia and S. R. Bowman. Identifying and reducing gender bias in word-level language models. In *NAACL-HLT (Student Research Workshop)*, 2019b.
- D. Borkan, L. Dixon, J. Sorensen, N. Thain, and L. Vasserman. Nuanced metrics for measuring unintended bias with real data for text classification. In *Companion Proceedings of The 2019 World Wide Web Conference, WWW ’19*, page 491–500, New York, NY, USA, 2019. Association for Computing Machinery. ISBN 9781450366755. doi: 10.1145/3308560.3317593. URL <https://doi.org/10.1145/3308560.3317593>.
- T. Chen, S. Kornblith, M. Norouzi, and G. Hinton. A simple framework for contrastive learning of visual representations. In *International conference on machine learning*, pages 1597–1607. PMLR, 2020a.

- T. Chen, S. Kornblith, M. Norouzi, and G. Hinton. A simple framework for contrastive learning of visual representations. In H. D. III and A. Singh, editors, *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pages 1597–1607. PMLR, 13–18 Jul 2020b. URL <https://proceedings.mlr.press/v119/chen20j.html>.
- P. Cheng, W. Hao, S. Yuan, S. Si, and L. Carin. Fairfil: Contrastive neural debiasing method for pretrained text encoders. In *International Conference on Learning Representations*, 2021. URL <https://openreview.net/forum?id=N6JECD-PI5w>.
- J. Cui, Z. Zhong, S. Liu, B. Yu, and J. Jia. Parametric contrastive learning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 715–724, 2021.
- M. De-Arteaga, A. Romanov, H. Wallach, J. Chayes, C. Borgs, A. Chouldechova, S. Geyik, K. Kenthapadi, and A. T. Kalai. Bias in bios: A case study of semantic representation bias in a high-stakes setting. In *Proceedings of the Conference on Fairness, Accountability, and Transparency, FAT* '19*, page 120–128, New York, NY, USA, 2019. Association for Computing Machinery. ISBN 9781450361255. doi: 10.1145/3287560.3287572. URL <https://doi.org/10.1145/3287560.3287572>.
- D. de Vassimon Manela, D. Errington, T. Fisher, B. van Breugel, and P. Minervini. Stereotype and skew: Quantifying gender bias in pre-trained and fine-tuned language models. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 2232–2242, 2021.
- J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova. BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/N19-1423. URL <https://aclanthology.org/N19-1423>.
- L. Dixon, J. Li, J. Sorensen, N. Thain, and L. Vasserman. Measuring and mitigating unintended bias in text classification. In *Proceedings of the 2018 AAAI/ACM Conference on AI, Ethics, and Society, AIES '18*, page 67–73, New York, NY, USA, 2018. Association for Computing Machinery. ISBN 9781450360128. doi: 10.1145/3278721.3278729. URL <https://doi.org/10.1145/3278721.3278729>.
- C. Dwork, M. Hardt, T. Pitassi, O. Reingold, and R. Zemel. Fairness through awareness. In *Proceedings of the 3rd innovations in theoretical computer science conference*, pages 214–226, 2012.
- S. Edunov, M. Ott, M. Auli, and D. Grangier. Understanding back-translation at scale. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 489–500, Brussels, Belgium, Oct.-Nov. 2018. Association for Computational Linguistics. doi: 10.18653/v1/D18-1045. URL <https://aclanthology.org/D18-1045>.
- Y. Elazar and Y. Goldberg. Adversarial removal of demographic attributes from text data. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*,

- pages 11–21, Brussels, Belgium, Oct.-Nov. 2018. Association for Computational Linguistics. doi: 10.18653/v1/D18-1002. URL <https://aclanthology.org/D18-1002>.
- F. Farnia and D. Tse. A minimax approach to supervised learning. *Advances in Neural Information Processing Systems*, 29, 2016.
- L. Gao, Y. Zhang, J. Han, and J. Callan. Scaling deep contrastive learning batch size under memory limited setup. In *Proceedings of the 6th Workshop on Representation Learning for NLP (RepL4NLP-2021)*, pages 316–321, Online, Aug. 2021a. Association for Computational Linguistics. doi: 10.18653/v1/2021.repl4nlp-1.31. URL <https://aclanthology.org/2021.repl4nlp-1.31>.
- T. Gao, X. Yao, and D. Chen. SimCSE: Simple contrastive learning of sentence embeddings. In *Empirical Methods in Natural Language Processing (EMNLP)*, 2021b.
- B. Gunel, J. Du, A. Conneau, and V. Stoyanov. Supervised contrastive learning for pre-trained language model fine-tuning. In *International Conference on Learning Representations*, 2021. URL <https://openreview.net/forum?id=cu7IUiOhujH>.
- R. Hadsell, S. Chopra, and Y. LeCun. Dimensionality reduction by learning an invariant mapping. In *2006 IEEE Computer Society Conference on Computer Vision and Pattern Recognition*, volume 2, pages 1735–1742. IEEE, 2006.
- X. Han, T. Baldwin, and T. Cohn. Diverse adversaries for mitigating bias in training. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 2760–2765, Online, Apr. 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.eacl-main.239. URL <https://aclanthology.org/2021.eacl-main.239>.
- M. Hardt, E. Price, and N. Srebro. Equality of opportunity in supervised learning. *Advances in neural information processing systems*, 29:3315–3323, 2016.
- K. He, H. Fan, Y. Wu, S. Xie, and R. Girshick. Momentum contrast for unsupervised visual representation learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9729–9738, 2020.
- O. Henaff. Data-efficient image recognition with contrastive predictive coding. In *International Conference on Machine Learning*, pages 4182–4192. PMLR, 2020.
- B. Hutchinson, V. Prabhakaran, E. Denton, K. Webster, Y. Zhong, and S. Denuyl. Social biases in nlp models as barriers for persons with disabilities. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5491–5501, 2020.
- M. Kearns, S. Neel, A. Roth, and Z. S. Wu. Preventing fairness gerrymandering: Auditing and learning for subgroup fairness. In J. Dy and A. Krause, editors, *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pages 2564–2572. PMLR, 10–15 Jul 2018. URL <https://proceedings.mlr.press/v80/kearns18a.html>.

- P. Khosla, P. Teterwak, C. Wang, A. Sarna, Y. Tian, P. Isola, A. Maschinot, C. Liu, and D. Krishnan. Supervised contrastive learning. *Advances in Neural Information Processing Systems*, 33, 2020.
- S. Kobayashi. Contextual augmentation: Data augmentation by words with paradigmatic relations. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 452–457, New Orleans, Louisiana, June 2018. Association for Computational Linguistics. doi: 10.18653/v1/N18-2072. URL <https://aclanthology.org/N18-2072>.
- P. W. Koh, S. Sagawa, H. Marklund, S. M. Xie, M. Zhang, A. Balsubramani, W. Hu, M. Yasunaga, R. L. Phillips, I. Gao, T. Lee, E. David, I. Stavness, W. Guo, B. A. Earnshaw, I. S. Haque, S. Beery, J. Leskovec, A. Kundaje, E. Pierson, S. Levine, C. Finn, and P. Liang. WILDS: A benchmark of in-the-wild distribution shifts. In *International Conference on Machine Learning (ICML)*, 2021.
- L. Logeswaran and H. Lee. An efficient framework for learning sentence representations. *arXiv preprint arXiv:1803.02893*, 2018.
- C. May, A. Wang, S. Bordia, S. R. Bowman, and R. Rudinger. On measuring social biases in sentence encoders. In *2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL HLT 2019*, pages 622–628. Association for Computational Linguistics (ACL), 2019.
- X. Nguyen, M. J. Wainwright, and M. I. Jordan. Estimating divergence functionals and the likelihood ratio by convex risk minimization. *IEEE Transactions on Information Theory*, 56(11):5847–5861, 2010. doi: 10.1109/TIT.2010.2068870.
- Y. Pruksachatkun, S. Krishna, J. Dhamala, R. Gupta, and K.-W. Chang. Does robustness improve fairness? approaching fairness with word substitution robustness methods for text classification. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 3320–3331, Online, Aug. 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.findings-acl.294. URL <https://aclanthology.org/2021.findings-acl.294>.
- S. Ravfogel, Y. Elazar, H. Gonen, M. Twiton, and Y. Goldberg. Null it out: Guarding protected attributes by iterative nullspace projection. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7237–7256, Online, July 2020a. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.647. URL <https://aclanthology.org/2020.acl-main.647>.
- S. Ravfogel, Y. Elazar, H. Gonen, M. Twiton, and Y. Goldberg. Null it out: Guarding protected attributes by iterative nullspace projection. *arXiv preprint arXiv:2004.07667*, 2020b.
- A. Shen, X. Han, T. Cohn, T. Baldwin, and L. Frermann. Contrastive learning for fair representations. *arXiv preprint arXiv:2109.10645*, 2021.
- Y.-H. H. Tsai, M. Q. Ma, H. Zhao, K. Zhang, L.-P. Morency, and R. Salakhutdinov. Conditional contrastive learning: Removing undesirable information in self-supervised representations. *arXiv preprint arXiv:2106.02866*, 2021.

- Y.-H. H. Tsai, T. Li, M. Q. Ma, H. Zhao, K. Zhang, L.-P. Morency, and R. Salakhutdinov. Conditional contrastive learning with kernel. In *International Conference on Learning Representations*, 2022. URL <https://openreview.net/forum?id=AAJLBoGt0XM>.
- T. Wang and P. Isola. Understanding contrastive representation learning through alignment and uniformity on the hypersphere. In *International Conference on Machine Learning*, pages 9929–9939. PMLR, 2020.
- K. Webster, X. Wang, I. Tenney, A. Beutel, E. Pitler, E. Pavlick, J. Chen, E. Chi, and S. Petrov. Measuring and reducing gendered correlations in pre-trained models. *arXiv preprint arXiv:2010.06032*, 2020.
- J. Wei and K. Zou. EDA: Easy data augmentation techniques for boosting performance on text classification tasks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 6382–6388, Hong Kong, China, Nov. 2019. Association for Computational Linguistics. doi: 10.18653/v1/D19-1670. URL <https://aclanthology.org/D19-1670>.
- L. Weidinger, J. Mellor, M. Rauh, C. Griffin, J. Uesato, P.-S. Huang, M. Cheng, M. Glaese, B. Balle, A. Kasirzadeh, et al. Ethical and social risks of harm from language models. *arXiv preprint arXiv:2112.04359*, 2021.
- H. Zhao and G. Gordon. Inherent tradeoffs in learning fair representations. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc., 2019. URL <https://proceedings.neurips.cc/paper/2019/file/b4189d9de0fb2b9cce090bd1a15e3420-Paper.pdf>.
- H. Zhao, A. Coston, T. Adel, and G. J. Gordon. Conditional learning of fair representations. In *International Conference on Learning Representations*, 2019.
- J. Zhao, T. Wang, M. Yatskar, V. Ordonez, and K.-W. Chang. Gender bias in coreference resolution: Evaluation and debiasing methods. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 15–20, New Orleans, Louisiana, June 2018. Association for Computational Linguistics. doi: 10.18653/v1/N18-2003. URL <https://aclanthology.org/N18-2003>.

Appendix A. Omitted Proofs

A.1 Proof of Lemma 3.1

Proof. By the definition of conditional mutual information:

$$\begin{aligned}
 & I(Z'; Z | Y) - I(Z'; Z | A, Y) \\
 &= (H(Z | Y) - H(Z | Z', Y)) - (H(Z | A, Y) - H(Z | Z', A, Y)) \\
 &= (H(Z | Y) - H(Z | A, Y)) + (H(Z | Z', A, Y) - H(Z | Z', Y)) \\
 &= I(Z; A | Y) + (H(Z | Z', A, Y) - H(Z | Z', Y)) \\
 &\leq I(Z; A | Y) + H(Z | Z', A, Y) \\
 &\leq I(Z; A | Y) + H(Z | Z', Y) \\
 &\leq I(Z; A | Y) + \epsilon
 \end{aligned}$$

Next, we prove the opposite side,

$$\begin{aligned}
 & I(Z'; Z | Y) - I(Z'; Z | A, Y) \\
 &= (H(Z | Y) - H(Z | Z', Y)) - (H(Z | A, Y) - H(Z | Z', A, Y)) \\
 &= (H(Z | Y) - H(Z | A, Y)) + (H(Z | Z', A, Y) - H(Z | Z', Y)) \\
 &= I(Z; A | Y) + (H(Z | Z', A, Y) - H(Z | Z', Y)) \\
 &\geq I(Z; A | Y) - H(Z | Z', Y) \\
 &\geq I(Z; A | Y) - \epsilon,
 \end{aligned}$$

which completes the proof. \square

A.2 Proof of Proposition 3.1

Proof.

$$\begin{aligned}
 I(Z'; Z | Y) &= -H(Z' | Z, Y) + H(Z' | Y) \\
 &= \mathbb{E}_{p(y)} [\mathbb{E}_{p(z', z|y)} [\log p(z' | z, y)] - \mathbb{E}_{p(z'|y)} [\log p(z' | y)]] \\
 &= \mathbb{E}_{p(y)} [\mathbb{E}_{p(z', z|y)} [\log p(z' | z, y)] - \mathbb{E}_{p(z'|y)} [\log \mathbb{E}_{p(z|y)} [p(z' | z, y)]]] \\
 &\leq \mathbb{E}_{p(y)} [\mathbb{E}_{p(z', z|y)} [\log p(z' | z, y)] - \mathbb{E}_{p(z'|y)} [\mathbb{E}_{p(z|y)} [\log p(z' | z, y)]]] \\
 &\leq -\mathbb{E}_{p(z'|y)} [\mathbb{E}_{p(z|y)} [\log p(z' | z, y)]]
 \end{aligned}$$

where the second lines follow the marginal of a joint distribution can be expressed as the expectation of the corresponding conditional distribution, and the third line follows Jensen's Inequality. \square

A.3 Proof of Proposition 3.2

Proof. Define two probability measures $\mathcal{P} = P_{Z', Z}$ and $\mathcal{Q} = \mathbb{E}_{P_{A, Y}} [P_{Z'|A, Y} P_{Z|A, Y}]$, we have

$$\begin{aligned}
& \mathbb{E}_{P(a,y)} \left[\mathbb{E}_{P(z'_i, z_i | a, y)^{\otimes N}} \left[\log \frac{\exp(s(z'_i, z_i))}{\frac{1}{N} \sum_{j=1}^N \exp(s(z'_i, z_j))} \right] \right] \\
&= \mathbb{E}_{(z', z_1) \sim \mathcal{P}, (z', z_{2:N}) \sim \mathcal{Q}^{\otimes N-1}} \left[\log \frac{\exp(s(z', z_1))}{\frac{1}{N} \sum_{j=1}^N \exp(s(z', z_j))} \right] \\
&\leq D_{\text{KL}}(\mathcal{P} \| \mathcal{Q}) \\
&= D_{\text{KL}}(P_{Z', Z} \| \mathbb{E}_{P_{A, Y}} [P_{Z' | A, Y} P_{Z | A, Y}]) \\
&\leq I(Z'; Z | A, Y).
\end{aligned}$$

where the second equation follows Lemma A.3 and the last equation follows Proposition A.3. \square

Lemma A.1 ((Nguyen et al., 2010)). Let \mathcal{Z} be the sample space for Z' and Z , $s : \mathcal{Z} \times \mathcal{Z} \rightarrow \mathbb{R}$ be any function, and \mathcal{P} and \mathcal{Q} be the probability measures over $\mathcal{Z} \times \mathcal{Z}$. We have

$$D_{\text{KL}}(\mathcal{P} \| \mathcal{Q}) = \sup_s \mathbb{E}_{(z', z) \sim \mathcal{P}} [s(z', z)] - \mathbb{E}_{(z', z) \sim \mathcal{Q}} [\exp(s(z', z))] + 1$$

Proof. We first get the second-order functional derivative of the objective: $-\exp(s(z', z)) \cdot d\mathcal{Q}$, which is negative and it implies there is a supreme value for the objective. Next, we set the first-order functional derivative of the objective to be zero:

$$d\mathcal{P} - \exp(s(z', z)) \cdot d\mathcal{Q} = 0.$$

Reorganizing the equation above we get the optimal similarity function $s^*(z', z) = \log(\frac{d\mathcal{P}}{d\mathcal{Q}})$. Plugging it into the original objective, we have

$$\mathbb{E}_{\mathcal{P}} [s^*(z', z)] - \mathbb{E}_{\mathcal{Q}} [\exp(s^*(z', z))] + 1 = \mathbb{E}_{\mathcal{P}} [\log(\frac{d\mathcal{P}}{d\mathcal{Q}})] = D_{\text{KL}}(\mathcal{P} \| \mathcal{Q}).$$

\square

Lemma A.2 (Four-variable variant of Lemma A.1). Let \mathcal{Z} be the sample space for Z' and Z , \mathcal{Y} be the sample space for Y , \mathcal{A} be the sample space for A , $s : \mathcal{Z} \times \mathcal{Z} \times \mathcal{Y} \times \mathcal{A} \rightarrow \mathbb{R}$ be any function, and \mathcal{P} and \mathcal{Q} be the probability measures over $\mathcal{Z} \times \mathcal{Z} \times \mathcal{Y} \times \mathcal{A}$. We have

$$D_{\text{KL}}(\mathcal{P} \| \mathcal{Q}) = \sup_s \mathbb{E}_{(z', z, y, a) \sim \mathcal{P}} [s(z', z, y, a)] - \mathbb{E}_{(z', z, y, a) \sim \mathcal{Q}} [\exp(s(z', z, y, a))] + 1$$

Proof. The proof technique is identical to the proof of Lemma A.1 and the only difference is that the similarity function takes four variables as input. \square

Lemma A.3. $\sup_s \mathbb{E}_{(z', z_1) \sim \mathcal{P}, (z', z_{2:N}) \sim \mathcal{Q}^{\otimes N-1}} \left[\log \frac{\exp(s(z', z_1))}{\frac{1}{N} \sum_{j=1}^N \exp(s(z', z_j))} \right] \leq D_{\text{KL}}(\mathcal{P} \| \mathcal{Q})$

Proof.

$$\begin{aligned}
 D_{\text{KL}}(\mathcal{P} \parallel \mathcal{Q}) &= \mathbb{E}_{(z', z_{2:N}) \sim \mathcal{Q}^{\otimes N-1}} \left[D_{\text{KL}}(\mathcal{P} \parallel \mathcal{Q}) \right] \\
 &= \mathbb{E}_{(z', z_{2:N}) \sim \mathcal{Q}^{\otimes N-1}} \left[\mathbb{E}_{\mathcal{P}} \left[\log \frac{\exp(s^*(z', z))}{\frac{1}{N} \sum_{j=1}^N \exp(s(z', z_j))} \right] - \mathbb{E}_{\mathcal{Q}} \left[\frac{\exp(s^*(z', z))}{\frac{1}{N} \sum_{j=1}^N \exp(s(z', z_j))} \right] + 1 \right] \\
 &= \mathbb{E}_{(z', z_{2:N}) \sim \mathcal{Q}^{\otimes N-1}} \left[\mathbb{E}_{\mathcal{P}} \left[\log \frac{\exp(s^*(z', z))}{\frac{1}{N} \sum_{j=1}^N \exp(s(z', z_j))} \right] - 1 + 1 \right] \\
 &= \mathbb{E}_{(z', z_1) \sim \mathcal{P}, (z', z_{2:N}) \sim \mathcal{Q}^{\otimes N-1}} \left[\log \frac{\exp(s(z', z_1))}{\frac{1}{N} \sum_{j=1}^N \exp(s(z', z_j))} \right],
 \end{aligned}$$

where the first line follows the fact that $D_{\text{KL}}(\mathcal{P} \parallel \mathcal{Q})$ is a constant, the second line follows Lemma A.1, the third line follows the fact that (z', z_1) and $(z', z_{2:N})$ are interchangeable when sampling from \mathcal{Q} . Thus, for all similarity function s , we have

$$\sup_s \mathbb{E}_{(z', z_1) \sim \mathcal{P}, (z', z_{2:N}) \sim \mathcal{Q}^{\otimes N-1}} \left[\log \frac{\exp(s(z', z_1))}{\frac{1}{N} \sum_{j=1}^N \exp(s(z', z_j))} \right] \leq D_{\text{KL}}(\mathcal{P} \parallel \mathcal{Q})$$

□

Lemma A.4.

$$\begin{aligned}
 &D_{\text{KL}}(P_{Z', Z} \parallel \mathbb{E}_{P_{A, Y}} [P_{Z'|A, Y} P_{Z|A, Y}]) \\
 &= \sup_s \mathbb{E}_{(z', z) \sim P_{Z', Z}} [s(z', z)] - \mathbb{E}_{(z', z) \sim \mathbb{E}_{P_{A, Y}} [P_{Z'|A, Y} P_{Z|A, Y}]} [\exp(s(z', z))] + 1.
 \end{aligned}$$

Proof. We use Lemma A.1 and substitute \mathcal{P} and \mathcal{Q} with $P_{Z', Z}$ and $\mathbb{E}_{P_{A, Y}} [P_{Z'|A, Y} P_{Z|A, Y}]$, respectively. □

Lemma A.5.

$$\begin{aligned}
 &I(Z'; Z \mid A, Y) \\
 &= D_{\text{KL}}(P_{Z', Z, A, Y} \parallel P_{A, Y} P_{Z'|A, Y} P_{Z|A, Y}) \\
 &= \sup_s \mathbb{E}_{(z', z, a, y) \sim P_{Z', Z, A, Y}} [s(z', z, a, y)] - \mathbb{E}_{(z', z, a, y) \sim P_{A, Y} P_{Z'|A, Y} P_{Z|A, Y}} [\exp(s(z', z, a, y))] + 1.
 \end{aligned}$$

Proof. We use Lemma A.2 and substitute \mathcal{P} and \mathcal{Q} with $P_{Z', Z, A, Y}$ and $P_{A, Y} P_{Z'|A, Y} P_{Z|A, Y}$, respectively. □

Proposition A.1. $D_{\text{KL}}(P_{Z', Z} \parallel \mathbb{E}_{P_{A, Y}} [P_{Z'|A, Y} P_{Z|A, Y}]) \leq I(Z'; Z \mid A, Y)$

Proof. We have

$$\begin{aligned}
 &D_{\text{KL}}(P_{Z', Z} \parallel \mathbb{E}_{P_{A, Y}} [P_{Z'|A, Y} P_{Z|A, Y}]) \\
 &= \sup_s \mathbb{E}_{(z', z) \sim P_{Z', Z}} [s(z', z)] - \mathbb{E}_{(z', z) \sim \mathbb{E}_{P_{A, Y}} [P_{Z'|A, Y} P_{Z|A, Y}]} [\exp(s(z', z))] + 1 \\
 &= \sup_s \mathbb{E}_{(z', z, a, y) \sim P_{Z', Z, A, Y}} [s(z', z)] - \mathbb{E}_{(z', z, a, y) \sim P_{A, Y} P_{Z'|A, Y} P_{Z|A, Y}} [\exp(s(z', z))] + 1,
 \end{aligned}$$

where the first equation follows Lemma A.4. Let $s^*(z', z)$ be the function when the supreme value is achieved and let $\hat{s}^*(z', z, a, y) = s^*(z', z), \forall (a, y) \in P_{A,Y}$, and we have

$$\begin{aligned} & D_{\text{KL}}(P_{Z',Z} \parallel \mathbb{E}_{P_{A,Y}}[P_{Z'|A,Y}P_{Z|A,Y}]) \\ &= \sup_s \mathbb{E}_{(z',z,a,y) \sim P_{Z',Z,A,Y}}[s(z', z)] - \mathbb{E}_{(z',z,a,y) \sim P_{A,Y}P_{Z'|A,Y}P_{Z|A,Y}}[\exp(s(z', z))] + 1 \\ &= \mathbb{E}_{(z',z,a,y) \sim P_{Z',Z,A,Y}}[\hat{s}^*(z', z, a, y)] - \mathbb{E}_{(z',z,a,y) \sim P_{A,Y}P_{Z'|A,Y}P_{Z|A,Y}}[\exp(\hat{s}^*(z', z, a, y))] + 1 \\ &\leq \sup_{\hat{s}} \mathbb{E}_{(z',z,a,y) \sim P_{Z',Z,A,Y}}[\hat{s}(z', z, a, y)] - \mathbb{E}_{(z',z,a,y) \sim P_{A,Y}P_{Z'|A,Y}P_{Z|A,Y}}[\exp(\hat{s}(z', z, a, y))] + 1 \\ &= I(Z'; Z | A, Y), \end{aligned}$$

where the last equation follows Lemma A.5. □

Appendix B. Experimental Details

B.1 Data preprocessing pipelines

Jigsaw Our first dataset, which we refer to as `jigsaw`, is a corpus of comments from an online forum associated with a toxicity rating. `jigsaw`'s main task is binary classification: given a “toxicity” score in the range $[0, 1]$ that has been assigned to each comment, we determine whether the “toxicity” score is greater or equal to 0.5. Each comment is also annotated with some “identity” labels, indicating whether some identities belonging to specific demographic groups are mentioned in the comment. We focus on the identity labels related to “race or ethnicity” and binarize the identity labels into black and non-black. Note that there are a multitude of other sensitive attributes in the *Jigsaw-Toxicity* dataset and we constrain the scope of our study to the “race” attributes present in text classification datasets. We follow (Koh et al., 2021) to perform the train/val/test splits. The data with “race or ethnicity” identity labels are split into training, validation, and test sets summarized in Table 1. Figure 4 plots the distribution of the toxicity label in each of the splits.

Table 1: Summary of training, validation, and test splits for the `jigsaw` dataset.

Data split	Samples	Protected attribute (NB = non-black, B = black)	Task label average
Training	25,954 (60.5%)	61.9% (NB), 38.1% (B)	0.2822
Validation	4,390 (10.2%)	62.4% (NB), 37.6% (B)	0.2897
Test	12,562 (29.3%)	61.2% (NB), 38.8% (B)	0.2873
Total	42,906	61.7% (NB), 38.3% (B)	0.2844

Bias-in-Bios To measure model fairness and performance in the multi-class classification setting, we use the professional biographies dataset of De-Arteaga et al. (2019), which we refer to as the `biasbios` dataset. The data consist of nearly 400,000 online biographies collected from the Common Crawl corpus. These biographies are annotated with one of the 28 professions to which their subject belongs. The data are mapped to a binary gender based on the occurrence of gendered pronouns and are scrubbed to exclude the authors’ names and pronouns. It is worth noting that the mapping of gender to binary labels is a strong simplified assumption to map data to a demographic

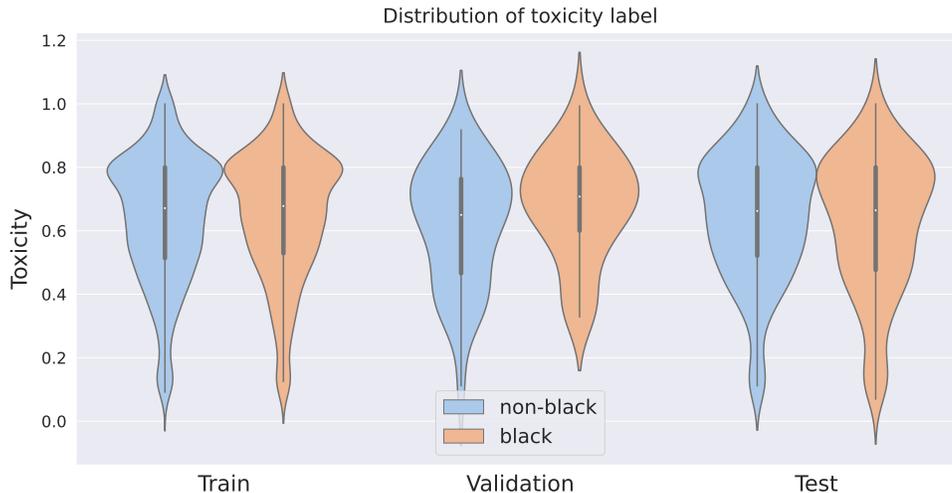


Figure 4: Violin plot of the distribution of the “toxicity” task label in the `jigsaw` dataset.

Table 2: Summary of the training, validation, and test splits of the `biasbios` dataset.

Data split	Samples	Protected attribute (F = female, M = male)
Training	255,710 (65.0%)	46.0% (F), 54.0% (M)
Validation	39,369 (10.0%)	47.8% (F), 52.2% (M)
Test	98,344 (25.0%)	46.5% (F), 53.5% (M)
Total	393,423	46.3% (F), 53.7% (M)

label cleanly; it ignores people who do not identify as female or male as well as the complexity of gender identity more generally. We refer readers to the original work (De-Arteaga et al., 2019) for further discussion of these issues. For our experiments, we attempt to predict the profession as our task label while protecting against the gender attribute. We replicate the splits of `biasbios` used by Ravfogel et al. (2020b), which are summarized in Table 2.

B.2 Detailed Implementations and Hyperparameter Settings

In this section, we provide more detail on our implementations and give the hyperparameter we use in our experiments. We first give detail on how we tune the performance and fairness trade-offs for each method.

- **One-stage / Two-stage CL:** for one- and two-stage CL, once we determine the best classification performance by conducting a grid search on temperature, (pre-training) batch size, and data augmentation strategies (as well as γ in one-stage CL), we only tune the parameter λ described in Sec. 3.2, which affects the trade-offs between supervised contrastive loss L_{sup} and the conditional supervised InfoNCE loss $L_{CS-InfoNCE}$.

- **Diverse adversarial training:** Following (Han et al., 2021), we use an ensemble of three adversarial discriminators and use the same adversarial network architecture. There are two hyperparameters of interest: λ_{diff} and λ_{adv} . λ_{diff} is a difference loss hyperparameter that encourages discriminators to learn orthogonal representations. λ_{adv} affects the tradeoff in the model between task performance and learning a hidden representation independent of the protected attribute. We first do a grid search on $\lambda_{diff} = \{0, 100, 1000, 5000\}$ and vary the values of λ_{adv} to determine the best hyperparameter configurations.
- **Adversarial training:** The implementation is nearly identical to diverse adversarial training, except that there is just one adversarial discriminators.
- **INLP:** Following (Ravfogel et al., 2020a), we use the weight of the a SVM classifier as the parameters of the linear guarding layer and follow the same hyperparameters in training the linear guarding layer. The trade-off hyperparameter that we tune for INLP is N_{clf} , which is the number of classifiers trained by INLP (*i.e.*, the number of rounds).

Table 3 contains the trade-off hyperparameters used for our experiments on the `jigsaw` dataset, while Table 4 summarizes the hyperparameter choices for the `biasbios` dataset. The remaining hyperparameters for all methods are listed in Table 5.

Table 3: Hyperparameters tested for RQ2 (Figure 2) for the `jigsaw` dataset.

Method	Hyperparameters tested
Adversarial training	$\lambda_{adv} \in \{0.1, 0.5, 1, 2\}$
Diverse adversarial training ($N_{adv} = 3, \lambda_{diff} = 100$)	$\lambda_{adv} \in \{0.1, 0.5, 1, 2\}$
INLP	$N_{clf} \in \{20, 50, 80, 100, 150\}$
One-stage CL	$\lambda \in \{0, 1, 2, 5\}$
Two-stage CL	$\lambda \in \{0, 0.5, 1, 2, 5\}$

Table 4: Hyperparameters tested for RQ2 (Figure 2) for the `biasbios` dataset.

Method	Hyperparameters tested
Adversarial training	$\lambda_{adv} \in \{0.1, 0.2, 0.5, 1\}$
Diverse adversarial training ($\lambda_{diff} = 5000$)	$\lambda_{adv} \in \{0.1, 0.2, 0.5, 1\}$
INLP	$N_{clf} \in \{20, 50, 100, 300\}$
One-stage CL	$\lambda \in \{0, 1, 5, 10\}$
Two-stage CL	$\lambda \in \{0, 1, 5, 10\}$

Table 5: Additional hyperparameters used for experiments.

Hyperparameter	(jigsaw)	(biasbios)
Batch size	32	32
Learning rate	2e-5	2e-5
Epochs	10	7
Optimizer	Adam	Adam

B.3 Data Augmentation Strategies

In this section, we provide a description of the data augmentation strategies used in CL-based methods⁴.

- Easy data augmentation (EDA) (Wei and Zou, 2019): EDA consists of four simple operations: synonym replacement, random insertion, random swap, and random deletion. Following the suggestions provided by the original paper, we choose the augmentation ratio to be 0.1 and create four augmented examples per example.
- Back translation (Edunov et al., 2018): It first translates the input example to another language and translates it back to English. We use the machine translation model `wmt19-en-de` in our experiment.
- Word replacement using contextual language model (CLM insert) (Kobayashi, 2018): It replaces words based on a language model that leverages contextual word embeddings to find the most similar word for augmentation. We use the RoBERTa-base model as the language model and choose the augmentation rate is 0.1.
- Word insertion using contextual language model (CLM insert) (Kobayashi, 2018): It inserts words based on a language model that leverages contextual word embeddings to find the most similar word for augmentation. We use the RoBERTa-base model as the language model and choose the augmentation rate is 0.1.

Appendix C. Additional Experimental Results

C.1 More Comments for CL-based Methods

Our method achieves highly consistent results with respect to fairness and performance compared to the baseline methods. Figure 5 visualize hows model performance and EO fairness of two-stage CL under different hyperparameter settings when $\lambda = \{0.0, 5.0\}$ in the `jigsaw` dataset. Table 6 shows the standard deviation in model fairness and performance averaged across all training runs. In general, both one- and two-stage CL tend to achieve the highest stability with respect to fairness and performance across the datasets that we tested on.

C.2 How Different Pretrained Text Encoders affects the Performance of INLP?

To give the clearest comparison between our proposed methods and the baselines, we used the best settings for the baseline methods that we were able to attain. Nonetheless, we observed that the performance of INLP was highly sensitive to the encoder training settings, which could be an important practical consideration for practitioners selecting between different ways of improving

⁴. We use the implementations of data augmentation at: <https://github.com/makcedward/nlpaug>.

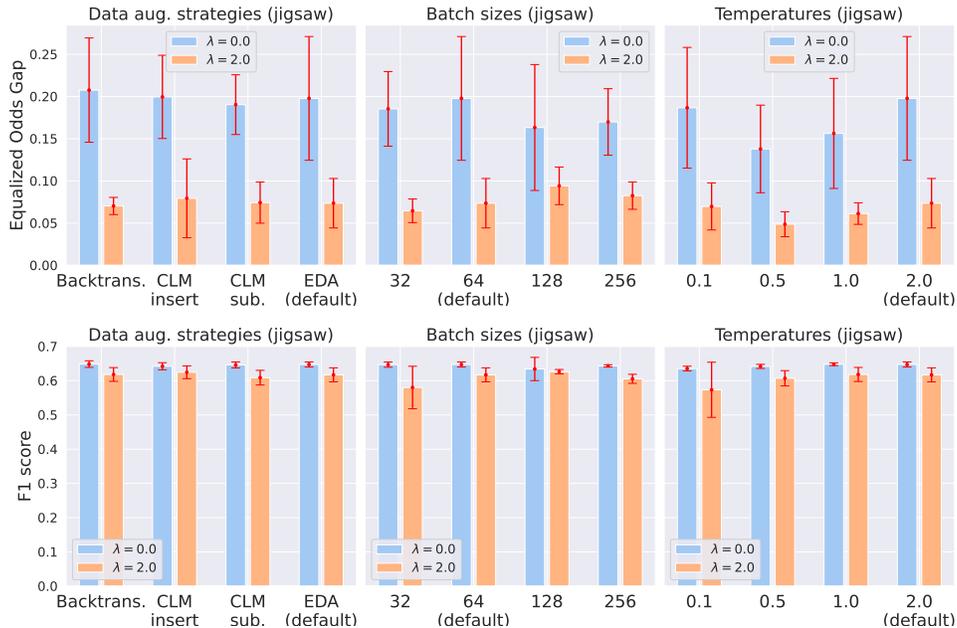


Figure 5: Sensitivity analysis of two-stage CL to key hyperparameter changes in (Jigsaw).

Table 6: Performance and fairness stability of training methods. σ_{F1} and σ_{EO_gap} denote, respectively, the standard deviation of the F_1 scores and equalized odds gaps for each method averaged across all training seeds and hyperparameter values.

Method	Stability (jigsaw)		Stability (biasbios)	
	σ_{F1}	σ_{EO_gap}	σ_{F1}	σ_{EO_gap}
CE training	0.0105	0.0625	0.0014	0.0058
Adversarial training	0.0145	0.1033	0.0018	0.3025
Diverse adversarial training	0.0118	0.0817	0.0018	0.2757
INLP	0.0182	0.0367	0.0015	0.1249
One-stage CL	0.0046	0.0149	0.0006	0.0996
Two-stage CL	0.0168	0.0423	0.0006	0.0614

model fairness. Figure 6 compares the performance and fairness of INLP using different encoder pre-training strategies. We see that in both datasets, the classification and fairness performance of INLP changes drastically even with the same values of trade-off parameter. In comparison, our methods are more robust to hyperparameter changes.

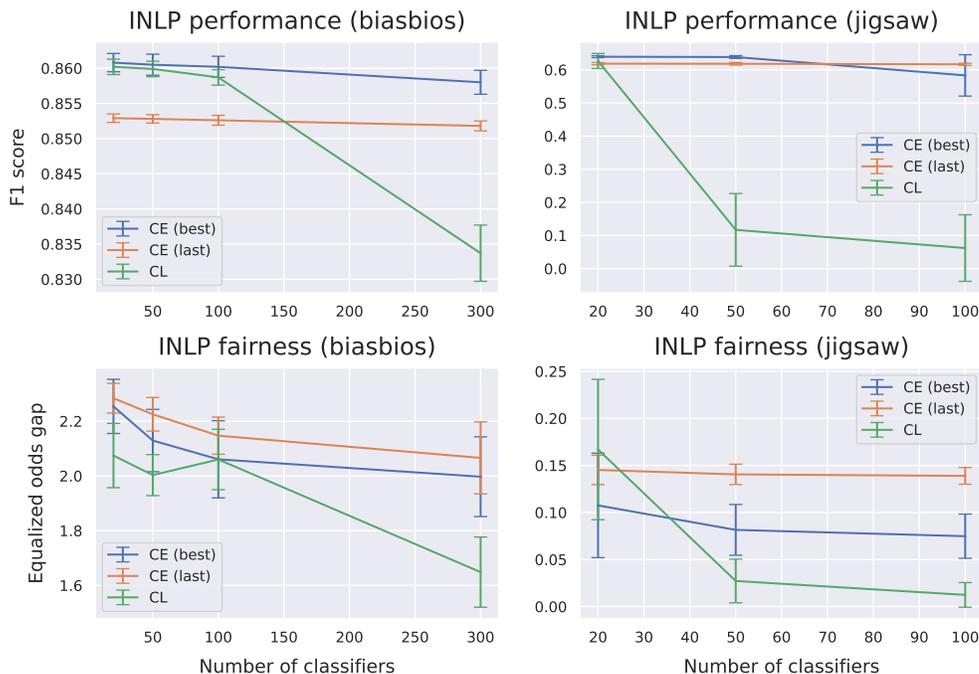


Figure 6: Comparison of INLP performance and fairness under different pretrained encoders. CE (best) indicates that we train the text encoder using CE loss and save the encoder that achieve the best validation loss for INLP. CE (last) indicates that we train the text encoder using CE loss and save the encoder in the last epoch for INLP. CL indicates that we train the text encoder using supervised contrastive loss.