

Classification of four-qubit entangled states via Machine Learning

S. V. Vintskevich,¹ N. Bao,² A. Nomerotski,² P. Stankus,² and D.A. Grigoriev³

¹*Independent Researcher, UAE*

²*Brookhaven National Laboratory, Upton NY 11973, USA*

³*Independent Researcher, Georgia*

We apply the support vector machine (SVM) algorithm to derive a set of entanglement witnesses (EW) to identify entanglement patterns in families of four-qubit states. The effectiveness of SVM for practical EW implementations stems from the coarse-grained description of families of equivalent entangled quantum states. The equivalence criteria in our work is based on the stochastic local operations and classical communication (SLOCC) classification and the description of the four-qubit entangled Werner states. We numerically verify that the SVM approach provides an effective tool to address the entanglement witness problem when the coarse-grained description of a given family state is available. We also discuss and demonstrate the efficiency of nonlinear kernel SVM methods as applied to four-qubit entangled state classification.

I. INTRODUCTION

The ability to quantify, detect and analyze the structure of quantum entanglement [1] is essential for quantum computation [2–4], communication [5–7], quantum networks [8] and quantum metrology [9, 10]. Moreover, an improper "amount" of entanglement, specific structure or pattern of multipartite entangled state, or action of quantum noise could severely affect the overall efficiency of quantum computation tasks[11] or performance of a given quantum protocol, such as that of entanglement purification [12]. Thus, it is crucial to detect and describe the structure of entanglement in a set of states to maximize the efficiency of a given protocol. For instance, one can detect the presence of entanglement in particular families of states which can be used in a quantum protocol with a given probability to succeed.

The success probability may vary when one uses different families of entangled states in a given quantum protocol [13–15]. One the most characteristic examples of such differences are the multipartite GHZ- and W- type states. The GHZ-type states are fragile against loss and utilized in quantum information sharing protocols, whereas GHZ-type states are robust against the noise and are used in multi-party quantum network protocols [16]. These two state types define two distinguishable families of states that cannot be converted into one another by Local Operations and Classical Communications (LOCC).

The entanglement witness (EW) technique is one of the most common, effective, and practical methods to detect the presence of entanglement for a given *multipartite* quantum state, see, e.g.[1, 17], and references therein. In the present work, we analyze this technique applied to qubit systems. The essence of the EW technique is briefly summarized below. By finding a specific Hermitian operator, called the entanglement witness \hat{W} , one calculates a linear functional (EW functional), which maps a given multipartite quantum state described by density operator $\hat{\rho}$ into a real number. It was proven [1, 18, 19] that the EW functional has a non-negative value for all separable states $\hat{\rho}_{sep.}$ and that there exists a particular set of entangled states for which the EW functional has negative values. More specifically, let us define a set of arbitrary n_q qubits states as follows: $S_{n_q} := \{\hat{\rho}_{n_q} \in \mathcal{T}(\mathcal{H}_{n_q}) | \text{tr}(\hat{\rho}_{n_q}) = 1, \hat{\rho}_{n_q} \geq O\}$. We denote $\mathcal{T}(\mathcal{H}_{n_q})$ as a linear space of trace class operators [20] acting on Hilbert space \mathcal{H}_{n_q} . Mathe-

matically, the EW functional is defined as follows:

$$\text{tr}(\hat{\rho}_{sep.} \hat{W}) \geq 0, \forall \hat{\rho}_{sep.} \in S; \text{tr}(\hat{\rho}_{ent.} \hat{W}) < 0, \quad (1)$$

where we denote S as a subset of all separable states. By definition [1, 20] a state $\hat{\rho}_{sep.}$ is separable if it can be represented as a convex combination of factorized states: $\hat{\rho} = \sum_i^k p_i \hat{\rho}_1^i \otimes \dots \otimes \hat{\rho}_N^i$; each $\hat{\rho}^i$ is a state of i -th qubit subsystem, a density operator acting on a subspace \mathcal{H}_i of a N -partite quantum system with joint space $\mathcal{H} = \mathcal{H}_1 \otimes \dots \otimes \mathcal{H}_N$; $\sum_{i=1}^k p_i = 1$, $k \leq \dim \mathcal{H}^2$. Thus, the set of all separable states is a convex subset of all states S_{n_q} defined above with respect to the trace norm [20], while, by definition, the entangled states are those states that are not separable.

Note that the entanglement witness operator \hat{W} , which can detect the entanglement for a given state $\hat{\rho}_{ent}$ is not universal. There are always entangled states $\hat{\sigma}_{ent}$ such that $\text{tr}(\hat{W} \hat{\sigma}_{ent}) > 0$, but at the same time $\text{tr}(\hat{W} \hat{\rho}_{ent}) < 0$. Unfortunately one cannot determine the entanglement witness operator for all possible entangled states for a general multipartite quantum state [1, 20]. However, in some cases, the aforementioned disadvantage might be partially overcome. For instance, we can specify equivalence classes of pure entangled states, which can be transformed into each other with nonzero probability through local operations and classical communications (LOCC) [21, 22].

Here we aim to employ the coarse-grained classifications of four-qubit quantum states following the results of [22] to construct a set of entanglement witness operators. We avoid the difficulties of analytical derivation of the entanglement witness operators by approaching the problem numerically. The core of our numerical analysis is based on the well-known Support Vector Machine (SVM) method in machine-learning (ML) [23, 24]. The SVM-based algorithm is designed to detect the presence of entanglement not only in arbitrary four-qubit states but also to assign this state to a particular families of states. To train SVM model we sample a data set of quantum states for each class of entangled and separable states based on this coarse-grained classification. There are $N_{data} = 10000$ samples for each class comprised together in a data set.

It is worth emphasizing that in recent years, machine learning-based methods have demonstrated remarkable efficiency in application to various areas of quantum physics [25–28]. For instance, others have used neural networks

four qubits has another advantage - the SLOCC classification of entangled states. This coarse-grained classification of four-qubit entangled states further reduces the complexity of the EW problem and effectively applies SVM. In the next subsection II A we focus on this classification following the results of [22] and applying it to the construction of EW operators. The subsection II B provides the results of SVM approach for constructing the EW operators and entanglement detection of arbitrary four-qubit states.

A. Classification of four-qubit states

In [22] it was shown how one can classify all pure states of four qubits into distinguishable classes of entangled *pure* states. The authors specified nine equivalent classes of this form. The equivalence criteria were determined with respect to the stochastic local quantum operations assisted by classical communication (SLOCC) applied to a particular quantum state. More specifically, states in a set can be treated as equivalent if any state for this set can be transformed into *any other state* with non-zero probability by means of LOCC. Note that in the present analysis we restrict ourselves to only local operations that are unitary transformations. A local unitary transformation of an arbitrary four-qubit state can be written as:

$$\hat{\rho} = \hat{U}_1 \otimes \hat{U}_2 \otimes \hat{U}_3 \otimes \hat{U}_4 \hat{\rho}_1^\dagger \otimes \hat{U}_2^\dagger \otimes \hat{U}_3^\dagger \otimes \hat{U}_4^\dagger, \quad (5)$$

where \hat{U} are arbitrary unitary operators acting on Hilbert space of a single qubit \mathcal{H}_2 . Operationally, the states belonging to the same class can be used in a given quantum protocol but they will have a different protocol efficiency. We list the explicit state classification in Appendix A based on results of [22]. We denote these *pure states* via ket - vectors $|G\rangle, |L\rangle_i, i = 1, \dots, 8, |F\rangle_0$, where $|G\rangle$ represents a generic state, as $|E\rangle_i$ we denoted "specific" classes of entangled states and $|F\rangle_0$ is a factorized state, so is a class member of separable four-qubit states.

Some of the states, like the class representatives in (A1) - (A9), are parametrized with complex numbers, e.g. the generic states such as $|G\rangle$ in (A1) and states $|E\rangle_i, i = 1, 5$ in (A2)-(A6). However, some classes are represented just by a single pure state. To form a data set needed to train our SVM model we sample complex numbers for each class $\{E_i, i = 1, 5\}$. In addition, we sample random unitary matrices \hat{U} to increase the diversity of a particular data set in accordance with (5).

The sampling algorithm of random unitary matrices is implemented via QUTIP PYTHON PACKAGE [33, 34] with slight modification. We took the standard QUTIP function `rand_unitary` and added an additional parameter ε to control the value of U_ε . For this we assumed that:

$$U_\varepsilon = \exp(i\varepsilon H), \quad (6)$$

where H is a random 2×2 full rank Hermitian matrix. The sampling of H is done with another QUTIP function, `rand_herm`. Summarizing, for each SLOCC class of four-qubit states we create $N_{data} = 10000$ samples of pure states, including factorized states, utilizing LOCC transformations for each state (5) with random unitary operators in accordance with Eq. (6). We normalize each

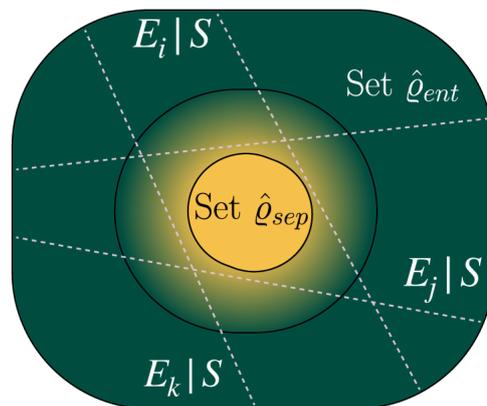


Figure 2: Schematic representation of results obtained with the SVM approach. The decision boundaries between the set of separable states S and each class of entangled states E_i are represented by dashed lines. Each line corresponds to a particular class and is specified by vector representation \vec{w}_i of entanglement witness operator \hat{W}_i in accordance with Eqs. (1) and Eqs. (3)

sample by replacing $\hat{\rho}_{E_i} \rightarrow \hat{\rho}_{E_i}/\text{tr}(\hat{\rho}_{E_i})$. On the next step we find EW operators via the SVM algorithm, which can distinguish separable four-qubit states $\hat{\rho}_{sep}$ and each class of entangled states represented in families $E_i, i = 1, \dots, 8$. Figure 2 illustrates the expected result.

The set of separable states S is a closed convex set and any separable state can be represented as a convex hull of factorized states. We directly employ this property to create a data set of separable states to train and validate our results achieving high accuracy, see subsection II B. To create a single separable state we sample $4 * 4^{nq=4}$ random factorized unitary operators (matrices): $\hat{U}_f^{(4)} \equiv \hat{U}_1 \otimes \hat{U}_2 \otimes \hat{U}_3 \otimes \hat{U}_4$. Each 2x2 single qubit unitary operator \hat{U} is distributed according to the Haar measure [35]. As a result one can get a random pure factorized state $|F\rangle' = \hat{U}_f^{(4)} |F\rangle_0$. The number $4 * 4^4$ unitary operators is driven by the requirement of Carathéodory's theorem for convex sets and dimension of state space \mathcal{H}_{nq} , see [20] for detailed discussion. To sample an arbitrary separable four-qubit state we construct a convex hull: $\hat{\rho}_S = \sum_{i=1}^{2^4} p_i |F\rangle'_i \langle F|'_i$, where the probability distribution $\{p_i\}$ is generated from the Dirichlet distribution [24]. Note that it is possible to train SVM and find the EW operator by using only pure factorized states. It follows directly from the definition of separable states and properties of entanglement witnesses. We will return to this remark in the next subsection.

Summarizing, our central goal is to demonstrate that the SVM approach allows one to classify and detect the entanglement for an *arbitrary* four-qubit state, not only for pure states. In the next subsection we confirm that the presented above SVM approach can achieve this goal with high accuracy.

B. Constructing Entanglement Witness operators via Linear Support Vector Machines.

To implement the linear SVM algorithm, we prepared a data set comprised of pairs of entangled and separable states. The data set has 10000 samples of each family of states $\{G, E_i, i = 1, \dots, 8\}$ and the same number of samples of separable states S . Specifically, in the case of $G, E_1 - E_5$ we randomly sample complex numbers a, b, c, d describing parametrization of a particular family (A1) - (A9). All states in the data set are normalized and converted to density operator form as we mentioned above.

As a result, for each member of $\{E_i, i = 1, \dots, 8\}$, we constructed a corresponding set of normalized EW operators such that $|\text{tr}(\hat{\rho}\hat{W})| \leq 1$. To train an SVM model for a given family, we split the corresponding data subset into three parts: 8000 samples for the training set, and 1000 samples for both validation and accuracy testing sets. One can find examples of resulting performance of the trained model via SVM in Figures 3 and 4 for the cases of families E_3 and G . Note for both presented cases we have chosen parameter $\varepsilon = 0.5$ in (6) to assemble data sets of states. To train SVM model the regularization parameter λ in (4) was set equal to $0.5 * 10^{-4}$ to yield an acceptable generalization. To train a SVM model we used the Adam optimizer implemented in TENSORFLOW library [36]. The total number of training steps (epochs) was chosen 25000 steps, but an acceptable convergence of SVM algorithm with the batch size 500 had been achieved after approximately 5000 training steps. Histograms of E_3 and G consist of 75 bins versus $\text{tr}(\hat{\rho}\hat{W})$ covering the range of $|\text{tr}(\hat{\rho}\hat{W}_G)| \leq 1$.

It is clear from the validation and accuracy histograms that the resulting witness can reliably distinguish separable and entangled states.

Let us further analyze the performance of the linear SVM algorithm. It is worth mentioning that in accordance with the properties of multipartite EW (1), while a functional $f_W(\rho) \geq 0$ for all separable states but $f_W(\hat{\rho}_{sep.}) < 0$ for *at least one* entangled state $\hat{\rho}_{ent.}$; it does not exist an EW operator that can detect all entangled states. We aim to find the best possible EW operator that can detect the presence of entanglement in a maximum number of states of a given family of states. Usually, the optimal EW implies an operator \hat{W}_{opt} that can detect the maximum number of entangled states [20]. In geometrical terms it means that the decision hyperplane is tangent to the set of all separable states S . Note that for a single entangled state it is guaranteed that this entangled state and all separable states can be linearly separated. On the other hand in terms of linear SVM we tend to find the maximal distance to the closest sample of a given set of states from the decision boundary. It is known [24], that the linear SVM works perfectly for linearly separable data, but even for non linearly separable data it might perform quite well [32].

Our analysis presented here directly tests the ability to distinguish entangled and separable states for each SLOCC family individually. The SVM generalization performance is considered for the newly resampled entangled and separable states. We analyze a variety of states correctly detected by EW without limiting them to only entangled states. We also include mixed and pure (factor-

ized) separable states in the analysis.

In the case of entangled states, one considers three different cases. In these cases we operate with different data sets of entangled states where the diversity of each sample is varying by parameter ε in (6), in accordance with the SLOCC classification criteria (5). We tested the procedure for the following parameters: $\varepsilon_1 = 0.5, \varepsilon_2 = 0.75, \varepsilon_3 = 1$. The results are presented in Figure 5. It is clear from the figure that the ability to detect entanglement with already trained EW operator for the corresponding family members drops dramatically for $\varepsilon_3 = 1$: the score is equal to about 40% on average for all classes compared to almost 100% for $\varepsilon_1 = 0.5$. In these cases, the value of ε has a possible interpretation of ability to distinguish entangled states from separable ones employing *linear* SVM and, therefore, the EW theory.

The approach works similarly for all families $\{E_i\}, i = 1 \dots 8$. In other words, one can roughly estimate the vicinity for any state if it is a member of a given family of entangled states, for which a linear model can detect the presence of entanglement. We also analyzed the SVM generalization performance in the worst case scenario. In this case, each state is modified via (5) but each unitary operator $\hat{U}_f^{(4)} \equiv \hat{U}_1 \otimes \hat{U}_2 \otimes \hat{U}_3 \otimes \hat{U}_4$ is distributed according to the Haar measure. As expected, in this case we get much inferior performance: scores $\leq 1\%$ for all SLOCC families. However, the correct detection scores for separable and factorized states have not changed and are still high, about 99.5%. Such behavior concurs with the EW properties.

A pure factorized state always has an infinitely large number of entangled states within ε , the vicinity, calculated e.g. with respect to the trace norm or Hilbert-Schmidt norm. This may lead to inferior performance of the SVM algorithm in its attempt to derive EWs capable of detecting the *mixed entangled states*. Consequently, to improve the algorithm further we have included mixed entangled states in our training model. For instance, let us consider another important family of multipartite quantum states $\hat{\rho}_W$, so called Werner states [37, 38], which involve entanglement of mixed states. These states are invariant under the diagonal action of the unitary group, i.e. it is a particular case represented in Eq. (5), namely:

$$\hat{\rho}_W = [\hat{U}_1 \otimes \hat{U}_2]_{1|3} \otimes [\hat{U}_1 \otimes \hat{U}_2]_{2|4} \hat{\rho}_W [\hat{U}_1 \otimes \hat{U}_2]_{1|3}^\dagger \otimes [\hat{U}_1 \otimes \hat{U}_2]_{2|4}^\dagger \quad (7)$$

Despite the high accuracy achieved for the SLOCC classes, the entanglement detection for random entangled Werner states yielded poor accuracy. We obtained correct entanglement detection scores of $\approx 1\%$ in the case of family G others families yield scores $\approx 0.1\%$. On the other hand, the separable states are again classified with almost 100% accuracy. Summarizing, almost all sampled Werner states are classified as separable states. Thus, it is essential to train SVM linear modes for the Werner states and consider such states as a separate family. The performance results of trained EW in the case of Werner states is presented in Figure 6.

In this subsection, we considered several families of entangled states, including mixed states. Our analysis clearly shows that a linear SVM algorithm can be efficiently employed to construct a set of EW operators. It

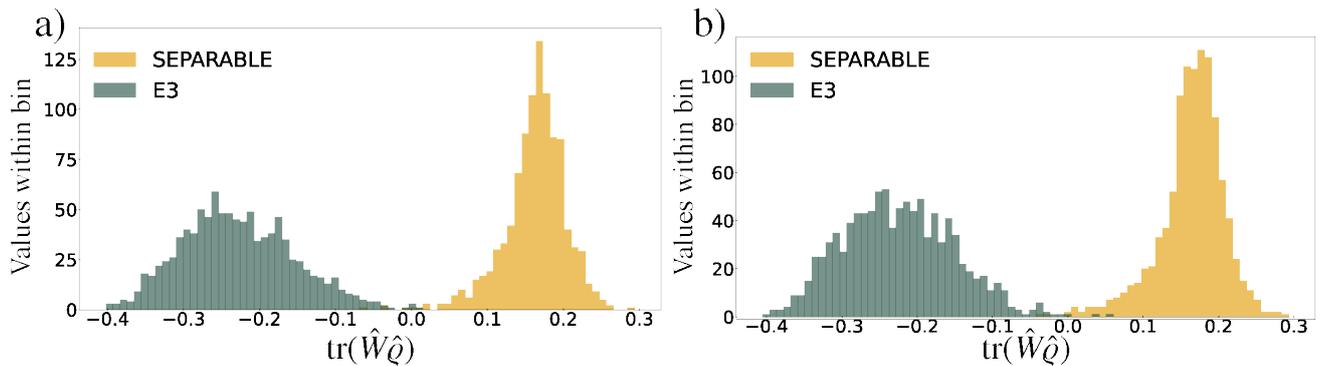


Figure 3: Distribution of $\text{tr}(\hat{\rho}\hat{W})$, mean value of the entanglement witness for a) accuracy set and b) validation set of the trained EW model via Linear SVM algorithm in the case of E_3 family of states. Both accuracy set and accuracy set consist of 2000 samples: 1000 separable states and 1000 entangled states of E_3 family. For both accuracy and validation sets there were only few ($5 \leq$) miss-classifications of entangled states and zero miss-classifications for separable states.

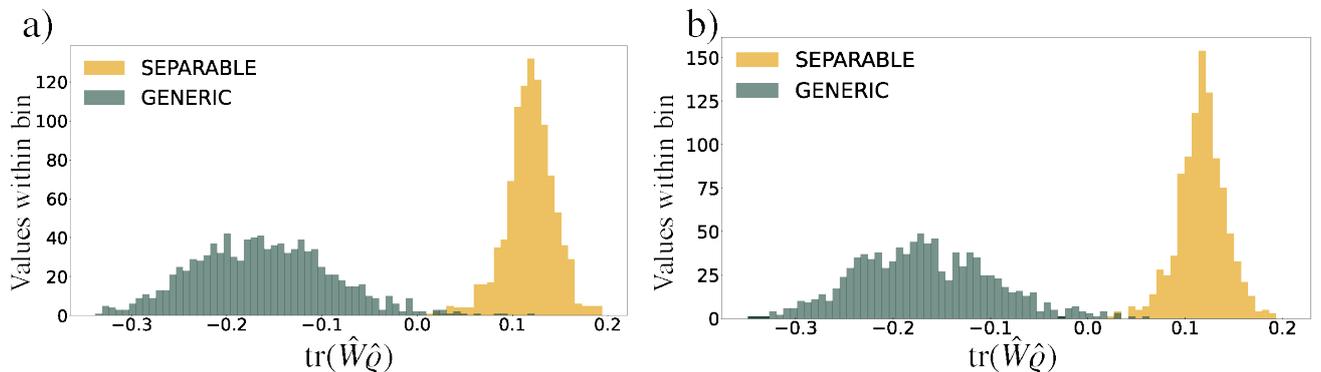


Figure 4: Distribution of $\text{tr}(\hat{\rho}\hat{W})$, mean value of entanglement witness, for a) accuracy set and b) validation set of trained EW model via Linear SVM algorithm in the case of generic G family of states. Both accuracy and validation set consist of 2000 samples: 1000 separable states and 1000 entangled states of E_3 family. For both accuracy and validation sets there were only few ($5 \leq$) miss-classifications of entangled states and zero miss-classifications for separable states.

was also demonstrated that the approach has fundamental limitations and, clearly, each family as a whole cannot be separated using a linear SVM. In the following, we discuss possible nonlinear extensions of the SVM algorithms applicable to EW problem.

C. Constructing Entanglement Witness operators via Support Vector Machines with nonlinear kernels

Let us consider possible improvements of the discussed above approach. The SVM method is a quadratic constrained programming problem, which can be seen from Equation (4). Importantly, the maximum margin problem has a dual representation operating with kernel functions [24, 32]. We can upgrade our simple linear model (3) with the following expression:

$$f_{\phi(w)}(\vec{\varrho}) = \left(\vec{\phi}(\vec{w}), \vec{\varrho} \right), \quad (8)$$

where a map $\vec{\phi}(\cdot)$ transforms the initial feature space, but the overall model is still linear. One can write error function (loss) in the following form:

$$\tilde{L}(\vec{a}) = \sum_i^N a_n - \frac{1}{2} \sum_{n,m}^N a_n a_m t_n t_m k(\vec{\varrho}_n, \vec{\varrho}_m), \quad (9)$$

where we introduced a new vector $\vec{a} = (a_1, \dots, a_N)$ related to \vec{w} as follows: $\vec{w} = \sum_i^N a_n t_n \vec{\phi}(\vec{\varrho})$. The symbol $k(\vec{\varrho}_n, \vec{\varrho}_m)$ represents a *kernel function*, which can be efficiently used to evaluate nonlinear transformations. The optimization (training by finding \vec{a}) of quadratic function (9) yields the following predictive model in terms of kernel function:

$$f_{\phi(w)}(\vec{\varrho}) = \sum_i^N a_n t_n k(\vec{\varrho}_n, \vec{\varrho}) \quad (10)$$

Note that working with kernel functions allows one to avoid explicit operations with the featured space, though it could produce, in principle, more successful and complex models. For instance, it could happen that one finds a specific kernel that can perfectly distinguish separable states and the *whole* family of of entangled states based on SLOCC classification. Indeed, we verified this assumption directly applying a nonlinear SVM using SCIKIT LEARN package. Figure (7) provides a comparison of models with linear and nonlinear kernels to classify the

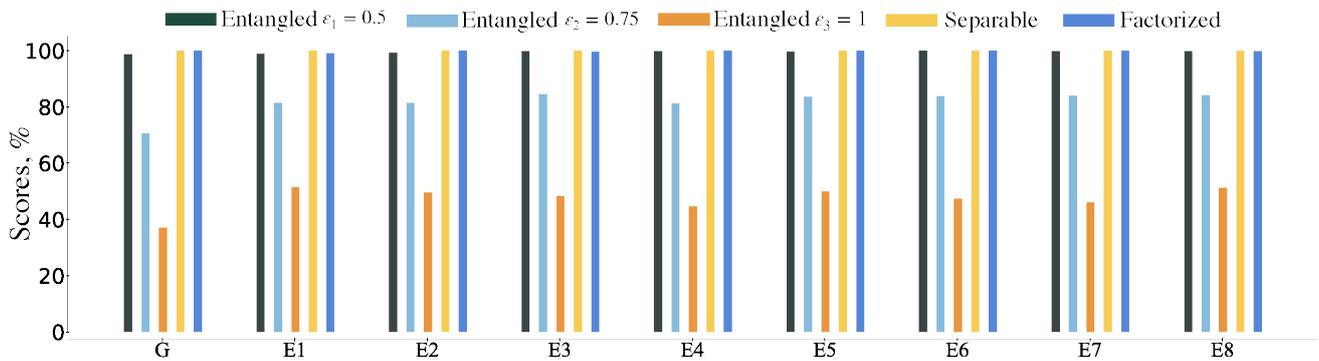


Figure 5: General analysis of correct detection of entangled states based on trained set of EW operators. For each family G, E_1, \dots, E_8 we used new 10000 samples of states. Each state is modified according to Eq. (5). Random unitary operators are controlled by parameters ε according to Eq. (6). The depicted bars represent the probability (or score) to correctly detect entangled states of a given family for various values of ε : 1 \leftrightarrow $\varepsilon_1 = 0.5$, 2 \leftrightarrow $\varepsilon_2 = 0.75$, 3 \leftrightarrow $\varepsilon_3 = 1$. For each family index $G, E_1 - E_8$ a fourth bar 4 mixed separable states, fifth bar 5 correspond to pure separable (factorized) states. The set of EW is obtained employing SVM with parameters described in the caption of Figure (3) and Fig.(4).

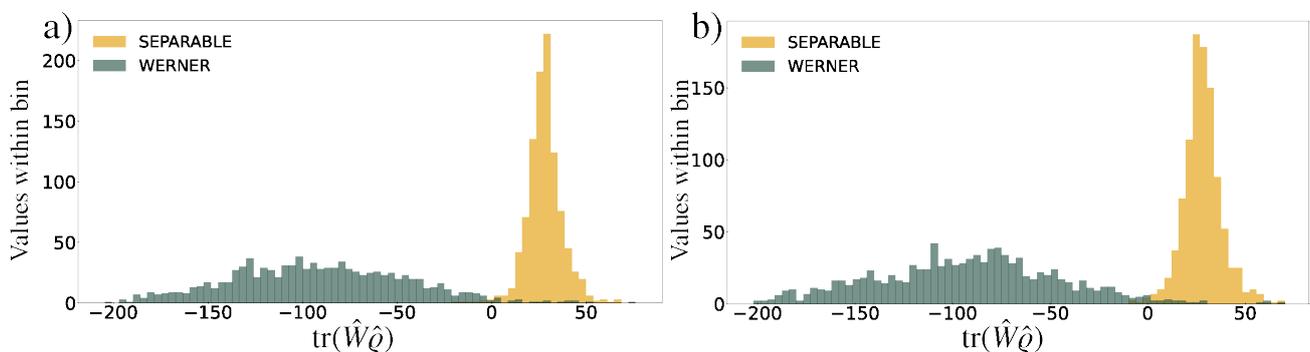


Figure 6: Distribution of $\text{tr}(\hat{\rho}\hat{W})$, mean value of entanglement witness, for a) accuracy set and b) validation set of trained EW model via Linear SVM algorithm in the case of Werner family of entangled states. All parameters are the same as was described in Figure (3) and Figure (4) described in the main text.

entangled Werner, generic and separable states. Moreover, we modify the generic states according to the Haar measure to assemble a new data set of 1000 samples. We observe 100 % accuracy on a test set in the case of nonlinear SVM with Radial Basis Function (RBF) kernel: $k(\vec{\rho}, \vec{\sigma}) = \exp(-\gamma\|\vec{\rho} - \vec{\sigma}\|_2^2)$, compared to the linear model.

Unfortunately, there are constraints among the feature values that restrict the dimension of feature space so evaluating kernel functions for all samples might be computationally demanding. To reduce the problem complexity, one needs to find certain heuristics or another advanced coarse-grained classification. In the next section we summarize the obtained results and discuss possible applications and further steps.

III. DISCUSSION

Let us summarize the salient points regarding the problem of entanglement detection in multipartite states using the support vector machine algorithms as we considered in our work.

The entanglement detection problem is rather complex. Ideally, one would aim to find tangent hyperplanes at each point of a set of separable states. Several methods were proposed to find an approximate distance between a given

witness and a set of separable states, which helps to detect the entanglement of a particular state [39]. In this context the considered SVM approach has a similar objective to the one mentioned above. The SVM aims to maximize the shortest distance between the decision boundary and "support" state (vector). However, as it was shown in [39–41] the characterization of all EWs for a given multipartite system is a NP-hard problem as the dimensionality increases. The geometrical interpretation of this problem is also a highly nontrivial task [42].

Nevertheless, the complexity of EW problem can be reduced by employing a coarse-grained classification such as the considered four-qubit SLOCC classification or description in terms of Werner states. We demonstrated successful applications of the linear SVM algorithm for both of these cases. It is important to mention that our analysis is akin to that proposed in [31], where the authors also emphasized the direct relationship of the entanglement witness functional and linear SVM. In our work here, we focus on the successful applicability of the SVM technique specifically for the coarse-grained classification of entangled states joined in some families. However, the success of linear models comes with a price owing to the mentioned above NP-hardness of the EW problem. In general, the linear SVM approach cannot provide high accuracy for all states in a particular family. As we showed, one can detect the entanglement with high accuracy for all family

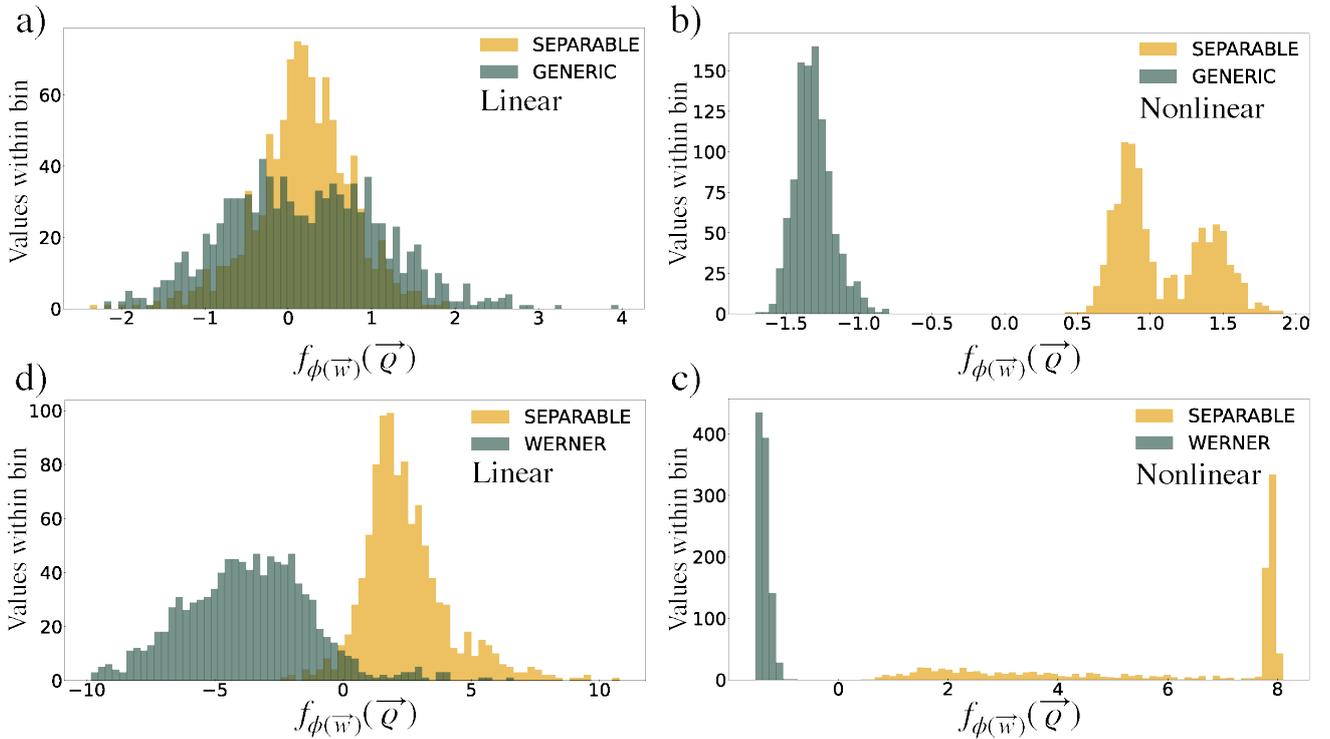


Figure 7: Distribution of $f_{\phi(\vec{w})}(\vec{Q})$ and performance results comparison of trained nonlinear SVM algorithm for linear and nonlinear-RBF kernels. Cases a),b) correspond to Generic and Werner states for nonlinear RBF kernel and c),d) correspond same states with linear kernel. We verify results by sampling 1000 states of each family and for each case. The prediction model $f_{\phi(\vec{w})}(\vec{Q})$ is given by Eqs.(10) and (10). Note, the assembled data set of Generic states is obtained by modifying each sample by unitary operators distributed according to Haar measure and Eq.5.

members only within a vicinity of a fiducial state of the family. Thus, one can interpret the accuracy of a trained EW model based on linear SVM as a measure of complexity for a given family or parametrization of entangled states.

One of the main advantages of the discussed linear SVM approach is its universality in terms of implementation. Note that the modern Python packages such as QUTIP, TENSORFLOW, SCIKIT LEARN [33, 34, 43, 44] provide all necessary tools for implementation of both linear and nonlinear SVM to find EW. In addition, a nonlinear version of SVM can be a valuable tool for theoretical analysis, especially in the case of coarse-grained classifications. We demonstrated that nonlinear SVM allows to detect the entanglement with almost perfect accuracy for any arbitrary state from a given family, while the linear SVM has almost zero accuracy. It is not surprising because an arbitrary family of states based on a given classification or parametrization is highly likely to be not linearly separable from a convex set of separable states. We also showed that introduction of the kernel function could be useful for specific cases. At the same time it may require considerable computing resources making the nonlinear kernels less attractive in general.

Another advantage of linear models is that they allow for physical interpretation of EW operators, as observables that can be measured directly in an experiment. An interesting goal would be to analyze further the connection between kernel methods and optimal collective measurements within the concept of collective entanglement witnesses [45].

The presented SVM-based analysis of EW can be use-

ful for practical applications. For instance, SLOCC operations described in the equations above directly relate to the field of quantum metrology. In particular, optical interferometers were proposed where an entangled ancilla was shared between two or more stations to improve the accuracy of astrometrical measurements [46–50]. Each ancilla’s subsystem interacts locally with a fiducial state in the station that carries valuable information to be extracted. For practical implementation of such schemes, one needs to understand how the noise affects the ancilla’s state and also specifics of local interactions to optimize the measurement protocol and to quantify the structure of the entangled states. Simple and effective tools such as the proposed SVM approach can help solving the problem of detecting and classifying the structure of entangled states used in those quantum astrometry schemes.

Finally, another promising application of this approach is its employment in quantum-enhanced sensor networks [51] and quantum reservoir computing [52, 53]. It was already demonstrated that both SVM and EW problems could be mapped and processed by such multipartite quantum systems working as a quantum-enhanced processors [51]. These promising developments open new directions for application of multipartite quantum systems to address cross-cutting interdisciplinary problems of machine learning and quantum metrology.

IV. ACKNOWLEDGMENTS

We are grateful to Anže Slosar, Zhi Chen, Yen-Chi (Samuel) Chen and Elisha Siddiqui for useful discussions.

This work was supported in part by the U.S. Department of Energy QUANTISED award and BNL LDRD grant 19-30.

Appendix A: SLOCC classification of four-qubit pure states

All trained SVM models discussed above were derived by combining all states in one family based on a given property such as SLOCC equivalence or another particular state property (parametrization) intrinsic to the Werner states. This appendix provides an explicit description of SLOCC classification used in this manuscript. Such classification was investigated in detail in [22] where the authors derived nine families of states corresponding to nine different ways of entangling four qubits.

The main idea of derivation follows from the equivalence of groups $SU(2) \otimes SU(2)$ and $SO(4)$ in the Lie-group theory, where $SU(2)$ is a special group of 2x2 unitary matrices and $SO(4)$ is a group of orthogonal matrices with unit determinant. Mathematically, this equivalence is represented by $\forall U_1, U_2 \in SU(2) \exists T : O = T(U_1 \otimes U_2)T^\dagger \in SO(4)$. Additionally, each four-qubit pure state can be represented as a 4x4 complex matrix $R = T\psi_{(i_1 i_2)(i_3 i_4)}T^\dagger$, where $\psi_{(i_1 i_2)(i_3 i_4)}$ is a reshaped matrix element of four-qubit state representation in the computational basis. Thus, the aforementioned equivalence and state representation allows one to represent the SLOCC transformation of four-qubit state in (5) as an action of orthogonal matrices: $R' = O_1 R O_2$. On the other hand it was proven that a given 4x4 complex matrix R can always be transformed via O_1 and O_2 to the Jordan block normal form. This means that the normal form encodes the genuine non-local properties of the four-qubit state and allows classification of the states. Entangled states from the same family can perform the same quantum protocol but with a different probability. The following distinct classes of (unnormalized) pure states were specified in the computational basis:

$$\begin{aligned} |G_{abcd}\rangle = & \\ & \frac{a+d}{2}(|0000\rangle + (|1111\rangle)) + \frac{a-d}{2}(|0011\rangle + |1100\rangle) + \\ & \frac{b+c}{2}(|0101\rangle + |1010\rangle) + \\ & + \frac{b-c}{2}(|0110\rangle + |1001\rangle) \end{aligned} \quad (A1)$$

$$\begin{aligned} |E_1\rangle = & \frac{a+b}{2}(|0000\rangle + |1111\rangle) + \frac{a-b}{2}(|0011\rangle \\ & + |1100\rangle) + c(|0101\rangle + |1010\rangle) + |0110\rangle \end{aligned} \quad (A2)$$

$$\begin{aligned} |E_2\rangle = & a(|0000\rangle + |1111\rangle) + b(|0101\rangle + |1010\rangle) \\ & + |0110\rangle + |0011\rangle \end{aligned} \quad (A3)$$

$$\begin{aligned} |E_3\rangle = & a(|0000\rangle + |1111\rangle) + \frac{a+b}{2}(|0101\rangle + |1010\rangle) \\ & + \frac{a-b}{2}(|0110\rangle + |1001\rangle) \\ & + \frac{i}{\sqrt{2}}(|0001\rangle + |0010\rangle + |0111\rangle + |1011\rangle) \end{aligned} \quad (A4)$$

$$\begin{aligned} |E_4\rangle = & a(|0000\rangle + |0101\rangle) + |1010\rangle + |1111\rangle \\ & + (i|0001\rangle + |0110\rangle - i|1011\rangle) \end{aligned} \quad (A5)$$

$$\begin{aligned} |E_5\rangle = & a(|0000\rangle + |1111\rangle) \\ & + (|0011\rangle + |0101\rangle + |0110\rangle) \end{aligned} \quad (A6)$$

$$|E_6\rangle = |0000\rangle + |0101\rangle + |1000\rangle + |1110\rangle \quad (A7)$$

$$|E_7\rangle = |0000\rangle + |1011\rangle + |1101\rangle + |1110\rangle \quad (A8)$$

$$|E_8\rangle = |0000\rangle + |0111\rangle \quad (A9)$$

$$|S_0\rangle = |0110\rangle \equiv |E\rangle_1 : a = b = c = 0 \quad (A10)$$

The state $|S_0\rangle$ represents a subclass of the pure factorized state. All other states (classes) possess unique properties and entanglement structure. For instance, the state $|G\rangle_{abcd}$ represents a class of generic pure states. It is claimed that this is a class of states with maximal 4-partite entanglement on the orbit generated by SLOCC measured in accordance with majorization criteria [22].

- [1] R. Horodecki, P. Horodecki, M. Horodecki, and K. Horodecki, *Rev. Mod. Phys.* **81**, 865 (2009), URL <https://link.aps.org/doi/10.1103/RevModPhys.81.865>.
- [2] R. Jozsa and N. Linden, *Proceedings of the Royal Society of London. Series A: Mathematical, Physical and Engineering Sciences* **459**, 2011 (2003), <https://royalsocietypublishing.org/doi/pdf/10.1098/rspa.2002.1097>, URL <https://royalsocietypublishing.org/doi/abs/10.1098/rspa.2002.1097>.
- [3] H. J. Briegel and R. Raussendorf, *Phys. Rev. Lett.* **86**, 910 (2001), URL <https://link.aps.org/doi/10.1103/PhysRevLett.86.910>.
- [4] A.-N. Zhang, C.-Y. Lu, X.-Q. Zhou, Y.-A. Chen, Z. Zhao, T. Yang, and J.-W. Pan, *Phys. Rev. A* **73**, 022330 (2006), URL <https://link.aps.org/doi/10.1103/PhysRevA.73.022330>.
- [5] S.-H. Wei, B. Jing, X.-Y. Zhang, J.-Y. Liao, C.-Z. Yuan, B.-Y. Fan, C. Lyu, D.-L. Zhou, Y. Wang, G.-W. Deng, et al., *Laser & Photonics Reviews* **16**, 2100219 (2022), URL <https://doi.org/10.1002/lpor.202100219>.
- [6] X.-M. Hu, C.-X. Huang, Y.-B. Sheng, L. Zhou, B.-H. Liu, Y. Guo, C. Zhang, W.-B. Xing, Y.-F. Huang, C.-F. Li, et al., *Phys. Rev. Lett.* **126**, 010503 (2021), URL <https://link.aps.org/doi/10.1103/PhysRevLett.126.010503>.
- [7] S. Lloyd, *Phys. Rev. Lett.* **90**, 167902 (2003), URL <https://link.aps.org/doi/10.1103/PhysRevLett.90.167902>.
- [8] W. McCutcheon, A. Pappa, B. A. Bell, A. McMillan, A. Chailloux, T. Lawson, M. Mafu, D. Markham, E. Diamanti, I. Kerenidis, et al., *Nature Communications* **7** (2016), URL <https://doi.org/10.1038/ncomms13251>.
- [9] G. Tóth, *Phys. Rev. A* **85**, 022322 (2012), URL <https://link.aps.org/doi/10.1103/PhysRevA.85.022322>.
- [10] P. Hyllus, W. Laskowski, R. Krischek, C. Schwemmer, W. Wieczorek, H. Weinfurter, L. Pezzé, and A. Smerzi, *Phys. Rev. A* **85**, 022321 (2012), URL <https://link.aps.org/doi/10.1103/PhysRevA.85.022321>.
- [11] D. Gross, S. T. Flammia, and J. Eisert, *Phys. Rev. Lett.* **102**, 190501 (2009), URL <https://link.aps.org/doi/10.1103/PhysRevLett.102.190501>.
- [12] W. Dür and H. J. Briegel, *Reports on Progress in Physics* **70**, 1381 (2007), URL <https://doi.org/10.1088/0034-4885/70/8/r03>.
- [13] J. Eisert, D. Hangleiter, N. Walk, I. Roth, D. Markham, R. Parekh, U. Chabaud, and E. Kashefi, *Nature Reviews Physics* **2**, 382 (2020), URL <https://doi.org/10.1038/s42254-020-0186-4>.
- [14] M. Kliesch and I. Roth, *PRX Quantum* **2**, 010201 (2021), URL <https://link.aps.org/doi/10.1103/PRXQuantum.2.010201>.
- [15] O. Gühne, Y. Mao, and X.-D. Yu, *Phys. Rev. Lett.* **126**, 140503 (2021), URL <https://link.aps.org/doi/10.1103/PhysRevLett.126.140503>.
- [16] D. Cruz, R. Fournier, F. Gremion, A. Jeannerot, K. Komagata, T. Tosić, J. Thiesbrummel, C. L. Chan, N. Macris, M.-A. Dupertuis, et al., *Advanced Quantum Technologies* **2**, 1900015 (2019), URL <https://doi.org/10.1002/qute.201900015>.
- [17] O. Gühne and G. Tóth, *Physics Reports* **474**, 1 (2009), URL <https://doi.org/10.1016/j.physrep.2009.02.004>.
- [18] M. Horodecki, P. Horodecki, and R. Horodecki, *Physics Letters A* **223**, 1 (1996), ISSN 0375-9601, URL <https://www.sciencedirect.com/science/article/pii/S0375960196007062>.
- [19] B. M. Terhal, *Physics Letters A* **271**, 319 (2000), ISSN 0375-9601, URL <https://www.sciencedirect.com/science/article/pii/S0375960100004011>.
- [20] T. Heinosaari and M. Ziman, *The Mathematical Language of Quantum Theory* (Cambridge University Press, 2009), URL <https://doi.org/10.1017/cbo9781139031103>.
- [21] W. Dür, G. Vidal, and J. I. Cirac, *Phys. Rev. A* **62**, 062314 (2000), URL <https://link.aps.org/doi/10.1103/PhysRevA.62.062314>.
- [22] F. Verstraete, J. Dehaene, B. De Moor, and H. Verschelde, *Phys. Rev. A* **65**, 052112 (2002), URL <https://link.aps.org/doi/10.1103/PhysRevA.65.052112>.
- [23] C. Cortes and V. Vapnik, *Machine Learning* **20**, 273 (1995).
- [24] C. M. Bishop, *Pattern Recognition and Machine Learning (Information Science and Statistics)* (Springer, 2007), 1st ed., ISBN 0387310738, URL <http://www.amazon.com/Pattern-Recognition-Learning-Information-Statistics/dp/0387310738%3FSubscriptionId%3D13CT5CVB80YFWJEPWS02%26tag%3Dws%26linkCode%3Dxm%26camp%3D2025%26creative%3D165953%26creativeASIN%3D0387310738>.
- [25] G. Carleo and M. Troyer, *Science* **355**, 602 (2017), <https://www.science.org/doi/pdf/10.1126/science.aag2302>, URL <https://www.science.org/doi/abs/10.1126/science.aag2302>.
- [26] G. Torlai, G. Mazzola, J. Carrasquilla, M. Troyer, R. Melko, and G. Carleo, *Nature Physics* **14**, 447 (2018), URL <https://doi.org/10.1038/s41567-018-0048-5>.
- [27] G. Carleo, I. Cirac, K. Cranmer, L. Daudet, M. Schuld, N. Tishby, L. Vogt-Maranto, and L. Zdeborová, *Rev. Mod. Phys.* **91**, 045002 (2019), URL <https://link.aps.org/doi/10.1103/RevModPhys.91.045002>.
- [28] I. A. Luchnikov, S. V. Vintskevich, D. A. Grigoriev, and S. N. Filippov, *Phys. Rev. Lett.* **124**, 140502 (2020), URL <https://link.aps.org/doi/10.1103/PhysRevLett.124.140502>.
- [29] Y.-C. Ma and M.-H. Yung, *npj Quantum Information* **4** (2018), URL <https://doi.org/10.1038/s41534-018-0081-3>.
- [30] S. Lu, S. Huang, K. Li, J. Li, J. Chen, D. Lu, Z. Ji, Y. Shen, D. Zhou, and B. Zeng, *Phys. Rev. A* **98**, 012315 (2018), URL <https://link.aps.org/doi/10.1103/PhysRevA.98.012315>.
- [31] E. Y. Zhu, L. T. Wu, O. Levi, and L. Qian, arXiv preprint [arXiv:2107.02301](https://arxiv.org/abs/2107.02301) (2021).
- [32] A. Géron, *Hands-on machine learning with Scikit-Learn, Keras, and TensorFlow: Concepts, tools, and techniques to build intelligent systems* (" O'Reilly Media, Inc.", 2019).
- [33] J. Johansson, P. Nation, and F. Nori, *Computer Physics Communications* **183**, 1760 (2012), ISSN 0010-4655, URL <https://www.sciencedirect.com/science/article/pii/S0010465512000835>.
- [34] J. Johansson, P. Nation, and F. Nori, *Computer Physics Communications* **184**, 1234 (2013), ISSN 0010-4655, URL <https://www.sciencedirect.com/science/article/pii/S0010465512003955>.
- [35] M. Fasi and L. Robol, *Sampling the eigenvalues of random orthogonal and unitary matrices* (2020), URL <https://arxiv.org/abs/2009.11515>.
- [36] TensorFlow Developers, *Tensorflow* (2022), URL <https://zenodo.org/record/4724125>.
- [37] F. Huber, I. Klep, V. Magron, and J. Volčič, *Dimension-free entanglement detection in multipartite werner states* (2021), URL <https://arxiv.org/abs/2108.08720>.
- [38] D. Chruściński and A. Kossakowski, *Phys. Rev. A* **73**, 062314 (2006), URL <https://link.aps.org/doi/10.1103/PhysRevA.73.062314>.

- [39] L. M. Ioannou (2006), URL <https://arxiv.org/abs/quant-ph/0603199>.
- [40] L. M. Ioannou, B. C. Travaglione, D. Cheung, and A. K. Ekert, Phys. Rev. A **70**, 060303 (2004), URL <https://link.aps.org/doi/10.1103/PhysRevA.70.060303>.
- [41] L. M. Ioannou and B. C. Travaglione, Phys. Rev. A **73**, 052314 (2006), URL <https://link.aps.org/doi/10.1103/PhysRevA.73.052314>.
- [42] I. Bengtsson and K. Życzkowski, *Geometry of quantum states: an introduction to quantum entanglement* (Cambridge university press, 2017).
- [43] M. Abadi, A. Agarwal, P. Barham, E. Brevdo, Z. Chen, C. Citro, G. S. Corrado, A. Davis, J. Dean, M. Devin, et al., *TensorFlow: Large-scale machine learning on heterogeneous systems* (2015), software available from tensorflow.org, URL <https://www.tensorflow.org/>.
- [44] F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, et al., Journal of machine learning research **12**, 2825 (2011).
- [45] M. Horodecki, K. Horodecki, P. Horodecki, R. Horodecki, J. Oppenheim, A. Sen(De), and U. Sen, Phys. Rev. Lett. **90**, 100402 (2003), URL <https://link.aps.org/doi/10.1103/PhysRevLett.90.100402>.
- [46] D. Gottesman, T. Jennewein, and S. Croke, Phys. Rev. Lett. **109**, 070503 (2012), URL <https://link.aps.org/doi/10.1103/PhysRevLett.109.070503>.
- [47] E. T. Khabiboulline, J. Borregaard, K. De Greve, and M. D. Lukin, Phys. Rev. Lett. **123**, 070504 (2019), URL <https://link.aps.org/doi/10.1103/PhysRevLett.123.070504>.
- [48] E. T. Khabiboulline, J. Borregaard, K. De Greve, and M. D. Lukin, Phys. Rev. A **100**, 022316 (2019), URL <https://link.aps.org/doi/10.1103/PhysRevA.100.022316>.
- [49] P. Stankus, A. Nomerotski, A. Slosar, and S. Vintskevich, arXiv preprint arXiv:2010.09100 (2020).
- [50] A. Nomerotski, P. Stankus, A. Slosar, S. Vintskevich, S. Andrews, G. Carini, D. Dolzhenko, D. England, E. Figueroa, S. Gera, et al., in *Optical and Infrared Interferometry and Imaging VII*, edited by P. G. Tuthill, A. Mérand, and S. Sallum, International Society for Optics and Photonics (SPIE, 2020), vol. 11446, pp. 290 – 306, URL <https://doi.org/10.1117/12.2560272>.
- [51] Q. Zhuang and Z. Zhang, Phys. Rev. X **9**, 041023 (2019), URL <https://link.aps.org/doi/10.1103/PhysRevX.9.041023>.
- [52] S. Ghosh, A. Opala, M. Matuszewski, T. Paterek, and T. C. H. Liew, npj Quantum Information **5** (2019), URL <https://doi.org/10.1038/s41534-019-0149-8>.
- [53] S. Vintskevich and D. Grigoriev, arXiv preprint arXiv:2201.07969 (2022).