

---

# Trust-based Consensus in Multi-Agent Reinforcement Learning Systems

---

**Ho Long Fung**  
University College London  
ho.fung.20@ucl.ac.uk

**Victor-Alexandru Darvari**  
University College London  
The Alan Turing Institute  
v.darvari@ucl.ac.uk

**Stephen Hailes**  
University College London  
s.hailes@ucl.ac.uk

**Mirco Musolesi**  
University College London  
The Alan Turing Institute  
University of Bologna  
m.musolesi@ucl.ac.uk

## Abstract

An often neglected issue in multi-agent reinforcement learning (MARL) is the potential presence of unreliable agents in the environment whose deviations from expected behavior can prevent a system from accomplishing its intended tasks. In particular, consensus is a fundamental underpinning problem of cooperative distributed multi-agent systems. Consensus requires different agents, situated in a decentralized communication network, to reach an agreement out of a set of initial proposals that they put forward. Learning-based agents should adopt a protocol that allows them to reach consensus despite having one or more unreliable agents in the system. This paper investigates the problem of unreliable agents in MARL, considering consensus as case study. Echoing established results in the distributed systems literature, our experiments show that even a moderate fraction of such agents can greatly impact the ability of reaching consensus in a networked environment. We propose Reinforcement Learning-based Trusted Consensus (RLTC), a decentralized trust mechanism, in which agents can independently decide which neighbors to communicate with. We empirically demonstrate that our trust mechanism is able to deal with unreliable agents effectively, as evidenced by higher consensus success rates.

## 1 Introduction

A *cooperative multi-agent system* (MAS) is a system composed of multiple autonomous entities, known as *agents*, that collaborate within a shared environment to solve tasks in order to improve their joint welfare [21]. A largely neglected issue in the multi-agent reinforcement learning literature is the potential presence of unreliable agents within the environment. An agent might be unreliable due to node and/or transmission failure or simply because it exchanges incorrect information. Identifying the exact cause of unreliability is difficult and often impossible a priori.

A general class of cooperative tasks that is susceptible to unreliable agents is *consensus*. Consensus deals with reaching an agreement among agents that put forward different proposals. It is a problem of interdisciplinary interest and of wide applicability, such as distributed computer systems and social networks [6, 32, 33, 39, 40]. A *consensus protocol* can be defined as a procedure that agents follow in order to reach agreement successfully. A protocol can be hard-coded, where each agent executes an algorithm written by an expert (e.g. in the distributed systems literature [14]). Otherwise, the

protocol is *emergent* if it arises from agents learning how to achieve consensus through repeated interactions. Consensus problems are often studied in decentralized settings, where agents can only make local observations of the environment, act independently of each other and interact solely by communicating over a network [14, 19, 33, 41]. These limitations make the problem of reaching consensus nontrivial. A reason is the lack of a central coordinator that can aggregate and distribute values to and from all agents in the system. Another reason is the existence of failed or unreliable agents in the network that deviate from their expected behavior. Decentralization makes these failures hard to detect, because an agent cannot determine another agent’s reliability by direct observation. In real world scenarios, the occurrence of unexpected failures is often an integral property of the environment [35, 46]. Suppose that a MAS adopts a consensus protocol that assumes agents are always reliable. In cases where agents fail unexpectedly, this may lead to errors in message transmission or performing local computations. Since the protocol cannot accommodate for these failures, agents will assume that the rest of the system is still reliable and execute the protocol as usual, using incomplete or incorrect information, which may severely impact the system’s performance. Therefore, to reach consensus reliably, agents must adopt a protocol that can continue operating at an acceptable level despite one or more failures in the system.

One way to deal with unreliable agents is through the introduction of *trust mechanisms*, which have been widely studied in the distributed systems and multi-agent systems literature (e.g., [2, 42]). Agents can try to quantify the trustworthiness of other agents based on past interactions and data about them. Given these abilities, agents can decide if it is beneficial to cooperate with others. For example, if an agent believes another agent is unreliable and sending incorrect messages, it can cut off communication in order to prevent misinformation from spreading to the rest of the system.

This paper investigates the problem of unreliable agents in multi-agent reinforcement learning (MARL), considering the problem of distributed consensus as a case study. We start by assuming a network of reliable agents with a basic communication model, then introduce unreliable agents and observation noise and study their impact on achieving consensus. In line with classic results in distributed systems (e.g., [33, 41]), we find that unreliable agents greatly impact the ability of decentralized learning-based setups to reach consensus. To mitigate this issue, we introduce the notion of trust by equipping RL agents with a learnable trust mechanism, which we refer to as *Reinforcement Learning-based Trusted Consensus (RLTC)*. Experiments show that it increases the consensus success rate of the system when compared to a setting without the trust mechanism (i.e. agents assume all other agents are reliable), which suggests that our trust mechanism is able to deal with unreliable agents effectively.

## 2 Related work

**Deep multi-agent reinforcement learning.** In the last decade, there has been a significant amount of work on deep multi-agent reinforcement learning for cooperative multi-agent tasks, such as traffic junctions [47], multi-robot warehouses [17], cooperative navigation and predator-prey games [36]. Differentiable communication mechanisms have been introduced to allow deep agents to choose what and to whom to communicate with [22, 28, 43, 47, 50]. Progress is also being made in the design of *emergent communication protocols*, where agents learn to associate communication symbols with perceptual input and actions by solving cooperative downstream tasks [11, 30, 34, 37]. However, to our knowledge, this body of work often assumes that all agents are fully functional throughout the lifetime of the system. In our work, we instead investigate if RL agents can learn to adapt to the presence of unreliable agents, then continue to solve their tasks at an acceptable level of performance.

**Complex networks.** Interactive models have been used to study the collective behavior of agents in networked environments, such as social networks and particle systems in general. Examples include the Voter model [6] and majority rule [31], where neighboring agents can communicate and update their local state using a random mechanism. In our work, we use a discrete-time variant of the Voter model, where each agent can choose who to communicate with by sampling from a subset of trusted neighbors, which the agent can adjust over time. In addition, work such as [4, 10, 20] studies the effects of error and attacks on networks at a macroscopic level. These studies are concerned with the robustness of the network topology against failed connections or nodes, rather than the ability of individual agents to adapt to failures.

**Averaging consensus algorithms.** There are other formulations of consensus applied to areas such as social influence networks [23], sensor networks [38] and vehicle formations [26]. A relevant example is the class of *averaging algorithms*, where each node in a network updates its local scalar value by computing an average over its neighbors, potentially using different and/or randomized weights [12]. Properties of these algorithms, such as asymptotic convergence, have been studied with matrix theory and algebraic graph theory [39, 44]. In contrast, our work uses RL, where each agent decides which neighbors to trust and aggregate values from, resulting in adaptive rather than pre-determined behavior.

**Distributed systems.** Consensus is an important problem in the field of distributed systems with well-established algorithms and theoretical results [16, 27, 33, 41]. Theoretical work includes the study of the Byzantine Generals problem [33, 41], the derivation of the Fisher, Lynch, and Paterson (FLP) impossibility result [27] and the design of failure detectors [16]. There have been multiple proposed solutions and analyses of these problems, each with a variety of modeling assumptions [5, 8, 9, 24, 33]. Two well-known consensus algorithms used in practice are Paxos [32] and Raft [40]. Consensus has a very wide range of uses in distributed computer systems, such as distributed locks [13], key-value stores [1], online games [7] and data centers [35]. In contrast, we are interested in the ability of RL agents to learn an emergent strategy for consensus that is resilient to the presence of unreliable agents, rather than relying on hard-wired ones.

**Trust in distributed systems.** Trust is important for supporting cooperation and coordination in multi-agent systems [21]. Various formulations of trust have been studied in the distributed and multi-agent systems literature. Ways to quantify trust include discrete trust levels and scores, which are usually computed based on past interactions and data about other agents [2, 45]. These can help an agent to decide if it is beneficial to cooperate with another agent. Models based on reputation and recommendations for gathering, aggregating and promoting ratings that approximate the trustworthiness of an agent have also been developed [2, 15, 18, 42, 45]. Our work is related to the area of decentralized trust, where agents learn who to trust by interacting with others over a period of time, rather than relying on a central authority [2].

### 3 Problem description

This section provides a formal definition of a consensus problem, including modeling assumptions such as the means of inter-agent communication and trust mechanisms.

**Consensus definition.** Consensus is reached when agents agree upon a common value out of a set of initial proposals. Denote the set of agents in the system as  $\mathcal{N} = \{1, 2, \dots, N\}$ . They must agree upon a global value from a known set of candidates  $\mathcal{D}$ , which we assume is binary:  $\mathcal{D} = \{0, 1\}$ . We also define a predetermined ground-truth value as 1, while the incorrect value is 0. Initially, each agent  $i \in \mathcal{N}$  proposes a value  $v_i \in \mathcal{D}$  with independent probability  $p$  of being equal to 1 and 0 with probability  $1 - p$ , the latter of which we will refer to as the *noise parameter*. Then, agents can share information over a communication network and update their local values appropriately. Eventually, consensus is reached if all agents agree upon the true value, otherwise known as *global consensus*. However, due to the decentralized nature of our setup, where agents can only interact with its immediate neighbors, it is difficult for agents to determine if all other agents agreed on 1. Thus, we define an agent-specific success criterion, known as *local consensus*, which is when the agent and its neighbors in the network agree on 1.

**Communication model.** Agents are interconnected by a communication network. It is defined by an undirected, connected graph  $\mathcal{G} = (\mathcal{N}, \mathcal{E})$  with nodes  $\mathcal{N}$ , which correspond to agents, and bi-directional communication links  $\mathcal{E}$  between nodes. For simplicity, we assume the communication network is a 2D square lattice. See Figure 1 for an illustration with  $N = 9$  agents. Agents interact by performing consecutive message-passing rounds in lock-step. A round starts with each agent broadcasting its current value  $v_i$  to all of

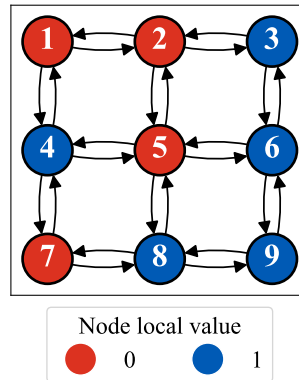


Figure 1: Communication network example with 9 agents, where nodes represent agents, arrows indicate communication links and colors are mapped to the agents’ local values.

its neighbors  $ne(i)$ . Then, upon receiving all incoming values into a message buffer denoted  $buffer_i$ , each agent updates its current value by randomly selecting a value in  $\{v_i\} \cup buffer_i$ . See Figure 2 as an example of communication between an agent and its neighbors. This communication mechanism described is similar to opinion formation models which are used to simulate interactions in social networks [6]. They assume a population of agents that initially have contradictory opinions and can update their own opinions over time by interacting pairwise with other agents in the network. This is also similar to randomized averaging algorithms, where nodes can choose which values to aggregate by following a stochastic model [12].

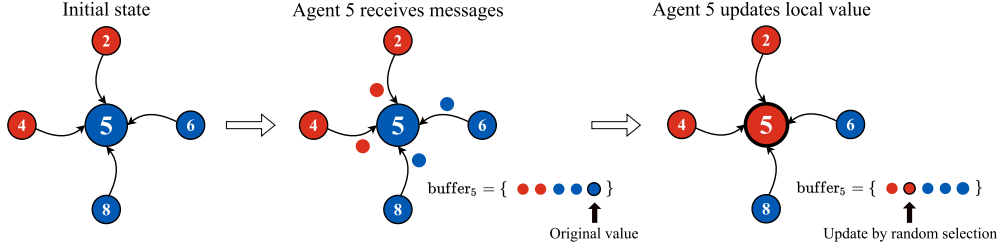


Figure 2: Communication mechanism from the perspective of agent 5. Agent 5 receives the values from its neighbors, then updates its local value by randomly selecting from the set of received values and its own. During each timestep, this is performed simultaneously by all agents.

**Failure model.** In addition, we specify the *failure model* that describes how agents can deviate from expected behavior: namely, we assume that a faulty or unreliable agent always sends the incorrect value 0 to its neighbors. This is shown in Figure 3. In addition, Figure 6a illustrates an example of a network with a single unreliable agent, in which consensus fails due to the propagation of misinformation by the other agents. We note that the trust-based mechanism approach that we introduce next is independent of the specific failure model.




Figure 3: Example of an unreliable agent 1 (square) that always ignores messages from neighbors 2 and 3 and sends 0.

## 4 Trust mechanisms for consensus

A potential solution to our consensus problem is through the notion of trust, as introduced in Section 2. To this end, we propose a simple decentralized trust mechanism that can be learned through MARL. In this section, we present its basic operation, then Section 5 will provide the reader with a more formal description of the proposed solution based on MARL.

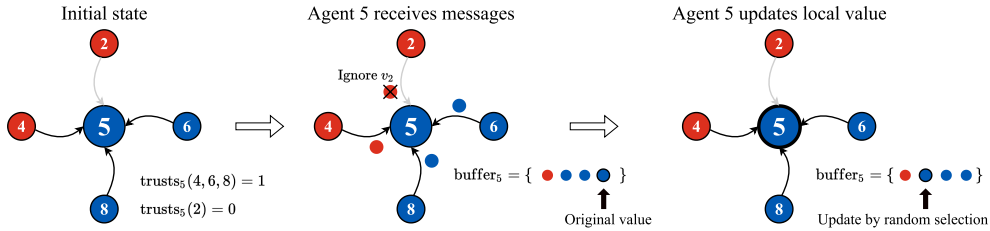


Figure 4: Communication between agent 5 and its neighbors, but agent 5 is equipped with a trust mechanism. Agent 5 trusts neighbors 4, 6 and 8 but not agent 2. It updates its local value by randomly sampling from itself and its *trusted* neighbors only.

Each agent  $i$  maintains a binary score for each neighbor  $j$ , representing whether  $i$  trusts  $j$ . Denote  $trusts_i(j)$  as the trust score of agent  $i$  towards  $j$  and  $trusts_i(\cdot)$  as the array containing all trust scores of that agent. If an agent  $i$  distrusts a neighbor  $j$ , or  $trusts_i(j) = 0$ , then it can choose to ignore all incoming messages from  $j$ .

In effect, the array  $\text{trusts}_i(\cdot)$  defines the subset of neighbors from which agent  $i$  is allowed to sample values from during each timestep. Figure 4 demonstrates this from the perspective of one agent. Figure 5 illustrates an example of trust in a grid. For example, both agents 4 and 5 distrust each other ( $\text{trusts}_4(5) = 0$  and  $\text{trusts}_5(4) = 0$ ). As a result, both agents ignore each other’s incoming messages, as indicated by the grayed out arrows from node 5 to 4 and vice versa. Agents 2 and 3 mutually trust each other, as shown by black arrows in both directions. Agent 1 distrusts Agent 4 (so Agent 1 ignores 4’s messages, indicated by the grayed out *incoming* arrow into Agent 1 from Agent 4), but Agent 4 trusts Agent 1. This is an example of unreciprocated trust. Through continual interactions, each agent can update its trust scores in order to minimize the effects of unreliable agents and improve the chances of successful consensus.




Figure 5: Communication grid example with 9 agents, in which not all agents trust each other.

## 5 MARL model

Given the trust mechanism discussed in Section 4, we will describe how the agents can learn to update their trust scores. This is achieved by formulating the problem as a multi-agent decentralized Markov Decision Process, then learning the trust mechanism using  $Q$ -learning [48, 49]. The multi-agent MDP that we will use is characterized by a tuple  $\mathcal{M} = (\mathcal{S}, \mathcal{A}, P, R)$ , containing the state space, action space, transition probability and reward function respectively. Each of these elements are described below. In addition, we assume a finite horizon of length  $T$ . Note that each agent  $i$  in the MDP corresponds to a *reliable* node in the network only. Unreliable nodes follow a deterministic behavior as described in Section 3. They do not have a trust mechanism and are not trained, thus are excluded from the MDP. Figure 6b illustrates an example of episodic execution with 9 agents.

**States.**  $\mathcal{S} = \prod_{i \in \mathcal{N}} \mathcal{S}^i$  is the global state space, which is composed of the local state spaces  $\mathcal{S}^i$  per agent  $i$ . An agent’s local state  $s^i$  corresponds to its trust array  $\text{trusts}_i(\cdot)$  as described in Section 4, so  $\mathcal{S}^i \in \{0, 1\}^{\text{ne}(i)}$ . For example, Agent 1 in Figure 5 has  $\text{trusts}_1(2) = 1$  and  $\text{trusts}_1(4) = 0$ , so  $s^1 = (1, 0)$  in ascending order of neighbor IDs 2 and 4. Agent 5’s local state is  $s^5 = (0, 0, 0, 1)$  which corresponds neighbors 2, 4, 6 and 8 respectively. At the start of each episode, all entries of all trust arrays are initialized to 1 (e.g.,  $s^5$  would be  $(1, 1, 1, 1)$  at  $t = 0$ ). Note that local states only consider trust scores and are independent of the agent’s current local value (0 or 1).

**Actions.**  $\mathcal{A} = \prod_{i \in \mathcal{N}} \mathcal{A}^i$  is the joint action space composed of the individual local action space  $\mathcal{A}^i$  of each agent  $i$ . A local action  $a^i$  corresponds to agent  $i$  toggling its trust score of a specific neighbor or not toggling any score at all. So,  $\mathcal{A}^i = \{\emptyset\} \cup \text{ne}(i)$ , where  $\emptyset$  is a no-op action. Concretely, if  $a^i = j$  then  $\text{trusts}_i(j) \leftarrow \neg \text{trusts}_i(j)$ . For example, in Figure 6b between  $t = 0$  and  $t = 1$ , agent 1 toggles its trust score of neighbor 2 from  $\text{trusts}_1(2) = 1$  to 0 by selecting action  $a^1 = 2$ . Agent 4 did not modify its trust scores, so  $a^4 = \emptyset$ . Due to the decentralized nature of our setup, agents select actions  $a^i$  independently, following their local policy  $\pi^i(s^i)$  and independently of other agents.

**Transitions.**  $P$  is the transition function:  $P(s'|s, \{a^i\}_{i \in \mathcal{N}})$  is the probability of moving from global state  $s \in \mathcal{S}$  to state  $s' \in \mathcal{S}$  when each agent  $i$  executes some action  $a^i$ . The global state is the collective trust score arrays of all agents in the system after they individually perform local actions (toggling or doing nothing). The state transitions are deterministic, only depending on the agents’ actions. See Figure 6b for examples of consecutive global state transitions, but ignore the agents’ local values (red or blue) because the MDP does not consider this information.

**Reward and consensus optimization objective.** The goal of the trust mechanism is to ensure that consensus can still be attained despite disruptions caused by unreliable nodes in the network. Each reliable agent must update its trust scores so that it reaches agreement with its neighbors correctly. To achieve this, it must discover a policy  $\pi^i$  that allows it to perform appropriate updates to its trust array. Thus, we define the reward function  $R^i$  in terms of the local success criteria for consensus described in Section 3, which is appropriate for our decentralized setup where agents can only interact directly with their neighbors. Each agent  $i$  is assigned reward  $R^i = +1$  if it correctly agrees with all neighbors:  $\forall j \in \{i\} \cup \text{ne}(i) : v_j = 1$ . If this is not satisfied, then  $R^i = -1$ . The global objective

is to find an optimal joint policy  $\pi = \langle \pi^1, \dots, \pi^N \rangle$  that maximizes the joint action-value function  $Q^\pi(s, a) = \mathbb{E} \left[ \sum_{k=t+1}^T \gamma^{k-t-1} \sum_{i \in \mathcal{N}} R_k^i | s_t = s, a_t = a \right]$ , where  $s$  is the joint state,  $a$  is the joint action,  $T$  is the horizon and  $\gamma \in [0, 1)$  is the discount factor.

**$Q$ -learning update.** Due to the decentralized setup, we will optimize the above objective using independent  $Q$ -learning [48], where each agent learns according to its own actions and local state. The update rule for agent  $i \in \{1, \dots, N\}$  is as follows:

$$Q^i(s_t^i, a_t^i) \leftarrow Q^i(s_t^i, a_t^i) + \alpha \left( \left[ R_t^i + \gamma \max_{a \in \mathcal{A}^i} Q^i(s_{t+1}^i, a) \right] - Q^i(s_t^i, a_t^i) \right) \quad (1)$$

where  $Q^i$  is the  $Q$ -function of agent  $i$ ,  $\alpha$  is the learning rate and  $\gamma$  is the discount factor. The update uses states and actions local to agent  $i$ , i.e.  $s^i$  and  $a^i$ . Each agent uses the  $\epsilon$ -greedy behavior policy during training and the greedy policy for evaluation.

**Summary of consensus protocol execution.** The full execution of our consensus protocol is detailed in Algorithm 1. To aid understanding, an example is illustrated in Figure 6b. At the beginning, the communication graph contains both reliable and unreliable agents. In the example, only agent 2 is unreliable. Reliable agents are trained, and unreliable agents have fixed behavior as described in (Section 3). Then, the consensus protocol consists of both the trust mechanism (set up as an MDP above) and communication (sending and updating local values, which are not part of the MDP). The protocol executes over a finite episode with length  $T$ . At the start of each episode, all trust scores are initialized to 1, as indicated by all black arrows in Figure 6b. Each reliable agent’s local value is randomly set to 0 with probability  $1 - p$ , 1 otherwise, while the unreliable agents always start with 0. In the example, reliable agents 1 and 9 start with 0 while the others have 1, while unreliable agent 2 has 0. Then, each timestep consists of three phases: agents receive the incoming values of trusted neighbors, update their local values and then update their trust scores, the latter being decided by the agents’ local action policies. The episode terminates after the final timestep  $T$  is reached.

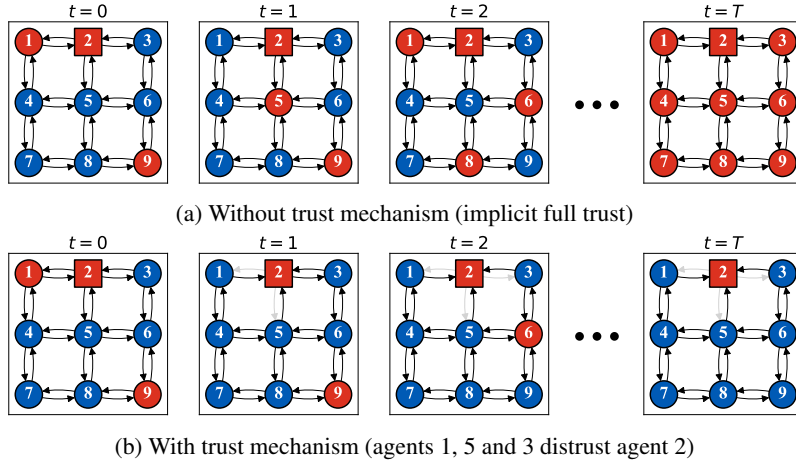


Figure 6: An example scenario with 9 agents with one unreliable agent labeled 2. Timesteps 0, 1, 2 and  $T = 30$  of an episode are shown. Figure 6a does not have the trust mechanism and results in failure, because the incorrect value 0 (red) has spread to all agents. Figure 6b has the trust update mechanism. Reliable agents 1 and 5 toggle their trust scores of agent 2 to 0 at  $t = 1$ , then agent 3 does the same at  $t = 2$ . Here, consensus is successful, because agent 2 is effectively isolated from the rest of the network, and all reliable agents agree on 1 (blue).

## 6 Experiments

Our goal is to determine whether the decentralized trust mechanism described in Section 4 can increase the chances of successful consensus despite the presence of unreliable agents. To this end, we implement an environment according to our problem specification and perform a series of MARL experiments using the setup described in Section 5. We vary two parameters, namely the fraction

---

**Algorithm 1: RLTC Consensus Protocol Episode Execution**

---

```
1 Initialize each  $v_i$  randomly to 1 with probability  $p$ , 0 otherwise.
2 Initialize all  $\text{trusts}_i(j) = 1$ .
3 for timestep  $t = 1, 2, \dots, T$  do
4   for  $i \in \mathcal{N}$  do  $\text{buffer}_i \leftarrow \{v_j \mid j \in \text{ne}(i) \wedge \text{trusts}_i(j) = 1\}$  // Receive messages ;
5   for  $i \in \mathcal{N}$  do  $v_i \leftarrow \text{random}(\{v_i\} \cup \text{buffer}_i)$  // Update local values ;
6   for  $i \in \mathcal{N}$  do
7      $j \leftarrow \pi_i(s_t^i)$ ;
8     if  $j \neq \emptyset$  then  $\text{trusts}_i(j) \leftarrow \neg \text{trusts}_i(j)$  // Update trust score ;
    // If training, do  $Q$ -learning update for agent  $i$  (Equation (1))
```

---

Table 1: Performance metrics

Name	Equation	Description
Success rate	$\frac{1}{N} \sum_{i=1}^N \mathbb{1}[v_i = v_{\text{true}}]$	Fraction of reliable agents with the correct value.
Average trust rate	$\frac{1}{N} \sum_{i \in \mathcal{N}} \frac{1}{ \text{ne}(i) } \sum_{j \in \text{ne}(i)} \text{trusts}_i(j)$	Average fraction of neighbors, reliable or otherwise, that each reliable agent trusts.
Mutual trust rate	$\frac{1}{ \mathcal{E} } \sum_{i,j \in \mathcal{E}} \mathbb{1}[\text{trusts}_i(j) \wedge \text{trusts}_j(i)]$	Fraction of mutually-trusting reliable agents. 0 if no reliable agents are adjacent in the network.
Average trust accuracy	$\frac{1}{N} \sum_{i \in \mathcal{N}} \frac{1}{ \text{ne}(i) } \sum_{j \in \text{ne}(i)} \mathbb{1}[\text{trusts}_i(j) = \mathbb{1}[j \in \mathcal{N}]]$	Fraction of correct trust scores assigned to neighbors on average, i.e. the agent assigns trust score 1 for reliable neighbors and 0 for unreliable ones.

$f$  of faulty agents in the system and the value initialization noise  $1 - p$ . We measure the average consensus success rate and also observe the emergent properties of the learned trust mechanisms.

## 6.1 Experimental setup

We run experiments on both  $3 \times 3$  and  $4 \times 4$  square lattices ( $N = 9$  and 16 respectively). We repeat the experiments 30 times, each one starting with a unique random seed. At the start of each repetition, the reliable and unreliable agents are randomly positioned in the communication graph. Each repetition executes 20,000 training episodes and 2,000 evaluation episodes. Results are averaged over the random seeds. The performances of our method *RLTC* (i.e. trust learned by using IQL) are compared with two *fixed* baselines: *Trust All* where all agents trust each other, and *Oracle* where each reliable agent knows which of its neighbors are reliable a priori and only trusts them (see Figure 7 for an example). These baseline agents are *not* trained using RL and their trust scores are always fixed. Please refer to the supplementary material for additional experimental details. The source code will be made available in a future version of this article.

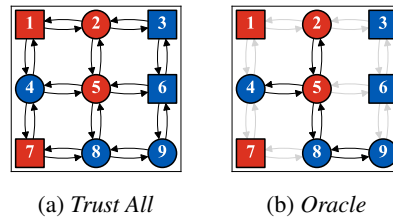


Figure 7: Scenarios with baseline agents with fixed trust score arrays (circles) and unreliable agents (squares).

Table 1 outlines the metrics that are recorded in our experiments. We assess both the consensus success rate and properties of the trust system that emerges. All metrics are computed exclusively over the subset of *reliable* agents. For the *Trust All* baseline, the average trust rate is always 1 since all agents trust each other. For the *Oracle*, average trust accuracy is 1. This metric describes how far a learned solution differs from the oracle. During the experiments, each metric is computed per timestep, then averaged over all timesteps for an episode-specific statistic.



## 6.2 Results

We present the experimental results for 16 agents. The observed trends in the 9-agent experiments are similar, thus are moved to the supplementary material. Figure 8 and Figure 9 show the effects of varying the fraction of reliable agents on the performance metrics for several fixed values of noise. The values for  $f$  and  $1 - p$  are  $\{0.25, 0.5, 0.75, 1.0\}$  and  $\{0, 0.1, 0.2, 0.3\}$  respectively.

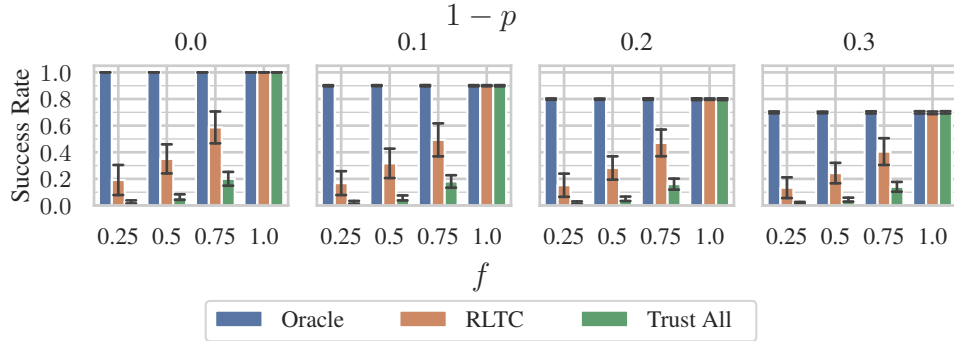


Figure 8: Success rates for different fractions of reliable agents  $f$  and noise values  $1 - p$  (16 agents). Each bar height and error bar represents the mean and 1 standard deviation respectively wrt. 30 runs over different random seeds.

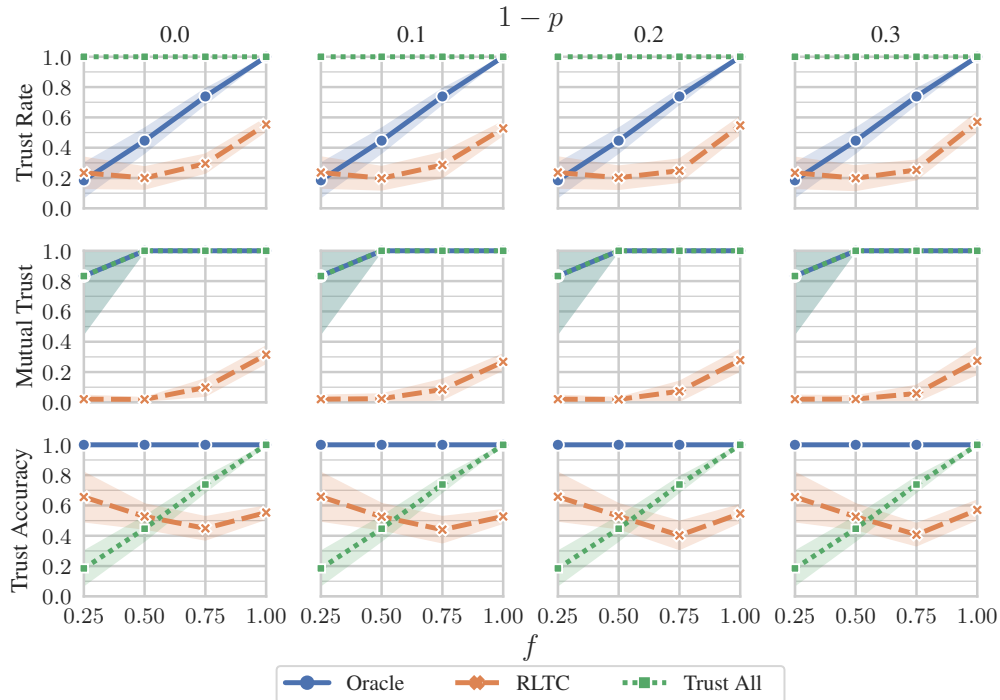


Figure 9: Fraction of reliable agents  $f$  against trust metrics for fixed noise  $1 - p$  (16 agents). Each line and error band represent the mean and 1 standard deviation respectively wrt. 30 runs with different random seeds.

We observe that fixing the fraction of reliable agents and varying noise has little effect on the output metrics for *RLTC* agents. Increasing  $1 - p$  only decreases the success rate for *Oracle* and *Trust All* agents, which is expected behavior. For fixed  $1 - p$ , as  $f$  increases, the success rate increases as



for *Trust All* and *RLTC*; we also note that the success rate for *RLTC* agents is higher than *Trust All*, suggesting that the trust mechanism leads to a statistically significant improvement.

In addition, both the average trust rate and mutual trust increase as the reliable fraction increases. However, the values are low compared to the oracle, meaning that the reliable agents do not always trust each other and often prefer their own values  $v_i$  over those of their neighbors when performing updates. Low mutual trust also indicates the lack of reciprocation between agents. This is challenging due to our decentralized setup: each agent updates its trust scores locally and independently of others, hence it is difficult to coordinate trust between pairs of agents. The trust accuracy for *RLTC* agents is also relatively low, which means that it deviates from the oracle solution. It shows a decreasing trend as the fraction of reliable agents increases until  $f = 0.75$ , but increases between  $0.75 \leq f \leq 1$  (refer to the supplementary material for a further discussion about this phenomenon).




Figure 10: Success rates against the grid dimension  $\sqrt{N}$ .

We also investigate the scalability of our approach by experimenting with larger communication grid sizes (5, 6, 7, 8, 9, 10) with parameters  $f = 0.75$  and  $1 - p = 0.3$  as an example. The results shown in Figure 10 demonstrate that our decentralized approach maintains similar performance as the number of agents in the system is increased. It is worth noting that, for comprehensiveness, we also test *RLTC* against a randomized failure model in which unreliable agents sometimes update the local value incorrectly, finding that our method also yields a statistically significant gain in success rate in this scenario as well (please refer to the supplementary material for experimental results).

## 7 Conclusion

**Summary of the contributions.** In this work, we have investigated the problem of learning in the presence of unreliable agents, an aspect which has been largely not considered thus far in the multi-agent reinforcement learning literature. Considering distributed consensus as a case study, we found that the presence of unreliable agents greatly affect the dynamics and the expected behavior of the system. To mitigate this, we have presented Reinforcement Learning-based Trust Consensus (RLTC), a decentralized trust mechanism for the consensus problem that allows agents to independently learn which neighbors to trust and which to ignore. Our experiments show that the trust mechanism significantly improves the consensus success rate, indicating that we are able to address the problem of dealing with unreliable agents effectively. We have also studied the properties of the emerging protocol, showing that it leads to low overall trust rate as well as asymmetric trust between agents.

**Limitations and future work.** A main limitation to RLTC is the failure to ensure mutual or reciprocated trust, largely due to the decentralized setup that makes inter-agent coordination difficult. Possible extensions include sending additional information within messages, recommending trust scores to others, considering the history of interactions and evaluating semi-decentralized solutions with coordinating agents. Potential future work includes simulating other failure models, additional network topologies (e.g., Erdős-Rényi and Barabási-Albert models [3, 25]), local aggregation mechanisms (e.g., majority function, uniform symmetric gossip [12]) and establishing a connection with deep learning work such as Das et al. [22], Rangwala and Williams [43], [50] and message passing neural networks [29]. There are no specific ethical concerns given the theoretical nature of our work in its current state. However, our work may have broader impacts on real-world distributed systems, where fault prevention, recovery and tolerance are fundamental problems underpinning their design [35, 46].

## Acknowledgments and Disclosure of Funding

This work was supported by The Alan Turing Institute under the UK EPSRC grant EP/N510129/1. The authors declare no competing financial interests with respect to this work.

## References

- [1] Etcd: A distributed, reliable key-value store for the most critical data of a distributed system, 2022. URL <https://etcd.io/>. Last accessed: 18 April 2022.
- [2] Alfarez Abdul-Rahman and Stephen Hailes. A distributed trust model. In *Proceedings of the 1997 Workshop on New Security Paradigms*, page 48–60. Association for Computing Machinery, 1998.
- [3] Réka Albert and Albert-László Barabási. Statistical mechanics of complex networks. *Reviews of Modern Physics*, 74:47–97, 2002.
- [4] Réka Albert, Hawoong Jeong, and Albert-László Barabási. Error and attack tolerance of complex networks. *Nature*, 406(6794):378–382, 2000.
- [5] James Aspnes and Maurice Herlihy. Fast randomized consensus using shared memory. *Journal of Algorithms*, 11(3):441–461, 1990.
- [6] Alain Barrat, Marc Barthelemy, and Alessandro Vespignani. *Dynamical Processes on Complex Networks*. Cambridge University Press, 2008.
- [7] N.E. Baughman and B.N. Levine. Cheat-proof payout for centralized and distributed online games. In *Proceedings of IEEE INFOCOM*, volume 1, pages 104–113 vol.1, 2001.
- [8] Michael Ben-Or. Another advantage of free choice (extended abstract): Completely asynchronous agreement protocols. In *Proceedings of the 2nd Annual ACM Symposium on Principles of Distributed Computing*, page 27–30. Association for Computing Machinery, 1983.
- [9] Piotr Berman and Juan A. Garay. Cloture votes: $n/4$ -resilient distributed consensus in  $t + 1$  rounds. *Theory of Computing Systems*, 26(1):3–19, 1993.
- [10] Alina Beygelzimer, Geoffrey Grinstein, Ralph Linsker, and Irina Rish. Improving network robustness by edge modification. *Physica A: Statistical Mechanics and its Applications*, 357(3): 593–612, 2005.
- [11] Diane Bouchacourt and Marco Baroni. How agents see things: On visual representations in an emergent language game. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 981–985. Association for Computational Linguistics, 2019.
- [12] Francesco Bullo. *Lectures on Network Systems*. Kindle Direct Publishing, 1.6 edition, 2022. URL <http://motion.me.ucsb.edu/book-1ns>.
- [13] Mike Burrows. The Chubby lock service for loosely-coupled distributed systems. In *Proceedings of the 7th Symposium on Operating Systems Design and Implementation*, pages 335–350, 2006.
- [14] Christian Cachin, Rachid Guerraoui, and Luis Rodrigues. *Introduction to Reliable and Secure Distributed Programming*. Springer, 2011.
- [15] C. Castelfranchi and R. Falcone. Principles of trust for MAS: cognitive anatomy, social importance, and quantification. In *Proceedings of the International Conference on Multi-Agent Systems*, pages 72–79, 1998.
- [16] Tushar Deepak Chandra and Sam Toueg. Unreliable failure detectors for reliable distributed systems. *Journal of the ACM*, 43(2):225–267, March 1996.
- [17] Filippos Christianos, Lukas Schäfer, and Stefano Albrecht. Shared experience actor-critic for multi-agent reinforcement learning. In *Advances in Neural Information Processing Systems*, volume 33, 2020.
- [18] Robin Cohen, Mike Schaekermann, Sihao Liu, and Michael Cormier. Trusted AI and the contribution of trust modeling in multiagent systems. In *Proceedings of the 18th International Conference on Autonomous Agents and Multi-Agent Systems*, page 1644–1648, 2019.

- [19] George Coulouris, Jean Dollimore, Tim Kindberg, and Gordon Blair. *Distributed Systems: Concepts and Design*. Pearson Education, 2012.
- [20] Paolo Crucitti, Vito Latora, and Massimo Marchiori. Model for cascading failures in complex networks. *Physical Review E*, 69(4):045104, 2004.
- [21] Allan Dafoe, Edward Hughes, Yoram Bachrach, Tatum Collins, Kevin R McKee, Joel Z Leibo, Kate Larson, and Thore Graepel. Open Problems in Cooperative AI. *arXiv preprint arXiv:2012.08630*, 2020.
- [22] Abhishek Das, Théophile Gervet, Joshua Romoff, Dhruv Batra, Devi Parikh, Mike Rabbat, and Joelle Pineau. TarMAC: Targeted multi-agent communication. In *Proceedings of the International Conference on Machine Learning*, pages 1538–1546, 2019.
- [23] Morris H. DeGroot. Reaching a consensus. *Journal of the American Statistical Association*, 69(345), 1974.
- [24] Danny Dolev and H. Raymond Strong. Authenticated algorithms for byzantine agreement. *SIAM Journal on Computing*, 12(4):656–666, 1983.
- [25] Paul Erdős and Alfréd Rényi. On the evolution of random graphs. In *The Structure and Dynamics of Networks*, pages 38–82. Princeton University Press, 2011.
- [26] J.A. Fax and R.M. Murray. Information flow and cooperative control of vehicle formations. *IEEE Transactions on Automatic Control*, 49(9), 2004.
- [27] Michael J. Fischer, Nancy A. Lynch, and Michael S. Paterson. Impossibility of distributed consensus with one faulty process. *Journal of the ACM*, 32(2):374–382, 1985.
- [28] Jakob Foerster, Ioannis Alexandros Assael, Nando de Freitas, and Shimon Whiteson. Learning to communicate with deep multi-agent reinforcement learning. In *Advances in Neural Information Processing Systems*, volume 29, 2016.
- [29] Justin Gilmer, Samuel S. Schoenholz, Patrick F. Riley, Oriol Vinyals, and George E. Dahl. Neural message passing for quantum chemistry. In *Proceedings of the 34th International Conference on Machine Learning*, page 1263–1272, 2017.
- [30] Laura Harding Graesser, Kyunghyun Cho, and Douwe Kiela. Emergent Linguistic Phenomena in Multi-Agent Communication Games. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing*, pages 3700–3710. Association for Computational Linguistics, 2019.
- [31] Paul L Krapivsky and Sidney Redner. Dynamics of majority rule in two-state interacting spin systems. *Physical Review Letters*, 90(23):238701, 2003.
- [32] Leslie Lamport. The part-time parliament. *ACM Transactions on Computer Systems*, 16(2): 133–169, 1998.
- [33] Leslie Lamport, Robert Shostak, and Marshall Pease. The Byzantine generals problem. *ACM Transactions on Programming Languages and Systems*, 4(3):382–401, 1982.
- [34] Angeliki Lazaridou, Karl Moritz Hermann, Karl Tuyls, and Stephen Clark. Emergence of Linguistic Communication from Referential Games with Symbolic and Pixel Input. In *Proceedings of the 6th International Conference on Learning Representations*, 2018.
- [35] Tom Lianza and Chris Snook. A Byzantine failure in the real world - the cloudflare blog, Nov 2020. URL <https://blog.cloudflare.com/a-byzantine-failure-in-the-real-world/>. Last accessed: 18 April 2022.
- [36] Ryan Lowe, Yi Wu, Aviv Tamar, Jean Harb, Pieter Abbeel, and Igor Mordatch. Multi-agent actor-critic for mixed cooperative-competitive environments. In *Advances in Neural Information Processing Systems*, volume 30, 2017.
- [37] Igor Mordatch and Pieter Abbeel. Emergence of Grounded Compositional Language in Multi-Agent Populations. *AAAI Conference on Artificial Intelligence*, pages 1495–1502, 2017.

- [38] R. Olfati-Saber and J.S. Shamma. Consensus filters for sensor networks and distributed sensor fusion. In *Proceedings of the 44th IEEE Conference on Decision and Control*, 2005.
- [39] Reza Olfati-Saber, J. Alex Fax, and Richard M. Murray. Consensus and cooperation in networked multi-agent systems. *Proceedings of the IEEE*, 95(1):215–233, Jan 2007.
- [40] Diego Ongaro and John Ousterhout. In search of an understandable consensus algorithm. In *2014 USENIX Annual Technical Conference*, pages 305–319. USENIX Association, 2014.
- [41] Marshall Pease, Robert Shostak, and Leslie Lamport. Reaching agreement in the presence of faults. *Journal of the ACM*, 27(2):228–234, 1980.
- [42] Sarvapali D. Ramchurn, Dong Huynh, and Nicholas R. Jennings. Trust in multi-agent systems. *Knowledge Engineering Review*, 19(1):1–25, 2004.
- [43] Murtaza Rangwala and Ryan Williams. Learning multi-agent communication through structured attentive reasoning. In *Advances in Neural Information Processing Systems*, volume 33, 2020.
- [44] Wei Ren, R.W. Beard, and E.M. Atkins. A survey of consensus problems in multi-agent coordination. In *Proceedings of the 2005 American Control Conference*, pages 1859–1864 vol. 3, 2005.
- [45] Jordi Sabater and Carles Sierra. Review on computational trust and reputation models. *Artificial Intelligence Review*, 24(1):33–60, 2005.
- [46] Bianca Schroeder and Garth A. Gibson. A large-scale study of failures in high-performance computing systems. *IEEE Transactions on Dependable and Secure Computing*, 7(4):337–350, 2010.
- [47] Sainbayar Sukhbaatar, Arthur Szlam, and Rob Fergus. Learning multiagent communication with backpropagation. In *Advances in Neural Information Processing Systems*, volume 29, 2016.
- [48] Ming Tan. Multi-agent reinforcement learning: Independent vs. cooperative agents. In *Proceedings of the 10th International Conference on Machine Learning*, pages 330–337, 1993.
- [49] Christopher J. C. H. Watkins and Peter Dayan. Q-learning. *Machine Learning*, 8(3):279–292, 1992.
- [50] Sai Qian Zhang, Qi Zhang, and Jieyu Lin. Succinct and robust multi-agent communication with temporal message control. In *Advances in Neural Information Processing Systems*, volume 33, 2020.

---

# Supplementary Material

---

## 1 Experimental Setting

**Platform specifications.** Experiments are run on Linux (Centos 7.9.2009) using Python 3.10.3. The platform uses Intel(R) Xeon(R) CPU E5-2637 v4 @ 3.50GHz with 16 cores and 60 GB RAM. Training occurs purely on CPU; no GPU is required. The full set of experiments takes approximately 12 hours to run. The source code for experiments uses public software libraries [2–6].

**Configuration** Table 1 lists the hyperparameters used in all experiments. Multiplicative epsilon decay is used, i.e.  $\varepsilon_{t+1} = r^t \varepsilon_0$  at each timestep, where  $r$  is a constant decay factor. 20,000 training episodes and 2,000 evaluation episodes are used, each episode with length 30. Results are averaged over 30 random seeds, which were generated using Haahr [1] in the source code. Table 2 reiterates the values that were used in experiments from the main paper for convenience (excluding the scalability experiment, which uses more values of  $N$ .)

Table 1: RL hyperparameters

Name	Value
$Q$ -learning step size $\alpha$	0.03
Discount factor $\gamma$	0.999
Initial exploration probability $\varepsilon_0$	0.3
Exploration decay factor $r$	0.9996

Table 2: Variable ranges

Name	Values
Number of agents $N$	9, 16
Fraction of reliable agents $f$	0.25, 0.5, 0.75, 1.0
Local value initialization noise $1-p$	0, 0.1, 0.2, 0.3

**Hyperparameter selection.** The RL hyperparameters are selected using a basic grid search. See Table 3 for the combinations used. We discover that only the discount factor  $\gamma$  and epsilon decay factor  $r$  have any noticeable impact on the average reward: using  $\gamma = 0.999$  and  $r = 0.9996$  converges to the highest value.  $\alpha = 0.03$  leads to less noisy rewards over time, and a larger  $\varepsilon_0$  allows for more initial exploration.

## 2 Additional Results and Figures

**Results for 9 agents.** Figure 1 and Figure 2 show the experimental results for 9 agents that were omitted in the main text for brevity, mainly due to similar trends being exhibited.

**Plots for 16 agents but with fixed  $f$  per column.** Figure 3 shows the same results for 16 agents as seen in the main text, but with  $1-p$  on the  $x$ -axes and fixed  $f$  per column.

Table 3: RL hyperparameter grid search

Name	Value
$\alpha$	0.03, 0.01, 0.1
$\gamma$	0.999, 0.95
$\varepsilon_0$	0.1, 0.3
$r$	0.9996, 1.0

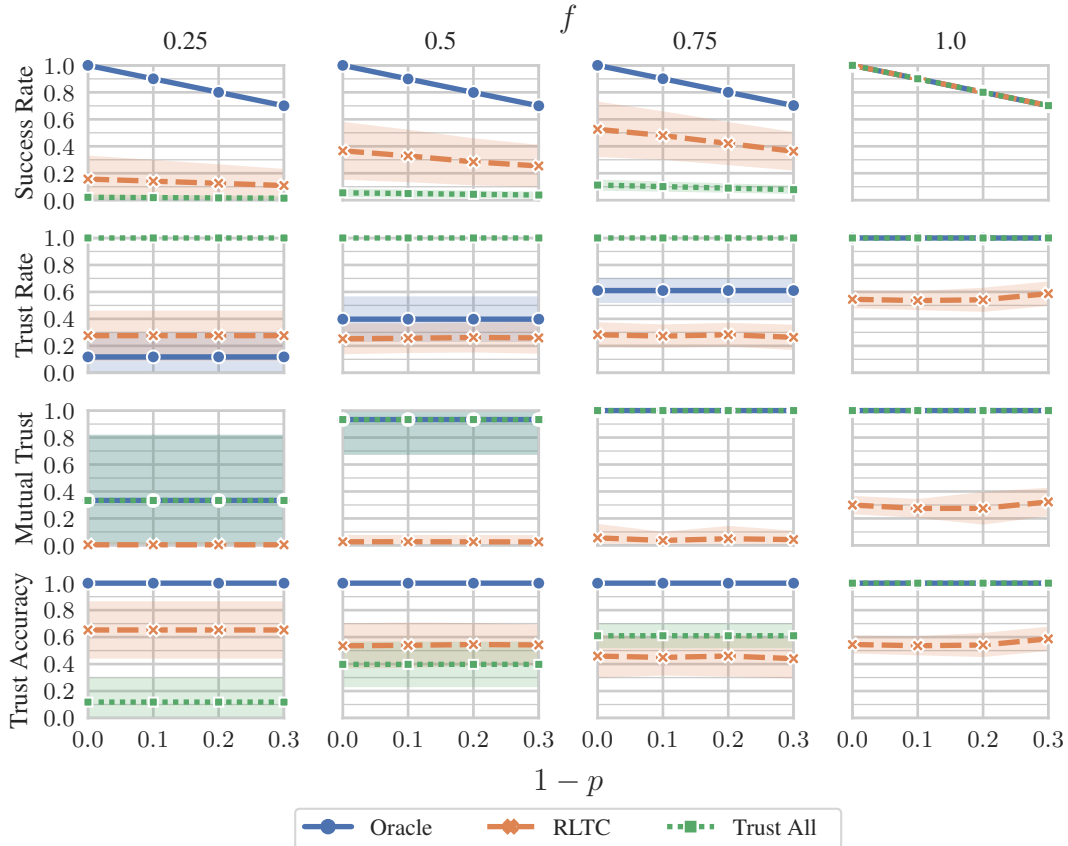


Figure 1: Noise against metric for fixed reliable fractions (9 agents)

**Investigating trust accuracies for  $0.75 \leq f \leq 1.0$ .** In the main paper, we notice that the trust accuracy of trained agents decreases when the fractions of reliable agents is between 0 and 0.75, but increases in the 0.75 to 1.0 interval. To investigate this inconsistency, we run finer-grained experiments for values 0.75, 0.8, 0.85, 0.9, 0.95, 1.0. The results are illustrated in Figure 4. We notice a general smooth increase for fixed values of noise, which is an interesting emergent property of the system.

**Unreliable agents following a randomized failure model.** In the main paper, we only present results for a specific type of failure model, where a faulty or unreliable agent always has a local value  $v_i = 0$  and never updates it (i.e. it ignores incoming messages and always sends out 0 to its neighbors.) To test the generality of our method, we also experiment with another model where unreliable agents sometimes update the local value incorrectly. More specifically, the faulty agent sets  $v_i$  to either 0 or 1, each with 0.5 probability, again ignoring the values of its neighbors. We present these results for 16 agents in Figure 5 and Figure 6. Notice that the success rates are higher in general because the unreliable agents output the correct value 50% of the time. However, *RLTC* exhibits a

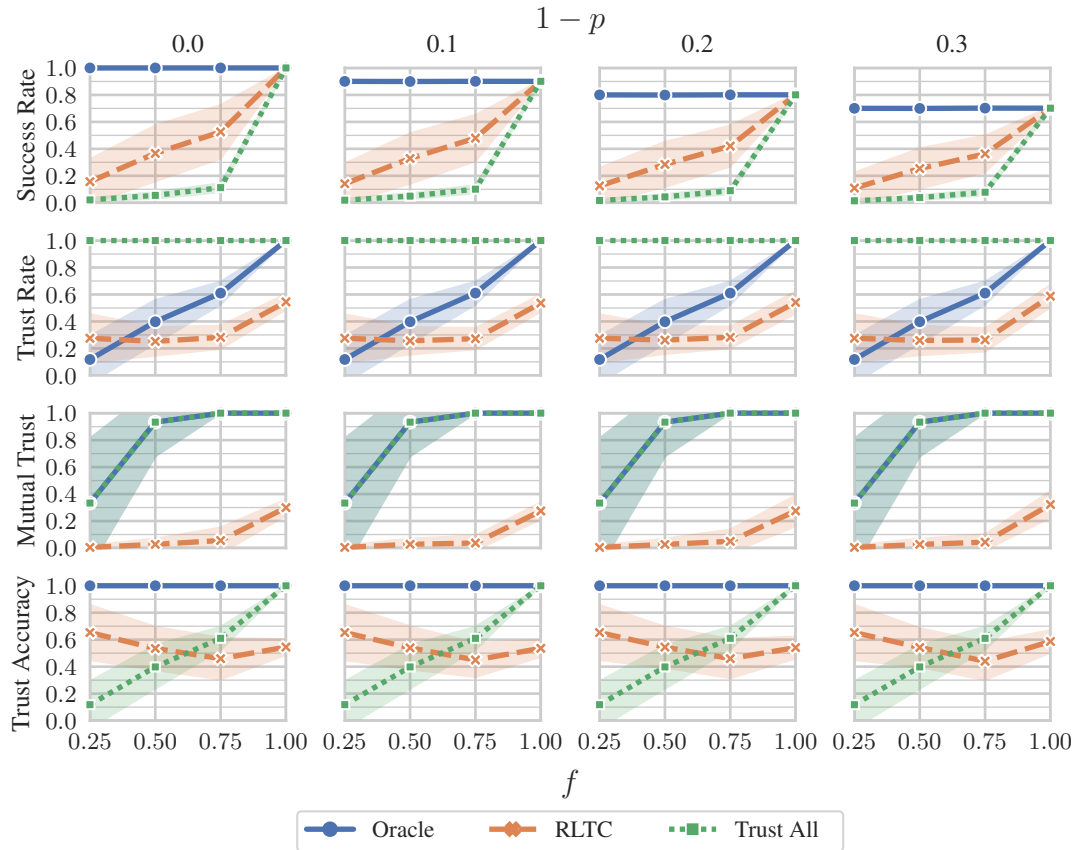


Figure 2: Reliable fraction against metric for fixed noise values (9 agents)

statistically significant increase in success rate from *Trust All*. This shows that the functionality of our method is not limited to one type of failure model.

## References

- [1] Mads Haahr. RANDOM.ORG: true random number service. <https://www.random.org>, 1998–2018. Accessed: 2022-01-31.
- [2] Aric Hagberg, Pieter Swart, and Daniel S. Chult. Exploring network structure, dynamics, and function using networkx. In *SciPy*, 2008.
- [3] Charles R Harris, K Jarrod Millman, Stéfan J van der Walt, Ralf Gommers, Pauli Virtanen, David Cournapeau, Eric Wieser, Julian Taylor, Sebastian Berg, Nathaniel J Smith, et al. Array programming with NumPy. *Nature*, 585(7825):357–362, 2020.
- [4] J. D. Hunter. Matplotlib: A 2D graphics environment. *Computing in Science & Engineering*, 9(3):90–95, 2007.
- [5] Wes McKinney et al. pandas: a foundational Python library for data analysis and statistics. *Python for High Performance and Scientific Computing*, 14(9):1–9, 2011.
- [6] Michael L. Waskom. Seaborn: statistical data visualization. *Journal of Open Source Software*, 6(60):3021, 2021.



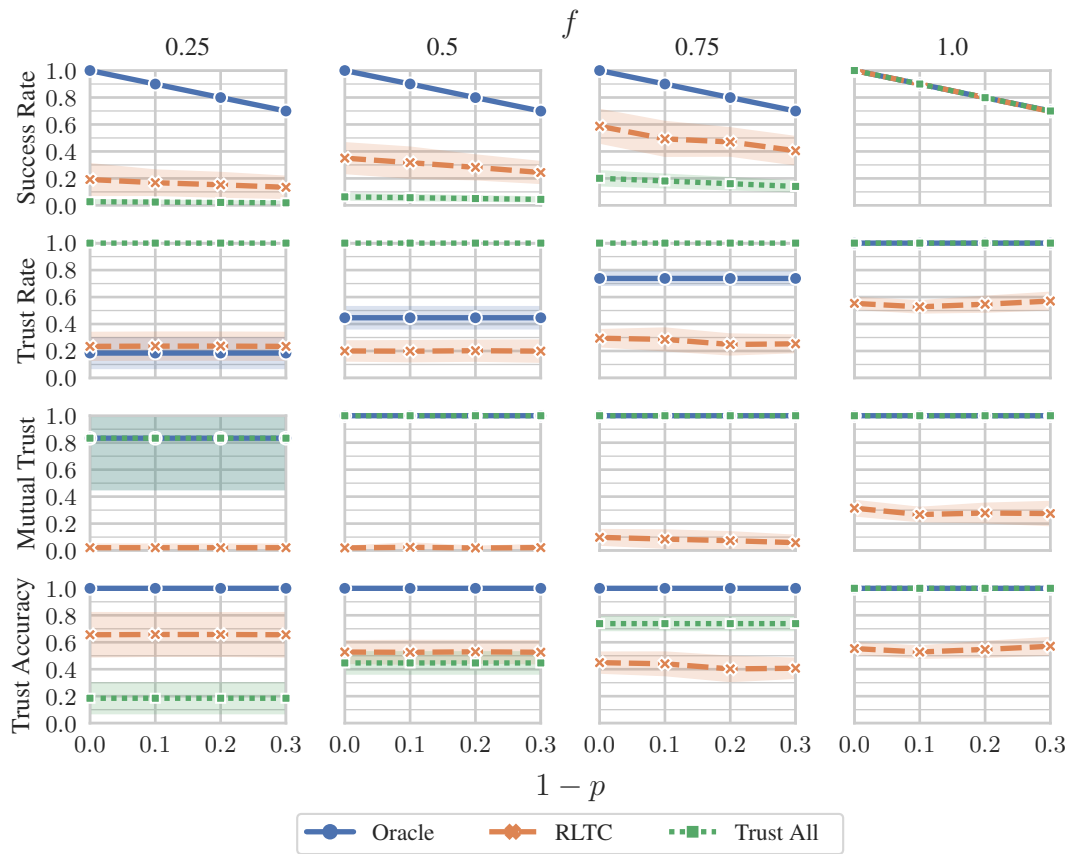


Figure 3: Noise against metric for fixed reliable fractions (16 agents)

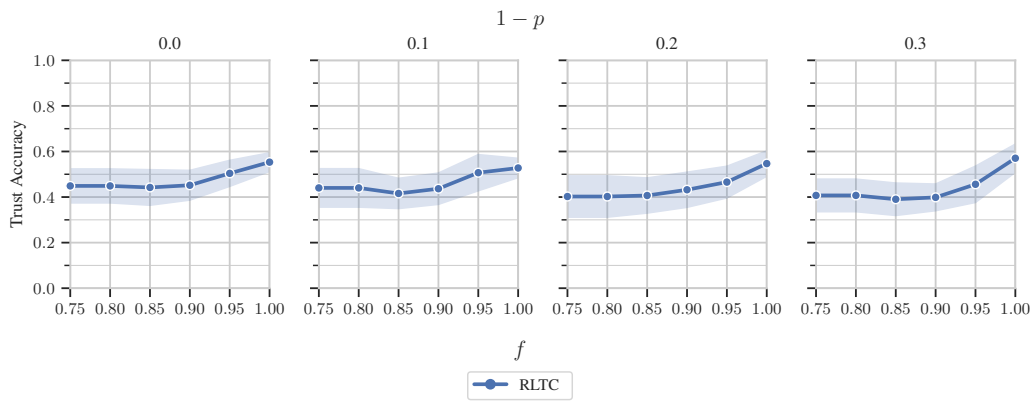


Figure 4: Trust accuracy for  $0.75 \leq f \leq 1.0$ , 16 agents.

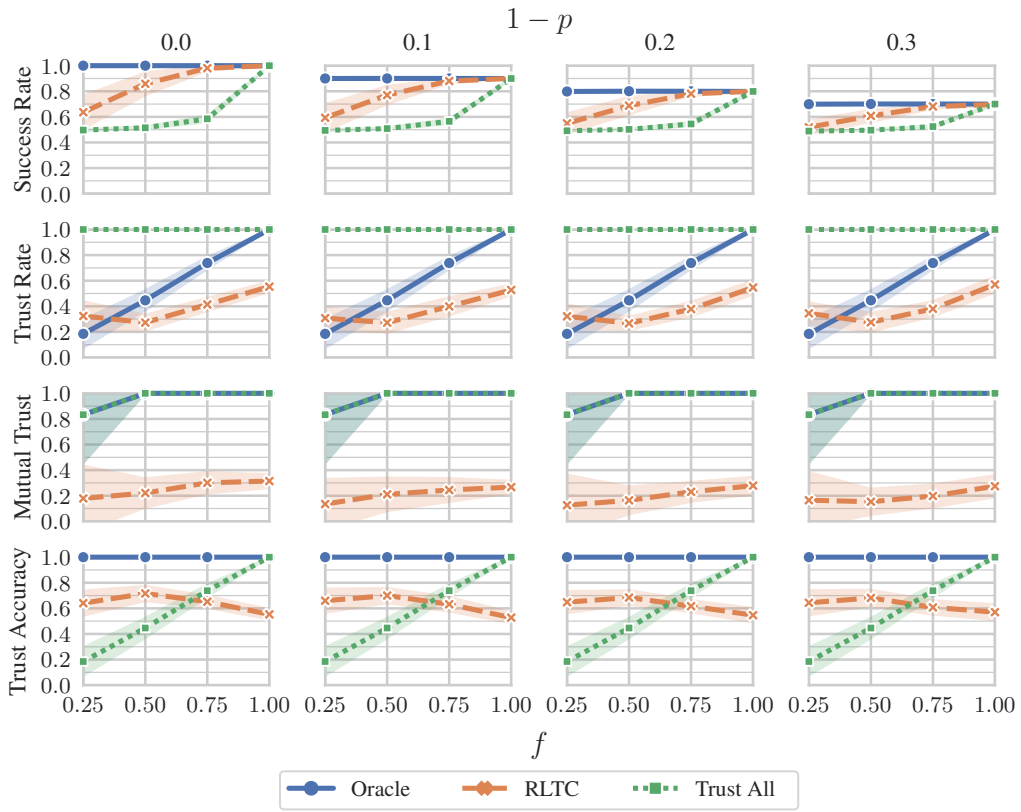


Figure 5:  $f$  against metric for fixed  $1-p$  values using the random failure model and 16 agents.

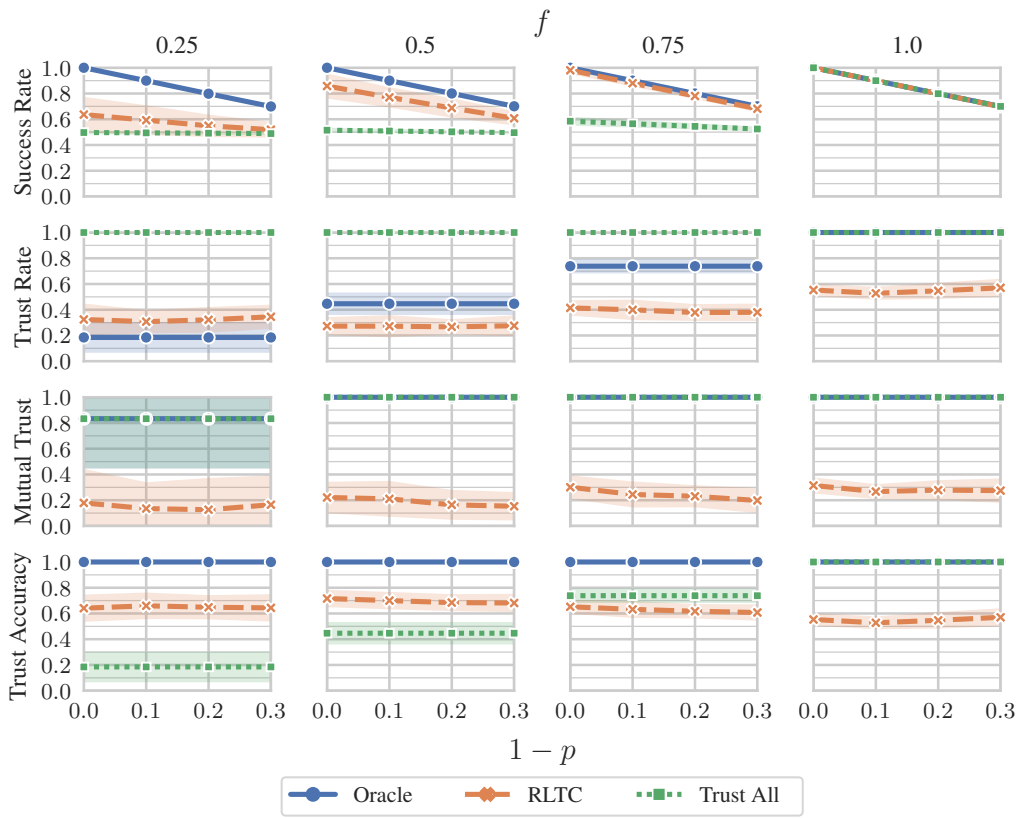


Figure 6:  $1 - p$  against metric for fixed  $f$  values using the random failure model and 16 agents.