

On a certified VMS-Smagorinsky Reduced Basis model with LPS pressure stabilization

Tomás Chacón Rebollo* Enrique Delgado Ávila†
Macarena Gómez Mármol†

Abstract

In this work we present the numerical analysis of a Reduced Basis VMS-Smagorinsky model with local projection stabilization (LPS) on the pressure. We construct the reduced velocity space by two different strategies, by considering or not the enrichment of the reduced velocity space with the so-called inner pressure *supremizer*. We present the development of an *a posteriori* error estimator for the snapshot selection through a Greedy algorithm, based on the Brezzi-Rappaz-Raviart (BRR) theory. Moreover, the Empirical Interpolation Method (EIM) is considered for the approximation of the non-linear terms. Finally, we present some numerical tests in which we show an speedup on the computation of the reduced basis problem with the LPS pressure stabilisation, with respect to the method using pressure supremizers.

Keywords: Reduced basis method, Emprical interpolation method, *a posteriori* error estimation, VMS-Smagorinsky model, LPS pressure stabilization.

*Departamento de Ecuaciones Diferenciales y Análisis Numérico, and Instituto de Matemáticas de la Universidad de Sevilla (IMUS) , Apdo. de correos 1160, Universidad de Sevilla, 41080 Seville, Spain. chacon@us.es

†Departamento de Ecuaciones Diferenciales y Análisis Numérico, Apdo. de correos 1160, Universidad de Sevilla, 41080 Seville, Spain. edelgado1@us.es, macarena@us.es

1 Introduction

In this work we present a reduced basis Variational Multi-Scale (VMS) Smagorinsky turbulence model with local projection stabilisation (LPS) of the pressure, and small-small VMS modelling of eddy viscosity. We address a turbulence model to consider realistic situations, as turbulent flows frequently appear in actual applications. The Smagorinsky model is a basic Large Eddy Simulation (LES) turbulence model, that provides particularly accurate solutions when the eddy viscosity acts on the resolved small scales (the small-small VMS setting, cf. [21]).

Stabilised methods for finite element discretisations provide stable discretisations of the pressure that allow to circumvent the Brezzi-Babuska inf-sup condition. This occurs with both residual-based methods and penalty methods. As residual-based stabilisation methods let us mention the Galerkin-Least Squares (GALS) (cf. [20]) and modifications of this method as the Streamline Upwind Galerkin (SUPG) method (cf. [8, 23]), or the Adjoint-Stabilised method (cf. [17]). The stabilising effect of those methods is due to the dissipative effect of the terms added to the Galerkin projection. In particular, the pressure stabilisation is granted thanks to a weighted pressure Laplacian term. The penalty methods are simplified versions that just keep the dissipative terms, although losing full consistency. We may mention the penalty term-by-term stabilised method (cf. [10]), that is an extension of the pure penalty method introduced in [6]. In the latter method, the penalty term is just a scaled pressure Laplacian. Further, the Local Projection Stabilisation (LPS) treatment of the pressure is a penalty method that just stabilises the high-frequency components of the pressure gradient that cannot be represented in the discrete velocity space. It allows to use non-stable pairs of velocity-pressure finite elements, such as $\mathbb{P}_k - \mathbb{P}_k$, $k \geq 2$, while keeping optimal order of accuracy in both velocity and pressure (cf. [10, 12]).

There exist several well-established techniques to stabilise the discretisation of the reduced pressure in reduced order models (ROM) of incompressible flows. Let us mention to enrich the reduced velocity space with reduced velocity divergence - reduced pressure supremizers (cf. [2, 24]), or solving a Poisson equation for the reduced pressure –by testing the momentum conservation equation with gradients of reduced pressures–(cf. [9, 26]), or using SUPG stabilisation (cf. [1]). These techniques provide efficient approximations of the reduced pressure, although are somewhat involved, requiring either increasing the dimension of the reduced velocity space, building an equation for the pressure with a number of terms, or increasing the com-

plexity of the discrete problem. The LPS stabilisation provides a simplified alternative to these techniques. The POD-ROM solution of Navier-Stokes equations with LPS stabilisation of the pressure has recently been addressed in [22], which includes an a-priori error analysis of the method.

In this work, we address the *a posteriori* error analysis - based reduced order modelling of incompressible flow equations with LPS stabilisation of the pressure. This allows to construct “certified” solvers, with error level below targeted values. We actually afford the reduced basis solution of the steady Smagorinsky turbulence model for the sake of addressing realistic flows. We include the small-small VMS formulation of the eddy diffusion which, actually, is a three-level LES turbulence model (cf. [4]) that provides good accuracy in the approximation of first and second order turbulence statistics (cf. [13]). We prove the stability of the reduced problem with LPS stabilisation of the pressure for velocity-pressure finite elements, whenever the pressure is piecewise affine. We construct an *a posteriori* error bound estimator using the Brezzi-Raviart-Rappaz (BRR) theory of approximation of regular branches of solutions of non-linear equations (cf. [7]). This is the key to build a certified RB solver. We use the Empirical Interpolation Method (EIM) to build reduced approximations of the non-linear coefficients appearing in model: the eddy diffusion and the stabilised coefficient appearing in the LPS formulation. We present some numerical results where we compare the velocity supremizers approach versus the LPS pressure discretization. We observe an improved speedup for the LPS discretization with similar error levels.

The structure of this work is as follows. In section 2, we present the VMS-Smagorinsky model with local projection stabilisation for the pressure. In subsection 2.1, we present the FE model, while the reduced basis method is considered in subsection 2.2. The numerical analysis for the well-posedness is presented in section 3, and the sub-sequent development of the *a posteriori* error bound estimator in section 4. Then, in section 5, we present the approximation of the eddy-viscosity and the pressure stabilisation constant by the EIM. Finally, we present the numerical tests in section 6, in which we highlight the speedup rates for the computation of solution with the present RB model presented in this work.

2 Pressure local projection stabilised VMS-Smagorinsky model

In this section we describe a local projection-stabilised VMS-Smagorinsky model. In the turbulence LES (Large Eddy Simulation) high fidelity model that we consider, the eddy-viscosity only acts on the small resolved scales. This leads to a less diffusive model than the Smagorinsky one presented in [11], where the eddy viscosity acts on both large and small resolved scales. In [13], it has been shown that this model has a good precision for the approximation of the mean flow and the second-order statistics of the turbulent flow. Moreover, we use a LPS stabilisation treatment for the pressure, that allows us to use non-stable pairs of finite elements.

2.1 Finite element problem

Let Ω be a bounded domain of \mathbb{R}^d ($d = 2, 3$), with Lipschitz-continuous boundary Γ . We assume that Γ is split into $\Gamma = \Gamma_D \cup \Gamma_N$ where Γ_D and Γ_N are two connected measurable sets of positive $(d - 1)$ -dimensional measure, with disjoint interiors. We intend to impose Dirichlet and Neumann boundary conditions on Γ_D and Γ_N , respectively.

We present a parametric steady Smagorinsky model, where we consider the Reynolds number as a parameter, denoted by $\mu \in \mathcal{D}$, where \mathcal{D} is a compact sub-set of \mathbb{R} . Although the Smagorinsky model is intrinsically discrete, we present it in a continuous form in order to clarify its relationship with the Navier-Stokes equations: We search for a velocity field $\mathbf{u} : \Omega \mapsto \mathbb{R}^d$ and a pressure function $p : \Omega \mapsto \mathbb{R}$ such that

$$\left\{ \begin{array}{ll} \mathbf{u} \cdot \nabla \mathbf{u} + \nabla p - \nabla \cdot \left(\frac{1}{\mu} \nabla \mathbf{u} + \nu_T(\mathbf{u}') \nabla \mathbf{u}' \right) = \mathbf{f} & \text{in } \Omega, \\ \nabla \cdot \mathbf{u} = \mathbf{0} & \text{in } \Omega, \\ \mathbf{u} = \mathbf{0} & \text{on } \Gamma_D, \\ \mathbf{n} \cdot \left(\frac{1}{\mu} \nabla \mathbf{u} + \nu_T(\mathbf{u}') \nabla \mathbf{u}' \right) = 0 & \text{on } \Gamma_N, \end{array} \right. \quad (1)$$

where \mathbf{f} is the kinetic momentum source, $\nu_T(\mathbf{u}')$ is the eddy viscosity defined as

$$\nu_T(\mathbf{u}') = C_S^2 \sum_{K \in \mathcal{T}_h} h_K^2 |\nabla \mathbf{u}'|_K \chi_K, \quad (2)$$

where $|\cdot|$ denotes the Frobenius norm in $\mathbb{R}^{d \times d}$, C_S is the Smagorinsky constant and \mathbf{u}' stands for the small-scales part of the resolved velocity field \mathbf{u} , \mathbf{u}' is assumed to lie in the inertial spectrum of the full velocity field. The eddy viscosity setting in (1)-(2) corresponds to the small-small VMS setting introduced in [21]. Other possibilities would correspond to replacing \mathbf{u}' by \mathbf{u} in either (1) or (2). The eddy viscosity in (1) only acts on the small scales of the resolved part of the velocity field. Let $\{\mathcal{T}_h\}_{h>0}$ is uniformly regular mesh in the sense of Ciarlet [?].

To state the full order discretization that we consider for problem (1), let us introduce the spaces

$$Y = \{\mathbf{v} \in H^1(\Omega)^d, \text{ s.t. } \mathbf{v}|_{\Gamma_D} = \mathbf{0}\}, \quad M = \{q \in L^2(\Omega), \text{ s.t. } \int_{\Omega} q = 0\}.$$

We assume $\mathbf{f} \in Y'$.

Given an integer $n \geq 1$ and an element $K \in \mathcal{T}_h$, we denote by $\mathbb{P}_n(K)$ the Finite Element space given by Lagrange polynomials of degree less than, or equal to, n defined on K . We assume that Ω is polygonal when $d = 2$ or polyhedral when $d = 3$, and consider a triangulation \mathcal{T}_h such that Γ_D and Γ_N are unions of full simplices of the boundaries of elements of \mathcal{T}_h . Let us define the finite element space

$$V^{(n)} = \{v_h \in C^0(\bar{\Omega}) \text{ such that } v_h|_K \in \mathbb{P}_n(K), \forall K \in \mathcal{T}_h\}. \quad (3)$$

Let $Y_h = Y \cap [V^{(n)}]^d$ and $M_h \subset M \cap V^{(m)}$ be two finite element subspaces of Y and M , respectively. We introduce the LPS-VMS discretisation of the Smagorinsky model (1), with stabilisation on the pressure,

$$\left\{ \begin{array}{l} \text{Find } (\mathbf{u}_h, p_h) = (\mathbf{u}_h(\mu), p_h(\mu)) \in Y_h \times M_h \text{ such that} \\ a(\mathbf{u}_h, \mathbf{v}_h; \mu) + b(\mathbf{v}_h, p_h; \mu) + a'_S(\mathbf{u}_h; \mathbf{u}_h, \mathbf{v}_h; \mu) \\ + c(\mathbf{u}_h, \mathbf{u}_h, \mathbf{v}_h; \mu) = \langle \mathbf{f}, \mathbf{v} \rangle \quad \forall \mathbf{v}_h \in Y_h, \\ b(\mathbf{u}_h, q_h; \mu) + s_{pres}(p_h, q_h; \mu) = 0 \quad \forall q_h \in M_h, \end{array} \right. \quad (4)$$

where the bilinear forms $a(\cdot, \cdot; \mu)$ and $b(\cdot, \cdot; \mu)$ are defined as

$$a(\mathbf{u}, \mathbf{v}; \mu) = \frac{1}{\mu} \int_{\Omega} \nabla \mathbf{u} : \nabla \mathbf{v} \, d\Omega, \quad b(\mathbf{v}, q; \mu) = - \int_{\Omega} (\nabla \cdot \mathbf{v}) q \, d\Omega; \quad (5)$$

while the trilinear form $c(\cdot, \cdot, \cdot; \mu)$ is defined as

$$c(\mathbf{z}, \mathbf{u}, \mathbf{v}; \mu) = \frac{1}{2} \left[\int_{\Omega} (\mathbf{z} \cdot \nabla \mathbf{u}) \mathbf{v} \, d\Omega - \int_{\Omega} (\mathbf{z} \cdot \nabla \mathbf{v}) \mathbf{u} \, d\Omega \right]. \quad (6)$$

Moreover, the non-linear form $a'_S(\cdot; \cdot, \cdot; \mu)$, is a multi-scale Smagorinsky modelling for the eddy viscosity term, and it is given by

$$a'_S(\mathbf{z}_h; \mathbf{u}_h, \mathbf{v}_h; \mu) = \int_{\Omega} \nu_T(\Pi_h^* \mathbf{z}_h) \nabla(\Pi_h^* \mathbf{u}_h) : \nabla(\Pi_h^* \mathbf{v}_h) d\Omega, \quad (7)$$

where $\Pi_h^* = Id - \Pi_h$, Π_h being a uniformly stable (in L^2 and H^1 -norms) interpolation operator on $Y \cap [V_h^{(n-1)}]^d$. This interpolation operator must satisfy optimal error estimates (cf. [5] Chap. IX) and preserve the homogeneous Dirichlet boundary conditions when restricted to Y_h . In this way the small-scale component of the velocity field that we consider is defined by $\mathbf{u}'_h = \Pi_h^* \mathbf{u}_h$. The eddy viscosity only acts on $\Pi_h^* \mathbf{u}_h$.

In VMS terminology, the *Large-Small* setting would corresponds to modeling the turbulent viscosity by a function of the whole resolved velocity, taking

$$a'_S(\mathbf{z}_h; \mathbf{u}_h, \mathbf{u}_h) = \int_{\Omega} \nu_T(\mathbf{z}_h) \nabla(\Pi_h^* \mathbf{u}_h) : \nabla(\Pi_h^* \mathbf{v}_h) d\Omega. \quad (8)$$

Further, the term $s_{pres}(\cdot, \cdot; \mu)$ is the projection-stabilisation term for the pressure, defined as

$$s_{pres}(p_h, q_h; \mu) = \sum_{K \in \mathcal{T}_h} \tau_{p,K}(\mu) (\sigma_h^*(\nabla p_h), \sigma_h^*(\nabla q_h))_K. \quad (9)$$

Here, $\sigma_h^* = Id - \sigma_h$, with σ_h some locally stable L^2 projection or interpolator operator from $L^2(\Omega)$ to $[V_h^{(n)}]^d$. Moreover, $\tau_{p,K}(\mu)$ is the stabilisation coefficient in (9), that must verify the following hypothesis:

Hypothesis 1. *There exists two positive constants α_1, α_2 , independent of h , such that*

$$\alpha_1 h_K^2 \leq \tau_{p,K}(\mu) \leq \alpha_2 h_K^2, \quad \forall \mu \in \mathcal{D}, \forall K \in \mathcal{T}_h, \forall h > 0. \quad (10)$$

In the following, we will use the stabilisation pressure coefficient $\tau_{p,K}(\mu)$ proposed by Codina in [15], and used in [13, 25]:

$$\tau_{p,K}(\mu) = \left[c_1 \frac{1/\mu + \bar{\nu}_{T|K}(\mu)}{h_K^2} + c_2 \frac{U_K(\mu)}{h_K} \right]^{-1}, \quad (11)$$

where $\bar{\nu}_{T|K}$ is some local eddy viscosity, U_K is a local velocity and c_1, c_2 some positive experimental constants. Taking $\tau_{p,K}(\mu)$ by this way, we are ensuring (10).

By denoting $X_h = Y_h \times M_h$, we rewrite problem (4), with compact notation, as follows

$$\begin{cases} \text{Find } U_h(\mu) = (\mathbf{u}_h, p_h) \in X_h \text{ such that} \\ A(U_h(\mu), V_h; \mu) = F(V_h; \mu) \quad \forall V_h \in X_h, \end{cases} \quad (12)$$

where

$$\begin{aligned} A(U_h(\mu), V_h; \mu) &= \frac{1}{\mu} A_{Diff}(U_h, V_h) + A_{Div}(U_h, V_h) + A_{Conv}(U_h; V_h) \\ &+ A_{Sma}(U_h; V_h) + A_{Pres}(U_h, V_h; \mu), \end{aligned} \quad (13)$$

where, denoting $U = (\mathbf{u}, p^u)$, $V = (\mathbf{v}, p^v)$,

$$\begin{aligned} A_{Diff}(U, V) &= \int_{\Omega} \nabla \mathbf{u} : \nabla \mathbf{v} \, d\Omega, \\ A_{Div}(U, V) &= \int_{\Omega} (\nabla \cdot \mathbf{u}) p^v \, d\Omega - \int_{\Omega} (\nabla \cdot \mathbf{v}) p^u \, d\Omega \\ A_{Conv}(U; V) &= \frac{1}{2} \int_{\Omega} ((\mathbf{u} \cdot \nabla \mathbf{u}) \mathbf{v} - (\mathbf{u} \cdot \nabla \mathbf{v}) \mathbf{u}) \, d\Omega, \\ A_{Sma}(U; V) &= \int_{\Omega} \nu_T(\Pi_h^* \mathbf{u}) \nabla(\Pi_h^* \mathbf{u}) : \nabla(\Pi_h^* \mathbf{v}) \, d\Omega, \\ A_{Pres}(U, V; \mu) &= \sum_{K \in \mathcal{T}_h} \int_K \tau_{p,K}(\mu) \sigma_h^*(\nabla p^u) \cdot \sigma_h^*(\nabla p^v) \, d\Omega, \\ F(V_h; \mu) &= \langle \mathbf{f}, \mathbf{v}_h \rangle. \end{aligned}$$

The numerical analysis (existence of solutions, stability and error analysis) of the full-order projection-based VMS-Smagorinsky model for problem (4) (or equivalently (12)) with wall-law boundary conditions can be found in [13].

2.2 Reduced basis problem

In this section we introduce the Reduced Basis (RB) model. It is the discretisation (12) with LPS stabilisation of the pressure built on the reduced spaces. The RB problem reads

$$\begin{cases} \text{Find } (\mathbf{u}_N, p_N) \in Y_N \times M_N \text{ such that} \\ \begin{aligned} &a(\mathbf{u}_N, \mathbf{v}_N; \mu) + b(\mathbf{v}_N, p_N; \mu) + a'_S(\mathbf{u}_N; \mathbf{u}_N, \mathbf{v}_N; \mu) \\ &+ c(\mathbf{u}_N, \mathbf{u}_N, \mathbf{v}_N; \mu) = \langle \mathbf{f}, \mathbf{v}_N \rangle \\ &b(\mathbf{u}_N, q_N; \mu) = 0 \end{aligned} \quad \begin{aligned} &\forall \mathbf{v}_N \in Y_N, \\ &\forall q_N \in M_N. \end{aligned} \end{cases} \quad (14)$$

Here, we denote by Y_N the reduced velocity space, and by M_N the reduced pressure space. The computation of the reduced spaces is done through the Greedy algorithm [16]. The Greedy algorithm summarizes:

1. Set μ^1 , compute $(\mathbf{u}_h(\mu^1), p_h(\mu^1))$ solving problem (4), and define the reduced space $Y_1 = \text{span}\{\mathbf{u}_h(\mu^1)\}$, $M_1 = \text{span}\{p_h(\mu^1)\}$. Orthonormalize the spaces Y_1, M_1 .
2. For $k \geq 2$, compute $\Delta_{k-1}(\mu), \forall \mu \in \mathcal{D}_{train}$ and set $\mu^k = \arg \max_{\mu \in \mathcal{D}_{train}} \Delta_{k-1}(\mu)$. Here, we denote by Δ_k the *a posteriori* error estimator.
3. Compute $(\mathbf{u}_h(\mu^k), p_h(\mu^k))$, define the reduced spaces Y_k, M_k by adding the new computed snapshot, and orthonormalize them.
4. Stop if $\max_{\mu \in \mathcal{D}_{train}} \Delta_k(\mu) < \varepsilon_{RB}$. If not, back to 2.

This yields reduced velocity and pressure spaces corresponding to the solution of problem (14) for selected values of the Reynolds number:

$$Y_N = \text{span}\{\zeta_i^{\mathbf{v}} := \mathbf{u}(\mu^i), i = 1, \dots, N\}; \quad (15)$$

$$M_N = \text{span}\{\xi_i^p := p(\mu^i), i = 1, \dots, N\}, \quad (16)$$

where the μ^i are selected by the Greedy algorithm. The stability of this discretization is proved in the next section.

To test the numerical performances of this discretisation, we compare it with the strategy consisting in enriching the reduced velocity space with the supremizers of the reduced velocity divergence - reduced pressure duality. The reduced velocity space in this case is given by

$$Y_N = \text{span}\{\zeta_{2i-1}^{\mathbf{v}} := \mathbf{u}(\mu^i), \zeta_{2i}^{\mathbf{v}} := T_p^\mu(\xi_i^p), i = 1, \dots, N\}, \quad (17)$$

where here we are denoting $T_p^\mu : M_h \rightarrow Y_h$ the reduced pressure *supremizer*, defined by

$$(\nabla T_p^\mu q_h, \nabla \mathbf{v}_h)_\Omega = b(q_h, \mathbf{v}_h; \mu) \quad \forall \mathbf{v}_h \in Y_h. \quad (18)$$

This strategy leads to an offline/online stabilisation where the dimension of the reduced space $X_N = Y_N \times M_N$ in problem (14) is $3N$, while using the LPS stabilisation the dimension of X_N is $2N$.

When Y_N is defined by (17), i. e., when it includes the reduced pressure supremizers, then the discrete inf-sup condition between spaces Y_N and M_N holds (cf. [2]). Consequently, for small enough data \mathbf{f} , the reduced problem

(15) admits a solution by a finite-dimensional compactness argument, similar to the one used in [13] to prove the existence of solutions of high fidelity problem (4).

When the LPS approach is followed, this argument also holds when the velocities are piecewise affine. Indeed, in this case we may bound a weaker norm of the pressure,

$$|||q_N|||_N = \sup_{\mathbf{v}_N \in Y_N} \frac{(q_N, \nabla \cdot \mathbf{v}_N)_\Omega}{\|\nabla \mathbf{v}_N\|_{0,2,\Omega}} + \|\sigma_h^*(\nabla q_N)\|_{\tau_p}, \quad \forall q_N \in M_N, \quad (19)$$

where

$$\|r\|_{\tau_p} = \left(\sum_{K \in \mathcal{T}_h} \tilde{\tau}_{p,K} \|r\|_{0,2,K}^2 \right)^{1/2}, \quad \text{for } r \in L^2(\Omega),$$

where $\tilde{\tau}_{p,K} = \inf_{\mu \in \mathcal{D}} \tau_{p,K}(\mu)$, and we denote by $\|\cdot\|_{l,p,S}$ the $W^{l,p}(S)$ norm on some open set S . It holds

Proposition 1. *Assume that M_h is formed by piecewise affine functions, and that the space Y_N defined by (15) contains some function \mathbf{w}_N such that $\int_\Omega \mathbf{w}_N \neq 0$. Then $|||\cdot|||_N$ is a norm on M_N . Moreover, there exists a constant $C > 0$ such that*

$$|||q_N|||_N \leq C \|q_N\|_{0,2,\Omega}, \quad \forall q_N \in M_N. \quad (20)$$

Proof. It is straightforward to prove that $|||q|||_N \geq 0$ for any $q \in L^2(\Omega)$ and that $|||\cdot|||_N$ satisfies the triangular inequality. Assume now that $|||q_N|||_N = 0$ for some $q_N \in M_N$. Then $\sigma_h^*(\nabla q_N) = 0$ and consequently $\nabla q_N = \sigma_h(\nabla q_N) \in [V_h^n]^d$. Then ∇q_N is a continuous function and, as it is a constant on each element $K \in \mathcal{T}_h$, then ∇q_N is constant on Ω . Moreover, as $\sup_{\mathbf{v}_N \in Y_N} \frac{(q_N, \nabla \cdot \mathbf{v}_N)_\Omega}{\|\nabla \mathbf{v}_N\|_{0,2,\Omega}} = 0$, then $(q_N, \nabla \cdot \mathbf{v}_N)_\Omega = 0$ for any $\mathbf{v}_N \in Y_N$. Then

$$\nabla q_N \int_\Omega \mathbf{w}_N = -(q_N, \nabla \cdot \mathbf{w}_N)_\Omega = 0.$$

Consequently, $\nabla q_N = 0$ and as $\int_\Omega q_N = 0$ because $q_N \in M_h$, it follows $q_N = 0$.

Finally, estimate (20) readily follows from the inverse finite element estimate (cf. [5])

$$\|\nabla q_N\|_{0,2,K} \leq C h_K^{-2} \|q_N\|_{0,2,K}.$$

□

Then it follows

Corollary 1. *Under the hypotheses of Proposition 1, the reduced problem (14) admits at least a solution, that satisfies the estimates*

$$\|\nabla \mathbf{u}_N\|_{0,2,\Omega} + \|p_N\|_N \leq \Phi(\|\mathbf{f}\|_{Y'}; \mu).$$

for some positive continuous function $\Phi(\eta; \mu)$ increasing to $+\infty$ as $\eta \mapsto +\infty$ or $\mu \mapsto 0$.

Sketch of the proof. The proof of existence follows from a finite-dimensional compactness argument using Brouwer's fixed point theorem, similar to the one used in [13] to prove the existence of solutions of the high fidelity problem (4) with wall-law boundary conditions through a linearisation procedure. The essential point is the bounds for velocity and pressure that on one hand imply the uniqueness of solutions of the linearised problem and on another hand guarantee the hypotheses of Brouwer's fixed point theorem. Indeed, setting $\mathbf{v}_N = \mathbf{u}_N$ and $q_N = -p_N$, and summing the two equations appearing in (14), it follows

$$\|\nabla \mathbf{u}_N\|_{0,2,\Omega} + \|\sigma_h^*(\nabla p_N)\|_{\tau_p} \leq \Phi_1(\|\mathbf{f}\|_{Y'}; \mu) \quad (21)$$

for some positive continuous function $\Phi_1(\eta; \mu)$ increasing to $+\infty$ as $\eta \mapsto +\infty$ or $\mu \mapsto 0$. Further, setting $q_N = 0$ in (14), it holds

$$(\nabla \cdot \mathbf{v}_N, p_N)_\Omega = a(\mathbf{u}_N, \mathbf{u}_N; \mu) + a'_S(\mathbf{u}_N; \mathbf{u}_N, \mathbf{v}_N; \mu) + c(\mathbf{u}_N, \mathbf{u}_N, \mathbf{v}_N; \mu) - \langle \mathbf{f}, \mathbf{v}_N \rangle$$

for all $\mathbf{v}_N \in Y_N$. Consequently,

$$(\nabla \cdot \mathbf{v}_N, p_N)_\Omega \leq \Phi_2(\|\mathbf{f}\|_{Y'}; \mu) \|\nabla \mathbf{v}_N\|_{0,2,\Omega}$$

for some function $\Phi_2(\cdot; \cdot)$ with the same properties as Φ_1 . Then,

$$\sup_{\mathbf{v}_N \in Y_N} \frac{(\nabla \cdot \mathbf{v}_N, p_N)_\Omega}{\|\nabla \mathbf{v}_N\|_{0,2,\Omega}} \leq \Phi_2(\|\mathbf{f}\|_{Y'}; \mu). \quad (22)$$

Combining (21) and (22) it follows

$$\|\nabla \mathbf{u}_N\|_{0,2,\Omega} + \|p_N\|_N \leq \Phi_1(\|\mathbf{f}\|_{Y'}; \mu) + \Phi_2(\|\mathbf{f}\|_{Y'}; \mu).$$

The same argument allows to prove the bounds for velocity and pressure in the linearised problem and then to apply Brouwer's fixed point theorem. We do not describe the proof in detail for brevity. \square

3 Well-posedness analysis

In this section we study the well-posedness of the full order (4) and of the reduced problem (12), as well as of the linearised problem. This will be the basis for the derivation of the a posteriori error estimation in the next section.

We shall denote by $C > 0$ along the paper the constants that may vary from line to line but which are independent of ν and h . We need the following basic results:

Lemma 1. *It holds*

$$|c(\mathbf{z}, \mathbf{u}, \mathbf{v}; \mu)| \leq C_{S4}^2 \|\mathbf{z}\|_{0,2,\Omega} \|\mathbf{u}\|_{0,2,\Omega} \|\mathbf{v}\|_{0,2,\Omega} \forall \mathbf{z}, \mathbf{u}, \mathbf{v} \in Y, \quad (23)$$

where C_{S4} is the norm of the injection of Y into $L^4(\Omega)^d$.

This is a standard result, we omit its proof.

Lemma 2. *For any $\mathbf{u}_h, \mathbf{v}_h, \mathbf{z}_h \in Y_h$ and for any $\mu \in \mathcal{D}$, the non-linear form $a'_S(\cdot; \cdot, \cdot; \mu)$ defined in (7) satisfies*

$$|a'_S(\mathbf{z}_h; \mathbf{u}_h, \mathbf{v}_h; \mu)| \leq C_f C_S^2 h^{2-d/2} \|\nabla \mathbf{z}_h\|_{0,2,\Omega} \|\nabla \mathbf{u}_h\|_{0,2,\Omega} \|\nabla \mathbf{v}_h\|_{0,2,\Omega}, \quad (24)$$

for some constant $C_f > 0$.

Proof. Using the local inverse finite element estimates (cf. [5])

$$\|\nabla(\Pi_h^* \mathbf{z}_h)\|_{0,\infty,K} \leq C h_K^{-d/2} \|\nabla(\Pi_h^* \mathbf{z}_h)\|_{0,2,K}$$

for some constant $C > 0$, it holds $|\nu_T(\Pi_h^* \mathbf{z}_h)(\mathbf{x})| \leq C C_S^2 h_K^{2-d/2} \|\nabla(\Pi_h^* \mathbf{z}_h)\|_{0,2,K}$ for all $\mathbf{x} \in K$, for any $K \in \mathcal{T}_h$. Then,

$$\begin{aligned} & |a'_S(\mathbf{z}_h; \mathbf{u}_h, \mathbf{v}_h; \mu)| \\ & \leq C C_S^2 h^{2-d/2} \|\nabla(\Pi_h^* \mathbf{z}_h)\|_{0,2,\Omega} \sum_{K \in \mathcal{T}_h} \|\nabla(\Pi_h^* \mathbf{u}_h)\|_{0,2,K} \|\nabla(\Pi_h^* \mathbf{v}_h)\|_{0,2,K} \\ & \leq C C_S^2 h^{2-d/2} \|\nabla(\Pi_h^* \mathbf{z}_h)\|_{0,2,\Omega} \|\nabla(\Pi_h^* \mathbf{u}_h)\|_{0,2,\Omega} \|\nabla(\Pi_h^* \mathbf{v}_h)\|_{0,2,\Omega}. \end{aligned}$$

Using the stability of operator Π_h in $H^1(\Omega)^d$ norm, estimate (24) follows. \square

Lemma 3. *Assume Hypothesis 1 holds, and let $q_h \in V_h^1(\Omega)$. Then,*

$$\|\sigma_h^*(\nabla q_h)\|_{\tau_p} \leq C_\tau \|q_h\|_{0,2,\Omega} \quad (25)$$

for some constant $C_\tau > 0$.

Proof. Taking into account Hypothesis 1, and the local stability of operator σ , it holds

$$\tau_K \|\sigma_h^*(\nabla q_h)\|_{0,2,K}^2 \leq C h_K^2 \|\nabla q_h\|_{0,2,K}^2 \quad (26)$$

Considering the local inverse inequalities for finite element functions (cf. [5]) it follows

$$\|\nabla q_h\|_{0,2,K} \leq C h_K^{-1} \|q_h\|_{0,2,K}, \quad \forall K \in \mathcal{T}_h. \quad (27)$$

Consequently,

$$\|\sigma_h^*(\nabla q_h)\|_{\tau_p} \leq C \|q_h\|_{0,2,\Omega}.$$

□

We shall use the following inf-sup generalised condition (cf. [12])

Proposition 2. *Assume that the family of triangulations $\{\mathcal{T}_h\}_{h>0}$ is uniformly regular. Then it holds*

$$\|q_h\|_{0,2,\Omega} \leq \alpha \left(\sup_{\mathbf{v}_h \in Y_h} \frac{(q_h, \nabla \cdot \mathbf{v}_h)_\Omega}{\|\nabla \mathbf{v}_h\|_{0,2,\Omega}} + \|\sigma_h^*(\nabla q_h)\|_{\tau_p} \right) \quad \forall q_h \in M_h, \quad (28)$$

with $\alpha > 0$, independent of h .

We will assume in the sequel for simplicity of derivations that the grids are uniformly regular. The previous result can be extended to regular rather than uniformly regular grids, with a more involved analysis. For further details, see [12].

The following *a priori* estimates for the full order velocity and pressure hold:

Theorem 1. *Let $(\mathbf{u}_h, p_h) \in X_h$ a solution of problem (4). Let $\mathbf{f} \in Y'_h$. Then, the following *a priori* estimates are verified:*

$$\|\nabla \mathbf{u}_h\|_{0,2,\Omega} \leq \mu C_P \|\mathbf{f}\|_{Y'}, \quad (29)$$

$$\|\sigma_h^*(\nabla p_h)\|_{\tau_p} \leq \sqrt{\mu} C_P \|\mathbf{f}\|_{Y'}, \quad (30)$$

$$\|p_h\|_{0,2,\Omega} \leq \alpha^{-1} \left(((1 + \sqrt{\mu}) C_P + 1) \|\mathbf{f}\|_{Y'} + \frac{C}{\mu C_P} \|\mathbf{f}\|_{Y'}^2 \right), \quad (31)$$

where $C_P > 0$ is the norm of the Poincaré injection of Y into $L^2(\Omega)$ and $C > 0$ is a constant independent of h , μ and the data \mathbf{f} .

Proof. Estimates (29) and (30) are readily obtained taking $\mathbf{v}_h = \mathbf{u}_h$ and $q_h = p_h$ in (4) and summing the two identities appearing therein.

To prove (31), we take $\mathbf{v}_h = \mathbf{u}_h$ and $q_h = 0$ in (4). We have

$$a(\mathbf{u}_h, \mathbf{v}_h; \mu) + a'_s(\mathbf{u}_h; \mathbf{u}_h, \mathbf{v}_h; \mu) + c(\mathbf{u}_h, \mathbf{u}_h, \mathbf{v}_h; \mu) - (p_h, \nabla \cdot \mathbf{v}_h) = \langle \mathbf{f}, \mathbf{v}_h \rangle.$$

Thus, from Cauchy-Schwartz inequality, and Lemma 2,

$$\begin{aligned} |(p_h, \nabla \cdot \mathbf{v}_h)| &= |a(\mathbf{u}_h, \mathbf{v}_h; \mu) + a'_s(\mathbf{u}_h; \mathbf{u}_h, \mathbf{v}_h; \mu) + c(\mathbf{u}_h, \mathbf{u}_h, \mathbf{v}_h; \mu) - \langle \mathbf{f}, \mathbf{v}_h \rangle| \\ &\leq \frac{1}{\mu} \|\nabla \mathbf{u}_h\|_{0,2,\Omega} \|\nabla \mathbf{v}_h\|_{0,2,\Omega} + C \|\nabla \mathbf{u}_h\|_{0,2,\Omega}^2 \|\nabla \mathbf{v}_h\|_{0,2,\Omega} + \|\mathbf{f}\|_{Y'} \|\nabla \mathbf{v}_h\|_{0,2,\Omega}, \end{aligned}$$

for some constant $C > 0$. Therefore, from Proposition 2,

$$\begin{aligned} \alpha \|p_h\|_{0,2,\Omega} &\leq \sup_{\mathbf{v}_h \in Y_h} \frac{(p_h, \nabla \cdot \mathbf{v}_h)_\Omega}{\|\nabla \mathbf{v}_h\|_{0,2,\Omega}} + \|\sigma_h^*(\nabla p_h)\|_{\tau_p} \\ &\leq \frac{1}{\mu} \|\nabla \mathbf{u}_h\|_{0,2,\Omega} + C \|\nabla \mathbf{u}_h\|_{0,2,\Omega}^2 + (1 + \sqrt{\mu} C_P) \|\mathbf{f}\|_{Y'} \end{aligned}$$

Combining this estimate with (29), (31) follows. \square

Let us now consider the tangent operator $\partial_1 A(U, V; \mu)(Z)$, defined as the Gateaux derivative of the operator $A(\cdot, \cdot; \mu)$, with respect of the first variable, in the direction $Z \in X$. From (13) it holds

$$\begin{aligned} \partial_1 A(U, V; \mu)(Z) &= \frac{1}{\mu} \partial_1 A_{Diff}(U, V)(Z) + \partial_1 A_{Div}(U, V)(Z) + \partial_1 A_{Conv}(U, V)(Z) \\ &\quad + \partial_1 A_{Sma}(U; V)(Z) + \partial_1 A_{Pres}(U, V; \mu)(Z), \end{aligned}$$

where

$$\partial_1 A_{Diff}(U, V)(Z) = A_{Diff}(Z, V),$$

$$\partial_1 A_{Div}(U, V)(Z) = A_{Div}(Z, V),$$

$$\partial_1 A_{Conv}(U; V)(Z) = \frac{1}{2} \int_{\Omega} ((\mathbf{u} \cdot \nabla \mathbf{z}) \mathbf{v} + (\mathbf{z} \cdot \nabla \mathbf{u}) \mathbf{v} - (\mathbf{z} \cdot \nabla \mathbf{v}) \mathbf{u} - (\mathbf{u} \cdot \nabla \mathbf{v}) \mathbf{z}) \, d\Omega,$$

$$\begin{aligned} \partial_1 A_{Sma}(U; V)(Z) &= \int_{\Omega} \nu_T(\Pi_h^* \mathbf{u}) \nabla(\Pi_h^* \mathbf{z}) : \nabla(\Pi_h^* \mathbf{v}) \, d\Omega \\ &\quad + \sum_{K \in \mathcal{T}_h} \int_K (C_S h_K)^2 \frac{\nabla(\Pi_h^* \mathbf{u}) : \nabla(\Pi_h^* \mathbf{z})}{|\nabla(\Pi_h^* \mathbf{u})|} (\nabla(\Pi_h^* \mathbf{u}) : \nabla(\Pi_h^* \mathbf{v})) \, d\Omega, \end{aligned}$$

$$\partial_1 A_{Pres}(U, V; \mu)(Z) = A_{Pres}(Z, V; \mu).$$

Note that if $\nabla(\Pi_h^* \mathbf{u}) = 0$, $\partial_1 A_{Sma}(U; V)(Z) = 0$, since $A_{Sma}(U; V) = 0$. We further consider that $\nabla(\Pi_h^* \mathbf{u}) \neq 0$. The same analysis can be analogously performed when $\nabla(\Pi_h^* \mathbf{u}) = 0$.

In the sequel we endow the product space $X = Y \times M$ with the hilbertian norm

$$\|U\|_X = \sqrt{\|\nabla \mathbf{u}\|_{0,2,\Omega}^2 + \|p\|_{0,2,\Omega}^2} \quad \forall U = (\mathbf{u}, p) \in X. \quad (32)$$

The derivation of the a posteriori error estimation is based upon the uniform coerciveness and boundedness of the tangent operator $\partial_1 A(U, V; \mu)(Z)$ on the parametric solution of problem (4):

$$\infty > \gamma_0 \geq \gamma_h(\mu) \equiv \sup_{Z_h \in X_h} \sup_{V_h \in X_h} \frac{\partial_1 A(U_h(\mu), V_h; \mu)(Z_h)}{\|Z_h\|_X \|V_h\|_X}. \quad (33)$$

$$0 < \beta_0 \leq \beta_h(\mu) \equiv \inf_{Z_h \in X_h} \sup_{V_h \in X_h} \frac{\partial_1 A(U_h(\mu), V_h; \mu)(Z_h)}{\|Z_h\|_X \|V_h\|_X}. \quad (34)$$

for some constants γ_0, β_0 . The coercivity (34) holds on branches of non-singular solutions of problem (4), while the boundedness (33) is a general property:

Proposition 3. *There exists $\gamma_0 \in \mathbb{R}$ such that $\forall \mu \in \mathcal{D}$*

$$|\partial_1 A(U_h(\mu), V_h; \mu)(Z_h)| \leq \gamma_0 \|Z_h\|_X \|V_h\|_X \quad \forall Z_h, V_h \in X_h. \quad (35)$$

Proof. Let us denote $U_h = (\mathbf{u}_h, p_h^u)$, $V_h = (\mathbf{v}_h, p_h^v)$, $Z_h = (\mathbf{z}_h, p_h^z)$. It holds,

$$\begin{aligned} |\partial_1 A(U_h(\mu), V_h; \mu)(Z_h)| &\leq \frac{1}{\mu} |\partial_1 A_{Diff}(U_h(\mu), V_h)(Z_h)| + |\partial_1 A_{Div}(U_h(\mu), V_h)(Z_h)| \\ &+ |\partial_1 A_{Conv}(U_h(\mu), V_h)(Z_h)| + |\partial_1 A_{Sma}(U_h(\mu); V_h)(Z_h)| + |\partial_1 A_{Pres}(U_h(\mu), V_h; \mu)(Z_h)|. \end{aligned}$$

The boundedness of $|\partial_1 A_{Diff}(U_h(\mu), V_h; \mu)(Z_h)|$, $|\partial_1 A_{Div}(U_h(\mu), V_h)(Z_h)|$, and $|\partial_1 A_{Conv}(U_h(\mu); V_h)(Z_h)|$ can be proved in a standard way, the last one using estimate (23) (see [11]). To bound $|\partial_1 A_{Sma}(U_h(\mu); V_h)(Z_h)|$, we use the local inverse finite element estimates and the boundedness of operator Π_h .

It holds,

$$\begin{aligned}
|\partial_1 A_{Sma}(U_h(\mu); V_h)(Z_h)| &\leq \int_{\Omega} (C_S h)^2 |\nabla(\Pi_h^* \mathbf{u}_h)| |\nabla(\Pi_h^* \mathbf{z}_h)| |\nabla(\Pi_h^* \mathbf{v}_h)| d\Omega, \\
&+ \int_{\Omega} (C_S h)^2 \frac{|\nabla(\Pi_h^* \mathbf{u}_h)| |\nabla(\Pi_h^* \mathbf{z}_h)|}{|\nabla(\Pi_h^* \mathbf{u}_h)|} |\nabla(\Pi_h^* \mathbf{u}_h)| |\nabla(\Pi_h^* \mathbf{v}_h)| d\Omega, \\
&\leq 2(C_S h)^2 \|\nabla(\Pi_h^* \mathbf{u}_h)\|_{0,\infty,\Omega} \|\nabla(\Pi_h^* \mathbf{z}_h)\|_{0,2,\Omega} \|\nabla(\Pi_h^* \mathbf{v}_h)\|_{0,2,\Omega} \\
&\leq 2C_S^2 h^{2-d/2} \|\nabla(\Pi_h^* \mathbf{u}_h)\|_{0,2,\Omega} \|\nabla(\Pi_h^* \mathbf{z}_h)\|_{0,2,\Omega} \|\nabla(\Pi_h^* \mathbf{v}_h)\|_{0,2,\Omega} \\
&\leq 2C_1 C_S^2 h^{2-d/2} \|\nabla(\Pi_h^* \mathbf{u}_h)\|_{0,2,\Omega} \|\nabla \mathbf{z}_h\|_{0,2,\Omega} \|\nabla \mathbf{v}_h\|_{0,2,\Omega} \\
&\leq C_3 \|Z_h\|_X \|V_h\|_X,
\end{aligned}$$

for some constants $C_1 > 0$, $C_2 > 0$, $C_3 > 0$, where in the last inequality we have used estimate (29). The last term can be bounded using Lemma 3, and Cauchy-Schwartz inequality:

$$\begin{aligned}
|\partial_1 A_{Pres}(U_h(\mu); V_h; \mu)(Z_h)| &\leq \sum_{K \in \mathcal{T}_h} \int_K \tau_{p,K}(\mu) |\sigma_h^*(\nabla p_h^z)| |\sigma_h^*(\nabla p_h^v)| d\Omega \\
&\leq \|\sigma_h^*(\nabla p_h^z)\|_{\tau_p} \|\sigma_h^*(\nabla p_h^v)\|_{\tau_p} \leq C_{\tau}^2 \|p_h^z\|_{0,2,\Omega} \|p_h^v\|_{0,2,\Omega} \\
&\leq C_4 \|Z_h\|_X \|V_h\|_X.
\end{aligned}$$

Thus, we have proved (35). \square

The coercivity (34) may be proved for small enough data \mathbf{f} :

Proposition 4. *Suppose that*

$$\|\mathbf{f}\|_{Y'} < \inf_{\mu \in \mathcal{D}} \frac{1}{2\mu^2 C_P C_{4S}^2},$$

where C_{4S} is the norm of the injection of $H_0^1(\Omega)^d$ in $L^4(\Omega)^d$. Then there exists $\tilde{\beta} > 0$ such that,

$$\tilde{\beta} \|Z_h\|_X \leq \sup_{V_h \in X_h} \frac{\partial_1 A(U_h(\mu), V_h; \mu)(Z_h)}{\|V_h\|_X} \quad \forall Z_h \in X_h, \quad \forall \mu \in \mathcal{D}. \quad (36)$$

Proof. Let us denote, $U_h(\mu) = (\mathbf{u}_h, p_h^u)$, $Z_h = (\mathbf{z}_h, p_h^z)$. It holds

$$\partial_1 A_{Pres}(U_h(\mu), Z_h; \mu)(Z_h) = \|\sigma_h^*(\nabla p_h^z)\|_{\tau_p}^2.$$

Moreover,

$$\partial_1 A_{Sma}(U_h(\mu); Z_h)(Z_h) = \int_{\Omega} \nu_T (\nabla(\Pi_h^* \mathbf{u}_h)) |\nabla(\Pi_h^* \mathbf{z}_h)|^2 d\Omega$$

$$+ \sum_{K \in \mathcal{T}_h} \int_K (C_S h_K)^2 \frac{|\nabla(\Pi_h^* \mathbf{u}_h) : \nabla(\Pi_h^* \mathbf{z}_h)|^2}{|\nabla(\Pi_h^* \mathbf{u}_h)|} d\Omega \geq 0.$$

Also,

$$\begin{aligned} & \partial_1 A_{Diff}(U_h(\mu), Z_h; \mu)(Z_h) + \partial_1 A_{Conv}(U_h(\mu), Z_h)(Z_h) \\ & \geq \frac{1}{\mu} \|\nabla \mathbf{z}_h\|_{0,2,\Omega}^2 + \partial_1 A_{Conv}(U_h(\mu), Z_h)(Z_h) \\ & \geq \frac{1}{\mu} \|\nabla \mathbf{z}_h\|_{0,2,\Omega}^2 + \frac{1}{2} \int_{\Omega} ((\mathbf{z}_h \cdot \nabla \mathbf{u}_h) \mathbf{z}_h - (\mathbf{z}_h \cdot \nabla \mathbf{z}_h) \mathbf{u}_h) d\Omega \\ & \geq \frac{1}{\mu} \|\nabla \mathbf{z}_h\|_{0,2,\Omega}^2 - \|\mathbf{z}_h\|_{0,4,\Omega}^2 \|\nabla \mathbf{u}_h\|_{0,2,\Omega} - \|\mathbf{u}_h\|_{0,4,\Omega} \|\nabla \mathbf{z}_h\|_{0,2,\Omega} \|\mathbf{z}_h\|_{0,4,\Omega} \\ & \geq \left(\frac{1}{\mu} - 2 C_{S4}^2 \|\nabla \mathbf{u}_h\|_{0,2,\Omega} \right) \|\nabla \mathbf{z}_h\|_{0,2,\Omega}^2 \geq \left(\frac{1}{\mu} - 2 C_{S4}^2 \mu C_P \|\mathbf{f}\|_{Y'} \right) \|\nabla \mathbf{z}_h\|_{0,2,\Omega}^2 \\ & \geq \rho \|\nabla \mathbf{z}_h\|_{0,2,\Omega}^2, \quad \forall \mu \in \mathcal{D}, \end{aligned}$$

for $\rho = \inf_{\mu \in \mathcal{D}} \left(\frac{1}{\mu} - 2 C_{S4}^2 \mu C_P \|\mathbf{f}\|_{Y'} \right) > 0$. Consequently,

$$\partial_1 A(U_h(\mu), Z_h; \mu)(Z_h) \geq \rho \|\nabla \mathbf{z}_h\|_{0,2,\Omega}^2 + \|\sigma_h^*(\nabla p_h^z)\|_{\tau_p}^2.$$

Let

$$S(\mu) = \sup_{V_h \in X_h} \frac{\partial_1 A(U_h(\mu), V_h; \mu)(Z_h)}{\|V_h\|_X}.$$

Then, in abridged notation for brevity,

$$\rho \|\mathbf{z}_h\|_Y^2 + \|\sigma_h^*(\nabla p_h^z)\|_{\tau_p}^2 \leq S(\mu) \|Z_h\|_X = S(\mu) (\|\mathbf{z}_h\|_Y^2 + \|p_h^z\|_M^2)^{1/2}. \quad (37)$$

Also, letting $V_h = (\mathbf{v}_h, 0) \in X_h$, estimates similar to those carried on in the proof of Proposition 3 yield

$$(\nabla \cdot \mathbf{v}_h, p_h^z) \leq \left(S(\mu) + \left(\frac{1}{\mu} + C \right) \|\mathbf{z}_h\|_Y \right) \|\mathbf{v}_h\|_Y$$

for some constant $C > 0$ independent of ν and h . Then, letting

$$z = \sup_{\mathbf{v}_h \in Y_h} \frac{(p_h^z, \nabla \cdot \mathbf{v}_h)_{\Omega}}{\|\mathbf{v}_h\|_Y},$$

$$z \leq S(\mu) + C'(\mu) \|\mathbf{z}_h\|_Y \quad \text{with } C'(\mu) = \frac{1}{\mu} + C. \quad (38)$$

Combining (37) and (38), and using (28),

$$\begin{aligned} \rho \|\mathbf{z}_h\|_Y^2 + \|\sigma_h^*(\nabla p_h^z)\|_{\tau_p}^2 &\leq S(\mu) (\|\mathbf{z}_h\|_Y + z + \|\sigma_h^*(\nabla p_h^z)\|_{\tau_p}) \\ &\leq S(\mu) (\alpha S(\mu) + (1 + \alpha C'(\mu)) \|\mathbf{z}_h\|_Y^2 + \alpha \|\sigma_h^*(\nabla p_h^z)\|_{\tau_p}) \end{aligned}$$

Using Young's inequality, it follows

$$\begin{aligned} \rho \|\mathbf{z}_h\|_Y^2 + \|\sigma_h^*(\nabla p_h^z)\|_{\tau_p}^2 &\leq C \left(1 + \frac{1 + C'(\mu)}{\rho}\right) S(\mu)^2 \\ &\leq C \left(1 + \frac{1}{\mu \rho}\right) S(\mu)^2. \end{aligned} \quad (39)$$

Combining this inequality with (38),

$$z \leq \left(1 + C C'(\mu) \sqrt{1 + \frac{1}{\mu \rho}}\right) S(\mu). \quad (40)$$

Taking the square root of (39) and summing it with (40) finally yields

$$\begin{aligned} \min\{\sqrt{\rho}, \alpha^{-1}\} \|Z_h\|_X &\leq \sqrt{\rho} \|\mathbf{z}_h\|_Y + z + \|\sigma_h^*(\nabla p_h^z)\|_{\tau_p} \\ &\leq C \left(1 + \frac{1}{\mu}\right) \sqrt{1 + \frac{1}{\mu \rho}} S(\mu) \leq M S(\mu), \end{aligned}$$

with $M = \sup \left\{ C \left(1 + \frac{1}{\mu}\right) \sqrt{1 + \frac{1}{\mu \rho}}, \mu \in \mathcal{D} \right\}$. Then, (42) holds with $\tilde{\beta} = \min\{\sqrt{\rho}, \alpha^{-1}\}/M$. \square

The same demonstration proves the coercivity of the reduced problem for small data, when the reduced space X_N is endowed with the norm

$$\|U_N\|_N = \sqrt{\|\nabla \mathbf{u}_N\|_{0,2,\Omega}^2 + \|p_N\|_N^2} \quad \forall U_N = (\mathbf{u}_N, p_N) \in X_N, \quad (41)$$

where $\|\cdot\|_N$ is defined in (19).

Proposition 5. *Assume that the pressure finite element space M_h is formed by piecewise affine functions. Suppose that*

$$\|\mathbf{f}\|_{Y'} \leq \inf_{\mu \in \mathcal{D}} \frac{1}{2 \mu^2 C_P C_{4S}^2}.$$

Then there exists a constant $\tilde{\beta} > 0$ such that,

$$\tilde{\beta} \|Z_N\|_N \leq \sup_{V_N \in X_N} \frac{\partial_1 A(U_N(\mu), V_N; \mu)(Z_N)}{\|V_N\|_N} \quad \forall Z_N \in X_N, \quad \forall \mu \in \mathcal{D}. \quad (42)$$

In this case, the $\|\cdot\|_N$ norm is bounded from above by a constant times the $\|\cdot\|_{0,2,\Omega}$ norm but, to the best of our knowledge, they are no longer equivalent.

4 *A posteriori* error bound estimator

In this section we develop the *a posteriori* error bound estimator used in the hierarchical construction of the reduced space during the Greedy algorithm. We use the Brezzi-Rappaz-Raviart (BRR) theory [7] for approximation on a regular branch of solutions of non-linear problems. We start by proving the local Lipschitz continuity of the tangent Smagorinsky operator, which is a key result to apply this theory:

Lemma 4. *It holds*

$$\begin{aligned} |\partial_1 A(U_h^1, V_h; \mu)(Z_h) - \partial_1 A(U_h^2, V_h; \mu)(Z_h)| \leq \\ \rho_T \|U_h^1 - U_h^2\|_X \|Z_h\|_X \|V_h\|_X, \end{aligned} \quad (43)$$

for all $U_h^1, U_h^2, Z_h, V_h \in X_h$, with $\rho_T = 2C_{S^4}^2 + Ch^{2-d/2}$, for some constant $C > 0$.

Proof. We have

$$\begin{aligned} & \partial_1 A(U_h^1, V_h; \mu)(Z_h) - \partial_1 A(U_h^2, V_h; \mu)(Z_h) = \\ & \frac{1}{2} \left(\int_{\Omega} ((\mathbf{u}_h^1 - \mathbf{u}_h^2) \cdot \nabla \mathbf{z}_h) \mathbf{v}_h \, d\Omega + \int_{\Omega} (\mathbf{z}_h \cdot \nabla (\mathbf{u}_h^1 - \mathbf{u}_h^2)) \mathbf{v}_h \, d\Omega \right. \\ & \quad \left. - \int_{\Omega} (\mathbf{z}_h \cdot \nabla \mathbf{v}_h) (\mathbf{u}_h^1 - \mathbf{u}_h^2) \, d\Omega - \int_{\Omega} ((\mathbf{u}_h^1 - \mathbf{u}_h^2) \cdot \nabla \mathbf{v}_h) \mathbf{z}_h \, d\Omega \right) \\ & + \int_{\Omega} [\nu_T(\Pi_h^* \mathbf{u}_h^1) - \nu_T(\Pi_h^* \mathbf{u}_h^2)] \nabla(\Pi_h^* \mathbf{z}_h) : \nabla(\Pi_h^* \mathbf{v}_h) \, d\Omega \\ & + \sum_{K \in \mathcal{T}_h} \int_K (C_S h_K)^2 \frac{\nabla(\Pi_h^* \mathbf{u}_h^1) : \nabla(\Pi_h^* \mathbf{z}_h)}{|\nabla(\Pi_h^* \mathbf{u}_h^1)|} (\nabla(\Pi_h^* \mathbf{u}_h^1) : \nabla(\Pi_h^* \mathbf{v}_h)) \, d\Omega \\ & - \sum_{K \in \mathcal{T}_h} \int_K (C_S h_K)^2 \frac{\nabla(\Pi_h^* \mathbf{u}_h^2) : \nabla(\Pi_h^* \mathbf{z}_h)}{|\nabla(\Pi_h^* \mathbf{u}_h^2)|} (\nabla(\Pi_h^* \mathbf{u}_h^2) : \nabla(\Pi_h^* \mathbf{v}_h)) \, d\Omega. \end{aligned}$$

Thanks to the triangular inequality, it holds

$$\begin{aligned}
& |\partial_1 A(U_h^1, V_h; \mu)(Z_h) - \partial_1 A(U_h^2, V_h; \mu)(Z_h)| \leq \\
& \frac{1}{2} \left| \int_{\Omega} ((\mathbf{u}_h^1 - \mathbf{u}_h^2) \cdot \nabla \mathbf{z}_h) \mathbf{v}_h \, d\Omega \right| + \frac{1}{2} \left| \int_{\Omega} (\mathbf{z}_h \cdot \nabla (\mathbf{u}_h^1 - \mathbf{u}_h^2)) \mathbf{v}_h \, d\Omega \right| \\
& + \frac{1}{2} \left| \int_{\Omega} (\mathbf{z}_h \cdot \nabla \mathbf{v}_h) (\mathbf{u}_h^1 - \mathbf{u}_h^2) \, d\Omega \right| + \frac{1}{2} \left| \int_{\Omega} ((\mathbf{u}_h^1 - \mathbf{u}_h^2) \cdot \nabla \mathbf{v}_h) \mathbf{z}_h \, d\Omega \right| \\
& + \left| \int_{\Omega} [\nu_T(\Pi_h^* \mathbf{u}_h^1) - \nu_T(\Pi_h^* \mathbf{u}_h^2)] \nabla(\Pi_h^* \mathbf{z}_h) : \nabla(\Pi_h^* \mathbf{v}_h) \, d\Omega \right| \\
& + \left| \sum_{K \in \mathcal{T}_h} \int_K (C_S h_K)^2 \frac{\nabla(\Pi_h^* \mathbf{u}_h^1) : \nabla(\Pi_h^* \mathbf{z}_h)}{|\nabla(\Pi_h^* \mathbf{u}_h^1)|} (\nabla(\Pi_h^* \mathbf{u}_h^1) : \nabla(\Pi_h^* \mathbf{v}_h)) \, d\Omega \right. \\
& \left. - \sum_{K \in \mathcal{T}_h} \int_K (C_S h_K)^2 \frac{\nabla(\Pi_h^* \mathbf{u}_h^2) : \nabla(\Pi_h^* \mathbf{z}_h)}{|\nabla(\Pi_h^* \mathbf{u}_h^2)|} (\nabla(\Pi_h^* \mathbf{u}_h^2) : \nabla(\Pi_h^* \mathbf{v}_h)) \, d\Omega \right|. \tag{44}
\end{aligned}$$

We bound each term in (44) separately. The four first terms can be bounded in a standard way using estimate (23). For the third term, we use the local inverse inequalities of finite element functions (cf. [5]) and the stability of operator Π_h ,

$$\begin{aligned}
& \left| \int_{\Omega} (\nu_T(\Pi_h^* \mathbf{u}_h^1) - \nu_T(\Pi_h^* \mathbf{u}_h^2)) \nabla(\Pi_h^* \mathbf{z}_h) : \nabla(\Pi_h^* \mathbf{v}_h) \, d\Omega \right| \\
& \leq \sum_{K \in \mathcal{T}_h} \int_K (C_S h_K)^2 \left| |\nabla(\Pi_h^* \mathbf{u}_h^1)| - |\nabla(\Pi_h^* \mathbf{u}_h^2)| \right| |\nabla(\Pi_h^* \mathbf{z}_h)| |\nabla(\Pi_h^* \mathbf{v}_h)| \, d\Omega \\
& \leq (C_S h)^2 \int_{\Omega} |\nabla(\Pi_h^*(\mathbf{u}_h^1 - \mathbf{u}_h^2))| |\nabla(\Pi_h^* \mathbf{z}_h)| |\nabla(\Pi_h^* \mathbf{v}_h)| \, d\Omega \\
& \leq (C_S h)^2 \|\nabla(\Pi_h^*(\mathbf{u}_h^1 - \mathbf{u}_h^2))\|_{0,\infty,\Omega} \|\nabla(\Pi_h^* \mathbf{z}_h)\|_{0,2,\Omega} \|\nabla(\Pi_h^* \mathbf{v}_h)\|_{0,2,\Omega} \\
& \leq C_S^2 h^{2-d/2} C \|\nabla(\Pi_h^*(\mathbf{u}_h^1 - \mathbf{u}_h^2))\|_{0,2,\Omega} \|\nabla(\Pi_h^* \mathbf{z}_h)\|_{0,2,\Omega} \|\nabla(\Pi_h^* \mathbf{v}_h)\|_{0,2,\Omega} \\
& \leq C_S^2 h^{2-d/2} C C_f \|\nabla(\mathbf{u}_h^1 - \mathbf{u}_h^2)\|_{0,2,\Omega} \|\nabla \mathbf{z}_h\|_{0,2,\Omega} \|\nabla \mathbf{v}_h\|_{0,2,\Omega} \\
& \leq C_S^2 h^{2-d/2} C C_f \|U_h^1 - U_h^2\|_X \|Z_h\|_X \|V_h\|_X
\end{aligned}$$

The last term in (44) is bounded as follows:

$$\begin{aligned}
& \left| \sum_{K \in \mathcal{T}_h} \int_K (C_S h_K)^2 \frac{\nabla(\Pi_h^* \mathbf{u}_h^1) : \nabla(\Pi_h^* \mathbf{z}_h)}{|\nabla(\Pi_h^* \mathbf{u}_h^1)|} (\nabla(\Pi_h^* \mathbf{u}_h^1) : \nabla(\Pi_h^* \mathbf{v}_h)) \, d\Omega \right. \\
& \left. - \sum_{K \in \mathcal{T}_h} \int_K (C_S h_K)^2 \frac{\nabla(\Pi_h^* \mathbf{u}_h^2) : \nabla(\Pi_h^* \mathbf{z}_h)}{|\nabla(\Pi_h^* \mathbf{u}_h^2)|} (\nabla(\Pi_h^* \mathbf{u}_h^2) : \nabla(\Pi_h^* \mathbf{v}_h)) \, d\Omega \right|
\end{aligned}$$

$$\begin{aligned}
&= \left| \sum_{K \in \mathcal{T}_h} \int_K (C_S h_K)^2 \left[\frac{\nabla(\Pi_h^* \mathbf{u}_h^1) : \nabla(\Pi_h^* \mathbf{z}_h)}{|\nabla(\Pi_h^* \mathbf{u}_h^1)|} (\nabla(\Pi_h^* \mathbf{u}_h^1 - \Pi_h^* \mathbf{u}_h^2) : \nabla(\Pi_h^* \mathbf{v}_h)) \right. \right. \\
&\quad \left. \left. + \frac{\nabla(\Pi_h^* \mathbf{u}_h^1 - \Pi_h^* \mathbf{u}_h^2) : \nabla(\Pi_h^* \mathbf{z}_h)}{|\nabla(\Pi_h^* \mathbf{u}_h^2)|} (\nabla(\Pi_h^* \mathbf{u}_h^2) : \nabla(\Pi_h^* \mathbf{v}_h)) \right. \right. \\
&\quad \left. \left. + \frac{(|\nabla(\Pi_h^* \mathbf{u}_h^2)| - |\nabla(\Pi_h^* \mathbf{u}_h^1)|) \nabla(\Pi_h^* \mathbf{u}_h^1) : \nabla(\Pi_h^* \mathbf{z}_h)}{|\nabla(\Pi_h^* \mathbf{u}_h^1)| |\nabla(\Pi_h^* \mathbf{u}_h^2)|} (\nabla(\Pi_h^* \mathbf{u}_h^2) : \nabla(\Pi_h^* \mathbf{v}_h)) \right] d\Omega \right| \\
&\leq \sum_{K \in \mathcal{T}_h} \int_K (C_S h_K)^2 |\nabla(\Pi_h^* \mathbf{z}_h)| |\nabla(\Pi_h^* \mathbf{u}_h^1 - \Pi_h^* \mathbf{u}_h^2)| |\nabla(\Pi_h^* \mathbf{v}_h)| d\Omega \\
&\quad + \sum_{K \in \mathcal{T}_h} \int_K (C_S h_K)^2 |\nabla(\Pi_h^* \mathbf{u}_h^1 - \Pi_h^* \mathbf{u}_h^2)| |\nabla(\Pi_h^* \mathbf{z}_h)| |\nabla(\Pi_h^* \mathbf{v}_h)| d\Omega \\
&\quad + \sum_{K \in \mathcal{T}_h} \int_K (C_S h_K)^2 \left| |\nabla(\Pi_h^* \mathbf{u}_h^1)| - |\nabla(\Pi_h^* \mathbf{u}_h^2)| \right| |\nabla(\Pi_h^* \mathbf{z}_h)| |\nabla(\Pi_h^* \mathbf{v}_h)| d\Omega \\
&\leq 3(C_S h)^2 \|\nabla(\Pi_h^* \mathbf{u}_h^1 - \Pi_h^* \mathbf{u}_h^2)\|_{0,\infty,\Omega} \|\nabla(\Pi_h^* \mathbf{z}_h)\|_{0,2,\Omega} \|\nabla(\Pi_h^* \mathbf{v}_h)\|_{0,2,\Omega} \\
&\leq 3C_S^2 h^{2-d/2} C \|\nabla(\Pi_h^* \mathbf{u}_h^1 - \Pi_h^* \mathbf{u}_h^2)\|_{0,2,\Omega} \|\nabla(\Pi_h^* \mathbf{z}_h)\|_{0,2,\Omega} \|\nabla(\Pi_h^* \mathbf{v}_h)\|_{0,2,\Omega} \\
&\leq 3C_S^2 h^{2-d/2} C C_f \|\nabla(\mathbf{u}_h^1 - \mathbf{u}_h^2)\|_{0,2,\Omega} \|\nabla \mathbf{z}_h\|_{0,2,\Omega} \|\nabla \mathbf{v}_h\|_{0,2,\Omega} \\
&\leq 3C_S^2 h^{2-d/2} C C_f \|U_h^1 - U_h^2\|_X \|Z_h\|_X \|V_h\|_X.
\end{aligned}$$

Thus, we have just proved that

$$|\partial_1 A(U_h^1, V_h; \mu)(Z_h) - \partial_1 A(U_h^2, V_h; \mu)(Z_h)| \leq \rho_T \|U_h^1 - U_h^2\|_X \|Z_h\|_X \|V_h\|_X,$$

with, $\rho_T = 2C_T + C h^{2-d/2}$ for some constant $C > 0$. \square

We assume that the RB problem (14) is well posed, and define the following inf-sup and continuity constants:

$$0 < \beta_N(\mu) \equiv \inf_{Z_h \in X_h} \sup_{V_h \in X_h} \frac{\partial_1 A(U_N(\mu), V_h; \mu)(Z_h)}{\|Z_h\|_X \|V_h\|_X}, \quad (45)$$

$$\infty > \gamma_N(\mu) \equiv \sup_{Z_h \in X_h} \sup_{V_h \in X_h} \frac{\partial_1 A(U_N(\mu), V_h; \mu)(Z_h)}{\|Z_h\|_X \|V_h\|_X}, \quad (46)$$

Let us introduce the *a posteriori* error bound estimator:

$$\Delta_N(\mu) = \frac{\beta_N(\mu)}{2\rho_T} \left[1 - \sqrt{1 - \tau_N(\mu)} \right], \quad (47)$$

where $\tau_N(\mu)$ is given by

$$\tau_N(\mu) = \frac{4\epsilon_N(\mu)\rho_T}{\beta_N^2(\mu)}, \quad (48)$$

with $\epsilon_N(\mu)$ the dual norm, on X'_h , of the residual $\mathcal{R}(U_N(\mu); \mu)$, defined as

$$\mathcal{R}(U_N(\mu); \mu)(V_h) = A(U_N(\mu), V_h; \mu) - F(V_h; \mu);$$

that is,

$$\epsilon_N(\mu) = \sup_{V_h \in X_h} \frac{\mathcal{R}(U_N(\mu); \mu)(V_h)}{\|V_h\|_X}.$$

The *a posteriori* error bound estimator is stated by the following result

Theorem 2. *Let $\mu \in \mathcal{D}$, and assume that $\beta_N(\mu) > 0$. If problem (12) admits a solution $U_h(\mu)$ such that*

$$\|U_h(\mu) - U_N(\mu)\|_X \leq \frac{\beta_N(\mu)}{\rho_T},$$

then this solution is unique in the ball $B_X\left(U_N(\mu), \frac{\beta_N(\mu)}{\rho_T}\right)$.

Moreover, assume that $\tau_N(\mu) \leq 1$ for all $\mu \in \mathcal{D}$. Then there exists a unique solution $U_h(\mu)$ of (12) such that the error with respect to $U_N(\mu)$, solution of (14), is bounded by

$$\|U_h(\mu) - U_N(\mu)\|_X \leq \Delta_N(\mu) \leq \left[\frac{2\gamma_N(\mu)}{\beta_N(\mu)} + \tau_N(\mu) \right] \|U_h(\mu) - U_N(\mu)\|_X. \quad (49)$$

The proof of this theorem follows that of Theorem 5.3 in [11], we omit it for brevity.

Remark 1. *Note that $\Delta_N(\mu)$ is defined only if $\tau_N(\mu) \leq 1$. In practice, at the first iterations of the Greedy algorithm, $\tau_N(\mu) > 1$. For these cases, we consider a Taylor approximation of the *a posteriori* error estimator, that is given by*

$$\Delta_N(\mu) \simeq \frac{\beta_N(\mu)}{4\rho_T} \tau_N(\mu). \quad (50)$$

In Section 6 we show that this Taylor approximation is more accurate than $\tau_N(\mu)$ as estimator.

5 Approximation of eddy viscosity term and pressure stabilizing coefficient

In this section, we present the approximation of the non-linear terms with respect to the parameter, throughout the Empirical Interpolation Method [18, 3].

Both the Small-Small setting of the Smagorinsky eddy-diffusion term defined in (13), $\nu_T(\Pi_h^*(\nabla \mathbf{u})) := \nu_T(\mu)$, and the pressure stabilisation coefficient, $\tau_{p,K}(\mu)$, defined in (9) are non-linear functions of the parameter, and consequently need to be linearised with the EIM to build the RB model to reduce the on-line computation times.

For this purpose, we build two reduced-basis spaces $W_{M_1}^S = \{q_1^S(\mu), \dots, q_{M_1}^S(\mu)\}$ and $W_{M_2}^P = \{q_1^P(\mu), \dots, q_{M_2}^P(\mu)\}$ by a greedy procedure selection, with $W_{M_1}^S$ and $W_{M_2}^P$ the EIM reduced spaces associated to the eddy-viscosity term and the pressure-stabilisation term, respectively.

Thus, we approximate them by the following trilinear forms:

$$\begin{aligned} a'_S(\mathbf{u}_N; \mathbf{u}_N, \mathbf{v}_N; \mu) &\approx \hat{a}'_S(\mathbf{u}_N, \mathbf{v}_N; \mu), \\ s_{pres}(p_N, q_N; \mu) &\approx \hat{s}_{pres}(p_N, q_N; \mu), \end{aligned} \quad (51)$$

where,

$$\begin{aligned} \hat{a}'_S(\mathbf{u}_N, \mathbf{v}_N; \mu) &= \sum_{k=1}^{M_1} \sigma_k^S(\mu) s(q_k^S, \mathbf{u}_N, \mathbf{v}_N), \\ \hat{s}_{pres}(p_N, q_N; \mu) &= \sum_{k=1}^{M_2} \sigma_k^P(\mu) r(q_k^P, p_N, q_N), \end{aligned} \quad (52)$$

with,

$$\begin{aligned} s(q_k^S, \mathbf{u}_N, \mathbf{v}_N) &= \sum_{K \in \mathcal{T}_h} (q_k^S \nabla(\Pi_h^* \mathbf{u}_N), \nabla(\Pi_h^* \mathbf{v}_N))_K, \\ r(q_k^P, p_N, q_N) &= \sum_{K \in \mathcal{T}_h} (q_k^P \sigma_h^*(\nabla p_N), \sigma_h^*(\nabla q_N))_K. \end{aligned} \quad (53)$$

Here we are considering that the approximations given by the EIM for $\nu_T(\mu)$ and $\tau_{K,p}(\mu)$ are respectively

$$\begin{aligned} \mathcal{I}_{M_1}[\nu_T(\mu)] &= \sum_{k=1}^{M_1} \sigma_k^S(\mu) q_k^S, \\ \mathcal{I}_{M_2}[\tau_{K,p}(\mu)] &= \sum_{k=1}^{M_2} \sigma_k^P(\mu) q_k^P. \end{aligned} \quad (54)$$

In practice, to deal with non-homogeneous Dirichlet boundary conditions, we split the solution as $\mathbf{u}_N + \mathbf{u}_D$, where $\mathbf{u}_N \in X_h$ and $\mathbf{u}_D \in H^1(\Omega)^d$ is a lift of the Dirichlet boundary condition, compatible with the remaining boundary conditions (if any). We are thus led to a “practical” RB problem, given by

$$\left\{ \begin{array}{l} \text{Find } (\mathbf{u}_N, p_N) = (\mathbf{u}_N(\mu), p_N(\mu)) \in Y_N \times M_N \text{ such that} \\ a(\mathbf{u}_N, \mathbf{v}_N; \mu) + b(\mathbf{v}_N, p_N; \mu) + \hat{a}'_S(\mathbf{u}_N; \mathbf{v}_N; \mu) \\ + c(\mathbf{u}_N, \mathbf{u}_N, \mathbf{v}_N; \mu) + c(\mathbf{u}_D, \mathbf{u}_N, \mathbf{v}_N; \mu) \\ + c(\mathbf{u}_N, \mathbf{u}_D, \mathbf{v}_N; \mu) = F(\mathbf{v}_N; \mu) \quad \forall \mathbf{v}_N \in Y_N \\ b(\mathbf{u}_N, q_N; \mu) + \hat{s}_{pres}(p_N, q_N; \mu) = 0 \quad \forall q_N \in M_N. \end{array} \right. \quad (55)$$

We can express the solution $(\mathbf{u}_N(\mu), p_N(\mu)) \in X_N$ of (55) as a linear combination of the basis functions:

$$\mathbf{u}_N(\mu) = \sum_{j=1}^N u_j^N(\mu) \zeta_j^{\mathbf{v}}, \quad p_N(\mu) = \sum_{j=1}^N p_j^N(\mu) \xi_j^p.$$

The tensor representation associated to the eddy-viscosity term and the pressure stabilisation coefficient are define as follow:

$$(\mathbb{S}'_N(q_s^S))_{ij} = \sum_{K \in \mathcal{T}_h} (q_s^S \nabla(\Pi_h^* \zeta_j^{\mathbf{v}}), \nabla(\Pi_h^* \zeta_i^{\mathbf{v}}))_K, \quad i, j = 1, \dots, N, s = 1, \dots, M_1,$$

$$(\mathbb{P}_N(q_s^P))_{ij} = \sum_{K \in \mathcal{T}_h} (q_s^P \sigma_h^*(\nabla \zeta_j^p), \sigma_h^*(\nabla \zeta_i^p))_K, \quad i, j = 1, \dots, N, s = 1, \dots, M_2.$$

With this tensor representation for the non-linear terms in (14) done in the offline phase, it holds that

$$\hat{a}'_S(\zeta_j^{\mathbf{v}}; \zeta_i^{\mathbf{v}}; \mu) = \sum_{s=1}^{M_1} \sigma_s^S(\mu) \mathbb{S}'_N(q_s^S) \quad \text{and} \quad \hat{s}_{pres}(\xi_j^p, \xi_i^p; \mu) = \sum_{s=1}^{M_2} \sigma_s^P(\mu) \mathbb{P}_N(q_s^P).$$

Problem (55) is solved by a semi-implicit evolution approach. Thanks to these linearised representations, we are able to efficiently solve the RB model in the online phase.

6 Numerical Results

In this section, we present some numerical results to test the LPS pressure stabilisation for the Smagorinsky reduced basis model. We consider the lid-driven cavity problem for two different finite element discretisations. To let

this problem fit into the preceding theory we consider a lifting $\mathbf{u}_D \in [H^1(\Omega)]^2$ of the non-homogeneous boundary conditions, and search for the solution as $\mathbf{u} = \mathbf{u}_0 + \mathbf{u}_D$, where the new unknown \mathbf{u}_0 satisfies homogeneous Dirichlet boundary conditions. The change in the convection term makes it appear a linear term with the structure $\mathbf{u}_D \nabla \cdot \mathbf{u}_0 + \mathbf{u}_0 \nabla \cdot \mathbf{u}_D$, the remaining operator terms in the Smagorinsky model have the same structure. An involved, but straightforward, extension of the preceding analysis, proves that it also applies to this situation whenever \mathbf{u}_D is small enough with respect to the viscosity coefficient. We have preferred not to include all this analysis for brevity. In our tests we use as $\mathbf{u}_D \in [H^1(\Omega)]^2$ the standard boundary condition on the cavity lid $\mathbf{u} = (1, 0)$, extended by zero to the remaining of $\partial\Omega$.

We include LPS stabilisation of the pressure for both the full order and the reduced methods. On one hand the Taylor-Hood ($\mathbb{P}_2 - \mathbb{P}_1$) finite element, that fits into the theory developed above, then both the full order finite element and the reduced methods are stable. On another hand, the $\mathbb{P}_2 - \mathbb{P}_2$ finite element for velocity-pressure, for which the full order method is stable, but -to the best of our knowledge- not the reduced basis problem without pressure supremizers. For both cases, we consider the two strategies of either including pressure supremizers, or not, to build the reduced pressure spaces, to compare the performances of both strategies. We use FreeFem++ to perform the computations (cf. [19]).

We consider the Reynolds number as a parameter, ranging in $\mathcal{D} = [1000, 5100]$. In this range of Reynolds number, the solution reaches a steady state regime. We consider a regular mesh with 5000 triangles and 2601 nodes. In both cases, we implement the EIM for the eddy viscosity term and the pressure stabilisation constant.

We are aware that in the turbulent regime the lid-driven cavity flow is 3D (Cf. [14], Chapter 13). We consider these 2D tests to assess the theoretical derivations within the paper, and to compare the two strategies of including - not including pressure supremizers in the reduced velocity spaces, when the reduced model includes the LPS stabilisation of the pressure.

For the numerical tests, we consider a weighted the scalar product for the velocity space, that lets us improve the efficiency of the *a posteriori* error estimations as shown in [11]. This norm is defined as

$$(\mathbf{u}_h, \mathbf{v}_h)_T = \int_{\Omega} \left[\frac{1}{\bar{\mu}} + \nu_T'^* \right] \nabla \mathbf{u}_h : \nabla \mathbf{v}_h \, d\Omega \quad \forall \mathbf{u}_h, \mathbf{v}_h \in Y_h, \quad (56)$$

where $\nu_T^* = \nu_T(\Pi_h^* \mathbf{u}_h(\bar{\mu}))$, and

$$\bar{\mu} = \arg \min_{\mu \in \mathcal{D}} \sum_{K \in \mathcal{T}_h} (C_S h_K)^2 \min_{x \in K} |\nabla(\Pi_h^* \mathbf{u}_h)(\mu)|(x) \chi_K(x),$$

with $\mathbf{u}_h(\mu)$ the velocity solution of (4)

6.1 Test 1. Taylor-Hood finite element

For this test, we need $M_1 = 49$ basis functions q_k^S for the eddy viscosity ν_T EIM approximation and $M_2 = 29$ basis functions q_l^S for the stabilisation pressure coefficient $\tau_{p,K}$ EIM approximation to reach a prescribed tolerance of $\varepsilon_{EIM} = 5 \cdot 10^{-5}$ for both terms. In Fig. 1 we show the evolution of the error for the both EIM approximations.

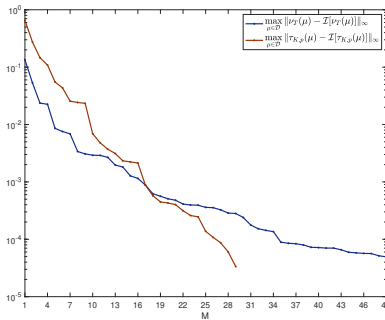


Figure 1: Test 1. Evolution of the parametric L^∞ error in the EIM approximation of eddy viscosity and stabilisation pressure coefficient.

For the Greedy algorithm that selects the reduced basis functions for velocity and pressure, we prescribe a tolerance of $\varepsilon_{RB} = 7 \cdot 10^{-5}$, which is reached for $N = 16$ basis functions in both cases. In Fig. 2 we show the evolution of the *a posteriori* error bound estimator during the Greedy algorithm for both strategies (including pressure supremizers or not in the reduced velocity space). We can observe that the evolution of the maximum value for the error estimator either considering supremizers (left) or not (right) are equivalent, giving the same number of basis functions until reaching the tolerance.

We also have measured, for some randomly selected parameter values, the maximum exact error for velocity and pressure snapshot solutions with respect to the reduced solution computed, during the Greedy algorithm. We

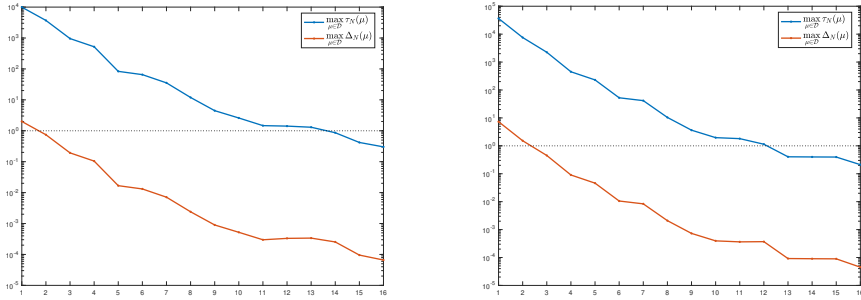


Figure 2: Test 1. Evolution of the error in the Greedy algorithm with (left) and without pressure supremizers (right).

can observe in Fig. 3 that for both the velocity and pressure the maximum error values in each iteration of the Greedy algorithm, for both velocity and pressure, are quite close.

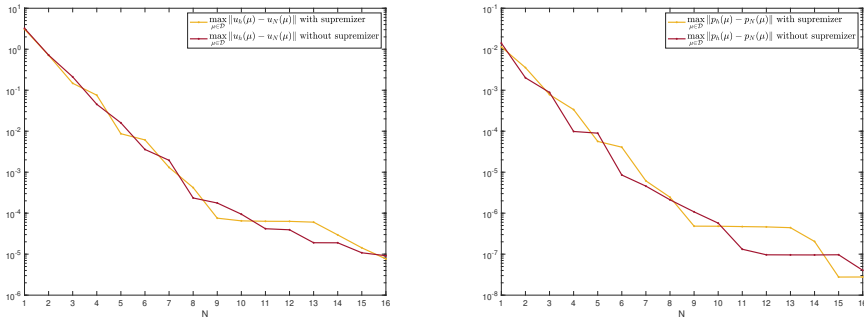


Figure 3: Test 1. Velocity (left) and pressure (right) maximum error during the Greedy algorithm.

In Fig. 4, we show the comparison of the exact error for some snapshots and the *a posteriori* error bound estimator considering either including the supremizers in the velocity spaces (left) or not (right). We can observe that the effectivity in this case is about one order of magnitude. The estimator is somewhat less smooth as function of the parameter μ for the LPS-VMS method.

Finally, in Table 1 we summarize results obtained for several values of Reynold numbers, where we can observe that the absolute error between FE and RB solution is 10^{-6} for the velocity and 10^{-8} for pressure. Moreover, we can observe that the speedup of the solution is several thousands of magnitude, with higher speedups (increase of nearly 50%) and somewhat

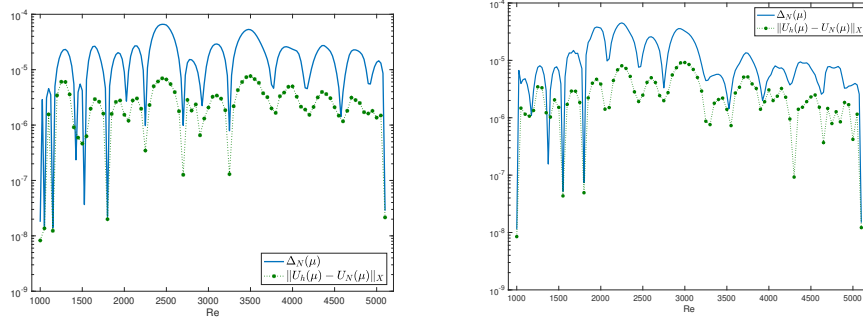


Figure 4: Error and *a posteriori* error bound estimator for $N = 16$, with (left) and without pressure supremizers (right).

larger errors for the strategy of not including the pressure *supremizers* in the reduced pressure spaces.

Without supremizer				
Data	$\mu = 1610$	$\mu = 2751$	$\mu = 3886$	$\mu = 4521$
T_{FE}	1372.65s	1513.53s	3184.17s	3608.32s
T_{online}	0.57s	0.65s	0.7s	0.77s
speedup	2407	2327	4548	4685
$\ \mathbf{u}_h - \mathbf{u}_N\ _T$	$2.01 \cdot 10^{-6}$	$1.98 \cdot 10^{-6}$	$2.04 \cdot 10^{-6}$	$2.64 \cdot 10^{-6}$
$\ p_h - p_N\ _{0,2,\Omega}$	$1.51 \cdot 10^{-8}$	$2.03 \cdot 10^{-8}$	$9.73 \cdot 10^{-9}$	$2.05 \cdot 10^{-8}$
With supremizer				
Data	$\mu = 1610$	$\mu = 2751$	$\mu = 3886$	$\mu = 4521$
T_{FE}	1372.65s	1513.53s	3184.17s	3608.32s
T_{online}	0.85s	0.97s	1.08s	1.11s
speedup	1596	1544	2947	3224
$\ \mathbf{u}_h - \mathbf{u}_N\ _T$	$2.21 \cdot 10^{-6}$	$2.85 \cdot 10^{-6}$	$3.83 \cdot 10^{-7}$	$1.98 \cdot 10^{-6}$
$\ p_h - p_N\ _{0,2,\Omega}$	$1.09 \cdot 10^{-8}$	$1.37 \cdot 10^{-8}$	$7.08 \cdot 10^{-9}$	$1.10 \cdot 10^{-8}$

Table 1: Computational time for FE solution and RB online phase, with the speedup and the error.

6.2 Test 2: $\mathbb{P}_2 - \mathbb{P}_2$ velocity-pressure finite element

For this test, we need $M_1 = 52$ basis for the eddy viscosity approximation and $M_2 = 28$ basis for the pressure stabilisation constant approximation to reach a prescribe tolerance of $\varepsilon_{EIM} = 5 \cdot 10^{-5}$ for both terms. In Fig. 5 we show the evolution of the error for both non-linear terms.

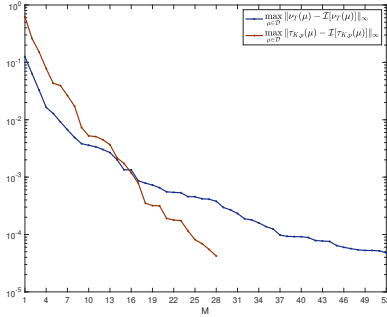


Figure 5: Evolution of the error in the EIM.

For the Greedy algorithm to determine the reduced velocity and pressure spaces, in this case we prescribe the same tolerance of $\varepsilon_{RB} = 7 \cdot 10^{-5}$. This tolerance is reached for $N = 16$ basis functions when we do not consider supremizers, while in the case of considering the supremizer, the tolerance is reached for $N = 17$. In Fig. 6 we show the evolution of the *a posteriori* error bound estimator during the Greedy algorithm for both cases. We can observe, again, that the evolution of the maximum value for the error estimator either considering supremizers (left) or not (right) are equivalent. Although we do not know whether the reduced problem without supremizers is stable, all computations take place as if it was.

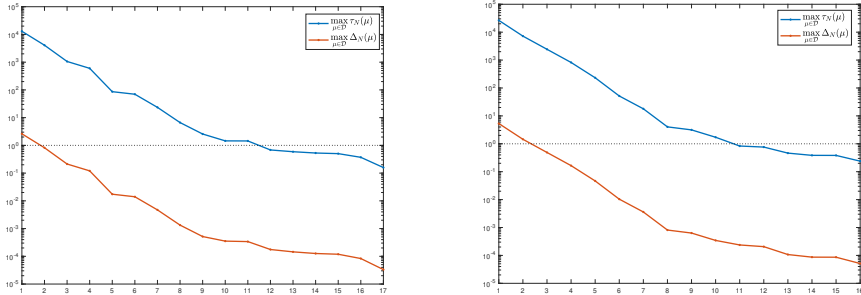


Figure 6: Test 2. Evolution of the error in the Greedy algorithm with (left) and without pressure supremizers (right).

We can observe in Fig. 7 that for both the velocity and pressure the maximum error value in each iteration of the Greedy algorithm, for both velocity and pressure, are quite close, as in the Taylor-Hood finite element test.

In Fig. 8 we show the comparison of the exact error for some snapshots

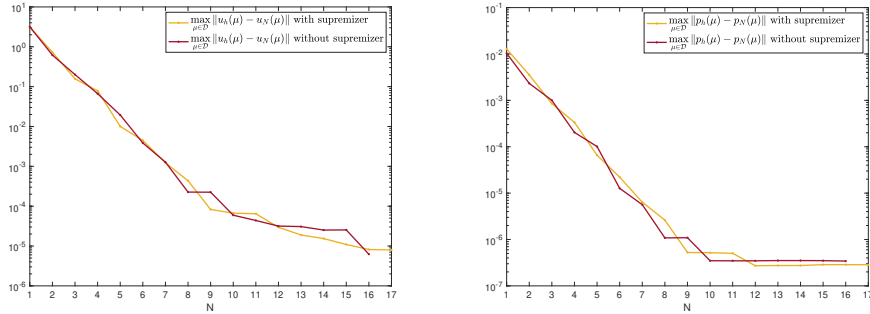


Figure 7: Test 2. Velocity (left) and pressure (right) maximum error during the Greedy algorithm.

and the *a posteriori* error bound estimator considering either including the supremizers in the velocity spaces (left) or not (right).

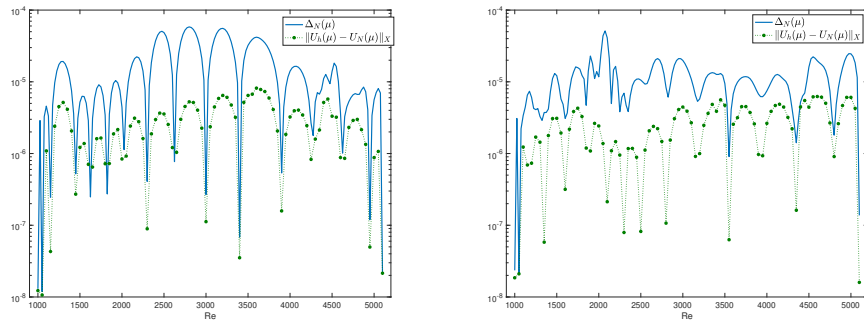


Figure 8: Test 2. Error and *a posteriori* error bound estimator for $N = 16$, with (left) and without pressure supremizers (right).

Finally, in Table 2 we summarize results obtained for several values of Reynolds numbers, where we can observe that the absolute error between FE and RB solution is around order of 10^{-6} for the velocity and 10^{-8} for pressure. Moreover, we can observe that the speedup of the solution is of several thousands of magnitude, with increase of nearly 50%, and somewhat larger errors, when no supremizers are used.

7 Conclusions

In this paper we have developed a VMS-Smagorinsky reduced basis model with local projection stabilisation (LPS) to stabilise the pressure discretiza-

Without supremizer				
Data	$\mu = 1610$	$\mu = 2751$	$\mu = 3886$	$\mu = 4521$
T_{FE}	2259.04s	3008.81s	5574.5s	6171.41s
T_{online}	0.70s	0.75s	0.78s	0.81s
speedup	3227	4011	7146	7619
$\ \mathbf{u}_h - \mathbf{u}_N\ _T$	$5.4 \cdot 10^{-7}$	$1.44 \cdot 10^{-6}$	$1.49 \cdot 10^{-6}$	$5.44 \cdot 10^{-6}$
$\ p_h - p_N\ _{0,2,\Omega}$	$1.34 \cdot 10^{-8}$	$3.35 \cdot 10^{-8}$	$1.55 \cdot 10^{-7}$	$2.25 \cdot 10^{-8}$
With supremizer				
Data	$\mu = 1610$	$\mu = 2751$	$\mu = 3886$	$\mu = 4521$
T_{FE}	2259.04s	3008.81s	5574.5s	6171.41s
T_{online}	0.99s	1.03s	1.26s	1.23s
speedup	2267	2895	4391	5016
$\ \mathbf{u}_h - \mathbf{u}_N\ _T$	$4.94 \cdot 10^{-7}$	$4.51 \cdot 10^{-6}$	$6.52 \cdot 10^{-7}$	$3.52 \cdot 10^{-6}$
$\ p_h - p_N\ _{0,2,\Omega}$	$5.23 \cdot 10^{-8}$	$3.22 \cdot 10^{-8}$	$6.38 \cdot 10^{-8}$	$8.45 \cdot 10^{-8}$

Table 2: Computational time for FE solution and RB online phase, with the speedup and the error.

tion. We have proved the stability of the LPS stabilised reduced problem for piecewise affine pressure discretisations. We use the EIM to approximate the eddy viscosity and the pressure stabilisation coefficient in order to reduce the non-linearities that appear in both terms, letting us to efficiently store the tensors associated to both the VMS-Smagorinsky term and the LPS pressure term. Also, we have developed an *a posteriori* error estimator for this problem via the BRR theory.

Finally, we have presented some numerical results of the RB method constructed by means of a Greedy algorithm, based upon this error estimator, applied to the 2D lid-driven cavity problem. We use both Taylor-Hood and $\mathbb{P}_2 - \mathbb{P}_2$ pairs of velocity-pressure discretizations of the full order model. Our theory proves that the Taylor-Hood discretisation reduced problem including LPS stabilisation of the pressure is stable. We have observed that in both strategies (including or not pressure supremizers in the reduced velocity spaces), the errors obtained for the velocity and pressure reduced solutions are quite close. Further, the computational speedup is higher, with increases of nearly 50%, when we do not consider the enrichment with pressure supremizers. We thus have built a RB method with enhanced reduction and speedup, while keeping error levels close to using pressure supremizers.

Acknowledgements

This work has been partially supported by the Andalusian Government - Feder Fund Project US-1254587, that provided the funding to hire Dr. Delgado for some time, and the Spanish Government - Feder Fund Project RTI2018-093521-B-C31.

References

- [1] S. ALI, F. BALLARIN, AND G. ROZZA, *Stabilized reduced basis methods for parametrized steady Stokes and Navier–Stokes equations*, Computers & Mathematics with Applications, 80 (2020), pp. 2399–2416.
- [2] F. BALLARIN, A. MANZONI, A. QUARTERONI, AND G. ROZZA, *Supremizer stabilization of POD-Galerkin approximation of parametrized steady incompressible Navier-Stokes equations.*, Int J Numer Methods Eng, (2014), pp. 1136–1161.
- [3] M. BARRAULT, Y. MADAY, N. C. NGUYEN, AND A. T. PATERA, *An ‘empirical interpolation’ method: application to efficient reduced-basis discretization of partial differential equations*, C.R. Acad. Sci. Paris Sér. I Math., 339 (2004), pp. 667–672.
- [4] C. BERNARDI, T. CHACÓN, AND M. GÓMEZ, *Error analysis of a sub-grid eddy viscosity multi-scale discretization of the Navier-Stokes equations*, SEMA Journal, (2012), pp. 51–74.
- [5] C. BERNARDI, Y. MADAY, AND F. RAPETTI, *Discrétisations variationnelles de problèmes aux limites elliptiques*, Springer Berlin Heidelberg, 2004.
- [6] F. BREZZI AND J. PITKÄRANTA, *On the stabilization of finite element approximations of the stokes equations*, in Efficient Solutions of Elliptic Systems, Vieweg+Teubner Verlag, 1984, pp. 11–19.
- [7] F. BREZZI, J. RAPPAZ, AND P. RAVIART, *Finite dimensional approximation of nonlinear problems*, Numer. Maht., 36 (1980), pp. 1–25.
- [8] A. N. BROOKS AND T. J. HUGHES, *Streamline upwind/petrov-galerkin formulations for convection dominated flows with particular emphasis on the incompressible navier-stokes equations*, Computer Methods in Applied Mechanics and Engineering, 32 (1982), pp. 199–259.

- [9] A. CAIAZZO, T. ILIESCU, V. JOHN, AND S. SCHYSCHLOWA, *A numerical investigation of velocity–pressure reduced order models for incompressible flows*, Journal of Computational Physics, 259 (2014), pp. 598–616.
- [10] T. CHACÓN REBOLLO, *A term by term stabilization algorithm for finite element solution of incompressible flow problems*, Numerische Mathematik, 79 (1998), pp. 283–319.
- [11] T. CHACÓN REBOLLO, E. DELGADO ÁVILA, M. GÓMEZ MÁRMOL, F. BALLARIN, AND G. ROZZA, *On a certified smagorinsky reduced basis turbulence model*, SIAM Journal on Numerical Analysis, 55 (2017), pp. 3047–3067.
- [12] T. CHACÓN REBOLLO, M. GÓMEZ MÁRMOL, V. GIRAULT, AND I. SÁNCHEZ MUÑOZ, *A high order term-by-term stabilization solver for incompressible flow problems*, IMA Journal of Numerical Analysis, 33 (2012), pp. 974–1007.
- [13] T. CHACÓN REBOLLO, M. GÓMEZ MÁRMOL, AND S. RUBINO, *Numerical analysis of a finite element projection-based VMS turbulence model with wall laws*, Computer Methods in Applied Mechanics and Engineering, 285 (2015), pp. 379–405.
- [14] T. CHACÓN REBOLLO AND R. LEWANDOWSKI, *Mathematical and Numerical Foundations of Turbulence Models and Applications*, Springer New York, 2014.
- [15] R. CODINA, *Stabilization of incompressibility and convection through orthogonal sub-scales in finite element methods*, Computer Methods in Applied Mechanics and Engineering, 190 (2000), pp. 1579–1599.
- [16] J. EDMONDS, *Matroids and the greedy algorithm*, Math. Program., 1 (1971), pp. 127–136.
- [17] L. P. FRANCA AND C. FARHAT, *Bubble functions prompt unusual stabilized finite element methods*, Computer Methods in Applied Mechanics and Engineering, 123 (1995), pp. 299–308.
- [18] M. A. GREPL, Y. MADAY, N. C. NGUYEN, AND A. T. PATERA, *Efficient reduced-basis treatment of nonaffine and nonlinear partial differential equations*, ESAIM: Mathematical Modelling and Numerical Analysis, 41 (2007), pp. 575–605.

- [19] F. HECHT, *New development in FreeFem++*, J. Numer. Math., 20 (2012), pp. 251–265.
- [20] T. J. HUGHES, L. P. FRANCA, AND G. M. HULBERT, *A new finite element formulation for computational fluid dynamics: VIII. the galerkin/least-squares method for advective-diffusive equations*, Computer Methods in Applied Mechanics and Engineering, 73 (1989), pp. 173–189.
- [21] T. J. R. HUGHES, A. A. OBERAI, AND L. MAZZEI, *Large eddy simulation of turbulent channel flows by the variational multiscale method*, Physics of Fluids, 13 (2001), pp. 1784–1799.
- [22] J. NOVO AND S. RUBINO, *Error analysis of proper orthogonal decomposition stabilized methods for incompressible flows*, SIAM Journal on Numerical Analysis, 59 (2021), pp. 334–369.
- [23] A. QUARTERONI AND A. VALLI, *Numerical Approximation of Partial Differential Equations*, vol. 23, Springer Berlin Heidelberg, 1994.
- [24] G. ROZZA AND K. VEROY, *On the stability of the reduced basis method for Stokes equations in parametrized domains*, Comput. Meth. Appl. Mech. Engrg., (2007), pp. 1244–1260.
- [25] S. RUBINO, *Numerical modeling of turbulence by Richardson number-based and VMS models*, PhD thesis, University of Seville, 2014.
- [26] K. VEROY AND A. T. PATERA, *Certified real-time solution of the parametrized steady incompressible Navier-Stokes equations: rigorous reduced-basis a posteriori error bounds*, Int. J. Numer. Methods Fluids, 47 (2005), pp. 773–788.