

Impact of Channel Memory on the Data Freshness

Qixing Guan and Xiaoli Xu

Abstract

In this letter, we investigate the impact of channel memory on the average age of information (AoI) for networks with various packet arrival models under first-come-first-served (FCFS) and preemptive last-generated-first-served (pLGFS) policy over Gilbert-Elliott (GE) erasure channel. For networks with Beroulli arrival, we first derive the average AoI under pLGFS queuing policy, and then characterize the AoI gap between FCFS and pLGFS policies. For networks with periodic arrival, we derive the closed-form expression for the average AoI under pLGFS and propose a numerical algorithm for calculating that under FCFS efficiently. It is revealed that for pLGFS policy, the average AoI increases monotonically with channel memory η at $\frac{\eta}{1-\eta}$. For FCFS, the average AoI increases even faster, with an additional term related to the packet arrival rate.

Index Terms

Age of information, channel memory, queue theory, arrival process.

I. INTRODUCTION

With the emerging of time sensitive applications, such as remote surgery and automatic driving, data freshness in communication systems has attracted a lot of research interest. Age of information (AoI) is one of the key metrics that describes the freshness attribution at the destination. The performances of the classic scheduling policies with the memoryless service time distribution have been investigated in [1]–[4]. In [1], the authors analyzed the average AoI of M/M/1, M/D/1 and D/M/1 queue models under first-come-first-served (FCFS) discipline in continuous system. The peak AoI for finite and infinite server queueing model under preemptive last-generated-first-served (pLGFS) policy was considered in [2]. The pLGFS policy was proved to be age-optimal with exponentially distributed service time [3]. Reference

Q. Guan is with the School of Software Engineering, Southeast University, Nanjing 210096, China (e-mail: scout@seu.edu.cn).

X. Xu is with the School of Information Science and Engineering, Southeast University, Nanjing 210096, China (e-mail: xiaolixu@seu.edu.cn).

[4] derived a general formula for the stationary distribution of the AoI under various arrival processes, queuing policies and service time distributions.

The work [1]–[4] mentioned above mainly focus on the channel which is time invariant, e.g., the erasure events in each slot are modelled by independent and identically distributed (i.i.d.) binary random variables. In practice, the communication channel usually has memory, or equivalently time correlation, for consecutive packet transmissions. Gilbert-Elliott (GE) channel is a popular model adopted for channel with memory [5]. Reference [6] derived the expression of average AoI for FCFS scheduling policy with Poisson arrival over GE channel in the continuous-time system by assuming the packet buffer size being zero or infinite. In [7], the authors considered the GE channel with periodic packet arrival in discrete system. With long term energy constrained, a threshold structure policy was proposed to minimize the average AoI. The impact of channel memory on the end-to-end (E2E) latency of the communication network with GE channel has been investigated in [8]. However, it is well known that optimizing the latency is fundamentally different from optimizing the AoI [1], since the former focuses on the in-order delivery of all the packets, while the later emphasizes more on the update of the latest information.

To the best of our knowledge, the impact of channel memory under the classical packet arrival models and scheduling policies has not be explicitly derived or systematically studied. This letter aims to investigate the impact of channel memory on the data freshness by deriving the average AoI achieved under various packet arrival models and queuing policies. Specifically, we derive the closed-form expression for the average AoI achieved with pLGFS queuing policy for both Bernoulli and periodic arrival, propose a novel approach for deriving the average AoI under FCFS by revealing the general AoI gap between pLGFS and FCFS policy, and design an efficient numerical method for calculating the average AoI under periodic arrival and FCFS policy.

The analytical results reveal that the average AoI achieved by pLGFS under GE channel is larger than that in the memoryless channel with a constant gap $\frac{\eta}{1-\eta}$ for both Bernoulli and periodic arrival, where $\eta \in [0, 1)$ is the memory of the GE channel. The gap vanishes when the channel memory η approaches 0. For FCFS policy, the average AoI increases even faster with the channel memory, with an additional term related to the packet arrival rate. Under the same average arrival rate, the system with periodic packet arrival achieves better AoI than that with Bernoulli arrival.

II. SYSTEM MODEL

We consider a slotted communication system where packets are generated at the beginning of each time slot. If it is transmitted immediately and not erased by the channel, it will be received at the end of the same slot. We consider the following packet arrival models:

- *Bernoulli arrival*, where a new packet arrives with probability λ at the beginning of each time slot, and no packet arrives with probability $(1 - \lambda)$.
- *Periodic arrival*, where a new packet arrives every K time slots, i.e., at the $(iK + 1)$ th slot, where $i = 0, 1, 2, \dots$, and no packet arrives at other slots.

When $\lambda = 1$ in Bernoulli arrival or $K = 1$ in periodic arrival process, they degenerate to the “generate-at-will” packet arrival model discussed in [9].

AoI is a metric reflecting the freshness of the information at the receiver, which is defined as the time interval between the current time slot and the generating slot of the information. We assume that the generating slot is equivalent to arrival slot and the AoI is measured at the beginning of each time slot. Let t_i denote the generating time of the latest received packet at the receiver by the beginning of the time slot t . Then, the AoI of this time slot, denoted by Δ_t , is given by

$$\Delta_t = t - t_i \quad (1)$$

according to the definition [1].

To investigate the impact of channel memory on AoI, we consider the GE channel model, which is described by a two-state Markov chain. The Markov chain has a “good” state and a “bad” state, which is denoted as state G and state B , with packet erasure probabilities p_e^G and p_e^B , respectively, where $p_e^G < p_e^B$. The GE channel transits from state G to B with probability p and transits from state B to G with probability r , and its memory is defined as

$$\eta = 1 - p - r. \quad (2)$$

The GE channel has a persistent memory for $0 < \eta < 1$, and the average packet erasure probability is

$$\bar{P}_e = \frac{r}{p+r} P_e^G + \frac{p}{p+r} P_e^B. \quad (3)$$

For simplicity, we assume $p_e^G = 0$, $p_e^B = 1$ in this letter and denote the channel by $GE(p, r)$ for convenience. The techniques and approaches can be extended to the case with general erasure probabilities.

III. THE AOI WITH BERNOULLI ARRIVAL MODEL

In this section, we derive the average AoI with Bernoulli arrival model under pLGFS and FCFS policy, respectively. For the pLGFS policy, a packet being served will be dropped out of the system if a new packet arrives at the transmitter. The preempted packet will not be transmitted again and the latest packet will be transmitted until it is preempted by the next arrival or delivered to the receiver successfully. Under the FCFS policy, the packets are served according to their generation time. A packet can be transmitted only when all the previous packets have been successfully delivered.

A. Average AoI under pLGFS policy

For the pLGFS policy, the AoI at the receiver is set to the age of the latest generated packet each time when the channel is in good state. Hence, the average AoI can be derived by analyzing the number of time slots between two good states and the age of the latest information at each good state. The result is summarized in Lemma 1.

Lemma 1. For a network with Bernoulli arrival packet at rate λ over GE erasure channel $GE(p, r)$, the average AoI under pLGFS policy is achieved and given by

$$\bar{\Delta}_{BL} = \frac{1}{\lambda} + \frac{p}{r(p+r)}. \quad (4)$$

Proof: Denote by N the random variable representing the AoI at the receiver. We have $N = n$ if the latest packet is generated n time slots before (including the current one), which occurs with the probability

$$P_N(n) = (1-\lambda)^{n-1}\lambda, n = 1, 2, \dots \quad (5)$$

Denote M as the number of time slots reaching the the next good state, we have

$$P_M(m) = \begin{cases} 1-p, & m = 1 \\ p(1-r)^{m-2}r, & m = 2, 3, \dots \end{cases} \quad (6)$$

Consider a segment as the time slots starting from good state until the next good state (exclusive). AoI increases by one within this segment and the expected accumulated age can be derived as

$$\begin{aligned} \Delta_{BL-M} &= \sum_{n=1}^{\infty} P_N(n) \sum_{m=1}^{\infty} \frac{m(2n+m-1)}{2} P_M(m) \\ &= \frac{1}{\lambda} \left(1 + \frac{p}{r}\right) + \frac{p}{r^2}. \end{aligned} \quad (7)$$

The expected number of time slots within the segment is:

$$\mu_M = \sum_{m=1}^{\infty} m P_M(m) = 1 + \frac{p}{r}, \quad (8)$$

and the average AoI can be derived as:

$$\bar{\Delta}_{BL} = \frac{\Delta_{BL-M}}{\mu_M}. \quad (9)$$

Substituting (7)-(8) into (9), we get the result in (4). ■

When $p = r = 0.5$, the channel $GE(p, r)$ is reduced to the random erasure channel with erasure probability $\bar{P}_e = 0.5$, and (4) reduces to the Lemma 1 derived in [10], i.e.,

$$\bar{\Delta}_{BL-0} = \frac{1}{\lambda} + 1. \quad (10)$$

To find the impact of channel memory, we consider the symmetric GE channel, i.e., $p = r = \frac{1-\eta}{2}$,

where η is the channel memory defined in (2). The average AoI in (4) reduces to a function of λ and η as

$$\bar{\Delta}_{BL-s} = \frac{1}{\lambda} + 1 + \frac{\eta}{1-\eta}. \quad (11)$$

Comparing (10) and (11), we find that under pLGFS policy, the channel memory brings the additional term in the AoI, i.e., $\frac{\eta}{1-\eta}$, which is monotonically increasing with η .

B. Average AoI under FCFS policy

Directly analyzing the AoI for FCFS policy under GE channel is rather challenging due to the coupling of the packet waiting time, service time with the queue status at the transmitter. To this end, we propose a novel analyzing approach by deriving the gap between the AoI curves for pLGFS and FCFS policy. An illustration diagram for the AoI evolution under pLGFS and FCFS policy is presented in Fig. 1.

Denote $T_i = t'_i - t_i$ as the E2E latency of the i th packet under FCFS, where t'_i denotes the receiving time of the i th packet. T_i is also referred to as ‘‘system time’’ of the i th packet in this literature. Define *inter-delivery time* $D_i = t'_{i+1} - t'_i, i \geq 1$ as the time interval between two successive deliveries at the receiver, during which the AoI is valued as the elapsed time from generating slot t_i .

If the FCFS policy is replaced by the pLGFS policy and a new packet arrives during the system time of the i th packet, i.e., from t_i to t'_i , the old packet will be preempted in pLGFS case. Moreover, if the preemptive behaviour occurs repeatedly before t'_i (exclusive), the effective packet that contributes to the AoI curve will be the last packet only, which is generated at $t_w = \max \{t | t \in [t_i, t'_i) \wedge t_j \neq \emptyset\}, j \geq i$. The AoI curve under pLGFS policy is valued at the time distance from it. Define *preemption time* $Y_i = t_w - t_i, i \geq 1$ the time interval between the generation slot of the preempted and effective preempting packets. It is observed that the preemptive policy introduces a constant AoI drop at value $Y_i \geq 1$, which lasts D_i time slots. On the other hand, if no packet arrives during the system time, the preemptive event will not occur. The AoI curve under pLGFS still plots the time interval from t_i , which is identical with the FCFS case. The corresponding preemption time is $Y_i = 0$.

To summarize, $Y_i = 0$ means no preemption while $Y_i \geq 1$ means a preemption during T_i , which contributes a drop to the FCFS AoI curve, lasting D_i time slots. The accumulated AoI gap of the i th inter-delivery is

$$\Delta_i = D_i Y_i, \quad (12)$$

and the expectation could be derived by averaging the geometric parts between two curves over time. Considering that there is no preemption before the first delivery t'_1 or after the last one $t'_{N(\tau)+1}$, the

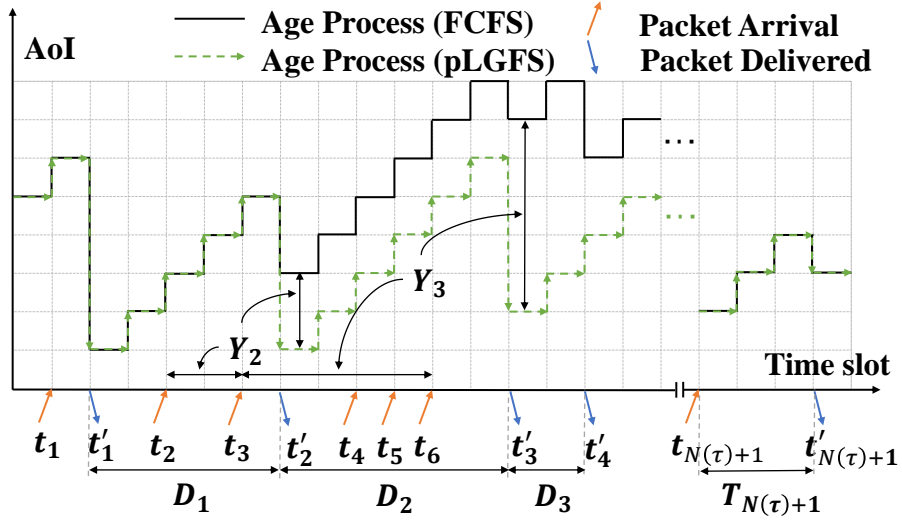


Fig. 1: An illustration example of relationship between AoI curves under FCFS and pLGFS policy. The 1st packet is not preempted, while the 2nd and 3rd packet are preempted with 2 and 5 time slots, which lasts for 6 and 2 slots, respectively.

average AoI gap could be expressed as

$$\bar{\Delta}_g = \lim_{\tau \rightarrow \infty} \frac{1}{\tau} \sum_{i=1}^{N(\tau)} \Delta_i = \lambda \mathbb{E}[DY], \quad (13)$$

where $N(\tau)$ denotes the number of deliveries by time τ .

Hence, the average AoI under FCFS could be written as

$$\bar{\Delta}_F = \bar{\Delta}_L + \lambda \mathbb{E}[DY], \quad (14)$$

where $\bar{\Delta}_L$ is the average AoI under pLGFS.

We then focus on the preemption time Y and inter-delivery time D in (14). For $Y_i \geq 1$, the packet being served under FCFS will be preempted under pLGFS. In this case, the random variable D only depends on the channel parameter, which is equal to the time it takes to transit from one good state to the next good state for the first time. It means that D is independent on Y when $Y_i \geq 1$. With the results in (6) and (8), we have

$$\mathbb{E}[D|Y \geq 1] = 1 + \frac{p}{r}. \quad (15)$$

Considering the fact that $Y_i = 0$ does not contribute to the expectation, we write

$$\mathbb{E}[D_i Y_i] = \mathbb{E}[D_i | Y_i \geq 1] \mathbb{E}[Y_i]. \quad (16)$$

Given a typical packet transmission process, whose system time is $T_i = t$. The meaningful value of

$Y_i = y$ ranges from 1 to $(t - 1)$, resulting in

$$\mathbb{E}[Y_i] = \sum_{t=2}^{\infty} \left(\sum_{y=1}^{t-1} y P_{Y|T}(y | t) \right) P_T(t). \quad (17)$$

The probability mass function (PMF) of the system time T is given by

$$P_T(t) = \begin{cases} \frac{r - (p + r)\lambda}{(p + r)(1 - \lambda)}, & t = 1 \\ \frac{p}{p + r} \frac{r - (p + r)\lambda}{(1 - \lambda)^2} \left(\frac{p + (1 - p - r)(1 - \lambda)}{1 - \lambda} \right)^{t-2}, & t \geq 2 \end{cases}. \quad (18)$$

Proof: Please refer to Appendix A. ■

For a given system time t , $Y_i = y$ means a preemption occurs with y slots after its generating slot, which requires no packet arrival after the preemption. We derive the conditional PMF of Y given T , i.e.,

$$P_{Y|T}(y|t) = \begin{cases} (1 - \lambda)^{t-1}, & y = 0 \\ \lambda(1 - \lambda)^{t-1-y}, & y = 1, 2, \dots, t - 1 \end{cases}. \quad (19)$$

With the results of (4), (15) - (19) substituted into (14), we derive the average AoI of Bernoulli arrival packets under the FCFS policy, as presented in Lemma 2.

Lemma 2. For a network with Bernoulli packet arrival at rate λ over GE erasure channel $GE(p, r)$, the average AoI under FCFS queue policy is achieved and given by

$$\bar{\Delta}_{BF} = \frac{1}{\lambda} + \frac{p}{r} \left[\frac{1}{p + r} + \frac{\lambda^2}{(r - (p + r)\lambda)(r - (p + r)\lambda + \lambda)} \right]. \quad (20)$$

When $p = r = 0.5$, the channel $GE(p, r)$ reduces to the random erasure channel with i.i.d. erasure probability $\bar{P}_e = 0.5$, and (20) is reduced to the Lemma 1 derived in [10], i.e.,

$$\bar{\Delta}_{BF-0} = \frac{1}{\lambda} + 1 + \frac{4\lambda^2}{1 - 2\lambda}. \quad (21)$$

Specially, the average AoI achieved by the FCFS policy over symmetric GE channel with memory η is given by

$$\bar{\Delta}_{BF-s} = \frac{1}{\lambda} + 1 + \underbrace{\frac{\eta}{1 - \eta}}_{\bar{\Delta}_1(\eta)} + \frac{4\lambda^2}{1 - 2\lambda} \underbrace{\frac{1}{(1 - \eta)(1 - (1 - 2\lambda)\eta)}}_{\bar{\Delta}_2(\eta)}. \quad (22)$$

It is observed that when $\eta \in [0, 1)$, $\bar{\Delta}_{BF-s}$ converges if and only if $\lambda \in (0, 0.5)$. This is consistent with expectation since the AoI will grow to infinity if the packet arrival rate exceeds the channel capacity, which is 0.5 here. For a given parameter λ , the additional AoI term includes two parts, satisfying $\bar{\Delta}_1(\eta) \geq 0$ and $\bar{\Delta}_2(\eta) \geq 1$. The former is the same as that under pLGFS policy, while the latter is the additional term related to the packet arrival rate λ . Furtherly, these two additional terms are both non-decreasing function of η . For networks operate close to the capacity, we have $(1 - 2\lambda) \rightarrow 0$. The additional AoI penalty, $\bar{\Delta}_2(\eta)$, is proportional to the factor $\frac{1}{1 - \eta}$, which grows faster as compared with that under pLGFS.

IV. THE AOI WITH PERIODIC ARRIVAL MODEL

In this section, we consider the transmission over the networks with periodic arrival model, where the packets are generated every K time slots.

A. Average AoI under pLGFS policy

The average AoI of periodic arrival packets under the pLGFS policy is presented in Lemma 3.

Lemma 3. For a network with periodic arrival parameter K over GE erasure channel $GE(p, r)$, the average AoI under pLGFS policy is achieved and given by

$$\bar{\Delta}_{pL} = \frac{K+1}{2} + \frac{p}{r(p+r)} \quad (23)$$

Proof: Note that we have derived the corresponding result of Bernoulli arrival case in section III-A, and the only difference between these two scenarios is the PMF of random variable N .¹ The packet is due to arrive at the transmitter every K slots, which constraints the value of n . We have

$$P_N(n) = \frac{1}{K}, n = 1, 2, \dots, K, \quad (24)$$

leading to the derivation of the expected accumulated age

$$\Delta_{pL-M} = \frac{1}{2} \left(1 + \frac{p}{r}\right) (K+1) + \frac{p}{r^2}. \quad (25)$$

Substituting (25) into RHS of (9), we get the result in (23). ■

When $p = r = 0.5$, i.e., $GE(p, r)$ reduces to random erasure channel with erasure probability $\bar{P}_e = 0.5$, (23) reduces to the result of P-LCFS D/M/1/0 model in [4], but in discrete correspondence, i.e.,

$$\bar{\Delta}_{pL-0} = \frac{K+1}{2} + 1. \quad (26)$$

The average AoI achieved by the pLGFS policy over symmetric GE channel with memory η is given by

$$\bar{\Delta}_{pL-s} = \frac{K+1}{2} + 1 + \frac{\eta}{1-\eta}. \quad (27)$$

We note that the additional AoI due to channel memory for periodic arrival is the same as that for Bernoulli arrival. Besides, for packet arrival process with the same average rate, i.e., $\lambda = \frac{1}{K}$, periodic model should achieve smaller AoI than Bernoulli model by a factor of $\frac{K-1}{2}$.

B. Average AoI under FCFS policy

The relationship between the achievable AoI under FCFS and pLGFS policy still works for periodic arrival model. However, the PMF of preemption time depends on that of system time, which is intractable

¹The notations in this subsection share the corresponding meanings with those in section III-A.

for the periodic packet arrival model. Hence, we derive the AoI by its relation with the E2E latency in this case, which is solved numerically in Algorithm 1.

Reference [1] has proved that with periodic inter-arrival time K , the average AoI under FCFS policy has a constant gap with the E2E latency, for any distribution of the service time. Mathematically, we have

$$\bar{\Delta}_{pF} = \mathbb{E}[T] + \frac{K-1}{2}. \quad (28)$$

Hence, deriving the average AoI is equivalent to deriving the expected E2E latency. Denote by $t_{n,G}$ and $t_{n,B}$ the expected E2E latency experienced by a packet which arrives when the transmitter has queue length n , and the channel is in good and bad state, respectively. According to the analysis in our previous work [8], $t_{n,G}$ and $t_{n,B}$ can be explicitly expressed as

$$\begin{aligned} t_{n,G} &= 1 + n \left(1 + \frac{p}{r}\right), \\ t_{n,B} &= 1 + \frac{1}{r} + n \left(1 + \frac{p}{r}\right). \end{aligned} \quad (29)$$

Further denote by $p_{n,G}$ and $p_{n,B}$ the probability for the queue size at the transmitter being n , with the channel in good and bad state, respectively. The expected E2E latency can be expressed as

$$\mathbb{E}[T] = \sum_{n=0}^{\infty} t_{n,G} p_{n,G} + t_{n,B} p_{n,B}, \quad (30)$$

The key for deriving $\mathbb{E}[T]$ is to derive the probability distributions $\{p_{n,G}, p_{n,B}, n = 0, 1, \dots\}$. Consider a typical packet, assuming that it arrives when the queue length is i , the probability that the next packet arrives when the queue length being n is equivalent to the probability that $(i+1-n)$ packets has been delivered during the K time slots. Denote by $P(K, n, s'|s)$ the probability that n packets been delivered in K consecutive time slots², with the channel state at the last time state being s' given the first being s , where $s, s' \in \{G, B\}$. Then, we can write the following recursive formulas for deriving $p_{n,G}$ and $p_{n,B}$:

$$p_{n,s} = \begin{cases} \sum_{s' \in \{G, B\}} \sum_{i=0}^{K-1} p_{i,s'} \sum_{j=i+1}^K P(K, j, s|s'), & n = 0 \\ \sum_{s' \in \{G, B\}} \sum_{i=n-1}^{K+n-1} p_{i,s'} P(K, i+1-n, s|s'), & n \geq 1 \end{cases}, \quad (31)$$

Theoretically, the values of $\{p_{n,G}, n = 0, 1, \dots\}$ and $\{p_{n,B}, n = 0, 1, \dots\}$ can be solved by combining (31) with the factor

$$\sum_{n=0}^{\infty} (p_{n,G} + p_{n,B}) = 1. \quad (32)$$

However, solving the above equations directly is rather challenging since the number of variables goes

²The value of $P(K, n, s'|s)$ can be calculated in a recursive manner by following the formulas given in [11], which is omitted here for brevity.

to infinity. By observing the recursive formula in (31), we can deduce the following relationship:

$$p_{n+1,s} = \beta p_{n,s}, \text{ for } n \geq 1, s \in \{G, B\}, \quad (33)$$

where the factor $\beta \in (0, 1)$ could be solved by substituting (33) into (31) with $n \geq 2$ (Line 4 in Algorithm 1). Further simplifying the equations in (31) when $n = 1$ renders

$$p_{1,B} = \beta p_{0,B}, \quad (34)$$

which means that the exponential trend of $p_{n,s}$ beginning with $n = 0$ for state B while $n = 1$ for state G . Next, we only need to solve for $p_{0,G}, p_{1,G}$ and $p_{0,B}$ (Line 5 in Algorithm 1), which can be obtained by the first two equations in the recursive formula (31), together with (32). Specifically,

$$\mathbf{A}_{3 \times 3} = \begin{pmatrix} 1 - \sum_{j=1}^K P(K, j, G|G), & - \sum_{i=0}^{K-1} \beta^i \sum_{j=i+1}^K P(K, j, G|B), & - \sum_{i=0}^{K-2} \beta^i \sum_{j=i+2}^K P_{GE}(K, j, G|G) \\ \sum_{j=1}^K P(K, j, B|G), & \sum_{i=0}^{K-1} \beta^i \sum_{j=i+1}^K P(K, j, B|B) - 1, & \sum_{i=0}^{K-2} \beta^i \sum_{j=i+2}^K P_{GE}(K, j, B|G) \\ 1, & \frac{1}{1-\beta}, & \frac{1}{1-\beta} \end{pmatrix}, \quad (35)$$

$$\mathbf{b} = \begin{pmatrix} 0 & 0 & 1 \end{pmatrix}^T. \quad (36)$$

Given the values of $p_{0,G}, p_{1,G}, p_{0,B}$ and β , we can obtain the general transmitter queue size and channel state distribution from (33) and (34). Substituting them back into (30) and then into (28), we derive the average AoI with periodic arrival under FCFS policy as

$$\bar{\Delta}_{pF} = p_{0,G} + \frac{1}{r(1-\beta)} \left(1 + \frac{r + \beta p}{1-\beta} \right) p_{0,B} + \frac{1}{1-\beta} \left(1 + \frac{p+r}{r(1-\beta)} \right) p_{1,G} + \frac{K-1}{2}. \quad (37)$$

Algorithm 1 average AoI numerical algorithm

- 1: **Input:** K, p, r ;
 - 2: **Output:** AoI ;
 - 3: Calculate $P(K, i, s'|s)$ recursively for $i = 0, 1, \dots, K$ and $s, s' \in \{G, B\}$;
 - 4: Solve β with $\frac{\beta - \sum_{i=0}^K \beta^i P(K, i, B|B)}{\sum_{i=0}^K \beta^i P(K, i, G|B)} = \frac{\sum_{i=0}^K \beta^i P(K, i, B|G)}{\beta - \sum_{i=0}^K \beta^i P(K, i, G|G)}$, satisfying $\beta \in (0, 1)$;
 - 5: Solve $\mathbf{p} \triangleq (p_{0,G} \ p_{0,B} \ p_{1,G})^T$ with $\mathbf{A}\mathbf{p} = \mathbf{b}$;
 - 6: Return the average AoI $\bar{\Delta}_{pF}$ with Eq (37).
-

V. NUMERICAL RESULTS

In this section, numerical results are provided to verify the analytical results for Bernoulli and periodic arrival under FCFS or pLGFS policy over GE channel. The simulation results are obtained by averaging

10^3 iterations and the network runs for 10^4 time slots for each iteration³.

Fig.2 compares the achievable average AoI under FCFS and pLGFS policies. The analytical AoI of FCFS with Bernoulli arrival and pLGFS with Bernoulli and periodic arrival are obtained by evaluating (22), (11) and (27), respectively. It shows that the simulation results match very well with our analytical results in Section III and IV. The pLGFS policy achieves lower AoI than the corresponding FCFS policy, at the cost of lower long-term average throughput. The average AoI of each scenario increases with channel memory monotonically. We deliberately set the same packet arrival rate, i.e., $\lambda = \frac{1}{K} = \frac{1}{3}$. It is observed that periodic arrival model achieves lower AoI than Bernoulli arrival model. Further, the gap is $\frac{K-1}{2}$ for pLGFS according to the analysis. With memory increasing, the curve slope becomes steeper, and the average AoI under FCFS grows faster than that under pLGFS policy.

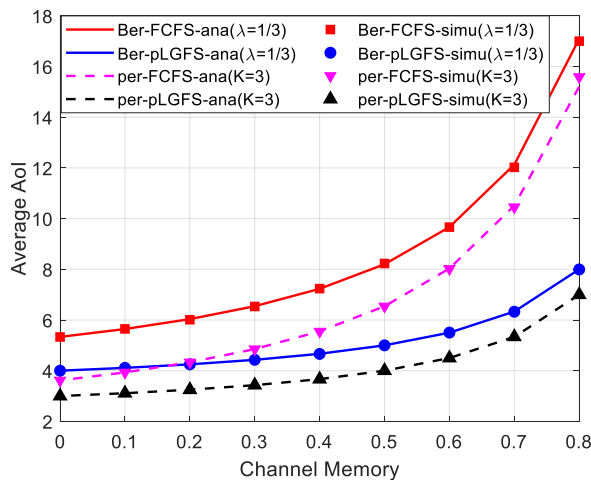


Fig. 2: The impact of channel memory on the average AoI of various simulation results, with packet arrival rate $\lambda = \frac{1}{K} = \frac{1}{3}$ and $p = r = \frac{1-\eta}{2}$ for GE channel.

VI. CONCLUSION

In this letter, we investigate the impact of channel memory on the data freshness. The closed-form expression of the average AoI under FCFS with Bernoulli arrival and that under pLGFS with Bernoulli and periodic arrival are derived. For FCFS with periodic arrival, we propose an efficient numerical algorithm to calculate the average AoI. The analytical results reveal that the average AoI under pLGFS increases with channel memory η at $\frac{\eta}{1-\eta}$, while that under FCFS increases even faster with channel memory. The analysis approaches introduced in this letter could be applied for deriving the average AoI under other

³The MATLAB codes for producing the results are available on Github at <https://github.com/OUTMAN666/age-of-information-over-GE-channel>.

network settings, and the analytical impact of channel memory could guide the design of more efficient AoI-optimal policy for networks with channel memory.

APPENDIX A

PROOF OF PMF OF SYSTEM TIME

Consider a typical segment of time, during which k information packets entered the queue with probability $P_K(k)$. Denote $F_N(n)$ as the probability that the number of time slot being n , where $n \geq k$, we have

$$P_K(k) = \sum_{n=k}^{\infty} \binom{n}{k} \lambda^k (1-\lambda)^{n-k} F_N(n), k = 0, 1, 2, \dots \quad (38)$$

Denote $g(z)$ as the probability generating function (PGF) of $P_K(k)$, furtherly

$$\begin{aligned} g(z) &= \sum_{k=0}^{\infty} \left(\sum_{n=k}^{\infty} \binom{n}{k} \lambda^k (1-\lambda)^{n-k} F(n) \right) z^k \\ &= \sum_{n=0}^{\infty} (\lambda z + 1 - \lambda)^n F(n). \end{aligned} \quad (39)$$

Let $y = \lambda z + 1 - \lambda$, then the PGF of $F_N(n)$ could be written as $\phi(y) = \sum_{n=0}^{\infty} F_N(n) y^n$. We have

$$g(z) = \phi(y) = \phi(\lambda z + 1 - \lambda) \quad (40)$$

For a system with FCFS queue discipline, the number of packets that the n th packet see left behind in the queue when it departs will be the number of arrivals that occurred while it was in the system [12], so does the PGF.

In the previous work [8], we have got the steady state probability distribution of G_n and B_n , corresponding to n packets in the queue when a packet arrives at the transmitter with channel state being good and bad state respectively, where $n = 0, 1, 2, \dots$. We derive the PGF of the number of packets in the queue by combining the states two by two whose queue length dimensions are the same, i.e.,

$$g(z) = G_0 - C + \frac{B_0 + C}{1 - \frac{p\lambda + (1-p-r)\lambda(1-\lambda)}{(1-\lambda)(r+(1-p-r)\lambda)} z}, \quad (41)$$

where

$$G_0 = \frac{r}{p+r} \left(1 - \frac{p\lambda}{r(1-\lambda)} \right), \quad (42)$$

$$B_0 = \frac{p}{p+r} \left(\frac{r - (p+r)\lambda}{(1-\lambda)(r+(1-p-r)\lambda)} \right), \quad (43)$$

$$C \triangleq \frac{pG_0}{p + (1-p-r)(1-\lambda)}. \quad (44)$$

Substitute (41) - (44) and $z = \frac{y+\lambda-1}{\lambda}$ in (40), we have

$$\phi(y) = G_0 - C + \frac{(B_0 + C)(r + (1 - p - r)\lambda)}{1 - \frac{p+(1-p-r)(1-\lambda)}{1-\lambda}y}. \quad (45)$$

Together with the relationship that

$$P_T(n) = F_N(n - 1), \quad (46)$$

we derive the final result in (18).

REFERENCES

- [1] S. Kaul, R. Yates, and M. Gruteser, "Real-time status: How often should one update?," in *2012 Proceedings IEEE INFOCOM*, pp. 2731–2735, IEEE, 2012.
- [2] V. Tripathi, R. Talak, and E. Modiano, "Age of information for discrete time queues," *arXiv preprint arXiv:1901.10463*, 2019.
- [3] A. M. Bedewy, Y. Sun, and N. B. Shroff, "Optimizing data freshness, throughput, and delay in multi-server information-update systems," in *2016 IEEE International Symposium on Information Theory (ISIT)*, pp. 2569–2573, 2016.
- [4] Y. Inoue, H. Masuyama, T. Takine, and T. Tanaka, "A general formula for the stationary distribution of the age of information and its application to single-server queues," *IEEE Transactions on Information Theory*, vol. 65, no. 12, pp. 8305–8324, 2019.
- [5] E. N. Gilbert, "Capacity of a burst-noise channel," *The Bell System Technical Journal*, vol. 39, no. 5, pp. 1253–1265, 1960.
- [6] L. Huang and L. P. Qian, "Age of information for transmissions over Markov channels," in *GLOBECOM 2017 - 2017 IEEE Global Communications Conference*, pp. 1–6, 2017.
- [7] G. Yao, A. M. Bedewy, and N. B. Shroff, "Age-optimal low-power status update over time-correlated fading channel," in *2021 IEEE International Symposium on Information Theory (ISIT)*, pp. 2972–2977, 2021.
- [8] Q. Guan and X. Xu, "Impact of channel memory on the end-to-end communication latency," in *2021 IEEE Globecom Workshops (GC Wkshps)*, pp. 1–6, 2021.
- [9] Y. Sun, E. Uysal-Biyikoglu, R. D. Yates, C. E. Koksal, and N. B. Shroff, "Update or wait: How to keep your data fresh," *IEEE Transactions on Information Theory*, vol. 63, no. 11, pp. 7492–7508, 2017.
- [10] X. Xu and Y. Zeng, "Packet encoding for data freshness and transmission efficiency with delayed feedback," in *2022 IEEE Wireless Communications and Networking Conference (WCNC)*, pp. 1611–1616, 2022.
- [11] G. Hasslinger and O. Hohlfeld, "The Gilbert-Elliott model for packet loss in real time services on the internet," in *14th GI/ITG Conference - Measurement, Modelling and Evaluation of Computer and Communication Systems*, pp. 1–15, 2008.
- [12] S. K. Bose, *An introduction to queueing systems*. Springer Science & Business Media, 2013.