

Bengali Common Voice Speech Dataset for Automatic Speech Recognition

Samiul Alam^{1*,2}, Asif Sushmit^{1*,3}, Zaowad Abdullah¹, Shahrin Nakkhatra¹, MD. Nazmuddoha Ansary¹, Syed Mobassir Hossen¹, Sazia Morshed Mehnaz¹, Tahsin Reasat^{1,4}, Ahmed Imtiaz Humayun^{1,5}

¹Bengali.AI ²Michigan State University ³RPI ⁴Vanderbilt University ⁵Rice University
*equal contribution

Abstract

Bengali is one of the most spoken languages in the world with over 300 million speakers globally. Despite its popularity, research into the development of Bengali speech recognition systems is hindered due to the lack of diverse open-source datasets. As a way forward, we have crowdsourced the *Bengali Common Voice Speech Dataset*, which is a sentence-level automatic speech recognition corpus. Collected on the *Mozilla Common Voice platform*, the dataset is part of an ongoing campaign that has led to the collection of over 400 hours of data in 2 months and is growing rapidly. Our analysis shows that this dataset has more speaker, phoneme, and environmental diversity compared to the OpenSLR Bengali ASR dataset, the largest existing open-source speech dataset. We present insights obtained from the dataset and discuss key linguistic challenges that need to be addressed in future versions. Additionally, we report the current performance of a few Automatic Speech Recognition (ASR) algorithms and set a benchmark for future research.

1. Introduction and Related Work

With the growing popularity of virtual platforms for communication and learning, the field of speech analysis has seen widespread development. Apart from large contributions in technology accessibility through voice assistants (1), Text-to-Speech (TTS) and Automatic Speech Recognition (ASR) (also known as Speech-To-Text (STT)) have ubiquitous applications across the spectrum, e.g., Automatic Speech Assessment for language education (2), language disorder assessment and therapy (3), and assistive agriculture (4). Despite extensive theoretical and computational studies done on modeling Bengali phonology and the advent of powerful deep learning networks, language technologies like the ones mentioned above have not been realized for Bengali due to the lack of datasets.

Large deep learning methods require large-scale annotated datasets, a requirement that is made even more imperative by the diverse accents and unique morphology of the Bengali language. Over the years, various datasets have been assembled each having its own limitations regarding speaker diversity, size and public availability (5; 6; 7; 8). To facilitate research in this direction, the Bengali Common Voice Speech Dataset: a collection of over 400 hours of transcribed audio recordings of spoken Bengali sentences was gathered from all over Bangladesh and India via community outreach and collaborative ef-

forts. The corpus is part of an ongoing campaign to collect audio recordings by Bengali.AI with a target of reaching 5000 hours of collected audio by 2023. In this paper, we discuss some important linguistic challenges for developing Bengali speech recognition systems and illustrate key insights observed from the data collected. We also tabulate the benchmark Word error rate (*WER*) of an HMM-GMM based ASR algorithm. This paper will be collaboratively updated with newer benchmarks and for newer releases of the Common Voice Speech Corpus.

The paper is organized as follows: Section 2 explains the key features of Bengali speech and the challenges they pose in the design of ASR and TTS systems. Section 3 describes the dataset in detail and illustrates important statistics showcasing the diversity of the data. Section 4 further analyses the data by comparing its feature diversity with Google’s OpenSLR dataset. Section 5 shows preliminary benchmarks on the dataset for baseline models. Finally, Section 6 presents our conclusions. For the ease of non-bengali readers, we have supplied the IPA transliterations (9) of Bengali words.

2. Linguistic Challenges in ASR and TTS modeling of Bengali

Bengali is a language with high linguistic complexity due to its writing system, inflectional morphology, gemination, and a high number of diphthongs and triphthongs (10). It is crucial to know these concepts to effectively design and deploy speech recognition algorithms for the Bengali language. In this section, we discuss some of the unique linguistic challenges that Bengali poses, compared to Romance or Germanic languages.

2.1. Grapheme Diversity

One of the most unique features of the Bengali writing system is the use of orthographic syllables as graphemes. All alpha-syllabary or *Abugida* languages follow this trait. We therefore interchangeably use the terms *orthographic syllables* and *graphemes* throughout this text. For Bengali, the number of unique orthographic syllables and hence, the number of possible words are very high. Bengali contains over 1300 commonly used orthographic syllables whereas ~ 15 million graphemes are theoretically possible (11). Many of these occur in rare words and also due to spelling mistakes(12). The Bengali Unicode system also allows duplicate ways to encode the same alphabet, which requires normalization (13) and also adds to the complexities surrounding grapheme diversity in text.

In Bengali, there are 168 commonly used grapheme roots, and of them, 80 are consonant conjuncts consisting of 2, 3 or higher consonants. A high number of consonant conjuncts leads to challenges in grapheme to phoneme mapping which depreciates the performance of TTS models, as the same conjuncts often have different pronunciations based on the context. For example, সূক্ষ্মিত is pronounced [ʃuʃmiʃ] whereas বিক্ষিত is pronounced [biʃʃiʃiʃ], despite having the same grapheme ক্ষি in the middle.

2.2. Inflection

In linguistics, *inflection* is the process of forming word variants using a template word based on grammar (e.g., variants based on tense) or sentence semantics (e.g., variants based on the gender of nouns) (14). Like most other Indic languages, Bengali is highly inflectional. Nouns have over 100 case markers/inflection variations and verbs are found to have more than 40 unique variations. This makes the number of whitespace-tokenized ‘words’ occur very frequently, on the level of tens of millions compared to 188k words in English (15). Bengali morphology also allows compound word creation which leads to a high number of Out of Vocabulary (OOV) words. This issue causes challenges in TTS and ASR modeling, especially for low-resource languages (16) like Bengali.

2.3. Aspiration

Aspirated consonants খ, ঘ, ছ, ঝ, ঠ, ঢ, থ, ধ, ফ, ভ [k^h, g^h, c^h, j^h, t^h, d^h, t̪^h, d̪^h, p^h, b^h] are consonants followed by voiceless glottal fricatives (17). Aspirated consonants pose challenges both in ASR and TTS modeling due to their subtlety in pronunciation. This, coupled with exaggerated aspiration in breathy voices, makes modeling real-life speech extremely hard (18). Moreover, people with strong accents as well as non-native speakers, pronounce these aspirated sounds differently and hence make generalization difficult. (19).

2.4. Gemination

Gemination is an instance of uttering a consonant for a longer period of time due to its consecutive use in a sentence (20). For example, বাদ দাও[baɖ d̪aʊ] may also be pronounced বাদ্দাও[baɖd̪aʊ], where the latter is geminated; the difference between these two pronunciations are subtle in natural speech but are quite different in text. In Bengali, gemination may occur both in-between words and within a single word. But it is more common between two consecutive words which start and end with similar phonemes. While this linguistic feature poses challenges in determining word boundaries for ASR algorithms for many languages (21), the modeling challenges posed for Bengali are not studied in detail in the literature. Roughly, gemination in Bengali can be summarized into the following bins:

1. Assimilation: Two sounds in a word can influence each other and reach a level of equality. জন্ম>জন্ম[jɔnmɔ > jɔmmɔ], কান্না>কান্না[kãɖna > kanna]
2. Progressive Assimilation: Here the previous sound of the word influences the later sound of the word. পদ্ম>পদ্ম[pɔɖɖɔ > pɔɖɖɔ], লগ্ন>লগ্ন[logno > loggo]

3. Long Consonant: Sometimes to emphasize something the sounds are uttered dually in a word. পাকা>পাকা[paka > pakka], সকাল>সকাল[ʃɔkal > ʃɔkkal]
4. Deletion of Consonant Diacritic R (র): Due to the deletion of র-কার the later sound of the previous র is often uttered as a double sound of that consonant. তক>তক[tɔrko > tɔkko], মারল>মাল্ল[marlo > mallo], করলাম>কল্লাম[korlam > kollam]
5. Juncture: Juncture in Bengali follows some specific rules and forms gemination, such as: বন + গুষ্ণি = বনৌষ্ণি [bɔn + oʃɔɖ^hi = bɔnɔu[ɔɖ^hi] মরু + উদ্যান = মরুদ্যান[moru + uɖɖan = moruɖɖan] বিপদ+জাল = বিপজ্জাল [bipɔɖ + jal = bipɔjʃal]

2.5. Diphthong and Triphthong

A *diphthong* is a combination formed with two vowels in a single syllable. The semi-vowel of the diphthong is placed either on the onset or the coda of the syllable. Thus diphthong is the linguistic summation of vowels plus glide. The exact number of Bengali diphthongs has varied from expert to expert (22). According to Sukumar Sen (23), there are only two Bengali diphthongs with characters assigned to them (ঐ, ঔ). Suniti Kumar Chatterjee (24) had however pointed out 25 diphthongs while Muhammad Abdul Hai had opined that the Bengali language can have up to 31 diphthongs among which 19 are regular and 12 are irregular (25). Bengali has a far higher number of diphthongs than English (which has 10 diphthongs).

Similarly, we have triphthongs. “Triphthong is a combination of three vowel sounds where the first vowel glides to the second which again glides to the third.” as defined by Barman et al. (26). In English, there are 5 Triphthongs whereas Bengali has 17.

Apart from these, there are many grammatical features in Bengali that make ASR and TTS modeling hard for Bengali. Brahmic Schwa deletion ambiguity (27) i.e. many Bengali words dropping their trailing vowel sounds are hard to model without a proper language model. The high number of homographs in Bengali (28) (29) are also related to this issue making modeling more challenging. Nasality (30) is often skipped while pronouncing by native Bengali speakers, but their written forms often explicitly include the markers of it. Also, it has been reported (31) that the phonological phrases in Bengali correspond to no plausible constituent of syntactic representation. This creates problems in modeling speech ensuring proper prosody. In Bengali speech, the phone(s) associated with glide (semivowel, glide, or semi-consonant is a sound that is phonetically similar to a vowel sound but functions as the syllable boundary), diphthongs (sound formed by the combination of two vowels) and emphasisers (modifier that serves to enhance and give additional emotional context) often sound similar. As these have different written representations, distinguishing them often requires high contextual information and this also poses challenges while modeling (32).

One unavoidable instance in Bangla sentence structure is the changing position of morpheme in the sentence. Bangla Language follows the SOV pattern of sentence structure. But in literature or daily life discourse, this pattern often alters to SVO, VSO, and OVS. (33) (34)

4. Comparison with Available Datasets

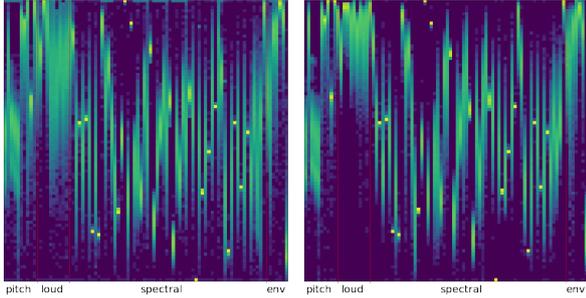


Figure 2: Geneva feature (39) log-histograms for 10,000 samples from the Common Voice Bengali Dataset (left) and the OpenSLR Bengali ASR Dataset (right). The feature set consists of pitch, loudness, spectral and envelope features separated via red markers in the figures. Common Voice has long-tailed distributions compared to OpenSLR due to higher speaker and environment diversity.

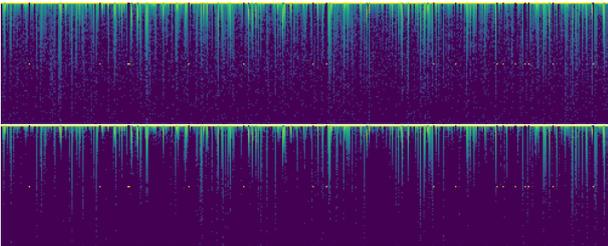


Figure 3: Log-histograms of word recognition features for 10,000 samples from the Common Voice Bengali Dataset (top) and the OpenSLR Bengali ASR Dataset (bottom). Features are extracted using a SpeechVGG (40) pre-trained on 1000 hours of English speech. The top histograms portray higher feature variability which is indicative of greater phoneme diversity in the Common Voice dataset.

To date, there are 5 datasets of continuous sentence/utterance level speech corpus of Bengali language that can be found in the literature that contains more than 100 hours of speech data. Of those only 2 are publicly available. Also, the dataset mentioned in (41) is synthetically prepared. In Table 2 comparative information is shown on the prominent speech corpus and information on the newly released 399 hour Common Voice Bengali speech corpus, which is the *largest* and most *diversified* publicly available speech corpus for Bengali.

To assess the feature diversity of the speech in the Common Voice dataset, we extract Geneva speech features (39) and SpeechVGG word recognition features (40) for 10,000 samples of the Common Voice dataset and compare it with the OpenSLR speech dataset. In Fig. 2 and Fig. 3, we present visualizations that show higher diversity of features in the Common Voice dataset. Here we discuss some of the feature differences which we find

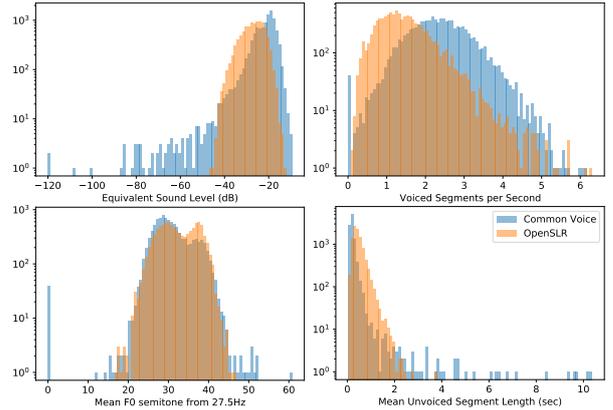


Figure 4: Feature Histogram comparisons between Common Voice and OpenSLR datasets. Common Voice has varying sound levels due to uncontrolled recording environments compared to OpenSLR. It has higher average voice segments per second possibly due to the fixed recording time constraint on the collection portal.

insightful from our analysis. We also provide histograms for the features in Fig. 4.

Voiced Segments Per Second. The minimum number of voiced segments per second in OpenSLR samples is 6.31 with a median of 1.36. Whereas, for Common Voice, the minimum is 0 and the median is 2.35. In Fig. 4-top-right, we can see a considerable number of samples with 0 voiced segments per second. This shows that Common Voice could have silent recordings or recordings with no vocalization, indicating a requirement for further curation. The median however for Common Voice is higher than OpenSLR, indicating that the sentences used in Common Voice require a higher frequency of vocalization compared to the phrases used in OpenSLR.

Equivalent sound level DB. We see that the sound level for OpenSLR has a lower dynamic range than Common Voice; with an upper and lower limit of -12 DB to -46 DB for OpenSLR and -9 DB to -120 DB for Common Voice. This is due to the fact that OpenSLR was acquired in a studio setting whereas Common Voice is crowdsourced from uncontrolled environments.

Mean Unvoiced Segment Length. The mean unvoiced segment length for non-empty recordings, quantifies the pauses in vocalization while recording. While Common Voice samples have smaller pauses compared to OpenSLR.

Mean F0 semitone. The Mean F0 semitone from 27.5Hz is the perceived pitch of recordings and varies based on gender and age. In Fig. 4., we can see that it is bimodal for the OpenSLR dataset but for Common Voice, one of the modes are larger than the other. The reason for this could possibly be the higher gender imbalance in Common Voice compared to OpenSLR, with a larger fraction of masculine (lower pitch) recordings.

5. Benchmarking

We benchmark the dataset for ASR using Kaaldi (HMM-GMM) (43). We use the train-val-test splits provided

Table 2: Comparison of Common Voice-Bengali Speech Corpus with other existing speech corpus. Detail on the other datasets taken from (42)

Year	Corpus Name	Size of Dataset	No. of Speakers	Availability
2012	IARPA-babel103b-v0.4b (5)	215 hours	Not known	Not Publicly Available. Access per application.
2014	LDC-IL (6)	138 hours	240 males, 236 females	Not Publicly Available.
2018	OpenSLR (7)	229 hours	323 males, 182 females	Publicly Available under Attribution-ShareAlike 3.0 Unported (CC BY-SA 3.0 US)
2020	Bengali Speech Corpus from Publicly Available Audio & Text (41)	960 hours	268 males, 251 females	Not Publicly Available
2020	Subak.ko (8)	241 hours	33 males, 28 females	Not Publicly Available.
2022	Common Voice Bengali Corpus V9.0	399 hours	20k Speakers	Publicly Available Under CC-0 Public Domain Attribution.

in the original form of the Common Voice dataset, but include the unvalidated data into the training pipeline and also de-duplicate the sentences from the splits. The models will be progressively retrained, fine-tuned, and released in the aforementioned Github repo.

5.1. Dataset Split

The validated part of this dataset (56 hours) has been split into roughly 80% training, 10% testing, and 10% validation data. This is the train-test-eval split from the Mozilla Common Voice portal. While performing the split, it has been ensured that one speaker’s recording is only in one split to make a fair evaluation of speaker generalization(36). While studying the dataset we propose the Bengali.AI Split for experimenting with the full (399 hours) dataset, which includes both the human validated and unvalidated data. For this, we have included all the non-validated data in the training set in our split while ensuring that no sentences that are present in the test set are present in the training set.

5.2. Result

For benchmarking the results we are using Word Error Rate (WER) and Character Error Rate (CER) as metrics. We are using Kaldi (HMM-GMM) model with standard hyper-parameters without any aggressive optimization techniques. We obtain 24.4 WER for this model. We also evaluate the performance of a benchmark model (Wev2vec2) trained on the OpenSLR dataset (44). On the test split of the Mozilla Common Voice Bengali dataset, the model shows 39.291 WER and 13.856 CER. We will progressively fine-tune these models and update them in the next versions of this paper. We release the training and evaluation codes and the custom splits here: <https://github.com/BengaliAI/commonvoice-bangla>.

6. Conclusion

In this paper, we reported the linguistic challenges of Bengali speech modeling and presented our analysis of the feature diversity and modeling on the 399 hour Bengali Common Voice Speech dataset. We show that this is the largest publicly available sentence-level ASR dataset, with greater feature diversities compared to its contemporaries. This dataset is promising for federated learn-

ing and many types of experimental modeling which are needed to be explored in the future. The dataset is under development, so eradicating the currently existing issues such as gender bias, corpus sentence structure diversification, etc will be needed in the next version of the dataset.

7. Acknowledgements

We thank the Mozilla foundation and their Common Voice project for the data collection framework.

References

- [1] T. Ammari, J. Kaye, J. Y. Tsai, and F. Bentley, “Music, search, and iot: How people (really) use voice assistants.” *ACM Trans. Comput. Hum. Interact.*, vol. 26, no. 3, pp. 17–1, 2019.
- [2] C. A. Chapelle and E. Voss, “20 years of technology and language assessment in language learning & technology,” *Language Learning & Technology*, vol. 20, no. 2, pp. 116–128, 2016.
- [3] P. Kitzing, A. Maier, and V. L. Åhländer, “Automatic speech recognition (asr) and its use as a tool for assessment or therapy of voice, speech, and language disorders,” *Logopedics Phoniatrics Vocology*, vol. 34, no. 2, pp. 91–96, 2009.
- [4] P. Swetha and J. Srilatha, “Applications of speech recognition in the agriculture sector: A review,” *ECS Transactions*, vol. 107, no. 1, p. 19377, 2022.
- [5] Bills, Aric, David, Anne, Dubinski, Eyal, Fiscus, Jonathan G., Gillies, Breanna, Harper, Mary, Jarrett, Amy, Molina, María Encarnación Pérez, Ray, Jessica, Rytting, Anton, Paget, Shelley, Shen, Wade, Silber, Ronnie, Tzoukermann, Evelyne, and Wong, Jamie, “Iarpa babel bengali language pack iarpa-babel103b-v0.4b,” 2016. [Online]. Available: <https://catalog.ldc.upenn.edu/LDC2016S08>
- [6] N. Choudhary and D. Rao, “The ldc-il speech corpora,” in *2020 23rd Conference of the Oriental COCOSDA International Committee for the Coordination and Standardisation of Speech Databases and Assessment Techniques (O-COCOSDA)*. IEEE, 2020, pp. 28–32.
- [7] O. Kjartansson, S. Sarin, K. Pipatsrisawat, M. Jansche, and L. Ha, “Crowd-sourced speech corpora

- for javanese, sundanese, sinhala, nepali, and bangladeshi bengali,” in *Proc. The 6th Intl. Workshop on Spoken Language Technologies for Under-Resourced Languages (SLTU)*, Gurugram, India, Aug. 2018, pp. 52–55. [Online]. Available: <http://dx.doi.org/10.21437/SLTU.2018-11>
- [8] S. Kibria, A. M. Samin, M. H. Kobir, M. S. Rahman, M. R. Selim, and M. Z. Iqbal, “Bangladeshi bangla speech corpus for automatic speech recognition research,” *Speech Communication*, vol. 136, pp. 84–97, 2022.
- [9] EBLICT. (2022) Bengali ipa transcription. [Online]. Available: <https://ipa.bangla.gov.bd/>
- [10] S. Bhattacharya, M. Choudhury, S. Sarkar, and A. Basu, “Inflectional morphology synthesis for bengali noun, pronoun and verb systems,” in *Proc. of the National Conference on Computer Processing of Bangla (NCCPB 05)*. Citeseer, 2005, pp. 34–43.
- [11] S. Alam, T. Reasat, A. S. Sushmit, S. M. Siddique, F. Rahman, M. Hasan, and A. I. Humayun, “A large multi-target dataset of common bengali handwritten graphemes,” in *International Conference on Document Analysis and Recognition*. Springer, 2021, pp. 383–398.
- [12] M. H. R. Sifat, C. R. Rahman, M. Rafsan, and H. Rahman, “Synthetic error dataset generation mimicking bengali writing pattern,” in *2020 IEEE Region 10 Symposium (TENSYP)*. IEEE, 2020, pp. 1363–1366.
- [13] M. M. Rashid, M. A. Hussain, and M. S. Rahman, “Text normalization and diphone preparation for bangla speech synthesis,” *Journal of Multimedia*, vol. 5, no. 6, p. 551, 2010.
- [14] J. Owens, “Case and proto-arabic, part i,” *Bulletin of the School of Oriental and African Studies*, vol. 61, no. 1, pp. 51–73, Feb. 1998. [Online]. Available: <https://doi.org/10.1017/s0041977x00015755>
- [15] A. Stevenson, *Oxford dictionary of English*. Oxford University Press, USA, 2010.
- [16] S. Murthy, D. Sitaram, and S. Sitaram, “Effect of tts generated audio on oov detection and word error rate in asr for low-resource languages.” in *Inter-speech*, 2018, pp. 1026–1030.
- [17] B. Vaux, “The laryngeal specifications of fricatives,” *Linguistic inquiry*, vol. 29, no. 3, pp. 497–511, 1998.
- [18] M. A. Berezina, D. Rudoy, and P. J. Wolfe, “Autoregressive modeling of voiced speech,” in *2010 IEEE International Conference on Acoustics, Speech and Signal Processing*. IEEE, 2010, pp. 5042–5045.
- [19] W. Li, S. M. Siniscalchi, N. F. Chen, and C.-H. Lee, “Improving non-native mispronunciation detection and enriching diagnostic feedback with dnn-based speech attribute modeling,” in *2016 IEEE international conference on acoustics, speech and signal processing (ICASSP)*. IEEE, 2016, pp. 6135–6139.
- [20] A. S. Kaye, “Gemination in english,” *English Today*, vol. 21, no. 2, pp. 43–55, 2005.
- [21] A. Messaoudi, J. Gauvain, and L. Lamel, “Arabic broadcast news transcription using a one million word vocalized vocabulary,” in *2006 IEEE International Conference on Acoustics Speech and Signal Processing Proceedings*, vol. 1. IEEE, 2006, pp. I–i.
- [22] J. I. Ali, *Introduction to phonology*. Maola Brothers, Dhaka, 2012.
- [23] S. Sena, *Bhasara Itibritta*, 2nd ed. Kalakātā: Ananda Publ, 1994.
- [24] S. Chatterjee, *Bhasha-prokash Bangla Byakoron*. Rupa and Co., Kolkata, 1989.
- [25] E. W., “Muhammad abdul hai and w. j. ball: The sound structures of english and bengali. [ix], 97 pp. [dacca]: University of dacca, 1961. rs. 8, 21s.” *Bulletin of the School of Oriental and African Studies*, vol. 27, p. 690, 10 2009.
- [26] B. Barman, “A contrastive analysis of english and bangla phonemics,” *Dhaka University Journal of Linguistics*, vol. 2, no. 4, pp. 19–42, 2009.
- [27] C. C. Johny and M. Jansche, “Brahmic schwa-deletion with neural classifiers: Experiments with bengali,” in *Proc. The 6th Intl. Workshop on Spoken Language Technologies for Under-Resourced Languages*, 2018, pp. 259–263. [Online]. Available: <http://dx.doi.org/10.21437/SLTU.2018-54>
- [28] M. Or Rashid, “How to process bangla linguistic-data through nlp pipeline,” *Dhaka University Journal of Linguistics*, vol. 12, pp. 135–164, 03 2021.
- [29] M. Rashid and S. Chowdhury, “Word sense ambiguity and bangla homographs a linguistic analysis,” *The Research Journal of Humanities*, vol. 1, pp. 327–36, 07 2016.
- [30] S. Hawkins and K. N. Stevens, “Acoustic and perceptual correlates of the non-nasal–nasal distinction for vowels,” *The Journal of the Acoustical Society of America*, vol. 77, no. 4, pp. 1560–1575, 1985.
- [31] B. Hayes and A. Lahiri, “Bengali intonational phonology,” *Natural language & linguistic theory*, vol. 9, no. 1, pp. 47–96, 1991.
- [32] S. K. Mandal, B. Gupta, A. K. Datta *et al.*, “Word boundary detection based on suprasegmental features: A case study on bangla speech,” *International Journal of Speech Technology*, vol. 9, no. 1, pp. 17–28, 2007.
- [33] A. K. M. Morshed, “Adhunik bhashatotto,” 2015.
- [34] M. D. Haque, “Bhashabiganer kotha,” 2014.
- [35] M. Roy, “Some problems of english consonants for a bengali speaker of english,” *ELT Journal*, vol. 23, no. 3, pp. 268–270, 1969.
- [36] R. Ardila, M. Branson, K. Davis, M. Henretty, M. Kohler, J. Meyer, R. Morais, L. Saunders, F. M. Tyers, and G. Weber, “Common voice: A massively-multilingual speech corpus,” *arXiv preprint arXiv:1912.06670*, 2019.
- [37] W. contributors, “Wikipedia — Wikipedia, the free encyclopedia,” 2022, [Online; accessed 1-May-2022]. [Online]. Available: <https://en.wikipedia.org/w/index.php?title=Wikipedia&oldid=1085136923>
- [38] A. Das and B. Gamback, “Poetic machine: Computational creativity for automatic poetry generation in bengali.” in *Iccc*, 2014, pp. 230–238.

- [39] F. Eyben, K. R. Scherer, B. W. Schuller, J. Sundberg, E. Andre, C. Busso, L. Y. Devillers, J. Epps, P. Laukka, S. S. Narayanan *et al.*, “The geneva minimalistic acoustic parameter set (gemaps) for voice research and affective computing,” *IEEE transactions on affective computing*, vol. 7, no. 2, pp. 190–202, 2015.
- [40] P. Beckmann, M. Kegler, H. Saltini, and M. Cernak, “Speech-vgg: A deep feature extractor for speech processing,” *arXiv preprint arXiv:1910.09909*, 2019.
- [41] S. Ahmed, N. Sadeq, S. S. Shubha, M. N. Islam, M. A. Adnan, and M. Z. Islam, “Preparation of bangla speech corpus from publicly available audio & text,” in *Proceedings of The 12th language resources and evaluation conference*, 2020, pp. 6586–6592.
- [42] S. Sultana, M. S. Rahman, and M. Z. Iqbal, “Recent advancement in speech recognition for bangla: A survey,” *Int. J. Adv. Comput. Sci. Appl*, vol. 12, no. 3, pp. 546–552, 2021.
- [43] P. Swietojanski, A. Ghoshal, and S. Renals, “Revisiting hybrid and gmm-hmm system combination techniques,” in *2013 IEEE International Conference on Acoustics, Speech and Signal Processing*. IEEE, 2013, pp. 6744–6748.
- [44] A. Mukherjee. (2021) Huggingface wav2vec2 large xlsr bengali. [Online]. Available: <https://huggingface.co/arijitx/wav2vec2-large-xlsr-bengali>