

Recovering the Graph Underlying Networked Dynamical Systems under Partial Observability: A Deep Learning Approach

Sérgio Machado, Anirudh Sridhar, Paulo Gil, Jorge Henriques
José M. F. Moura, Augusto Santos

Abstract—We study the problem of graph structure identification, i.e., of recovering the graph of dependencies among time series. We model these time series data as components of the state of linear stochastic *networked* dynamical systems. We assume partial observability, where the state evolution of only a subset of nodes comprising the network is observed. We devise a new feature vector computed from the observed time series and prove that these features are linearly separable, i.e., there exists a hyperplane that separates the cluster of features associated with connected pairs of nodes from those associated with disconnected pairs. This renders the features amenable to train a variety of classifiers to perform causal inference. In particular, we use these features to train Convolutional Neural Networks (CNNs). The resulting causal inference mechanism outperforms state-of-the-art counterparts w.r.t. sample-complexity. The trained CNNs generalize well over structurally distinct networks (dense or sparse) and noise-level profiles. Remarkably, they also generalize well to real-world networks while trained over a synthetic network (realization of a random graph). Finally, the proposed method consistently reconstructs the graph in a pairwise manner, that is, by deciding if an edge or arrow is present or absent in each pair of nodes, from the corresponding time series of each pair. This fits the framework of large-scale systems, where observation or processing of all nodes in the network is prohibitive.

I. INTRODUCTION

Networked dynamical systems are characterized by a set of interconnected nodes or agents. The state of the nodes evolves over time according to their peer-to-peer interactions constrained by a support network of contacts [1]–[4]. More concretely, the state of a node i is only *immediately* affected by the state of nodes that directly link to i , i.e., nodes that bear a direct causal effect on node i . This causal network is captured by a graph, which is often a latent structure underlying these systems.

Examples of networked dynamical systems include: *i*) *Pandemics* – the fraction of infections within each community of

individuals is captured by a time series that is strongly influenced by contacts in neighboring communities. Knowledge of the contact network (which determines the main avenues of contagion) is critical for designing effective mitigation measures [5]–[9]. For example, a natural mitigation policy is *network dismantling*: aiming to quarantine a minimal set of nodes to promote a maximal disconnect of the underlying contagion network [8], [9] – thus, hindering virus propagation across communities without disrupting the global function of the networked system; *ii*) *Brain activity* – based on temporal signals gathered from cranial probes, an important task is to infer the so-called *Functional Connectivity Matrix*, which represents the graph of interactions among the active regions of the brain (see, e.g., [10]). Recent evidence shows that the Functional Connectivity Matrix can be used to diagnose or predict the onset of motor activities or cognitive disorders [11]–[17]; *iii*) *Finance* – the dynamics of stock prices can be influenced by interactions between firms, and knowledge of this interaction network can inform government interventions, for instance [18]–[20].

In most practical instances of the examples above, the node-level time series are readily accessible, but the underlying causal network – which is of fundamental importance in downstream tasks – is fully or partially unknown. To address this issue, a growing body of literature has developed methods for reconstructing the network from the observed node-level time series [21]–[24]. In this work, we focus on *linear stochastic networked dynamical systems*, which is arguably one of the most natural settings for network identification from time series since a great class of nonlinear networked dynamical systems can be addressed via linearization about the equilibria under small-noise regimes [25], [26] or via appropriate embedding in higher dimensional spaces [27], [28]. Moreover, since it is typically impractical to monitor *all* node-level signals in large-scale systems, we assume a *partial observability* setting, wherein we observe the time series corresponding to a small subset of nodes and aim to reconstruct the corresponding subgraph connecting them using a small number of samples. This task is much more challenging than the *full observability* case, since the time series of the observed nodes are also affected by the unobserved dynamics of the remainder of the network. Fig. 1 summarizes the structure identification framework considered.

Departing from the standard approach of reconstructing the network based on scalar measures between time series

José. M. F. Moura is with the Department of Electrical and Computer Engineering at Carnegie Mellon University, Pittsburgh, PA, USA (e-mail: moura@andrew.cmu.edu).

A. Sridhar is with the Department of Electrical and Computer Engineering at Princeton University, New Jersey, NJ, USA (e-mail: anirudhs@princeton.edu).

P. Gil is with the Department of Electrical and Computer Engineering, School of Science and Technology at Universidade NOVA de Lisboa and University of Coimbra, CISUC, Coimbra, Portugal (e-mail: psg@fct.unl.pt).

S. Machado, J. Henriques and A. Santos are with the Centre for Informatics and Systems at the University of Coimbra, CISUC, Coimbra, Portugal (e-mail: smachado@student.dei.uc.pt, augustosantos@dei.uc.pt, jh@dei.uc.pt).

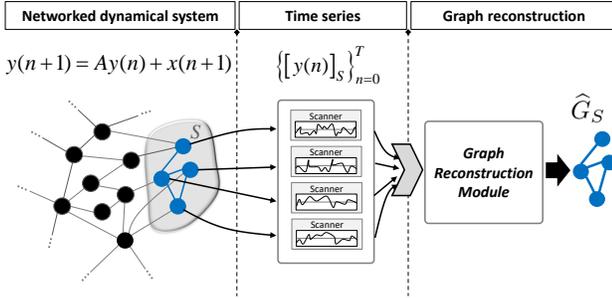


Fig. 1: Structure identification under partial observability.

– i.e., measures that assign a real-value to the coupling-strength between pairs of nodes, e.g., correlation, Granger or regression, and Precision matrix, – we adopt a more general *feature-based approach* whereby we construct a feature vector for each pair of nodes from their respective time series. We provide rigorous theoretical results proving that our features are *linearly separable* for *any* undirected network, once sufficiently many samples are taken. Our features can be readily used as an input to a variety of machine learning pipelines. In particular, we demonstrate that a Convolutional Neural Network (CNN) trained with our features for identifying causal links between nodes outperforms state-of-the-art methods in terms of accuracy and sample complexity.

II. RELATED WORK

Causal inference relies on the nature of the samples, and it depends on whether the observed time series are drawn independently from multivariate distributions (often assumed i.i.d. within the scope of graphical models), or are time series stemming from some networked dynamical law (not i.i.d.). For the multivariate case, the Markov property establishes a one-to-one correspondence between certain probability distributions and the set of (possibly directed) graphs [29], [30]. If X is conditionally independent of Z given Y , then there is no arrow, or direct causal effect, from Z to X . The dependence relationships are thus captured by a graph. This Markov property can be extended to discrete-time networked dynamical systems: the state of a node at instant $n + 1$ depends only on the state of some nodes at time n (also known as neighbors or parents). The general goal of causal inference is to uncover the possible *avenues of information flow*: to recover from observation of the time series samples the underlying graph structure of dependencies defined by the Markov property. Typically, this is done by leveraging various forms of scalar measures between time series, e.g., transformations of the covariance matrix; regression (e.g., Granger estimator) [22], [24], [31]; or other scalar graph metrics [23]. The performance of the precise method ties strongly to the data generative process and to whether the system is fully or partially observed.

A. Full-observability

Graphical models. Classical algorithms (assuming i.i.d. samples) based on conditional independence tests, include the

SGS [32], PC [33], GES [34], and FGS [35]. The algorithms and sufficient conditions for consistency devised in these works rely on sparsity related structural constraints that hardly fit the connectivity pattern of general networks. The work [36] offers an approach for the large scale setting under certain complying assumptions of sparsity. The independence tests are leveraged via conditional covariance tests. All structural constraints, revolving around sparsity, play a critical role to render the scaling of the independence tests amenable to computation, otherwise, the problem becomes quickly unfeasible [37], [38].

Networked dynamical systems. For approaches in the signal processing literature, [39] provides an overview highlighting regression plus regularization of the network sparsity methods for full-observability over distinct models – primarily promoting sparsity of the latent network, – including linear dynamical systems as vector autoregressive (VAR) models, as in [40]–[42]. In this regard, [22] addresses the problem for linear stochastic differential equations (SDEs) via an optimization formulation that regularizes sparsity of the latent network. This problem is addressed by first converting the continuous-time SDE into a discrete-time linear dynamical system – a technique that yields the discrete-time model considered in this work. Other schemes exploit spectral-based methods [43]–[45]. These leverage the spectral properties of the interaction matrix or support graph [46] to characterize signatures that allow consistent estimation over certain sparse networks.

B. Partial observability

Graphical models. In general, the proposed approaches rely on conditional independence (CI) tests or measures thereof, e.g., conditional mutual information (CMI) or transfer entropy, and a causal link is declared whenever a test yields a positive CMI-based metric. Classical algorithms for causal inference under the presence of latent variables are the FCI [47] and RFCI [48]. As in the full-observability setting, consistent tests scale combinatorially with the connectivity of the causal graph, rendering the CI-based approaches impractical for denser graphs. To control the curse of connectivity, CI-based methods often act at a microscopical level relying on several strong structural constraints including, directed acyclic graphs, long girth [49], [50] and other more technical local structural conditions, such as bottleneck and non-redundancy [51], [52].

Networked dynamical systems. In [23], [53], [54], linear dynamical systems are addressed via certain pseudo-metrics, e.g. log-coherence distance, aiming to capture the true graph-distance between nodes. In [31] some conditions on the network connectivity and interaction matrix of a linear networked dynamical system are proposed, in order to obtain uniqueness of the network connectivity given partially observed samples. It does not provide, however, an algorithm with consistency guarantees to retrieve the uniquely determined network. On the other hand, the work [55] uses an expectation-maximization based approach to address certain discrete-time discrete state-space networked dynamical systems, while [56]–[58] resort to convex optimization based methods for regularizing the sparsity of the network under partial observability. The works [24], [59], [60] establish structural consistency of the Granger (or

regression) and other matrix-valued estimators over partially observed discrete-time linear stochastic networked dynamical systems with symmetric interaction matrices, for distinct regimes of network connectivity (including densely connected networks). Similar to [50], the structural consistency of these estimators is established in the *thermodynamic limit*, i.e., as the number of nodes scales to infinite, which fits the framework of large-scale networks. Recently, [21] proved that the underlying interaction matrix, up to a multiplicative constant related to the noise level, can be expressed as a linear combination of covariance matrices, with high probability, under the following regime: *i*) the interaction matrix A is symmetric; *ii*) the noise \mathbf{x} is *diagonal* and homogeneous, i.e., its covariance matrix is a multiple of the identity matrix. Theorem 1 in [21] will be used in the present work to establish an important result regarding the proposed set of feature vectors, namely, consistent linear separability. This property will further yield a competitive performance for the trained CNNs in terms of sample-complexity.

III. PROBLEM FORMULATION

We consider the linear networked dynamical law

$$\mathbf{y}(n+1) = A\mathbf{y}(n) + \mathbf{x}(n+1), \quad (1)$$

where $\mathbf{y}(n) = [y_1(n) \ y_2(n) \ \dots \ y_N(n)]^\top \in \mathbb{R}^N$ represents the state-vector of the N -dimensional networked dynamical system at time n that collects the states $y_i(n)$ of each node i at time n ; $\mathbf{x}(n) \sim \mathcal{N}(0, \sigma^2 I_N)$ represents the excitation noise associated with the N nodes of the system with covariance matrix $\sigma^2 I_N$, and independent across time n ; $A \in \mathbb{R}_+^{N \times N}$ refers to the non-negative interaction matrix whose support represents the underlying graph linking the nodes. The dynamical system is assumed to be stable, i.e., $\rho(A) < 1$, where $\rho(A)$ stands for the spectral radius of A .

This work deals with the problem of recovering the support of the submatrix A_S , i.e., the graph structure of connections among the observed nodes in the subset S from observation of the subvector $[\mathbf{y}(n)]_S = [\mathbf{y}_{m_1}(n) \ \mathbf{y}_{m_2}(n) \ \dots \ \mathbf{y}_{m_{|S|}}(n)]^\top \in \mathbb{R}^{|S|}$ over time n , where $|S|$ is the cardinality of the subset S (see Fig.1).

Notation: $S = \{m_1, m_2, \dots, m_{|S|}\} \subset \{1, 2, \dots, N\}$ is a nonempty subset of indexes with $m_1 < m_2 < \dots < m_{|S|}$ and $|S| \leq N$; given a vector $\mathbf{y} \in \mathbb{R}^N$, $[\mathbf{y}]_S = [\mathbf{y}_{m_1}(n) \ \mathbf{y}_{m_2}(n) \ \dots \ \mathbf{y}_{m_{|S|}}(n)]^\top$ is the subvector obtained from \mathbf{y} and indexed by S ; accordingly, a similar notation is adopted for matrices, namely, given $A \in \mathbb{R}^{N \times N}$, the matrix $A_S \in \mathbb{R}^{|S| \times |S|}$ or $[A]_S \in \mathbb{R}^{|S| \times |S|}$ is defined as the submatrix whose ij^{th} entry is $A_{m_i m_j}$; $\text{Supp}(A)$ is the support of the matrix A , i.e., $[\text{Supp}(A)]_{ij} = \mathbf{1}_{\{A_{ij} \neq 0\}}$; $\|\mathbf{y}\|_\infty$ refers to the L_∞ -norm that returns the maximal absolute value across the entries of the vector $\mathbf{y} \in \mathbb{R}^N$; the set of natural numbers, including zero, is denoted by $\mathbb{N} = \{0, 1, 2, \dots\}$.

IV. STRUCTURAL CONSISTENCY

Consider the following k^{th} lag covariance matrix

$$R_k(n) \triangleq \mathbb{E} [\mathbf{y}(n+k)\mathbf{y}(n)^\top] \quad (2)$$

associated with the process $(\mathbf{y}(n))_{n \in \mathbb{N}}$. In addition, define the empirical counterpart of $R_k(n)$

$$\widehat{R}_k(n) \triangleq \frac{1}{n} \sum_{\ell=0}^{n-1} \mathbf{y}(\ell+k)\mathbf{y}(\ell)^\top. \quad (3)$$

We refer to a matrix-valued estimator as any map whose input is given by the (observed) time series and the output is given by a matrix, namely,

$$F^{(n)} : \quad \mathbb{R}^{|S| \times n} \quad \longrightarrow \quad \mathbb{R}^{|S| \times |S|} \\ \{[\mathbf{y}(\ell)]_S\}_{\ell=0}^{n-1} \quad \longmapsto \quad \mathcal{F}^{(n)}, \quad (4)$$

for any given $n \in \mathbb{N}$. The idea is that the ij^{th} entry of the output matrix $\mathcal{F}^{(n)}$ estimates the strength of the link from i to j from n samples of the observed time series. For instance, the empirical covariance matrix $\widehat{R}_k(n)$, under full-observability, or $[\widehat{R}_k(n)]_S$, in the case of partial-observability, are examples of matrix-valued estimators.

Definition 1 (structural consistency of a matrix). *A matrix-valued estimator $F^{(n)}$ is structurally consistent with high probability, whenever there exists a threshold τ so that,*

$$\mathbb{P} \left(\mathcal{F}_{ij}^{(n)} > \tau \right) \xrightarrow{n \rightarrow \infty} 1 \iff i \rightarrow j, \quad (5)$$

i.e., i links to j if and only if the ij^{th} entry of the estimator matrix $\mathcal{F}^{(n)}$ lies above the threshold τ , provided that there is a large enough number of samples n .

In other words, up to a proper threshold τ , the output matrix $\mathcal{F}^{(n)}$ reflects the underlying structure of the graph in that $[\text{Supp}(A_S)]_{ij} = \mathbf{1}_{\{\mathcal{F}_{ij}^{(n)} > \tau\}}$, for all pairs $i \neq j$ w.h.p.

An example of a structurally consistent w.h.p. matrix-valued estimator (under partial observability) is given by $\mathcal{F}^{(n)} \triangleq \widehat{R}_1(n) - \widehat{R}_3(n)$ [21]. Other examples of matrix-valued estimators that are provably structurally consistent under partial observability include: *i*) **Granger** $[\widehat{R}_1(n)]_S \left([\widehat{R}_0(n)]_S \right)^{-1}$; *ii*) **One-lag** $[\widehat{R}_1(n)]_S$; *iii*) **Residual** $[\widehat{R}_1(n)]_S - [\widehat{R}_0(n)]_S$. These latter estimators are proven to be structurally consistent under a certain *thermodynamic* limit regime [60], i.e., structural consistency is met in the limit $N \rightarrow \infty$ with $|S|/N \rightarrow \xi > 0$ or with $|S|/N \rightarrow 0$ for certain sparse regimes [59].

Remark 1. *Technically, one should formally refer to the sequence $(F^{(n)})_{n \in \mathbb{N}}$ of maps (estimators) as structurally consistent with high probability. However, hereby, for the sake of simplicity it will be simply referred to as “the estimator $F^{(n)}$ is structurally consistent w.h.p.”.*

Next, we introduce a tensor-valued estimator which is, formally, any map whose input is given by the (observed) time series and the output is an order-3 tensor, as follows

$$\mathcal{T}^{(n)} : \quad \mathbb{R}^{|S| \times n} \quad \longrightarrow \quad \mathbb{R}^{|S| \times |S| \times M} \\ \{[\mathbf{y}(\ell)]_S\}_{\ell=0}^{n-1} \quad \longmapsto \quad \mathcal{T}^{(n)}, \quad (6)$$

where the ij^{th} entry of the order-3 tensor $\mathcal{T}^{(n)}$ is a vector $\mathcal{T}_{ij}^{(n)} \in \mathbb{R}^M$ that models a feature statistical descriptor corresponding to the pair ij in the network and that is built from n samples of the time series $\{[\mathbf{y}(\ell)]_S\}_{\ell=0}^{n-1}$.

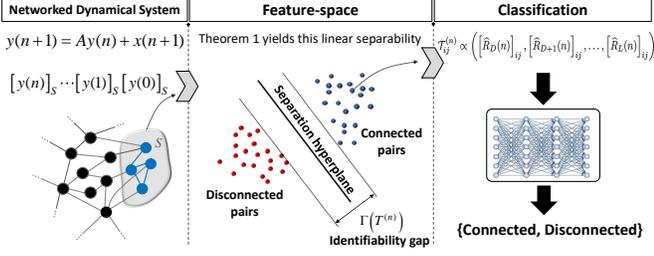


Fig. 2: Proposed framework.

Definition 2 (structural consistency of a tensor). A tensor-valued estimator $T^{(n)}$ of order-3 is linearly structurally consistent with high probability, if there exists an affine map $\mathcal{L} : \mathbb{R}^M \rightarrow \mathbb{R}$ (or hyperplane) that separates the underlying features associated with connected pairs from those associated with disconnected pairs w.h.p., that is,

$$\begin{aligned} \mathbb{P}\left(\mathcal{L}(\mathcal{T}_{ij}^{(n)}) > 0\right) &\xrightarrow{n \rightarrow \infty} 1, & \text{if } ij \text{ is connected,} \\ \mathbb{P}\left(\mathcal{L}(\mathcal{T}_{ij}^{(n)}) \leq 0\right) &\xrightarrow{n \rightarrow \infty} 1, & \text{if } ij \text{ is disconnected} \end{aligned} \quad (7)$$

As an example, the estimator $T^{(n)}$ whose ij^{th} entry of the tensor output $\mathcal{T}^{(n)}$ is defined as

$$\mathcal{T}_{ij}^{(n)} \triangleq \left(\left[\widehat{R}_D(n) \right]_{ij}, \left[\widehat{R}_{D+1}(n) \right]_{ij}, \dots, \left[\widehat{R}_L(n) \right]_{ij} \right)$$

corresponds to an order-3 tensor-valued estimator. As we will show in the next section, if $D \leq 1$ and $L \geq 3$, then this estimator is linearly structurally consistent w.h.p.

V. FEATURES SEPARABILITY

The results presented in this section motivate the CNN-based approach for graph learning considered in this work.

Assumption 1. Let $\mathcal{E}^{(n)} := \{E_1^{(n)}, E_2^{(n)}, \dots, E_M^{(n)}\}$ be a family of matrix-valued estimators such that for some $\mathbf{w} := (w_1, w_2, \dots, w_M) \in \mathbb{R}^M$ with $\mathbf{w} \neq 0$, the linear combination $E^{(n)}(\mathbf{w}) = \sum_{\ell=1}^M w_\ell E_\ell^{(n)}$ is a structurally consistent w.h.p. matrix-valued estimator for the dynamics (1).

Lemma 1. For each pair ij , with $i \neq j$, define the associated feature vector as,

$$\mathcal{F}_{ij}^{(n)} := \left(\left[E_1^{(n)} \right]_{ij}, \left[E_2^{(n)} \right]_{ij}, \dots, \left[E_M^{(n)} \right]_{ij} \right) \in \mathbb{R}^M. \quad (8)$$

Then, under Assumption 1, the tensor-valued estimator $T^{(n)}$ is linearly structurally consistent w.h.p., or equivalently, the set of features $\{\mathcal{F}_{ij}^{(n)}\}_{i \neq j} \subset \mathbb{R}^M$ is consistently linearly separable w.h.p.

Proof. Since $E^{(n)}(\mathbf{w}) = \sum_{\ell=1}^M w_\ell E_\ell^{(n)}$ is structurally consistent w.h.p. for some $\mathbf{w} \in \mathbb{R}^M$, then there exists a threshold $\tau_{\mathbf{w}}$ so that $[E^{(n)}(\mathbf{w})]_{ij} > \tau_{\mathbf{w}}$ across connected pairs ij and $[E^{(n)}(\mathbf{w})]_{ij} < \tau_{\mathbf{w}}$, otherwise. Therefore, the affine

map $\mathcal{L}_{\mathbf{w}}(\mathbf{x}) = \mathbf{x} \cdot \mathbf{w} - \tau_{\mathbf{w}}$ consistently separates the set of features $\{\mathcal{F}_{ij}^{(n)}\}_{ij}$ w.h.p. Indeed,

$$\mathcal{L}_{\mathbf{w}}(\mathcal{F}_{ij}^{(n)}) = \mathcal{F}_{ij}^{(n)} \cdot \mathbf{w} - \tau_{\mathbf{w}} = [E^{(n)}(\mathbf{w})]_{ij} - \tau_{\mathbf{w}} > 0 \quad (9)$$

for a connected pair ij or

$$\mathcal{L}_{\mathbf{w}}(\mathcal{F}_{ij}^{(n)}) = [E^{(n)}(\mathbf{w})]_{ij} - \tau_{\mathbf{w}} < 0, \quad (10)$$

otherwise. In other words, the hyperplane characterized by the linear map $\mathcal{L}_{\mathbf{w}} : \mathbb{R}^M \rightarrow \mathbb{R}$ separates consistently the pairs ij for all $i \neq j$, w.h.p. \square

Theorem 1. For each pair ij , with $i \neq j$, define the associated feature vector as,

$$\mathcal{F}_{ij}^{(n)} := \left(\left[\widehat{R}_D(n) \right]_{ij}, \left[\widehat{R}_{D+1}(n) \right]_{ij}, \dots, \left[\widehat{R}_L(n) \right]_{ij} \right),$$

with $D \leq 1$ and $L \geq 3$, and assume that the interaction matrix A underlying the dynamics (1) is symmetric and the covariance matrix of the noise process $(\mathbf{x}(n))_{n \in \mathbb{N}}$ is given by $\Sigma_x := \sigma^2 I_N$, for some $\sigma > 0$. Then, the set $\{\mathcal{F}_{ij}^{(n)}\}_{i \neq j} \subset \mathbb{R}^M$ is consistently linearly separable w.h.p.

Proof. Define the vector $\mathbf{w} \in \{-1, 0, 1\}^M$ so that $E^{(n)}(\mathbf{w}) = \widehat{R}_1(n) - \widehat{R}_3(n)$, which is possible since $D \leq 1$ and $L \geq 3$. According to Theorem 1 in [21], $E^{(n)}(\mathbf{w}) = \widehat{R}_1(n) - \widehat{R}_3(n)$ is structurally consistent w.h.p. and the result now follows from the previous Lemma 1. \square

Remark 2 (Locality of the structural estimation). Note that, to compute the feature $\mathcal{F}_{ij}^{(n)}$ associated with each pair ij defined in Theorem 1, we need only the time series $\{y_i(\ell), y_j(\ell)\}_{\ell=0}^n$ associated with the pair ij as

$$\mathcal{F}_{ij}^{(n)} := \frac{1}{n} \sum_{\ell=0}^{n-1} (y_i(\ell + D)y_j(\ell), \dots, y_i(\ell + M)y_j(\ell)),$$

which only involves information related to nodes i and j . As such, it is possible to reconstruct the connectivity pattern in a pairwise manner. This is a special property that results from the fact that each lag-moment, or covariance matrix, in the feature vector can be locally estimated. Observe that the majority of the matrix-valued estimators does not exhibit this locality property. For example, to reconstruct the ij^{th} entry of the Precision matrix $(\widehat{R}_0(n))^{-1}$, one needs to know the whole matrix $\widehat{R}_0(n)$ (or a large portion around the pair ij thereof). This has the drawback of implying the observation of a large set of nodes (or of the whole network) just to estimate the corresponding entry ij of the Precision matrix.

Now, given a matrix-valued estimator $F^{(n)}$, define its identifiability gap as [60]

$$\Gamma(F^{(n)}) \triangleq \min_{ij: A_{ij} \neq 0} \mathcal{F}_{ij}^{(n)} - \max_{ij: A_{ij} = 0} \mathcal{F}_{ij}^{(n)}, \quad (11)$$

i.e., the gap between the smallest entry of $\mathcal{F}_{ij}^{(n)}$ across connected pairs and the largest entry of $\mathcal{F}_{ij}^{(n)}$ over disconnected pairs. An estimator $F^{(n)}$ is structurally consistent w.h.p. if and only if $\Gamma(F^{(n)}) > 0$ w.h.p., or in other words, if and only

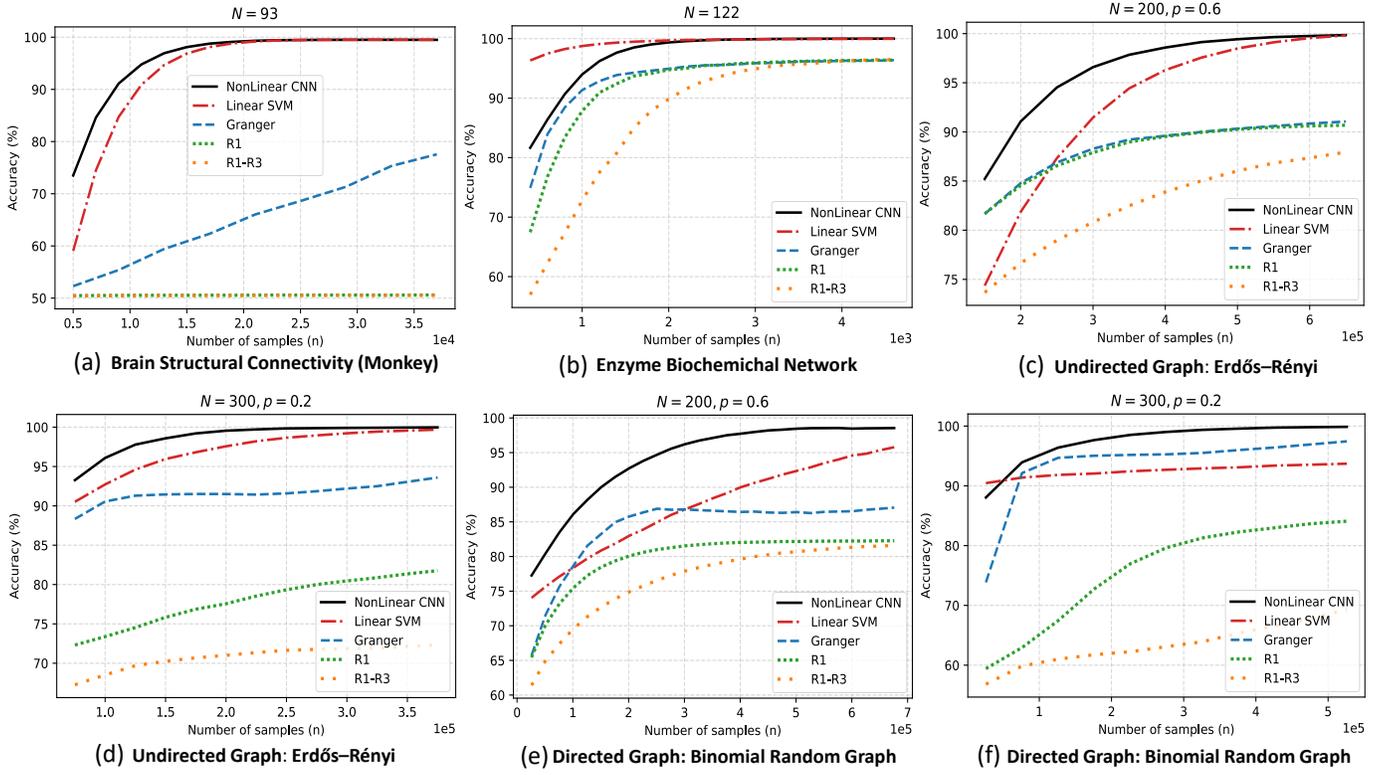


Fig. 3: (a)-(f) Structure estimation performance: we plot the estimators' accuracy as a function of the number of samples. Plots (a)-(b) refer to real-world networks; (c)-(d) refer to undirected graphs (realization of an Erdős-Rényi model); and plots (e)-(f) refer to directed graphs (realization of a binomial random graph). We assume that we can only observe $|S| = 20$ nodes.

if connected pairs are separated from disconnected pairs, in view of the entries of the matrix $\mathcal{F}^{(n)}$, for n large enough. This statistical metric is a relevant parameter regarding the *hardness* of the classification. The larger the identifiability gap, the *easier* the classification via thresholding of the entries of the matrix $\mathcal{F}^{(n)}$ tends to be.

Similarly, define the identifiability gap $\Gamma(T^{(n)})$ associated with a tensor-valued estimator $T^{(n)}$ as the maximum distance among all parallel hyperplanes that consistently separate the features, as in Fig. 2. For example, the SVM algorithm is designed to find these margins. More concretely,

$$\Gamma(T^{(n)}) \triangleq \max_{(\mathbf{w}, \tau_1), (\mathbf{w}, \tau_2) \in \mathcal{C}} \frac{|\tau_1 - \tau_2|}{\|\mathbf{w}\|}, \quad (12)$$

where \mathcal{C} indexes the set of linear maps that consistently separate the features: $(\mathbf{w}, \tau) \in \mathcal{C}$ if and only if the linear map $\mathcal{L}_{\mathbf{w}, \tau}(\mathbf{x}) := \mathbf{w} \cdot \mathbf{x} - \tau$ consistently separates the features.

Lemma 2. *Let $T^{(n)}$ be a tensor-valued estimator whose underlying features at each pair ij are defined as*

$$\mathcal{T}_{ij}^{(n)} := \left([E_1^{(n)}]_{ij}, [E_2^{(n)}]_{ij}, \dots, [E_M^{(n)}]_{ij} \right) \in \mathbb{R}^M, \quad (13)$$

with identifiability gap $\Gamma_E^{(n)} \triangleq \Gamma(T^{(n)})$. Let $\hat{A}^{(n)}$ be a matrix-valued estimator with identifiability gap $\Gamma_A^{(n)} \triangleq \Gamma(\hat{A}^{(n)})$.

If both $\hat{A}^{(n)}$ and $T^{(n)}$ are (linearly) structurally consistent w.h.p., then the tensor-valued estimator $\tilde{T}^{(n)}$ defined via the augmented features

$$\tilde{\mathcal{T}}_{ij}^{(n)} := \left([\hat{A}^{(n)}]_{ij}, [E_1^{(n)}]_{ij}, \dots, [E_M^{(n)}]_{ij} \right) \in \mathbb{R}^M, \quad (14)$$

exhibits an identifiability gap obeying $\Gamma(\tilde{T}^{(n)}) \geq \|\Gamma^{(n)}\|_2$ w.h.p., with $\Gamma^{(n)} \triangleq (\Gamma_A^{(n)}, \Gamma_E^{(n)})$.

Lemma 2 asserts that, if further matrix-valued structurally consistent estimators are incorporated into the feature vector, the identifiability gap increases.

Proof. Let $\text{Cv}(\mathcal{S})$ denote the *convex hull* of a set $\mathcal{S} \subset \mathbb{R}^M$, i.e., the smallest convex set containing \mathcal{S} [61]. Define $\tilde{\mathcal{C}} \triangleq \left\{ \tilde{\mathcal{T}}_{ij}^{(n)} \right\}_{ij: A_{ij} \neq 0}$ as the set of augmented features

associated with connected pairs and $\tilde{\mathcal{D}} \triangleq \left\{ \tilde{\mathcal{T}}_{ij}^{(n)} \right\}_{ij: A_{ij} = 0}$

associated with disconnected pairs. Similarly, define $\mathcal{C} \triangleq \left\{ \mathcal{T}_{ij}^{(n)} \right\}_{ij: A_{ij} \neq 0}$ and $\mathcal{D} \triangleq \left\{ \mathcal{T}_{ij}^{(n)} \right\}_{ij: A_{ij} = 0}$. Let R be the

smallest entry of $\hat{A}^{(n)}$ across connected pairs and r be the greatest entry of $\hat{A}^{(n)}$ across disconnected pairs and note that $r < R$ w.h.p, since $\hat{A}^{(n)}$ is structurally consistent. We have that

$$\begin{aligned} \Gamma(\tilde{T}^{(n)})^2 &\stackrel{(a)}{=} d(\text{Cv}(\tilde{\mathcal{C}}), \text{Cv}(\tilde{\mathcal{D}}))^2 \\ &\stackrel{(b)}{\geq} d(\text{Cv}(\mathcal{C} \times [R, \infty)), \text{Cv}(\mathcal{D} \times (-\infty, r]))^2 \\ &\stackrel{(c)}{=} d(\text{Cv}(\mathcal{C}) \times [R, \infty), \text{Cv}(\mathcal{D}) \times (-\infty, r))^2 \\ &\stackrel{(d)}{=} d(\text{Cv}(\mathcal{C}), \text{Cv}(\mathcal{D}))^2 + (R - r)^2 \\ &= (\Gamma_E^{(n)})^2 + (\Gamma_A^{(n)})^2 = \|\Gamma^{(n)}\|_2^2 \end{aligned}$$

where for two subsets $\mathcal{X}, \mathcal{Y} \subset \mathbb{R}^M$, $d(\mathcal{X}, \mathcal{Y})$ is the distance

$$d(\mathcal{X}, \mathcal{Y}) \triangleq \inf_{x \in \mathcal{X}, y \in \mathcal{Y}} \|x - y\|_2; \quad (15)$$

the first identity (a) conforms to an alternative characterization for the identifiability gap (refer to Theorem 13 in [62]); the inequality (b) holds in view of the inclusions $\tilde{\mathcal{C}} \subset \mathcal{C} \times [R, \infty)$ and $\tilde{\mathcal{D}} \subset \mathcal{D} \times (-\infty, r]$; the identity (c) holds since the convex hull commutes with the cartesian product over convex sets [61]; the identity (d) is straightforward from the definition of the distance $d(\cdot, \cdot)$. \square

VI. METHODOLOGY

In order to stratify the pairs of nodes into connected or disconnected from the observed time series, we address the linear separability property of the covariance-based features $\{\mathcal{J}_{ij}^{(n)}\}_{ij}$ established in Theorem 1, by studying the performance of trained classifiers, in particular, linear Support Vector Machines (SVMs) and Convolutional Neural Networks (CNNs). The training set is given by

$$\text{Tr}^{(n)} \triangleq \left\{ \left(\bar{\mathcal{J}}_{ij}^{(n)}, \mathbf{1}_{\{A_{ij} \neq 0\}} \right) \right\}_{i \neq j} \quad (16)$$

where we have introduced the normalized feature vectors

$$\bar{\mathcal{J}}_{ij}^{(n)} := \frac{\mathcal{J}_{ij}^{(n)}}{\max_{i \neq j} \|\mathcal{J}_{ij}^{(n)}\|_{\infty}}, \quad (17)$$

with the unnormalized features given by,

$$\mathcal{J}_{ij}^{(n)} \triangleq \left(\left[\widehat{R}_{-100}(n) \right]_{ij}, \left[\widehat{R}_{-99}(n) \right]_{ij}, \dots, \left[\widehat{R}_{100}(n) \right]_{ij} \right).$$

In other words, for training, we provide a normalized feature $\bar{\mathcal{J}}_{ij}^{(n)}$ associated with the pair ij as input to a classifier and the output should be the ground truth $\mathbf{1}_{\{A_{ij} \neq 0\}}$.

The normalization in the training set is motivated by the following observation. With infinitely many samples,

$$\mathcal{J}_{ij}^{\infty} = \sigma^2 \left(\left[\overline{R}_D \right]_{ij}, \left[\overline{R}_{D+1} \right]_{ij}, \dots, \left[\overline{R}_M \right]_{ij} \right) \quad (18)$$

where \overline{R}_k is the k -lag covariance matrix (equation (2)) of the normalized process $(\mathbf{y}(n)/\sigma)_{n \in \mathbb{N}}$, i.e., the process whose noise is normalized to unit variance. With the proposed normalization in equation (17), the multiplicative factor σ^2 is cancelled out, which decreases the role played by the noise-level in the performance of the trained CNNs. Furthermore, this normalization renders the generalization performance of the trained CNNs robust across structurally distinct graphs.

To generate the matrix A to obtain the time series data $\{\mathbf{y}(\ell)\}_{\ell=0}^n$, given a graph G , the following procedure was considered. Let G be a given graph without self-loops, i.e., $G_{ii} = 0$ for all i . Define the interaction matrix A as

$$\begin{cases} A_{ij} &= \alpha_1 \frac{G_{ij}}{d_{\max}(G)}, & \text{for } i \neq j \\ A_{ii} &= \alpha - \sum_{k \neq i} A_{ik}, & \text{for all } i \end{cases}, \quad (19)$$

where $d_{\max}(G)$ is the maximum *in-flow* degree of the underlying graph G and $0 < \alpha_1 \leq \alpha < 1$ are some constants. In other words, the rows of A sum to $\alpha < 1$ and its support is given by G . This is often cast as the *Laplacian rule* [63]. This interaction matrix renders the networked dynamical system (1) stable and with a support graph of interactions given by G . To generate the support graph G , we considered the realization of

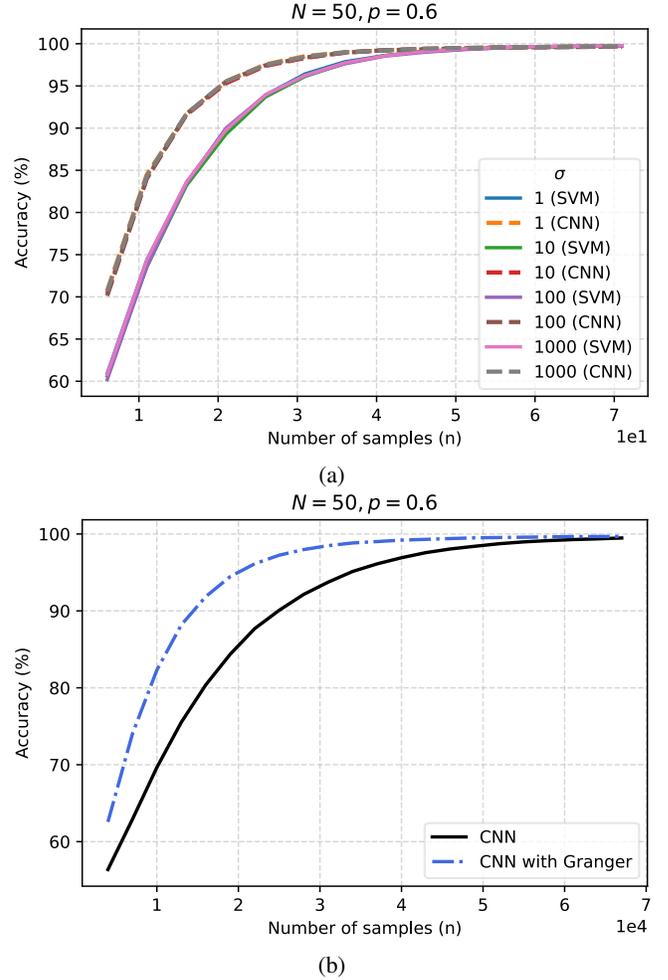


Fig. 4: (a) depicts the robustness against the noise variance for both the CNN and the SVM; and (b) considers the inclusion of the Granger estimator in the feature vector.

random graph models as Erdős–Rényi for undirected graphs, binomial random graphs for directed graphs, and real-world networks.

We train the classifiers over one realization of a random graph model with $p = 0.5$ and $N = 100$ and apply them to distinct networks, including real-world ones, where p is the probability of edge or arrow drawing in the random graph model and N is the number of nodes. Throughout, we assume that we can only observe the time series data from $|S| = 20$ nodes, that is, we assume $S = \{1, 2, \dots, 20\}$.

VII. SIMULATION RESULTS

In the numerical results considered, we define *accuracy* as the number of directed pairs correctly classified over the total number of directed pairs in the underlying graph. We consider 1000 Monte Carlo runs across all plots.

Fig. 3 (a) – (f) depict the sample-complexity performance of the estimators across structurally distinct networks, considering: *i*) Granger under partial observability $\left[\widehat{R}_1(n) \right]_S \left(\left[\widehat{R}_0(n) \right]_S \right)^{-1}$ that is provably structurally consistent [24], [59] for distinct regimes of network connectivity;

ii) The one-lag estimator $\widehat{R}_1(n)$, which is also consistent for several network connectivity regimes [60]; *iii*) the $\widehat{R}_1(n) - \widehat{R}_3(n)$ that is structurally consistent [21]; *iv*) the linear SVM; and *v*) the trained CNNs. For classification, we apply Gaussian mixture over the sorted entries of the matrix-valued estimators in order to stratify the connected and disconnected pairs. Our results show the overall superiority in performance for the CNN-based classifier. Figs. 3 (a) – (b) refer to real-world networks obtained from the database [64], with (a) for a Brain structural connectivity matrix of a monkey and (b) for an enzyme biochemical network; (c) – (d) refer to symmetric regimes where the underlying support graph of the networked dynamical system is undirected; and (e) – (f) refer to directed graph regimes. N and p stand for the number of nodes and probability of edge/arrow drawing in the random graph models. It should be remarked that while the CNN is trained over a synthetic network, namely, a particular realization of an Erdős–Rényi (for undirected networks) random graph model with $p = 0.5$ and $N = 100$, it generalizes well over real-world networks as demonstrated in Figs. 3 (a) – (b).

Fig. 4a illustrates the robustness of both the trained CNNs and the linear SVMs against distinct noise-level regimes. The CNNs and SVMs are trained with a noise variance of $\sigma^2 = 0.5$, but generalize well over an extended range of noise variance. Fig. 4a shows that the performance of these classifiers is not sensitive to the variance of the input noise in the dynamics (1). Fig. 4b shows the gain in performance when the Granger estimator is included in the feature vector. In particular, when we include in the feature vector

$$\mathcal{J}_{ij}^{(n)} \triangleq \left(\left[\widehat{A}_s \right]_{ij}, \left[\widehat{R}_{-100}(n) \right]_{ij}, \dots, \left[\widehat{R}_{100}(n) \right]_{ij} \right)$$

the additional component $\widehat{A}_s \triangleq \left[\widehat{R}_1(n) \right]_s \left(\left[\widehat{R}_0(n) \right]_s \right)^{-1}$ that is the Granger under partial observability, with only $|S| = 20$ nodes observed. This is consistent with Lemma 2, motivating the search for feature vectors built on other matrix-valued structurally consistent estimators. It motivates the following causal inference paradigm: *i*) characterize matrix-valued structurally consistent estimators; *ii*) define feature vectors that collect these consistent estimators; *iii*) use these new features to train classifiers like a CNN.

VIII. CONCLUDING REMARKS

This paper considered the problem of determining the graph that captures the fundamental dependencies among time series of data. These time series are indexed as nodes in linear stochastic networked dynamical systems. Only the time series of some nodes are observed (partial observability). We proposed a set of covariance-based features and proved they are consistently linearly separable. With this separability property, our features can be used as an input to a variety of machine learning pipelines in order to design new state-of-the-art algorithms for causal inference of linear networked dynamical systems. In particular, CNNs trained over this set of features exhibited remarkable sample-complexity performance, significantly reducing the number of samples required to reach a

certain level of accuracy, as compared with other state-of-the-art estimators, which require a much larger number of samples. Simulation results show the superiority of the CNN-based approach. It was further shown that the inclusion of structurally consistent matrix-valued estimators in the feature vectors increases the performance of structure identification. This motivates further study of new structurally consistent matrix-valued estimators as building blocks for feature vectors or tensor-valued estimators.

IX. ACKNOWLEDGMENTS

The work of S. Machado, A. Santos, J. Henriques and P. Gil was funded in part by the FCT - Foundation for Science and Technology, Portugal, I.P./MCTES through national funds (PIDDAC), within the scope of CISUC R&D Unit - UIDB/00326/2020 or project code UIDP/00326/2020 and CTS - Centro de Tecnologia e Sistemas - UIDB/00066/2020

REFERENCES

- [1] A. Barrat, M. Barthélemy, and A. Vespignani, *Dynamical Processes on Complex Networks*. London, UK: Cambridge University Press, November 2012.
- [2] T. Liggett, *Interacting Particle Systems*, 1st ed. Springer-Verlag Berlin Heidelberg, 2005.
- [3] P. Robert, *Stochastic Networks and Queues*. Springer-Verlag, 2003.
- [4] M. Porter and J. Gleeson, *Dynamical Systems on Networks: A Tutorial*. Springer International Publishing, 2016.
- [5] A. Lahmanovich and A. Y. James, “A deterministic model for gonorrhoea in a nonhomogeneous population,” *Mathematical Biosciences*, vol. 28, pp. 221–236, 1976.
- [6] A. Ganesh, L. Massoulié, and D. Towsley, “The effect of network topology on the spread of epidemics,” in *Proceedings IEEE 24th Annual Joint Conference of the IEEE Computer and Communications Societies.*, vol. 2, March 2005, pp. 1455–1466.
- [7] A. Santos, J. M. F. Moura, and J. Xavier, “Bi-virus SIS epidemics over networks: Qualitative analysis,” *IEEE Transactions on Network Science and Engineering*, vol. 2, no. 1, pp. 17–29, Jan 2015.
- [8] A. Braunstein, L. Dall’Asta, G. Semerjian, and L. Zdeborová, “Network dismantling,” *Proceedings of the National Academy of Sciences*, vol. 113, no. 44, pp. 12 368–12 373, 2016.
- [9] X.-L. Ren, N. Gleinig, D. Helbing, and N. Antulov-Fantulin, “Generalized network dismantling,” *Proceedings of the National Academy of Sciences*, vol. 116, no. 14, pp. 6554–6559, 2019. [Online]. Available: <https://www.pnas.org/content/116/14/6554>
- [10] R. Liégeois, A. Santos, V. Matta, D. Van De Ville, and A. H. Sayed, “Revisiting correlation-based functional connectivity and its relationship with structural connectivity,” *Network Neuroscience*, vol. 4, no. 4, pp. 1235–1251, 2020.
- [11] L. Douw, M. De Groot, E. Dellen, J. Heimans, H. Ronner, C. Stam, and J. Reijneveld, “‘functional connectivity’ is a sensitive predictor of epilepsy diagnosis after the first seizure,” *PloS one*, vol. 5, 05 2010.
- [12] K. G. Ranasinghe, L. B. Hinkley, A. J. Beagle, D. Mizuiri, A. F. Dowling, S. M. Honma, M. M. Finucane, C. Scherling, B. L. Miller, S. S. Nagarajan, and K. A. Vossel, “Regional functional connectivity predicts distinct cognitive impairments in alzheimer’s disease spectrum,” *NeuroImage: Clinical*, vol. 5, pp. 385–395, 2014. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S2213158214000989>
- [13] J. Oltra, A. Campabadal Delgado, B. Segura, C. Uribe, M. Marti, Y. Compta, F. Valldeoriola, N. Bargalló, A. Iranzo, and C. Junqué, “Disrupted functional connectivity in pd with probable rbd and its cognitive correlates,” *Scientific Reports*, vol. 11, 12 2021.
- [14] C. Stam, B. Jones, G. Nolte, M. Breakspear, and P. Scheltens, “Small-World Networks and Functional Connectivity in Alzheimer’s Disease,” *Cerebral Cortex*, vol. 17, no. 1, pp. 92–99, 2007.
- [15] S. Monajemi, K. Eftaxias, S. Sanei, and S. H. Ong, “An informed multitask diffusion adaptation approach to study tremor in parkinson’s disease,” *IEEE Journal of Selected Topics in Signal Processing*, vol. 10, no. 7, pp. 1306–1314, Oct 2016.

- [16] P. van Mierlo, Y. Höller, N. K. Focke, and S. Vulliemoz, "Network perspectives on epilepsy using eeg/meg source connectivity," *Frontiers in Neurology*, vol. 10, 2019.
- [17] K. Lehnertz, T. Bröhl, and T. Rings, "The human organism as an integrated interaction network: Recent conceptual and methodological challenges," *Frontiers in Physiology*, vol. 11, 2020.
- [18] D. J. Fenn, M. A. Porter, M. McDonald, S. Williams, N. F. Johnson, and N. S. Jones, "Dynamic communities in multichannel data: An application to the foreign exchange market during the 2007–2008 credit crisis," *Chaos: An Interdisciplinary Journal of Nonlinear Science*, vol. 19, no. 3, p. 033119, 2009. [Online]. Available: <https://doi.org/10.1063/1.3184538>
- [19] D. J. Fenn, M. A. Porter, P. J. Mucha, M. McDonald, S. Williams, N. F. Johnson, and N. S. Jones, "Dynamical clustering of exchange rates," *Quantitative Finance*, vol. 12, no. 10, pp. 1493–1520, 2012. [Online]. Available: <https://doi.org/10.1080/14697688.2012.668288>
- [20] M. Bazzi, M. A. Porter, S. Williams, M. McDonald, D. J. Fenn, and S. D. Howison, "Community detection in temporal multilayer networks, with an application to correlation networks," *Multiscale Modeling & Simulation*, vol. 14, no. 1, pp. 1–41, 2016. [Online]. Available: <https://doi.org/10.1137/15M1009615>
- [21] Y. Chen, Z. Wang, and X. Shen, "An unbiased symmetric matrix estimator for topology inference under partial observability," *IEEE Signal Processing Letters*, vol. 29, no. 02, pp. 1257–1261, 2022.
- [22] J. Pereira, M. Ibrahim, and A. Montanari, "Learning networks of stochastic differential equations," in *Advances in Neural Information Processing Systems*, vol. 23. Curran Associates, Inc., 2010.
- [23] D. Materassi and M. V. Salapaka, "Identification of network components in presence of unobserved nodes," in *Proc. IEEE Conference on Decision and Control (CDC)*, Osaka, Japan, Dec 2015, pp. 1563–1568.
- [24] V. Matta, A. Santos, and A. H. Sayed, "Graph learning under partial observability," *Proceedings of the IEEE*, vol. 108, pp. 2049 – 2066, 11 2020.
- [25] E. S. C. Ching and H. C. Tam, "Reconstructing links in directed networks from noisy dynamics," *Phys. Rev. E*, vol. 95, p. 010301, Jan 2017. [Online]. Available: <https://link.aps.org/doi/10.1103/PhysRevE.95.010301>
- [26] D. Napolitano and T. D. Sauer, "Reconstructing the topology of sparsely connected dynamical networks," *Physical Review E, Statistical, Nonlinear, and Soft Matter Physics*, vol. 77, p. 026103, 2008.
- [27] N. Lim, F. d'Alché Buc, C. Auliac, and G. Michailidis, "Operator-valued kernel-based vector autoregressive models for network inference," *Machine Learning*, vol. 99, no. 3, pp. 489–513, Jun 2015. [Online]. Available: <https://doi.org/10.1007/s10994-014-5479-3>
- [28] A. Mauroy and J. Goncalves, "Linear identification of nonlinear systems: A lifting technique based on the Koopman operator," in *2016 IEEE 55th Conference on Decision and Control (CDC)*, Las Vegas, USA, Dec 2016, pp. 6500–6505.
- [29] J. M. Hammersley and P. Clifford, "Markov fields on finite graphs and lattices." University of Oxford, 2021.
- [30] J. Pearl, *Causality*, 2nd ed. Cambridge University Press, 2009.
- [31] P. Geiger, K. Zhang, B. Schölkopf, M. Gong, and D. Janzing, "Causal inference by identification of vector autoregressive processes with hidden components," in *Proc. International Conference on Machine Learning*, vol. 37, July 2015, pp. 1917–1925.
- [32] P. Spirtes, C. Glymour, and R. Scheines, *Causation, Prediction, and Search*, 2nd ed. MIT press, 2000.
- [33] P. Spirtes and C. Glymour, "An algorithm for fast recovery of sparse causal graphs," *Social Science Computer Review*, vol. 9, no. 1, pp. 62–72, 1991. [Online]. Available: <https://doi.org/10.1177/089443939100900106>
- [34] D. M. Chickering, "Optimal structure identification with greedy search," *J. Mach. Learn. Res.*, vol. 3, no. null, p. 507–554, mar 2003. [Online]. Available: <https://doi.org/10.1162/15324430321897717>
- [35] J. Ramsey, M. Glymour, R. Sanchez-Romero, and C. Glymour, "A million variables and more: the fast greedy equivalence search algorithm for learning high-dimensional graphical causal models, with an application to functional magnetic resonance images," *International Journal of Data Science and Analytics*, vol. 3, pp. 121–129, 2016.
- [36] A. Anandkumar, V. Y. F. Tan, F. Huang, and A. S. Willsky, "High-dimensional gaussian graphical model selection: Walk summability and local separation criterion," *J. Mach. Learn. Res.*, vol. 13, no. 1, pp. 2293–2337, 2012.
- [37] G. Bresler, D. Gamarnik, and D. Shah, "Hardness of parameter estimation in graphical models," in *Proceedings of the 27th International Conference on Neural Information Processing Systems - Volume 1*, ser. NIPS'14. Cambridge, MA, USA: MIT Press, 2014, pp. 1062–1070. [Online]. Available: <http://dl.acm.org/citation.cfm?id=2968826.2968945>
- [38] A. Bogdanov, E. Mossel, and S. Vadhan, "The complexity of distinguishing markov random fields," in *Approximation, Randomization and Combinatorial Optimization. Algorithms and Techniques*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2008, pp. 331–342.
- [39] G. Mateos, S. Segarra, A. G. Marques, and A. Ribeiro, "Connecting the dots: Identifying network structure via graph signal processing," *IEEE Signal Processing Magazine*, vol. 36, no. 3, pp. 16–43, 2019.
- [40] J. Mei and J. M. F. Moura, "Signal processing on graphs: Causal modeling of unstructured data," *IEEE Transactions on Signal Processing*, vol. 65, no. 8, pp. 2077–2092, April 2017.
- [41] A. Moneta, N. Chlaß, D. Entner, and P. Hoyer, "Causal search in structural vector autoregressive models," in *Proceedings of the 12th International Conference on Neural Information Processing Systems (NIPS) Mini-Symposium on Causality in Time Series*, Vancouver, Canada, 2009, pp. 95–118.
- [42] E. Kivits and P. M. V. d. Hof, "Identification of diffusively coupled linear networks through structured polynomial models," *IEEE Transactions on Automatic Control*, pp. 1–16, 2022.
- [43] C. W. J. Granger, "Investigating causal relations by econometric models and cross-spectral methods," *Econometrica*, vol. 37, no. 3, pp. 424–438, 1969. [Online]. Available: <http://www.jstor.org/stable/1912791>
- [44] S. Segarra, M. T. Schaub, and A. Jadbabaie, "Network inference from consensus dynamics," in *2017 IEEE 56th Annual Conference on Decision and Control (CDC)*, Dec 2017, pp. 3212–3217.
- [45] S. Segarra, A. G. Marques, G. Mateos, and A. Ribeiro, "Network topology inference from spectral templates," *IEEE Transactions on Signal and Information Processing over Networks*, vol. 3, no. 3, pp. 467–483, 2017.
- [46] A. Sandryhaila and J. M. F. Moura, "Discrete signal processing on graphs," *IEEE Transactions on Signal Processing*, vol. 61, no. 7, pp. 1644–1656, 2013.
- [47] P. Spirtes, C. Meek, and T. Richardson, "Causal inference in the presence of latent variables and selection bias," in *Proceedings of the Eleventh Conference on Uncertainty in Artificial Intelligence*, ser. UAI'95. San Francisco, CA, USA: Morgan Kaufmann Publishers Inc., 1995, p. 499–506.
- [48] D. Colombo, M. H. Maathuis, M. Kalisch, and T. S. Richardson, "Learning high-dimensional directed acyclic graphs with latent and selection variables," *The Annals of Statistics*, vol. 40, no. 1, pp. 294–321, 2012.
- [49] A. Anandkumar, D. Hsu, A. Javanmard, and S. Kakade, "Learning linear bayesian networks with latent variables," in *Proceedings of the 30th International Conference on Machine Learning*, ser. Proceedings of Machine Learning Research, vol. 28, no. 1. Atlanta, Georgia, USA: PMLR, 17–19 Jun 2013, pp. 249–257.
- [50] A. Anandkumar and R. Valluvan, "Learning loopy graphical models with latent variables: Efficient methods and guarantees," *Ann. Statist.*, vol. 41, no. 2, pp. 401–435, 04 2013. [Online]. Available: <https://doi.org/10.1214/12-AOS1070>
- [51] J. Adams, N. R. Hansen, and K. Zhang, "Identification of partially observed causal models: Graphical conditions for the linear non-gaussian and heterogeneous cases," in *Advances in Neural Information Processing Systems 34 pre-proceedings (NeurIPS 2021)*, ser. NeurIPS '21, 2021.
- [52] A. A. Mastakouri, B. Schölkopf, and D. Janzing, "Necessary and sufficient conditions for causal feature selection in time series with latent common causes," in *Proceedings of the 38th International Conference on Machine Learning*, ser. Proceedings of Machine Learning Research, vol. 139. PMLR, 18–24 Jul 2021, pp. 7502–7511.
- [53] D. Materassi and M. V. Salapaka, "Network reconstruction of dynamical polytrees with unobserved nodes," in *Proc. IEEE Conference on Decision and Control (CDC)*, Maui, Hawaii, Dec 2012, pp. 4629–4634.
- [54] —, "On the problem of reconstructing an unknown topology via locality properties of the Wiener filter," *IEEE Transactions on Automatic Control*, vol. 57, no. 7, pp. 1765–1777, July 2012.
- [55] L. Zhao and Y. Wan, "Identifiability and estimation of partially-observed influence models," *IEEE Control Systems Letters*, pp. 1–1, 2022.
- [56] V. Chandrasekaran, P. A. Parrilo, and A. S. Willsky, "Latent variable graphical model selection via convex optimization," *The Annals of Statistics*, vol. 40, no. 4, pp. 1935–1967, 08 2012. [Online]. Available: <https://doi.org/10.1214/11-AOS949>
- [57] A. Jalali and S. Sanghavi, "Learning the dependence graph of time series with latent factors," in *Proceedings of the 29th International Conference on International Conference on Machine Learning*, ser. ICML'12. Madison, WI, USA: Omnipress, 2012, p. 619–626.

- [58] J. Mei and J. M. F. Moura, "Silvar: Single index latent variable models," *IEEE Transactions on Signal Processing*, vol. 66, no. 11, pp. 2790–2803, 2018.
- [59] A. Santos, V. Matta, and A. H. Sayed, "Local tomography of large networks under the low-observability regime," *IEEE Transactions on Information Theory*, vol. 66, pp. 587 – 613, 01 2020.
- [60] V. Matta, A. Santos, and A. H. Sayed, "Graph learning over partially observed diffusion networks: Role of degree concentration," *IEEE Open Journal of Signal Processing (Early Access)*, pp. 1–34, 2022.
- [61] J.-B. Hiriart-Urruty and C. Lemaréchal, *Fundamentals of Convex Analysis*, ser. Grundlehren Text Editions. Springer-Verlag Berlin Heidelberg, 2001.
- [62] A. Dax, "The distance between two convex sets," *Linear Algebra and its Applications*, vol. 416, no. 1, pp. 184–213, 2006, special Issue devoted to the Haifa 2005 conference on matrix theory. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0024379506001789>
- [63] A. H. Sayed, "Adaptation, Learning, and Optimization over Networks," *Found. Trends Mach. Learn.*, vol. 7, no. 4-5, pp. 311–801, 2014.
- [64] R. A. Rossi and N. K. Ahmed, "The network data repository with interactive graph analytics and visualization," in *AAAI*, 2015. [Online]. Available: <https://networkrepository.com>