

The END: Estimation Network Design for efficient distributed equilibrium seeking

Mattia Bianchi, *Member, IEEE*, Sergio Grammatico, *Senior Member, IEEE*

Abstract—Multi-agent decision problems are typically solved via distributed algorithms, where the computational burden is partitioned among a group of agents, only allowed to communicate on a peer-to-peer network. To cope with the limited information available, each processor is required to store a copy of certain variables, while agreement among the local copies is enforced via consensus protocols. This structure often leads to redundancy of the information, poor scalability with the network size, communication and memory overhead. In this paper, we develop a framework for the design and analysis of distributed algorithms, named Estimation Network Design (END), to systematically assign local copies only to a subset of the agents, while still ensuring consistency. END unifies and generalizes several existing (application-specific) approaches, and leverages the original sparsity of the problem to improve efficiency and minimize redundancy. We illustrate the flexibility and potential of END for several methods in the context of consensus optimization and game equilibrium seeking.

Index Terms—Nash equilibrium seeking, optimization algorithms, variational methods, communication networks.

I. INTRODUCTION

LARGE-SCALE problems in machine learning [1], signal processing [2] and decentralized control [3] involve huge volumes of data, often spatially scattered. In this scenario, distributed multi-agent computation – featuring peer-to-peer communication only, without central gathering of the data – is emerging as a fundamental paradigm to enable scalability, privacy preservation and robustness. On the downside, distributed algorithms require storage and transmission of multiple local copies of some variables, a form of redundancy that is absent from centralized processing. For instance, in consensus optimization [4], Nash equilibrium (NE) seeking over networks [5] and common fixed point computation [6], each agent keeps and exchanges with its neighbors an estimate of the entire decision variable – and possibly of some other global quantities, as the cost gradient or dual variables. This may result in prohibitive memory and communication requirements, and hinders scalability when the dimension of the estimates grows with the network size.

It is natural to question if this complexity can be mitigated. In particular, is it possible to leverage the structure of a

distributed problem to reduce the amount of copies allocated and exchanged in the network? We review the efforts made in this direction for two prominent applications: multi-agent optimization and games under partial-decision information.

Distributed optimization: Modern big data problems are typically *partially separable* [7], i.e., the objective function is the sum of local costs, each depending only on a *limited portion* of the overall optimization vector. Nevertheless, most consensus optimization algorithms entail the agents reaching agreement on the *whole* solution [8], [9] – even in applications where each agent finally discards most of the optimal vector, as in resource allocation and network control [10].

Part of the literature focuses on *partitioned* optimization, where the local cost of each agent only depends on its own “action” (local decision variable) and on the actions of its neighbors over the communication graph [10].

Then, approximating the actions of non-neighboring agents is superfluous [10]–[12].

Similarly, in constraint-coupled optimization, storing an estimate of the entire dual variable is not needed if each constraint only involves the actions of an agent and its neighbors [13].

Notably, both cases require that the communication graph matches the *interference* graph (describing the coupling among the agents in the cost or constraints), which allows the distributed implementation of many centralized methods [14].

Remarkably, general (non-partitioned) problems are addressed via dual methods by Mota et al. [14], and later by Alghunaim, Yuan and Sayed [15], [16]: in this approach, each component of the optimization variable is estimated by a suitably chosen cluster of agents, including *all* the agents whose cost depends on that component, but conceivably smaller than the entire network. As a drawback, the dual reformulation is only effective over undirected communication networks.

Nash equilibrium seeking: In NE problems under partial-decision information, each agent can only communicate with some neighbors, although its private cost function depends also on the action of non-neighboring agents. To cope with the lack of knowledge, it is typically assumed that each agent estimates all the competitors’ actions [17]–[19] – even if its cost might depend on a much smaller subset of them.

This approach raises concerns in terms of efficiency and is impractical for large networks. Scalable solutions are known for the class of aggregative games, where the agents only need to reconstruct an aggregation value (e.g., the average of all the

The authors are with the Delft Center for Systems and Control (DCSC), TU Delft, The Netherlands. E-mail addresses: {m.bianchi, s.grammatico}@tudelft.nl. This work was partially supported by NWO under research project OMEGA (grant n. 613.001.702) and by the ERC under research project COSMOS (802348).

actions) to evaluate their objective functions [20], [21].

While this setup was extensively studied, the problem remains widely open for more general, partially coupled, costs. The only results we are aware of are the algorithms proposed by Salehisadaghiani and Pavel [22], [23]: assuming that the communication network can be freely designed, each agent only needs to keep proxies of the decisions that directly influence its cost. Moreover, memory and communication efficient methods for generalized Nash equilibrium (GNE) problems (where the agents are also coupled via shared constraints) are not known in literature.

Contributions: Our work is motivated by the observation that, in distributed applications, the coupling among the agents often exhibits some sparsity. This sparsity *could* and *should* be exploited to design efficient algorithms and reduce the number of repeated variables in the network. While some particular scenarios are addressed via ad-hoc schemes [10], [22], what is missing is a systematic methodology to exploit the specific structure of a given problem – without resorting to a case-by-case convergence analysis.

To fill this gap, we introduce Estimation Network Design (END), a framework for the analysis and design of distributed iterations. Specifically, we provide a graph-theoretic language to describe how the estimates of the components of any variable of interest are allocated and combined among the agents in a generic distributed algorithm (in Section II). The notation we develop allows one to seamlessly cope with complex network interaction and with the non-homogeneity of the agents' copies (e.g., the local vectors kept by distinct agents may have different dimensions). Our framework is:

- *Versatile and algorithm-free:* The variables of interest can include any quantity some agents need to reach consensus upon, for instance decision vectors or dual multipliers in variational problems, but also the gradient of a cost or an aggregative function. For this reason, END can be employed in virtually any networked decision problem;
- *General:* END unifies the convergence analysis of standard (sparsity-unaware) algorithms (e.g., [24]) with that of algorithms specifically devised for problems with unique sparsity structure (e.g., [22]);
- *Customizable:* END algorithms can be tailored for specific instances of a problem, by embedding efficiency criteria (e.g., minimal memory allocation, bandwidth constraints), while preserving consistency.

We showcase the flexibility of END by generalizing several distributed algorithms in the literature. In particular:

- 1) For NE problems over networks, we prove linear convergence of a pseudo-gradient algorithm over directed graphs. Our result improves on existing work by relaxing the assumptions on the communication network [25], and by allowing for much more ductile estimate assignment [22], [23]. Moreover, special cases of our method recover both the full- and the partial-decision information setup (and a plethora of intermediate scenarios), for which a joint convergence analysis was not available. For GNE problems, we study a novel class of aggregative games, generalizing that considered in [26], and we demonstrate that END

can reduce the amount of copies allocated on the network for both the aggregation function and the dual variables (Section III);

- 2) We present the END version of several popular consensus optimization algorithms. In the case of dual methods, our setup coincides with that studied in [14]–[16]; compared to these works, we also consider primal methods and directed, time-varying graphs. In particular, we obtain a gradient-tracking method where each agent only has to approximate a portion of the whole gradient; and a push-sum distributed gradient descent (DGD) where each agent only estimates some components of the optimization variable (Section IV);
- 3) We numerically compare END algorithms against their sparsity-unaware counterparts. Our simulations suggests that not only communication and memory overhead are significantly reduced, but even that convergence speed can be

A. Background

1) *Basic notation:* \mathbb{N} is the set of natural numbers, including 0. \mathbb{R} ($\mathbb{R}_{\geq 0}$) is the set of (nonnegative) real numbers. $\mathbf{0}_q \in \mathbb{R}^q$ ($\mathbf{1}_q \in \mathbb{R}^q$) is a vector with all elements equal to 0 (1); $I_q \in \mathbb{R}^{q \times q}$ is an identity matrix; the subscripts may be omitted when there is no ambiguity. e_i denotes a vector of appropriate dimension with i -th element equal to 1 and all other elements equal to 0. For a matrix $A \in \mathbb{R}^{p \times q}$, $[A]_{i,j}$ is the element on row i and column j ; $\text{null}(A) := \{x \in \mathbb{R}^q \mid Ax = \mathbf{0}_n\}$ and $\text{range}(A) := \{v \in \mathbb{R}^p \mid v = Ax, x \in \mathbb{R}^q\}$; $\|A\|_\infty$ is the maximum of the absolute row sums of A . If $A = A^\top \in \mathbb{R}^{q \times q}$, $\lambda_{\min}(A) := \lambda_1(A) \leq \dots \leq \lambda_q(A) := \lambda_{\max}(A)$ denote its eigenvalues. $\text{diag}(A_1, \dots, A_N)$ is the block diagonal matrix with A_1, \dots, A_N on its diagonal. Given N vectors x_1, \dots, x_N , $\text{col}(x_1, \dots, x_N) := [x_1^\top \dots x_N^\top]^\top$. \otimes denotes the Kronecker product.

2) *Euclidean spaces:* Given a positive definite matrix $\mathbb{R}^{q \times q} \ni Q \succ 0$, $\mathcal{H}_Q := (\mathbb{R}^q, \langle \cdot, \cdot \rangle_P)$ is the Euclidean space obtained by endowing \mathbb{R}^q with the Q -weighted inner product $\langle x \mid y \rangle_Q = x^\top Q y$, $\|\cdot\|_Q$ is the associated norm; we omit the subscripts if $Q = I$. Unless otherwise stated, we assume to work in \mathcal{H} .

3) *Operator theory:* A set-valued operator $F : \mathbb{R}^q \rightrightarrows \mathbb{R}^q$ is characterized by its graph $\text{gra}(F) := \{(x, u) \mid u \in F(x)\}$. $\text{dom}(F) := \{x \in \mathbb{R}^q \mid F(x) \neq \emptyset\}$, $\text{fix}(F) := \{x \in \mathbb{R}^q \mid x \in F(x)\}$ and $\text{zer}(F) := \{x \in \mathbb{R}^q \mid \mathbf{0} \in F(x)\}$ are the domain, set of fixed points and set of zeros, respectively. F^{-1} denotes the inverse operator of F , defined as $\text{gra}(F^{-1}) = \{(u, x) \mid (x, u) \in \text{gra}(F)\}$. F is (μ -strongly) monotone in \mathcal{H}_Q if $\langle u - v \mid x - y \rangle_Q \geq 0$ ($\geq \mu \|x - y\|_Q^2$) for all $(x, u), (y, v) \in \text{gra}(F)$; we omit the indication “in \mathcal{H}_Q ” whenever $Q = I$. Id is the identity operator. $J_F := (\text{Id} + F)^{-1}$ denotes the resolvent operator of F . For a function $\psi : \mathbb{R}^q \rightarrow \overline{\mathbb{R}} := \mathbb{R} \cup \{\infty\}$, $\text{dom}(\psi) := \{x \in \mathbb{R}^q \mid \psi(x) < \infty\}$; its subdifferential operator is $\partial\psi : \text{dom}(\psi) \rightrightarrows \mathbb{R}^q : x \mapsto \{v \in \mathbb{R}^q \mid \psi(z) \geq \psi(x) + \langle v \mid z - x \rangle, \forall z \in \text{dom}(\psi)\}$; if ψ is differentiable and convex, $\partial\psi = \nabla\psi$. For a set $\Omega \subseteq \mathbb{R}^q$, $\iota_\Omega : \mathbb{R}^q \rightarrow \{0, \infty\}$ is the indicator function, i.e., $\iota_\Omega(x) = 0$ if $x \in \Omega$, ∞ otherwise; $N_\Omega : \Omega \rightrightarrows \mathbb{R}^q : x \mapsto \{v \in \mathbb{R}^q \mid \sup_{z \in \Omega} \langle v \mid z - x \rangle \leq 0\}$

is the normal cone operator of Ω . If Ω is closed and convex, then $\partial_{\ell\Omega} = \mathbf{N}_\Omega$ and $(\text{Id} + \mathbf{N}_\Omega)^{-1} = \text{proj}_{\Omega}$ is the Euclidean projection onto Ω .

4) Graph theory: A (directed) graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ consists of a nonempty set of vertices (or nodes) $\mathcal{V} = \{1, 2, \dots, V\}$ and a set of edges $\mathcal{E} \subseteq \mathcal{V} \times \mathcal{V}$. We denote by $\mathcal{N}(v) := \{u \mid (u, v) \in \mathcal{E}\}$ and $\overline{\mathcal{N}}(v) := \{u \mid (v, u) \in \mathcal{E}\}$ the set of in-neighbors (or simply neighbors) and out-neighbors of vertex $v \in \mathcal{V}$, respectively. A path from $v_1 \in \mathcal{V}$ to $v_N \in \mathcal{V}$ of length T is a sequence of vertices (v_1, v_2, \dots, v_T) such that $(v_t, v_{t+1}) \in \mathcal{E}$ for all $t = 1, \dots, T-1$. \mathcal{G} is rooted at $v \in \mathcal{V}$ if there exists a path from v to each $u \in \mathcal{V} \setminus \{v\}$. \mathcal{G} is strongly connected if there exist a path from u to v , for all $u, v \in \mathcal{V}$; in case \mathcal{G} is undirected, namely if $(u, v) \in \mathcal{E}$ whenever $(v, u) \in \mathcal{E}$, we simply say that \mathcal{G} is connected. The restriction of the graph \mathcal{G} to a set of vertices $\mathcal{V}^A \subseteq \mathcal{V}$ is defined as $\mathcal{G}|_{\mathcal{V}^A} := (\mathcal{V}^A, \mathcal{E} \cap (\mathcal{V}^A \times \mathcal{V}^A))$. We also write $\mathcal{G} = (\mathcal{V}^A, \mathcal{V}^B, \mathcal{E})$ to highlight that \mathcal{G} is bipartite, namely $\mathcal{V} = \mathcal{V}^A \cup \mathcal{V}^B$ and $\mathcal{E} \subseteq \mathcal{V}^A \times \mathcal{V}^B$. We may associate to \mathcal{G} a weight matrix $\mathbf{W} \in \mathbb{R}^{\mathcal{V} \times \mathcal{V}}$ compliant with \mathcal{G} , namely $w_{u,v} := [\mathbf{W}]_{u,v} > 0$ if $(v, u) \in \mathcal{E}$, $w_{u,v} = 0$ otherwise; we denote by $\mathbf{D} = \text{diag}((\deg(v))_{v \in \mathcal{V}})$ and $\mathbf{L} = \mathbf{D} - \mathbf{W}$ the in-degree and Laplacian matrices, with $\deg(v) = \sum_{v \in \mathcal{V}} w_{u,v}$. \mathcal{G} is unweighted if $w_{u,v} = 1$ whenever $(v, u) \in \mathcal{E}$. Given two graphs $\mathcal{G}^A = (\mathcal{V}^A, \mathcal{E}^A)$ and $\mathcal{G}^B = (\mathcal{V}^B, \mathcal{E}^B)$, we write $\mathcal{G}^A \subseteq \mathcal{G}^B$ if \mathcal{G}^A is a subgraph of \mathcal{G}^B , i.e., if $\mathcal{V}^A \subseteq \mathcal{V}^B$ and $\mathcal{E}^A \subseteq \mathcal{E}^B$; we define $\mathcal{G}^A \cup \mathcal{G}^B := (\mathcal{V}^A \cup \mathcal{V}^B, \mathcal{E}^A \cup \mathcal{E}^B)$. A time-varying graph $(\mathcal{G}^k)_{k \in \mathbb{N}}$, $\mathcal{G}^k = (\mathcal{V}, \mathcal{E}^k)$ is Q -strongly connected if $\bigcup_{t=kQ}^{(k+1)Q-1} \mathcal{G}^t$ is strongly connected for all $k \in \mathbb{N}$. Given a graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$, compliant weights \mathbf{W} , a root $r \in \mathcal{V}$ and terminals $\mathcal{T} \subseteq \mathcal{V}$, we consider the following problems:

- Steiner tree $\text{ST}(\mathcal{G}, \mathcal{T}, \mathbf{W})$: find an undirected connected subgraph $\mathcal{G}^* = (\mathcal{V}^*, \mathcal{E}^*) \subseteq \mathcal{G}$, $\mathcal{T} \subseteq \mathcal{V}^*$, with minimum cost (i.e., minimizing $\sum_{(v,u) \in \mathcal{E}^*} w_{u,v}$);
- Unweighted Steiner tree $\text{UST}(\mathcal{G}, \mathcal{T})$: find an undirected connected subgraph $\mathcal{G}^* = (\mathcal{V}^*, \mathcal{E}^*) \subseteq \mathcal{G}$, $\mathcal{T} \subseteq \mathcal{V}^*$, with minimum number of edges;
- Directed Steiner tree $\text{DST}(\mathcal{G}, r, \mathcal{T}, \mathbf{W})$: find a subgraph $\mathcal{G}^* = (\mathcal{V}^*, \mathcal{E}^*) \subseteq \mathcal{G}$, $\mathcal{T} \subseteq \mathcal{V}^*$, rooted at r , with minimum cost (i.e., minimizing $\sum_{(v,u) \in \mathcal{E}^*} w_{u,v}$);
- Unweighted directed Steiner tree $\text{UDST}(\mathcal{G}, r, \mathcal{T})$: find a subgraph $\mathcal{G}^* = (\mathcal{V}^*, \mathcal{E}^*) \subseteq \mathcal{G}$, $\mathcal{T} \subseteq \mathcal{V}^*$, rooted at r , with minimum number of edges;
- Strongly connected Steiner subgraph $\text{SCSS}(\mathcal{G}, \mathcal{T})$: find a strongly connected subgraph $\mathcal{G}^* = (\mathcal{V}^*, \mathcal{E}^*) \subseteq \mathcal{G}$, $\mathcal{T} \subseteq \mathcal{V}^*$, with minimal number of vertices.

II. ESTIMATE NETWORK DESIGN FRAMEWORK

A. The END setup

We start by introducing a generic information structure, useful both to describe existing distributed algorithms and to design new ones. It is characterized by:

- a set of agents $\mathcal{I} := \{1, 2, \dots, I\}$;
- a given (directed) *communication* network $\mathcal{G}^C = (\mathcal{I}, \mathcal{E}^C)$, over which the agents can exchange information: agent i can receive information from agent j if and only if $j \in \mathcal{N}^C(i)$;

- a variable of interest $y \in \mathbb{R}^{n_y}$ partitioned as $y = \text{col}((y_p)_{p \in \mathcal{P}})$, where, for each $p \in \mathcal{P} := \{1, \dots, P\}$, $y_p \in \mathbb{R}^{n_{y_p}}$, and $n_y = \sum_{p \in \mathcal{P}} n_{y_p}$;
- a given bipartite directed *interference* graph $\mathcal{G}^I = (\mathcal{P}, \mathcal{I}, \mathcal{E}^I)$, $\mathcal{E}^I \subseteq \mathcal{P} \times \mathcal{I}$, that specifies which components of y are indispensable for each agent: $p \in \mathcal{N}^I(i)$ means that agent i needs (an estimate of) y_p to perform some essential local computation.¹

The agents may be unable to access the value of the variable of interest y . Instead, each agent keeps an estimate of some (possibly all) the components y_p 's, and exchanges its estimates with some neighbors, as specified by:

- a bipartite directed *estimate* graph $\mathcal{G}^E = (\mathcal{P}, \mathcal{I}, \mathcal{E}^E)$, $\mathcal{E}^E \subseteq \mathcal{P} \times \mathcal{I}$, that specifies which components of y are estimated by each agent: agent i keeps an estimate $\mathbf{y}_{i,p} \in \mathbb{R}^{n_{y_p}}$ of y_p if and only if $p \in \mathcal{N}^E(i)$;
- P directed *design* graphs $\{\mathcal{G}_p^D\}_{p \in \mathcal{P}}$, with $\mathcal{G}_p^D = (\overline{\mathcal{N}}^E(p), \mathcal{E}_p^D)$, to describe how the agents exchange their estimates: agent i can receive $\mathbf{y}_{j,p}$ from agent j if and only if $i \in \mathcal{N}_p^D(j)$.²

Example 1 (Partially separable optimization): Consider the distributed optimization problem

$$\min_{y \in \mathbb{R}^{n_y}} \sum_{i \in \mathcal{I}} f_i(y), \quad (1)$$

where $f_i : \mathbb{R}^{n_y} \rightarrow \bar{\mathbb{R}}$ is a private cost function of agent i , and the optimization variable is partitioned as $y = \text{col}((y_p)_{p \in \mathcal{P}})$. In several engineering applications, like network control and data ranking [7], each cost function f_i depends only on some of the components of y , as specified by an interference graph \mathcal{G}^I : f_i depends on y_p if and only if $p \in \mathcal{N}^I(i) \subseteq \mathcal{P}$. With some abuse of notation, we highlight this fact by writing

$$f_i(y) = f_i((y_p)_{p \in \mathcal{N}^I(i)}). \quad (2)$$

The common approach to solve (1) over a communication network \mathcal{G}^C is to assign to each agent $i \in \mathcal{I}$ a copy $\tilde{\mathbf{y}}_i := \text{col}((\mathbf{y}_{i,p})_{p \in \mathcal{P}}) \in \mathbb{R}^{n_y}$ of the whole decision variable and to let the agents exchange their estimates with every neighbor over \mathcal{G}^C ; in END notation, we write this as³

$$\mathcal{E}^E = \mathcal{P} \times \mathcal{I}, \quad \mathcal{G}_p^D = \mathcal{G}^C \quad (\forall p \in \mathcal{P}). \quad (3)$$

This choice of graphs \mathcal{G}^E and $\{\mathcal{G}_p^D\}_{p \in \mathcal{P}}$ does not take advantage of the structure in (2). In fact, agent i only needs $(y_p)_{p \in \mathcal{N}^I(i)}$ to evaluate (the gradient of) its local cost f_i ; storing a copy of the whole vector y could be unnecessary and inefficient – especially if \mathcal{G}^I is sparse and n_y is large. \square

¹For ease of notation, we assume that $\overline{\mathcal{N}}^I(p) \neq \emptyset$ for all $p \in \mathcal{P}$ (i.e., each component of y is indispensable for some agent).

²Note that the vertices of \mathcal{G}_p^D are $\overline{\mathcal{N}}^E(p)$, namely all the agents that keep an estimate of y_p : in fact, agent i can only receive an estimate of y_p if it is keeping an estimate of y_p . Note that the graph \mathcal{G}^E is uniquely determined by $\{\mathcal{G}_p^D\}_{p \in \mathcal{P}}$; for this reason, in the following, we often only refer to the design graphs $\{\mathcal{G}_p^D\}_{p \in \mathcal{P}}$.

³In the following, we often refer to (3) as the “standard” setup, as it is the most widely studied scenario. With $\mathcal{G}^C = \mathcal{G}_p^D$ we also imply $\mathbf{W}^C = \mathbf{W}_p^D$.

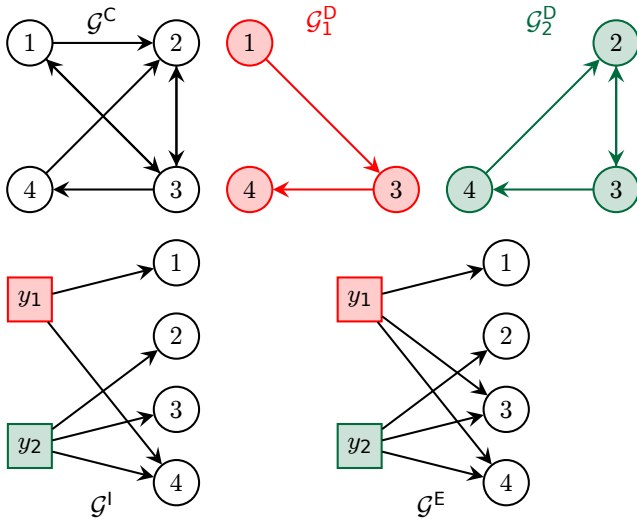


Fig. 1: An example of END. On the left, the given communication and interference graphs, with $\mathcal{I} = \{1, 2, 3, 4\}$ and $\mathcal{P} = \{1, 2\}$. On the right, a possible choice for the estimation graphs \mathcal{G}_1^D and \mathcal{G}_2^D , and the resulting estimation graph. \mathcal{G}_1^D is designed to have minimum number of edges, provided that is rooted at 1 (and the conditions in Problem 1(i) and 1(ii) are met); the graph is found by solving $\text{UDST}(\mathcal{G}^C, 1, \{1, 4\})$. Informally speaking, the goal is to minimize the transmission cost for one round of communication, but allowing the information on $y_{1,1}$ to reach agent 4. Note that agent 3 estimates y_1 , despite this variable is not indispensable for its local computation (i.e., $1 \notin \mathcal{N}^1(3)$): otherwise, the information on y_1 could not reach agent 4. Instead, \mathcal{G}_2^D is designed to be strongly connected, with minimum number of nodes (i.e., solving $\text{SCSS}(\mathcal{G}^C, \{2, 3, 4\})$), to minimize the memory allocation for the copies of y_2 .

B. Design

From an algorithm design perspective, the graphs \mathcal{G}^C and \mathcal{G}^I shall be considered fixed a priori and part of the problem formulation; in contrast, the graphs \mathcal{G}^E and $\{\mathcal{G}_p^D\}_{p \in \mathcal{P}}$ are design choices. Informally speaking, the goal is to design the graphs \mathcal{G}^E and $\{\mathcal{G}_p^D\}_{p \in \mathcal{P}}$ so that it is possible to *distributedly* and (possibly) *efficiently* solve a given decision problem. In mathematical terms, this objective translates to imposing extra structure on the estimate and design graphs.

Problem 1: Given the communication graph \mathcal{G}^C and the interference graph \mathcal{G}^I , design the estimate graph \mathcal{G}^E and the design graphs $\{\mathcal{G}_p^D\}_{p \in \mathcal{P}}$ such that:

- (i) $\mathcal{G}^I \subseteq \mathcal{G}^E$;
- (ii) $\mathcal{G}_p^D \subseteq \mathcal{G}^C$, for all $p \in \mathcal{P}$;
- (iii) “additional requirements” on \mathcal{G}^E , $\{\mathcal{G}_p^D\}_{p \in \mathcal{P}}$ are met. \square

In particular, it must hold that $\mathcal{G}^E \subseteq \mathcal{G}^I$, namely each agent estimates at least the components of y which are indispensable for local computation (in fact, \mathcal{G}^I expresses the minimal information necessary for each agent). Moreover, since data transmission can only happen over the communication graph \mathcal{G}^C , it must hold that $\mathcal{G}_p^D \subseteq \mathcal{G}^C$, for all $p \in \mathcal{P}$.

The “additional requirements” in Problem 1(iii) can encode *feasibility* conditions (for instance, we always need some type of connectedness for the graphs $\{\mathcal{G}_p^D\}_{p \in \mathcal{P}}$, to ensure that the agents can reach consensus on their estimates), but also *efficiency* specifications (treated as soft constraints, e.g. we might aim at reducing the memory allocation by minimizing

the overall number $|\mathcal{E}^E|$ of copies employed).

For continuity of presentation, we discuss in Appendix A several instances of Problem 1, solution methods and design choices. A simple example is also illustrated in Figure 1.

C. Unified analysis

All in all, the choice of the estimate and design graphs is vastly problem-dependent. Luckily, differently from most existing works, we do not need to consider a specific structure. Instead, we simply assume some level of connectedness for the design graphs.

Assumption 1 (Connectedness): At least one of the following conditions holds:

- (i) For each $p \in \mathcal{P}$, there exists $r_p \in \mathcal{I}$ such that \mathcal{G}_p^D is rooted at r_p .
- (ii) For each $p \in \mathcal{P}$, \mathcal{G}_p^D is strongly connected.
- (iii) For each $p \in \mathcal{P}$, \mathcal{G}_p^D is undirected and connected. \square

Throughout the paper, we also assume that the design graphs are chosen to satisfy the specifications in Problem 1(i) and 1(ii), without further mention.

Standing Assumption 1 (Consistency): It holds that $\mathcal{G}^I \subseteq \mathcal{G}^E$ and that $\mathcal{G}_p^D \subseteq \mathcal{G}^C$ for all $p \in \mathcal{P}$. \square

The conditions above ensure some properties for the estimate exchange, akin to those exploited in the analysis of standard consensus-based algorithms (as exemplified in Lemmas 1 and 2 below). This simple observation allows us to generalize the convergence analysis of several distributed algorithms to the END framework, allowing for great freedom in the estimates exchange, as we show in Sections III and IV. However, before proceeding, we need to introduce the stacked notation used throughout in our analysis.

D. END Notation

For all $p \in \mathcal{P}$, let $N_p := |\overline{\mathcal{N}}^E(p)|$ be the number of copies of y_p . We define:

$$\mathbf{y}_p := \text{col}((\mathbf{y}_{i,p})_{i \in \overline{\mathcal{N}}^E(p)}) \in \mathbb{R}^{N_p n_{y_p}}, \quad \forall p \in \mathcal{P}; \quad (4)$$

$$\mathbf{y} := \text{col}((\tilde{\mathbf{y}}_p)_{p \in \mathcal{P}}) \in \mathbb{R}^{n_y}, \quad (5)$$

where we recall that $\mathbf{y}_{i,p}$ is the estimate of the quantity y_p kept by agent i ; $n_y := \sum_{p \in \mathcal{P}} N_p n_{y_p}$. Note that \mathbf{y}_p collects all the copies of y_p , kept by different agents. For each $p \in \mathcal{P}$, for each $i \in \overline{\mathcal{N}}^E(p)$, we denote by

$$i_p := \sum_{j \in \overline{\mathcal{N}}^E(p), j \leq i} 1 \quad (6)$$

the position of i in the ordered set of nodes $\overline{\mathcal{N}}^E(p)$. For all $i \in \overline{\mathcal{N}}^E(p)$, we denote by $\mathbf{R}_{i,p} \in \mathbb{R}^{n_{y_p} \times N_p n_{y_p}}$ the matrix that selects $\mathbf{y}_{i,p}$ from \mathbf{y}_p , i.e., $\mathbf{y}_{i,p} = \mathbf{R}_{i,p} \mathbf{y}_p$. We denote $\mathbf{W}^D := \text{diag}((\mathbf{W}_p^D \otimes \mathbf{I}_{n_{y_p}})_{p \in \mathcal{P}})$, $\mathbf{L}^D := \text{diag}((\mathbf{L}_p^D \otimes \mathbf{I}_{n_{y_p}})_{p \in \mathcal{P}})$, where we recall that \mathbf{W}_p^D is the weight matrix of \mathcal{G}_p^D , and \mathbf{L}_p^D is its Laplacian. For all $p \in \mathcal{P}$, let

$$\mathcal{C}_p := \{\mathbf{y}_p \in \mathbb{R}^{N_p n_{y_p}} \mid \mathbf{y}_p = \mathbf{1}_{N_p} \otimes v, v \in \mathbb{R}^{n_{y_p}}\}, \quad (7)$$

be the consensus space for \mathbf{y}_p , namely the subspace where all the estimates of y_p are equal. The overall consensus space for the estimates is denoted by $\mathcal{C} := \prod_{p \in \mathcal{P}} \mathcal{C}_p$. Given $y = \text{col}((y_p)_{p \in \mathcal{P}}) \in \mathbb{R}^{n_y}$, we define $\mathcal{C}(y) := \text{col}((\mathbf{1}_{N_p} \otimes y_p)_{p \in \mathcal{P}})$.

We denote by \mathcal{C}_\perp the complementary subspace of \mathcal{C} ; by $\Pi_\parallel := \text{diag}(\dots((\mathbf{1}_{N_p} \mathbf{1}_{N_p}^\top \otimes I_{n_{y_p}})/N_p)_{p \in \mathcal{P}})$ and $\Pi_\perp := \mathbf{I} - \Pi_\parallel$ the projection matrices onto \mathcal{C} and \mathcal{C}_\perp , respectively.

Sometimes it is useful to define agent-wise quantities, which we indicate with a tilde. Let

$$\tilde{\mathbf{y}}_i := \text{col}((\mathbf{y}_{i,p})_{p \in \mathcal{N}^E(i)}), \quad \forall i \in \mathcal{I}; \quad (8)$$

$$\tilde{\mathbf{y}} := \text{col}((\tilde{\mathbf{y}}_i)_{i \in \mathcal{I}}) \in \mathbb{R}^{n_y}, \quad (9)$$

where $\tilde{\mathbf{y}}_i$ collects all the estimates kept by agent i . Let $\mathbf{P} \in \mathbb{R}^{n_y \times n_y}$ be the permutation matrix such that $\mathbf{P}\mathbf{y} = \tilde{\mathbf{y}}$; the graph structures corresponding to $\tilde{\mathbf{y}}$ can be defined via permutations, e.g., $\tilde{\mathbf{W}}^D := \mathbf{P}\mathbf{W}^D\mathbf{P}^\top$, $\tilde{\mathbf{L}}^D := \mathbf{P}\mathbf{L}^D\mathbf{P}^\top$, $\tilde{\mathcal{C}} := \mathbf{P}\mathcal{C}$.

The following lemmas follow by stacking over $p \in \mathcal{P}$ well-known graph-theoretic properties.

Lemma 1: Let Assumption 1(i) hold. Then, $\text{null}(\mathbf{L}^D) = \mathcal{C}$. Moreover, $\text{null}(\tilde{\mathbf{L}}^D) = \tilde{\mathcal{C}}$. \square

Lemma 2: Let Assumption 1(ii) hold and assume that \mathbf{W}_p^D is balanced, for all $p \in \mathcal{P}$. Then, for any $\mathbf{y} \in \mathbb{R}^{n_y}$, $\langle \mathbf{y}, \mathbf{L}^D \mathbf{y} \rangle \geq \frac{\bar{\lambda}}{2} \|\mathbf{I} - \Pi_\parallel\| \|\mathbf{y}\|^2$, where $\bar{\lambda} := \min_{p \in \mathcal{P}} \{\lambda_2(\mathbf{L}_p^D + \mathbf{L}_p^D)\} > 0$. \blacksquare

III. GENERALIZED NASH EQUILIBRIUM SEEKING

In this section we consider GNE problems. In particular, each agent $i \in \mathcal{I}$ is equipped with a private cost function $f_i(x_i, x_{-i})$, $f_i : \mathbb{R}^{n_{x_i}} \times \mathbb{R}^{n_{x_{-i}}} \rightarrow \mathbb{R}$, which depends both on its local action (decision variable) $x_i \in \mathbb{R}^{n_{x_i}}$ and on the actions of the other agents $x_{-i} := \text{col}((x_j)_{j \in \mathcal{I} \setminus \{i\}}) \in \mathbb{R}^{n_{x_{-i}}}$. Each agent chooses its action in a local feasible set $\Omega_i \subseteq \mathbb{R}^{n_{x_i}}$; let $x := \text{col}((x_i)_{i \in \mathcal{I}}) \in \Omega$ be the overall action, with $\Omega := \prod_{i \in \mathcal{I}} \Omega_i \subseteq \mathbb{R}^{n_x}$. The agents' decisions are also coupled via shared constraints: specifically, the overall feasible set is $\mathcal{X} := \Omega \cap \{x \in \mathbb{R}^{n_x} \mid Ax = a\}$, where $A \in \mathbb{R}^{n_a \times n_x}$, $a \in \mathbb{R}^{n_a}$. We call *generalized game* the following set of interdependent optimization problems:

$$(\forall i \in \mathcal{I}) \quad \underset{x_i \in \mathbb{R}^{n_{x_i}}}{\text{minimize}} \quad f_i(x_i, x_{-i}) \quad \text{s.t.} \quad (x_i, x_{-i}) \in \mathcal{X}. \quad (10)$$

The goal is to distributedly compute a GNE, a set of decisions simultaneously solving all the problems in (10). Formally, a GNE is an I -tuple $x^* = \text{col}((x_i^*)_{i \in \mathcal{I}}) \in \mathcal{X}$ such that, for all $i \in \mathcal{I}$, $f(x_i^*, x_{-i}^*) \leq \inf\{f(x_i, x_{-i}^*) \mid (x_i, x_{-i}^*) \in \mathcal{X}\}$. Let us define the *pseudo-gradient* operator $\mathbf{F} : \mathbb{R}^{n_x} \rightarrow \mathbb{R}^{n_x}$,

$$\mathbf{F}(x) := \text{col}((\nabla_{x_i} f_i(x_i, x_{-i}))_{i \in \mathcal{I}}). \quad (11)$$

We restrict our attention to convex and strongly monotone games; the following are standard conditions for GNE seeking over graphs [20, Asm. 1], [27, Asm. 1-2], [18, Asm. 1-2].

Assumption 2: For all $i \in \mathcal{I}$, Ω_i is closed and convex, f_i is continuous and $f_i(\cdot, x_{-i})$ is convex and differentiable for every x_{-i} ; \mathcal{X} is non-empty and satisfies Slater's constraint qualification. \square

Assumption 3: The pseudo-gradient \mathbf{F} in (11) is μ -strongly monotone and θ -Lipschitz continuous, for some $\mu, \theta > 0$. \square

We focus on the partial-decision information scenario, where each agent i only relies on the data received locally from some neighbors over a communication network \mathcal{G}^C . To cope with the limited information, the solution usually explored in the literature is to embed each agent with an estimate

of the whole vector x [17], [27] (and possibly a copy of a dual variable [18]). Critically, this approach fails to exploit the possible sparsity in the cost and constraint coupling. We remedy in the remainder of this section.

A. END pseudo-gradient dynamics for NE seeking

We start by considering games without coupling constraints (i.e., $\mathcal{X} = \Omega$): then, the notion of GNE boils down to that of a NE. Under Assumptions 2 and 3, the game in (10) has a unique NE. We describe the cost coupling via an interference graph $\mathcal{G}^I = (\mathcal{I}, \mathcal{I}, \mathcal{E}^I)$, where $(p, i) \in \mathcal{E}^I$ if and only if f_i explicitly depends on x_p , for all $i \neq p$, and $(i, i) \in \mathcal{E}^I$ for all $i \in \mathcal{I}$; we also write

$$f_i((x_p)_{p \in \mathcal{N}^I(i)}) := f_i(x_i, x_{-i}).$$

Hence, we choose the variable of interest for the END framework to be the overall action, i.e. $y = x$; $\mathcal{P} = \mathcal{I}$ and $y_i = x_i$ for all $i \in \mathcal{I}$ (finer partitions are also possible). Each agent i keeps and sends the copies $\{\mathbf{y}_{i,p}, p \in \mathcal{N}^E(i)\}$, estimating the actions of a *subset* of the other agents. Since the action x_i is actually a local variable, under the control of agent i , we formally define $\mathbf{y}_{i,i} := x_i$ (i.e., agent i 's estimate of its own action coincides with the *real* value). We study the following iteration (we recall the notation in Section II-D): each agent $i \in \mathcal{I}$ performs

$$\begin{aligned} \hat{\mathbf{y}}_{i,p}^k &:= \sum_{j \in \mathcal{N}_p^D(i)} [\mathbf{W}_p^D]_{i,p,j} \mathbf{y}_{j,p}^k \quad (\forall p \in \mathcal{N}^E(i)) \\ \mathbf{y}_{i,p}^{k+1} &= \hat{\mathbf{y}}_{i,p}^k \quad (\forall p \in \mathcal{N}^E(i) \setminus \{i\}) \\ \mathbf{y}_{i,i}^{k+1} &= \text{proj}_{\Omega_i} \left(\hat{\mathbf{y}}_{i,i}^k - \alpha \nabla_{x_i} f_i((\hat{\mathbf{y}}_{i,p}^k)_{p \in \mathcal{N}^I(i)}) \right). \end{aligned} \quad (12)$$

In (12), the estimates of the agents are updated according to a consensus protocol, with an extra (projected) gradient step for the own estimate $\mathbf{y}_{i,i}$. The algorithm retrieves [28, Alg. 1] if $\mathbf{W}_i^D = \mathbf{W}^C$ for all $i \in \mathcal{I}$, (i.e., the standard setup in (3)). Since $\mathcal{G}_i^D \subseteq \mathcal{G}^C$, the algorithm is distributed. Note that the local gradient $\nabla_{x_i} f_i$ is computed on the local estimates kept by agent i , not on the real action $x^k = \text{col}((\mathbf{y}_{i,i}^k)_{i \in \mathcal{I}})$. We define the *extended pseudo-gradient mapping*

$$\mathbf{F}(\mathbf{y}) := \text{col}((\nabla_{x_i} f_i((\mathbf{y}_{i,p})_{p \in \mathcal{N}^I(i)}))_{i \in \mathcal{I}}), \quad (13)$$

$\mathbf{R} := \text{diag}((\mathbf{R}_{i,i})_{i \in \mathcal{I}})$, with $\mathbf{R}_{i,i}$ as in Section II-D, and $\Omega := \{\mathbf{y} \mid \mathbf{R}\mathbf{y} \in \Omega\}$. Then, (12) can be written in stacked form in one line:

$$\mathbf{y}^{k+1} = \text{proj}_{\Omega} (\mathbf{W}^D \mathbf{y}^k - \alpha \mathbf{R}^\top \mathbf{F}(\mathbf{W}^D \mathbf{y}^k)). \quad (14)$$

Assumption 4: For each $i \in \mathcal{I}$, \mathcal{G}_i^D is rooted at i and $\mathbf{W}_i^D \mathbf{1}_{N_i} = \mathbf{1}_{N_i}$; we denote by $q_i^D \in \mathbb{R}^{N_i}$ the unique non-negative vector such that $q_i^{D\top} \mathbf{W}_i^D = q_i^{D\top}$, $\mathbf{1}_{N_i}^\top q_i^D = 1$. \square

Assumption 4 is very mild: rootedness is necessary for the consensus of the estimates; row-stochasticity is immediately satisfied whenever the agents have access to their own in-degree. One major technical complication – with respect to the usual, more restrictive strongly connectedness assumption – is that the (Perron) eigenvectors q_i^D 's might have zero elements. In addition, we require one technical condition.

Assumption 5: For all $i \in \mathcal{I}$, there is a matrix $\mathbf{Q}_i \succ 0$ such that $\sigma_i := \|\mathbf{W}_i^D - \mathbf{1}_{N_i} q_i^{D\top}\|_{\mathbf{Q}_i} < 1$, $[\mathbf{1}_{N_i}^\top \mathbf{Q}_i]_{i,i} = 1$,

$\mathbf{1}_{N_i}^\top Q_i W_i^D (\mathbf{I}_{N_i} - \mathbf{1}_{N_i} q_i^D)^\top = \mathbf{0}_{N_i}^\top$, and either (i) Q_i is diagonal, or (ii) $\Omega_i = \mathbb{R}^{n_{x_i}}$. \square

Remark 1: Assumption 5(i) alone is general enough to comprise all the cases considered in the existing literature:

- i. if \mathcal{G}_i^D is strongly connected with self-loops, then Assumption 5(i) holds with $Q_i = \text{diag}(q_i/[q_i]_{i_i})$ [25, Lem. 1]; in particular, if W_i^D is doubly stochastic, $Q_i = \mathbf{I}$;
- ii. if \mathcal{G}_i^D is the directed star graph (namely, there are all and only the edges from node i to every node in $\overline{\mathcal{N}^E}(i)$), then Assumption 5(i) holds with $Q_i = \mathbf{I}$ (and $\sigma_i = 0$, q_i with only one nonzero element $[q_i]_{i_i} = 1$); note that having this structure for all $i \in \mathcal{I}$ correspond to the classical full-information scenario (i.e., estimates and true values coincide), as detailed below.

Other relevant cases, satisfying Assumption 5 but never addressed in literature, are discussed in the following. \square

Theorem 1: Let Assumptions 2 to 5 hold, and let

$$\begin{aligned} \Xi &:= \text{diag}((Q_i \otimes \mathbf{I}_{n_{x_i}})_{i \in \mathcal{I}}) & \bar{\sigma} &:= \max_{i \in \mathcal{I}} \{\sigma_i\} \\ \bar{\theta} &:= \theta \sqrt{\max_{i \in \mathcal{I}} \{[Q_i]_{i_i, i_i}\} / \lambda_{\min}(\Xi)} \\ \underline{\gamma} &:= \sqrt{1 / \max_{i \in \mathcal{I}} \{\mathbf{1}^\top Q_i \mathbf{1}\}}, & \bar{\gamma} &:= \sqrt{1 / \min_{i \in \mathcal{I}} \{\mathbf{1}^\top Q_i \mathbf{1}\}} \\ M_\alpha &:= \begin{bmatrix} 1 - 2\alpha\mu\underline{\gamma}^2 + \alpha^2\theta^2\bar{\gamma}^2 & \bar{\sigma}(\alpha(\bar{\theta} + \theta\bar{\gamma}) + \alpha^2\bar{\theta}\theta\bar{\gamma}) \\ \bar{\sigma}(\alpha(\bar{\theta} + \theta\bar{\gamma}) + \alpha^2\bar{\theta}\theta\bar{\gamma}) & \bar{\sigma}^2(1 + 2\alpha\bar{\theta} + \alpha^2\bar{\theta}^2) \end{bmatrix} \end{aligned}$$

Let $\alpha > 0$ be chosen such that

$$\rho_\alpha = \lambda_{\max}(M_\alpha) < 1. \quad (15)$$

Then the sequence $(\mathbf{y}^k)_{k \in \mathbb{N}}$ generated by (14) converges linearly to $\mathbf{y}^* := \mathcal{C}(x^*)$, where x^* is the NE of the game (10): for all $k \in \mathbb{N}$, $\|\mathbf{y}^{k+1} - \mathbf{y}^*\|_\Xi^2 \leq \rho_\alpha \|\mathbf{y}^k - \mathbf{y}^*\|_\Xi^2$. \square

The condition (15) always holds for α small enough (explicit bounds are obtained as in [28]). Let us now highlight some of the novelties of Theorem 1:

- (a) Consider the standard scenario in (3), where agents store and exchange an estimate of the whole x . If \mathcal{G}^C is strongly connected and W^C is doubly stochastic, Theorem 1 retrieves exactly [28, Th. 1]. If W^C is only row stochastic, Theorem 1 improves on the results in [25] since (14) does not require the knowledge of any Perron eigenvector, but just a small-enough step; this is achieved by using the weight matrix Ξ in the analysis.
- (b) To our knowledge, the only other works that consider partial coupling are [22], [23]. The authors propose gossip algorithms where, assuming a lower bound for the strongly connected graph \mathcal{G}^C related to \mathcal{G}^I , each agent must only estimate the actions that directly affect its cost.⁴ However, this setup requires that the cost of each agent only depends on the actions of its communication neighbors and neighbors' neighbors [23, Lem. 3]. By allowing some agents to estimate a larger subset of actions (if needed), Theorem 1 avoids this limitation.

⁴This is also achieved in Theorem 1 by the choice $\mathcal{G}_i^D = (\overline{\mathcal{N}^I}(i), \mathcal{E}^C \cap (\overline{\mathcal{N}^I}(i) \times \overline{\mathcal{N}^I}(i)))$ if all the resulting $\{\mathcal{G}_i^D\}_{i \in \mathcal{I}}$ are strongly connected, which is a much weaker assumption than [23, Asm. 6].

- (c) Theorem 1 also allows for graphs \mathcal{G}_i^D 's that are not strongly connected. For instance, if $\{\mathcal{G}_i^D\}_{i \in \mathcal{I}}$ are all star graphs (i.e., Remark 1.ii), the action update in (14) is

$$x_i^{k+1} = \text{proj}_{\Omega_i}(x_i^k - \alpha \nabla_{x_i} f_i(x^k)) \quad (16)$$

which is the standard pseudo-gradient method for the full-information scenario. In particular, when \mathcal{G}^E is complete, Theorem 1 retrieves the well-known bound $\alpha < 2\mu/\theta^2$ (since $\bar{\sigma} = 0$, $\underline{\gamma}^2 = \bar{\gamma}^2 = \frac{1}{I}$) [29, Prop. 26.16].

- (d) Another (not strongly-connected) case not addressed before is that of a matrix $W_1^D = \begin{bmatrix} 1 & \mathbf{0}_{N_i-1}^\top \\ c & W \end{bmatrix}$, $c \in \mathbb{R}_{\geq 0}^{N_i-1}$, representing a leader-follower protocol (with agent 1 as the leader for ease of notation). If $\Omega_1 = \mathbb{R}^{n_{x_1}}$ and Assumption 4 holds, it can be checked that Assumption 5 is verified with $q_1^D = e_1$, $Q_1 = \begin{bmatrix} \mathbf{1} + \mathbf{1}^\top X_{22} \mathbf{1} & -\mathbf{1}^\top X_{2,2} \\ -X_{22} \mathbf{1}_{N_i-1} & X_{22} \end{bmatrix}$, where $X = \begin{bmatrix} X_{1,1} & X_{1,2} \\ X_{1,2}^\top & X_{2,2} \end{bmatrix} \succ 0$ is any matrix such that $\|W_1^D - \mathbf{1}q_1^D\|_X < 1$. As a special case, if $[c]_{j_1} = 1$, we have $\hat{y}_{j_1}^k = x_1^k$ and agent j can use the real action x_1 when evaluating its cost. We can also model a scenario in which the exact information on x_1 propagates over \mathcal{G}_1^D but with some delay, by choosing \mathcal{G}_1^D as a directed tree.
- (e) Each graph \mathcal{G}_i^D can be chosen independently. For instance, one variable x_i might be publicly available (choose \mathcal{G}_i^D as a star graph), while other actions can only be reconstructed via consensus. The convergence of these cases would otherwise require ad-hoc analysis (e.g., to determine bounds on the step sizes).

B. GNE seeking in aggregative games

In this section we also address the presence of coupling constraints. As per standard practice, we only focus on variational GNEs (v-GNEs), namely GNEs with identical dual variables, which are computationally tractable and economically more justifiable [30]. Under Assumptions 2 and 3, there is a unique v-GNE; moreover x^* is the v-GNE of (10) if and only if there exists a dual variables $\lambda^* \in \mathbb{R}^{n_\lambda}$ satisfying the Karush–Kuhn–Tucker (KKT) conditions [2, Th. 4.8]:

$$\mathbf{0}_{n_x} \in F(x^*) + N_\Omega(x^*) + A^\top \lambda^*, \quad \mathbf{0}_{n_\lambda} = Ax^* - a. \quad (17)$$

The coupling constraints are partitioned in M blocks, i.e., $A = [A_{m,i}]_{m \in \mathcal{M}, i \in \mathcal{I}}$, $a = \text{col}((\sum_{i \in \mathcal{I}} a_{m,i})_{m \in \mathcal{M}})$, where, for all $m \in \mathcal{M} := \{1, 2, \dots, M\}$, $A_{m,i} \in \mathbb{R}^{n_{\lambda_m} \times n_{x_i}}$ and $a_{m,i} \in \mathbb{R}^{n_{\lambda_m}}$ are local data kept by agent i . The coupling constraints sparsity pattern is described by the interference graph $\mathcal{G}^{I,\lambda} = (\mathcal{M}, \mathcal{I}, \mathcal{E}^{I,\lambda})$, where $(m, i) \in \mathcal{E}^{I,\lambda}$ if agent i is involved in the constraints block indexed by m ; in other terms,

$$(\forall (m, i) \notin \mathcal{E}^{I,\lambda}) \quad A_{m,i} = \mathbf{0}, \quad a_{m,i} = \mathbf{0}, \quad (18)$$

and the m -th block constraint can be written as $\sum_{i \in \overline{\mathcal{N}^{I,\lambda}}(m)} A_{m,i} x_i - a_{m,i} = \mathbf{0}$. Correspondingly, we partition the dual variable as $\lambda = \text{col}((\lambda_m)_{m \in \mathcal{M}})$, $\lambda_m \in \mathbb{R}^{n_{\lambda_m}}$.

We further study aggregative games [31], [32], where the cost coupling arises via an aggregation mapping $\sigma : \mathbb{R}^{n_x} \rightarrow \mathbb{R}^{n_\sigma}$, so that for all $i \in \mathcal{I}$, $f_i(x_i, x_{-i}) = \bar{f}_i(x_i, \sigma(x))$ for some function \bar{f}_i . Let σ be partitioned as $\sigma = \text{col}((\sigma_q)_{q \in \mathcal{Q}})$, $\mathcal{Q} :=$

$\{1, 2, \dots, Q\}$, and let $\mathcal{G}^{1,\sigma} = (\mathcal{Q}, \mathcal{I}, \mathcal{E}^{1,\sigma})$ be an interference graph such that, for all x (and with the usual overloading)

$$\sigma_q(x) = \sigma_q((x_i)_{i \in \overline{\mathcal{N}}^{1,\sigma}(q)}) \quad (19)$$

$$\bar{f}_i(x_i, \sigma(x)) = \bar{f}_i(x_i, (\sigma_q(x))_{q \in \overline{\mathcal{N}}^{1,\sigma}(i)}), \quad (20)$$

namely, $(q, i) \in \mathcal{E}^{1,\sigma}$ whenever *either* $\sigma_q(x)$ explicitly depends on x_i , or $\bar{f}_i(x_i, \sigma)$ explicitly depends on σ_q . Finally, we consider *affine* aggregation functions, so that

$$\sigma_q(x) := \sum_{i \in \overline{\mathcal{N}}^{1,\sigma}(q)} B_{q,i} x_i + b_{q,i}, \quad (21)$$

$$\sigma(x) = Bx + b, \quad (22)$$

$B_{q,i} \in \mathbb{R}^{n_{\sigma_q} \times n_{x_i}}$, $b_{q,i} \in \mathbb{R}^{n_{\sigma_q}}$ being local data of agent i , $B := [B_{q,i}]_{q \in \mathcal{Q}, i \in \mathcal{I}}$, $b = \sum_{i \in \mathcal{I}} b_i$, $b_i := \text{col}((b_{q,i})_{q \in \mathcal{Q}})$; $B_{q,i} := \mathbf{0}$ and $b_{q,i} = \mathbf{0}$ if $q \notin \overline{\mathcal{N}}^{1,\sigma}(i)$.⁵

When $M = Q = 1$ this setup boils down to standard generalized aggregative games [19], [33], where each agent must estimate the whole dual variable $\lambda \in \mathbb{R}^{n_\lambda}$ and the whole aggregative value $\sigma(x) \in \mathbb{R}^{n_\sigma}$. Instead, our idea is to leverage the possible problem sparsity by assigning to each agent copies of only some of the components of the dual variable and of the aggregation function, as specified by two⁶ estimate graphs $\mathcal{G}^{E,\lambda} = (\mathcal{M}, \mathcal{I}, \mathcal{E}^{E,\lambda})$, $\mathcal{G}^{E,\sigma} = (\mathcal{Q}, \mathcal{I}, \mathcal{E}^{E,\sigma})$. We postpone the discussion of a motivating application to Section V. To the best of our knowledge, the partial-coupling in the constraints or aggregation has not been considered in the literature. The only exception is the (non-generalized) game studied in [26], where the cost of each agent is only affected by some of the components of a (specific) aggregation function: nevertheless, this algorithm requires strong conditions on the (undirected) communication network – necessary to allow the choice $\mathcal{G}^I = \mathcal{G}^E$, see Example 6 in Appendix A.

Let us define the *extended pseudo-gradient mapping*

$$\tilde{\mathbf{F}}(x, \sigma) := \text{col}((\nabla_{x_i} \bar{f}_i(x_i, \tilde{\sigma}_i) + \tilde{B}_i^\top \nabla_{\tilde{\sigma}_i} \bar{f}_i(x_i, \tilde{\sigma}_i))_{i \in \mathcal{I}}), \quad (23)$$

where (with the customary overloading) $\bar{f}_i(x_i, \tilde{\sigma}_i) := \bar{f}_i(x_i, (\sigma_{i,q})_{q \in \overline{\mathcal{N}}^{1,\sigma}(i)})$, $\tilde{B}_i := \text{col}((B_{q,i})_{q \in \overline{\mathcal{N}}^{E,\sigma}(i)})$. Note that $\tilde{\mathbf{F}}$ coincides with the pseudo-gradient mapping when the estimates are exact and at consensus, i.e., $\tilde{\mathbf{F}}(x, \mathcal{C}^\sigma(\sigma(x))) = \mathbf{F}(x)$. We study the following distributed iteration:

$$x^{k+1} = \text{proj}_\Omega(x^k - \beta(\alpha \tilde{\mathbf{F}}(x^k, \sigma^k) + \mathbf{B}^\top \mathbf{L}^{D,\sigma} \sigma^k + \mathbf{A}^\top \lambda^k)) \quad (24a)$$

$$\sigma^{k+1} = \sigma^k - \beta \mathbf{L}^{D,\sigma} \sigma^k + \mathbf{B}(x^{k+1} - x^k) \quad (24b)$$

$$z^{k+1} = z^k + \beta \mathbf{L}^{D,\lambda} \lambda^k \quad (24c)$$

$$\lambda^{k+1} = \lambda^k - \beta(\mathbf{L}^{D,\lambda}(2z^{k+1} - z^k) - \mathbf{A}(2x^{k+1} - x^k) + \mathbf{a}), \quad (24d)$$

⁵This setup includes non-aggregative games as well, via $\sigma(x) = x$.

⁶Here we consider END problem for two variables of interest λ and σ . The notation in Section II is recovered by setting $y = \text{col}(\lambda, \sigma(x))$, with $P = M + Q$. However, for brevity, here we treat the two variables separately, as two independent instances of END, where the corresponding quantities in Section IV-A are distinguished via the superscripts λ and σ (e.g., $\mathcal{G}_m^{D,\lambda}$ describes how the agents exchange the estimates of λ_m). We also indicate the estimates of λ_m and $\sigma_q(x)$ kept by agent i with $\lambda_{i,m}$ and $\sigma_{i,q}$ (in place of $\mathbf{y}_{i,m}^\lambda$ and $\mathbf{y}_{i,q}^\sigma$), and analogously for the stacked vectors — e.g., $\sigma_q = \text{col}((\sigma_{i,q})_{i \in \overline{\mathcal{N}}^{E,\sigma}(q)})$, $\sigma = \text{col}((\sigma_q)_{q \in \mathcal{Q}})$.

where $\alpha > 0$, $\beta > 0$ are step sizes; $z = \text{col}((z_m)_{m \in \mathcal{M}}) \in \mathbb{R}^{n_\lambda}$, $z_m = \text{col}((z_{i,m})_{i \in \overline{\mathcal{N}}^{E,\lambda}(m)})$, where, for all $m \in \overline{\mathcal{N}}^{E,\lambda}(i)$, $z_{i,m} \in \mathbb{R}^{n_{\lambda_m}}$ is an auxiliary dual variable kept by agent i ; $\mathbf{A} := P^\lambda \text{diag}((\tilde{A}_i)_{i \in \mathcal{I}})$, where $\tilde{A}_i := \text{col}((A_{m,i})_{m \in \overline{\mathcal{N}}^{E,\sigma}(i)})$ (we recall that $P^\lambda \tilde{\lambda} = \lambda$); $\mathbf{a} := P^\lambda \text{col}((\tilde{a}_i)_{i \in \mathcal{I}})$ with $\tilde{a}_i = \text{col}((a_{m,i})_{m \in \overline{\mathcal{N}}^{E,\lambda}(i)})$; $\mathbf{B} := \text{diag}((N_q^\sigma I_{n_{\sigma_q}})_{q \in \mathcal{Q}}) P^\sigma \text{diag}((\tilde{B}_i)_{i \in \mathcal{I}})$ (we recall that $N_q^\sigma = |\overline{\mathcal{N}}^{E,\sigma}(q)|$). Moreover, let $\mathbf{b} := \text{diag}((N_q^\sigma I_{n_{\sigma_q}})_{q \in \mathcal{Q}}) P^\sigma \text{col}((\tilde{b}_i)_{i \in \mathcal{I}})$ with $\tilde{b}_i := \text{col}((b_{q,i})_{q \in \overline{\mathcal{N}}^{E,\sigma}(i)})$; we impose

$$\sigma^0 = Bx^0 + b, \quad (25)$$

or, agent-wise, $\tilde{\sigma}_i^0 = \text{col}((N_q^\sigma B_{q,i} x_i^0 + N_q^\sigma b_{q,i})_{q \in \overline{\mathcal{N}}^{E,\sigma}(i)})$. The algorithm is based on primal-dual pseudo-gradient dynamics, where the update in (24b) represents a dynamic tracking of the aggregation function σ , over the graphs $\{\mathcal{G}_q^{D,\sigma}\}_{q \in \mathcal{Q}}$. It is inspired by the methods in [18], [33], and in fact as in these works it is derived as a forward-backward (FB) method [29, §26.5].

Assumption 6: For each $m \in \mathcal{M}$, $\mathcal{G}_m^{D,\lambda}$ is undirected and connected and $W_m^{D,\lambda}$ is symmetric. For each $q \in \mathcal{Q}$, $\mathcal{G}_q^{D,\sigma}$ is strongly connected and $W_q^{D,\sigma}$ is balanced. \square

Theorem 2: Let Assumptions 2, 3 and 6 hold, and assume that $\tilde{\mathbf{F}}(x, \sigma)$ is θ -Lipschitz continuous. Then, for any small-enough $\alpha > 0$ there is a small-enough $\beta > 0$ such that the sequence $(x^k, \sigma^k, z^k, \mathbf{y}^k)_{k \in \mathbb{N}}$ generated by (24) converges to a point $(x^*, \mathcal{C}^\sigma(\sigma(x^*)), z^*, \mathcal{C}^\lambda(\lambda^*))$, where (x^*, λ^*) satisfies the KKT conditions in (17), hence x^* is the v-GNE of the game in (10). \square

IV. DISTRIBUTED OPTIMIZATION ALGORITHMS

In this section, we leverage the END framework to extend several distributed optimization algorithms and deal with partial coupling. In particular, we consider again the cost-coupled problem in Example 1, hereby recalled:

$$\min_{y \in \mathbb{R}^{n_y}} f(y) := \sum_{i \in \mathcal{I}} f_i((y_p)_{p \in \overline{\mathcal{N}}^1(i)}), \quad (26)$$

where f_i is a private cost function of agent i . We denote by \mathcal{Y}^* the solution set of (26), assumed to be nonempty. We take the optimization variable $y = \text{col}((y_p)_{p \in \mathcal{P}})$ as the variable of interest in the END; with the usual abuse of notation, let us write $f_i((\mathbf{y}_{i,p})_{p \in \overline{\mathcal{N}}^E(i)}) = f_i((\mathbf{y}_{i,p})_{p \in \overline{\mathcal{N}}^1(i)})$.

A. END dual methods

Under Standing Assumption 1, we can recast (26) by introducing local estimates and consensus constraints. The reformulation in the following proposition is not novel, and in fact it was employed for the dual methods in [14]–[16].

Proposition 1: Let Assumption 1(iii) hold. Then, problem (26) is equivalent to:

$$\begin{cases} \min_{\tilde{\mathbf{y}} \in \mathbb{R}^{n_y}} \sum_{i \in \mathcal{I}} f_i(\tilde{\mathbf{y}}_i) \\ \text{s.t. } \mathbf{y}_{i,p} = \mathbf{y}_{j,p} \quad \forall p \in \mathcal{P}, \forall (i, j) \in \mathcal{E}_p^D. \end{cases} \quad (27) \quad \square$$

If $\mathcal{G}_p^D = \mathcal{G}^C$ for all $p \in \mathcal{P}$, then (27) recovers the formulation used in the derivation of standard dual methods [1], [34], [35]: these algorithms require each agent to store a copy of the whole optimization vector. Instead, choosing a sparse \mathcal{G}^E can conveniently reduce the number of variables and constraints in (27). Regardless, due to its structure (i.e., separable costs and coupling constraints compliant with the communication graph), the problem in (27) can be immediately solved via several established Lagrangian-based algorithms (provided that the functions f_i 's are sufficiently well-behaved). In practice, this allows one to extend most (virtually all) the existing dual methods to the END framework.

Example 2 (END ADMM): Let Assumption 1(iii) hold, and assume that f_i is proper closed convex, for all $i \in \mathcal{I}$. Then, applying the alternating direction method of multipliers (ADMM) in [34] to the problem in (27)⁷ results in the iteration

$$\tilde{\mathbf{y}}_i^{k+1} = \underset{\tilde{\mathbf{y}}_i}{\operatorname{argmin}} \left\{ f_i(\tilde{\mathbf{y}}_i) + \sum_{p \in \mathcal{N}^E(i)} \sum_{j \in \mathcal{N}_p^D(i)} \left(\|\mathbf{y}_{i,p}\|^2 - \langle \mathbf{z}_{i,j,p}, \mathbf{y}_{i,p} \rangle \right) \right\} \quad (28a)$$

$$\mathbf{z}_{i,j,p}^{k+1} = (1 - \alpha) \mathbf{z}_{i,j,p}^k - \alpha \mathbf{z}_{j,i,p}^k + 2\alpha \mathbf{y}_{j,p}^{k+1}, \quad (28b)$$

where $\mathbf{z}_{i,j,p}$ is an auxiliary variable kept by agent i , for each $i \in \mathcal{I}$, $p \in \mathcal{N}^E(i)$, $j \in \mathcal{N}_p^D(i)$. Then, for any $\alpha \in (0, 1)$, $\mathbf{y}_{i,p}$ converges to \mathbf{y}_p^* , where $\mathbf{y}^* = \operatorname{col}((\mathbf{y}_p^*)_{p \in \mathcal{P}})$ is a solution of (26), for all $i \in \mathcal{I}$ and $p \in \mathcal{N}^E(i)$. Note that performing the update (28b) requires agent i to receive data from its neighbor $j \in \mathcal{N}_p^D(i)$ (while (28a) requires no communication). If $\mathcal{G}_p^D = \mathcal{G}^C$ for all $p \in \mathcal{P}$, then the method retrieves the standard ADMM for consensus optimization [34, Eq. (13)]. However, in general (28) requires the agents to store and exchange with their neighbors less (auxiliary) variables. \square

The edge constraints in (27) can be replaced by equivalent node conditions (as $\mathbf{L}^D \mathbf{y} = \mathbf{0}$). Furthermore, Proposition 1 would hold under the weaker Assumption 1(i), but distributed algorithms to efficiently solve (27) typically require undirected communication.

B. END ABC algorithm

In this subsection, we propose an END version of the ABC algorithm, recently developed in [9]. For differentiable costs f_i 's, let us consider the iteration: $(\forall i \in \mathcal{I})(\forall p \in \mathcal{N}^E(i))$

$$\mathbf{y}_{i,p}^{k+1} = -\mathbf{z}_{i,p}^k + \sum_{j \in \mathcal{N}^E(p)} [A_p]_{i_p, j_p} \mathbf{y}_{j,p}^k - \gamma [B_p]_{i_p, j_p} \nabla_{\mathbf{y}_p} f_j(\tilde{\mathbf{y}}_j^k) \quad (29a)$$

$$\mathbf{z}_{i,p}^{k+1} = \mathbf{z}_{i,p}^k + \sum_{j \in \mathcal{N}^E(p)} [C_p]_{i_p, j_p} \mathbf{y}_{j,p}^{k+1}, \quad (29b)$$

where $\mathbf{z}_{i,p} \in \mathbb{R}^{n_{y_p}}$ is a local variable kept by agent i ; for all $p \in \mathcal{P}$, A_p, B_p, C_p are matrices in $\mathbb{R}^{N_p \times N_p}$; $\gamma > 0$ is a step size. Note that if the matrices A_p, B_p, C_p 's are compliant with the corresponding graphs \mathcal{G}_p^D 's (e.g., $A_p = B_p = C_p = \mathbf{W}_p^D$),

⁷After decoupling the constraints in (27) by introducing auxiliary bridge variables as $\{\mathbf{y}_{i,p} = h_{(i,j),p}, h_{(i,j),p} = h_{(j,i),p}, h_{(j,i),p} = \mathbf{y}_{j,p}\}$; the approach is standard and we refer to [34] for a complete derivation.

then the iteration (29) is distributed. We can rewrite (29) in stacked form as

$$\mathbf{y}^{k+1} = \mathbf{A} \mathbf{y}^k - \gamma \mathbf{B} \nabla_{\mathbf{y}} \mathbf{f}(\mathbf{y}^k) - \mathbf{z}^k \quad (30a)$$

$$\mathbf{z}^{k+1} = \mathbf{z}^k + \mathbf{C} \mathbf{y}^{k+1}, \quad (30b)$$

where $\mathbf{A} := \operatorname{diag}((A_p \otimes \mathbf{I}_{n_{y_p}})_{p \in \mathcal{P}})$, $\mathbf{B} := \operatorname{diag}((B_p \otimes \mathbf{I}_{n_{y_p}})_{p \in \mathcal{P}})$, $\mathbf{C} := \operatorname{diag}((C_p \otimes \mathbf{I}_{n_{y_p}})_{p \in \mathcal{P}})$ belong to $\mathbb{R}^{n_{\mathbf{y}} \times n_{\mathbf{y}}}$, $\mathbf{z} := \operatorname{col}((\mathbf{z}_p)_{p \in \mathcal{P}})$ with $\mathbf{z}_p := \operatorname{col}((\mathbf{z}_{i,p})_{i \in \mathcal{N}^E(p)})$, and $\mathbf{f}(\mathbf{y}) := \sum_{i \in \mathcal{I}} f_i(\tilde{\mathbf{y}}_i)$.

Theorem 3: Let $\mathbf{D} := \operatorname{diag}((D_p \otimes \mathbf{I}_{n_{y_p}})_{p \in \mathcal{P}})$, for some $\{D_p \in \mathbb{R}^{N_p \times N_p}\}_{p \in \mathcal{P}}$. Assume that f_i is L -smooth and convex for each $i \in \mathcal{I}$, and that:

- (a) $\mathbf{A} = \mathbf{B} \mathbf{D}$ and $\mathbf{B} \succcurlyeq 0$, $\mathbf{D} \succ 0$;
- (b) $(\forall \mathbf{y} \in \mathcal{C}) \mathbf{D} \mathbf{y} = \mathbf{y}$, $\mathbf{B} \mathbf{y} = \mathbf{y}$;
- (c) $\mathbf{C} \succcurlyeq 0$, $\operatorname{null}(\mathbf{C}) = \mathcal{C}$;
- (d) \mathbf{B} and \mathbf{C} commute: $\mathbf{B} \mathbf{C} = \mathbf{C} \mathbf{B}$;
- (e) $\mathbf{I} - \frac{1}{2} \mathbf{C} - \sqrt{\mathbf{B} \mathbf{D}} \sqrt{\mathbf{B}} \succcurlyeq 0$.

Let $\mathbf{y}^* \in \mathcal{Y}^*$, $\mathbf{y}^* := \mathcal{C}(\mathbf{y}^*)$, and consider the merit function

$$\mathfrak{M}(\mathbf{y}) := \max\{\|\Pi_{\perp} \mathbf{y}\| \|\nabla_{\mathbf{y}} \mathbf{f}(\mathbf{y}^*)\|, \|\mathbf{f}(\mathbf{y}) - \mathbf{f}(\mathbf{y}^*)\|\}. \quad (31)$$

Then, for any $\mathbf{y}^0 \in \mathbb{R}^{n_{\mathbf{y}}}$, $\mathbf{z}^0 = \mathbf{0}_{n_{\mathbf{z}}}$, $\gamma \in (\frac{\lambda_{\min}(\mathbf{D})}{L})$, the sequence $(\mathbf{y}^k)_{k \in \mathbb{N}}$ generated by (30) satisfies

$$\mathfrak{M}(\mathbf{y}_{\text{avg}}^k) \leq \mathcal{O}(\frac{1}{k}), \quad (32)$$

for all $k \in \mathbb{N}$, where $\mathbf{y}_{\text{avg}}^k := \frac{1}{k} \sum_{t=1}^k \mathbf{y}^t$. \square

It is shown in [9] that many celebrated schemes for consensus optimization can be retrieved as particular instances of the ABC algorithm, by suitably choosing the matrices $\mathbf{A}, \mathbf{B}, \mathbf{C}$ [9, Tab. 2]: EXTRA [36], NEXT [37], DIGing [4], NIDS [38], and others. Theorem 3 permits the extension of each of these methods to the END framework. We only discuss an example below; for the other schemes, the analysis can be carried out analogously, see also [9, §III.A].

Example 3 (END AugDGM): The following gradient-tracking algorithm is the END version of [39, Alg. 1]: $(\forall i \in \mathcal{I})(p \in \mathcal{N}^E(i))$

$$\mathbf{y}_{i,p}^{k+1} = \sum_{j \in \mathcal{N}_p^D(i)} [\mathbf{W}_p^D]_{i_p, j_p} (\mathbf{y}_{j,p}^k - \gamma \mathbf{v}_{j,p}^k)$$

$$\mathbf{v}_{i,p}^{k+1} = \sum_{j \in \mathcal{N}_p^D(i)} [\mathbf{W}_p^D]_{i_p, j_p} (\mathbf{v}_{j,p}^k + \nabla_{\mathbf{y}_p} f_j(\tilde{\mathbf{y}}_j^{k+1}) - \nabla_{\mathbf{y}_p} f_j(\tilde{\mathbf{y}}_j^k)),$$

or, in stacked form,

$$\mathbf{y}^{k+1} = \mathbf{W}^D (\mathbf{y}^k - \gamma \mathbf{v}^k) \quad (34a)$$

$$\mathbf{v}^{k+1} = \mathbf{W}^D (\mathbf{v}^k + \nabla_{\mathbf{y}} \mathbf{f}(\mathbf{y}^{k+1}) - \nabla_{\mathbf{y}} \mathbf{f}(\mathbf{y}^k)); \quad (34b)$$

we impose $\mathbf{y}(0) = \mathbf{0}$, $\mathbf{v}(0) = \mathbf{W}^D \nabla_{\mathbf{y}} \mathbf{f}(\mathbf{y}^0)$. Here, $\mathbf{v}_{i,p}$ represents an estimate of $\nabla_{\mathbf{y}_p} \sum_{j \in \mathcal{I}} f_j(\mathbf{y}) / N_p$ kept by agent i . Note that agent i only estimates and exchanges the components of the cost gradient (and of the optimization variable) specified by $\mathcal{N}^E(i)$, instead of the whole vector as in [39, Alg. 1] – the two algorithms coincide only if $\mathbf{W}_p^D = \mathbf{W}^C$ for all $p \in \mathcal{P}$. By eliminating the \mathbf{v} variable in (34), we obtain

$$\mathbf{y}^{k+2} = 2\mathbf{W}^D \mathbf{y}^{k+1} - (\mathbf{W}^D)^2 \mathbf{y}^k - \gamma (\mathbf{W}^D)^2 (\nabla_{\mathbf{y}} \mathbf{f}(\mathbf{y}^{k+1}) - \nabla_{\mathbf{y}} \mathbf{f}(\mathbf{y}^k)). \quad (35)$$

Instead, eliminating \mathbf{z} from (30) we get

$$\begin{aligned} \mathbf{y}^{k+2} &= (\mathbf{I} - \mathbf{C} + \mathbf{A})\mathbf{y}^{k+1} - \mathbf{A}\mathbf{y}^k \\ &\quad - \gamma\mathbf{B}(\nabla_{\mathbf{y}}\mathbf{f}(\mathbf{y}^{k+1}) - \nabla_{\mathbf{y}}\mathbf{f}(\mathbf{y}^k)). \end{aligned} \quad (36)$$

which retrieves (35) for $\mathbf{A} = \mathbf{B} = (\mathbf{W}^{\mathbf{D}})^2$, $\mathbf{C} = (\mathbf{I} - \mathbf{W}^{\mathbf{D}})^2$.⁸ This choice satisfies the conditions in Theorem 3, with $\mathbf{D} = \mathbf{I}$, if Assumption 1(iii) holds and if each $\mathbf{W}_p^{\mathbf{D}}$ is symmetric and doubly stochastic.

Corollary 1: Let Assumption 1(iii) hold; assume that $\mathbf{W}_p^{\mathbf{D}}\mathbf{1}_{N_p} = \mathbf{1}_{N_p}$, $\mathbf{W}_p^{\mathbf{D}} = \mathbf{W}_p^{\mathbf{D}\top}$, for all $p \in \mathcal{P}$, and that f_i is L -smooth and convex, for all $i \in \mathcal{I}$. Then, for any $\gamma \in (0, \frac{1}{L})$ the rate (32) holds for (34). \square

Theorem 3 requires a recovery procedure (i.e., (32) holds for the running average only), as e.g., in [40], but pointwise convergence could be shown for several special cases of (30), see e.g., [39]. We also note that Theorem 3 enhances customizability with respect to [9, Th.24], even in the standard scenario (3) ($\mathcal{G}_p^{\mathbf{D}} = \mathcal{G}^{\mathbf{C}}$, for all $p \in \mathcal{P}$), by allowing for non-identical blocks \mathbf{A}_p 's (or \mathbf{B}_p 's, \mathbf{C}_p 's).

Remark 2 (Strong convexity and linear convergence): For certain design choices, the ABC algorithm achieves linear convergence when each function f_i is strongly convex in y [37, Th. 15]. Interestingly, it can be analogously shown that the END ABC (30) converges linearly under a weaker assumption, namely strong convexity of each f_i with respect to $\tilde{\mathbf{y}}_i$ only. This condition requires $\mathcal{G}^{\mathbf{E}} = \mathcal{G}^{\mathbf{I}}$, which is only a viable choice in some cases (see in Examples 5 and 6 in Appendix A); future work should investigate the convergence rate of (30) when only strong convexity of f_i with respect to $(y_p)_{p \in \mathcal{N}^{\mathbf{I}}(i)}$ (or of f in y , as in [36]) is postulated. \square

C. END Push-sum DGD

Techniques to solve optimization problems over switching or directed graphs also find their counterpart in the END framework. As an example, here we generalize the push-sum subgradient algorithm in [8, Eq. (1)].

Let the agents communicate over a time-varying network $(\mathcal{G}^{\mathbf{C},k})_{k \in \mathbb{N}}$, $\mathcal{G}^{\mathbf{C},k} = (\mathcal{I}, \mathcal{E}^{\mathbf{C},k})$. Given a fixed estimate graph $\mathcal{G}^{\mathbf{E}} \supseteq \mathcal{G}^{\mathbf{I}}$, for each $p \in \mathcal{P}$ we consider a time-dependent design graph $(\mathcal{G}_p^{\mathbf{D},k})_{k \in \mathbb{N}}$, $\mathcal{G}_p^{\mathbf{D},k} = (\overline{\mathcal{N}}^{\mathbf{E}}(p), \mathcal{E}_p^{\mathbf{D},k}) \subseteq \mathcal{G}^{\mathbf{C},k}$ (note that the set of nodes is fixed in $\mathcal{G}_p^{\mathbf{D},k}$). For all $i \in \mathcal{I}$ and $p \in \mathcal{N}^{\mathbf{E}}(i)$, agent i performs the following updates:

$$q_{i,p}^{k+1} = \sum_{j \in \overline{\mathcal{N}}^{\mathbf{E}}(p)} [\mathbf{W}_p^{\mathbf{D},k}]_{i_p, j_p} q_{j,p}^k \quad (37a)$$

$$\mathbf{w}_{i,p}^{k+1} := \sum_{j \in \overline{\mathcal{N}}^{\mathbf{E}}(p)} [\mathbf{W}_p^{\mathbf{D},k}]_{i_p, j_p} \mathbf{z}_{j,p}^k \quad (37b)$$

$$\mathbf{g}_{i,p}^{k+1} \in \partial_{y_p} f_i(\tilde{\mathbf{y}}_i^{k+1}), \quad \mathbf{y}_{i,p}^{k+1} := \frac{\mathbf{w}_{i,p}^{k+1}}{q_{i,p}^{k+1}} \quad (37c)$$

$$\mathbf{z}_{i,p}^{k+1} = \mathbf{w}_{i,p}^{k+1} - \gamma^k \mathbf{g}_{i,p}^{k+1}, \quad (37d)$$

initialized at $\mathbf{z}_{i,p}^0 \in \mathbb{R}^{n_{y_p}}$, $q_{i,p}^0 = 1$. With respect to [8, Eq. (1)], agent i keeps one scalar $q_{i,p}$ for each $p \in \mathcal{N}^{\mathbf{E}}(i)$ (instead of one overall), but does not store and exchange the variables $\mathbf{z}_{i,p} \in \mathbb{R}^{n_{y_p}}$ for $p \notin \mathcal{N}^{\mathbf{E}}(i)$.

⁸In fact, the sequence (\mathbf{y}^k) generated by (30) coincide with that generated by (34) for the given initialization.

Assumption 7: For all $k \in \mathbb{N}$ and $p \in \mathcal{P}$, it holds that:

- (i) *Self-loops:* for all $i \in \overline{\mathcal{N}}^{\mathbf{E}}(p)$, $(i, i) \in \mathcal{E}_p^{\mathbf{D},k}$;
- (ii) *Column-stochasticity:* $\mathbf{1}_{N_p}^{\top} \mathbf{W}_p^{\mathbf{D},k} = \mathbf{1}_{N_p}^{\top}$;
- (iii) *Finite weights:* $[\mathbf{W}_p^{\mathbf{D},k}]_{i_p, j_p} \geq \nu > 0$, $\forall (i, j) \in \mathcal{E}_p^{\mathbf{D},k}$. \square

Assumption 8: There exists an integer $Q > 0$ such that, for all $p \in \mathcal{P}$, $(\mathcal{G}_p^{\mathbf{D},k})_{k \in \mathbb{N}}$ is Q -strongly connected. \square

Example 4 (Design of $\mathcal{G}_p^{\mathbf{D},k}$): Assume that $\mathcal{G}^{\mathbf{C}} \subseteq \bigcup_{t=kQ}^{(k+1)Q-1} \mathcal{G}^{\mathbf{C},k}$ for all $k \in \mathbb{N}$, where $\mathcal{G}^{\mathbf{C}}$ is a strongly connected graph. Let $(\mathcal{G}_p^{\mathbf{D}})_{p \in \mathcal{P}}$ satisfy Standing Assumption 1 and Assumption 1(ii). Then, Assumption 8 holds by choosing

$\mathcal{G}_p^{\mathbf{D},k} = \mathcal{G}_p^{\mathbf{D}} \cap \mathcal{G}^{\mathbf{C},k}$, for all $p \in \mathcal{P}$ for all $k \in \mathbb{N}$. \square

Theorem 4: Let Assumptions 7 and 8 hold. Assume that, for all $i \in \mathcal{I}$, f_i is convex, and there is $L > 0$ such that, for all $y \in \mathbb{R}^{n_y}$ and $g_i \in \partial_y f_i(y)$, it holds that $\|g_i\| \leq L$. Let $(\gamma^k)_{k \in \mathbb{N}}$ be a positive non-increasing sequence such that $\sum_{k=0}^{\infty} \gamma^k = \infty$, $\sum_{k=0}^{\infty} (\gamma^k)^2 < \infty$. Then, the sequence $(\mathbf{y}^k)_{k \in \mathbb{N}}$ generated by (37) converges to $\mathcal{C}(\mathbf{y}^*)$, for some $\mathbf{y}^* \in \mathcal{Y}^*$. \square

D. Constraint-coupled distributed optimization

We consider now a different, constraint-coupled problem:

$$\begin{cases} \min_{x_i \in \mathbb{R}^{n_{x_i}}, i \in \mathcal{I}} & \sum_{i \in \mathcal{I}} f_i(x_i) \\ \text{s.t.} & \sum_{i \in \mathcal{N}^{\mathbf{I}}(p)} \mathbf{A}_{p,i} x_i - a_{p,i} = \mathbf{0}, \quad \forall p \in \mathcal{P} \end{cases} \quad (38a) \quad (38b)$$

for a given interference graph $\mathcal{G}^{\mathbf{I}} = (\mathcal{P}, \mathcal{I}, \mathcal{E}^{\mathbf{I}})$, where f_i and $\{\mathbf{A}_{p,i} \in \mathbb{R}^{n_{y_p} \times n_{x_i}}, a_{p,i} \in \mathbb{R}^{n_{y_p}}\}_{p \in \mathcal{N}^{\mathbf{I}}(i)}$ are private data kept by agent i (and the constraints (38b) are *not* compliant with the communication graph $\mathcal{G}^{\mathbf{C}}$, namely $\overline{\mathcal{N}}^{\mathbf{I}}(p) \not\subseteq \mathcal{N}^{\mathbf{C}}(i)$ for any i). Existing distributed methods to address (38) typically require each agent to store a copy of the entire dual variable (here, also our variable of interest) $y = \text{col}((y_p)_{p \in \mathcal{P}}) \in \mathbb{R}^{n_y}$ (and possibly of other variables in \mathbb{R}^{n_y} , e.g., an estimate of the constraint violation) [41], [42]. END primal-dual or dual methods can improve efficiency by exploiting the sparsity of $\mathcal{G}^{\mathbf{I}}$. For instance, (a simplified version of) (24) can be directly used to solve (38) over undirected graphs.⁹ Alternatively, let us consider the dual of (38):

$$\max_{y \in \mathbb{R}^{n_y}} \sum_{i \in \mathcal{I}} \varphi_i((y_p)_{p \in \mathcal{N}^{\mathbf{I}}(i)}) \quad (39)$$

$\varphi_i(y) := \min_{x_i \in \mathbb{R}^{n_{x_i}}} f_i(x_i) + \sum_{p \in \mathcal{N}^{\mathbf{I}}(i)} \langle y_p, \mathbf{A}_{p,i} x_i - a_{p,i} \rangle$; note that (39) is in the form (26). In fact, (39) was solved in [15] via the reformulation (27); this approach has the disadvantage of requiring undirected communication. Nonetheless, (39) can also be solved over directed (time-varying) networks, e.g., via the iteration in (37).¹⁰

V. ILLUSTRATIVE APPLICATIONS

We compare numerically some END algorithms and their sparsity-unaware counterparts, investigating how performance scales with the problem dimension, connectivity and sparsity.

⁹In fact, under convexity of the functions f_i 's, (17) coincides with the optimality conditions for (38).

¹⁰If each f_i is convex with compact domain, where the subgradients of the local dual function φ_i can be computed as $\mathbf{g}_{i,p}^k = \mathbf{A}_{p,i} x_i^*(\tilde{\mathbf{y}}_i^k) - a_{p,i}$, with $x_i^*(\tilde{\mathbf{y}}_i) \in \arg\min_{x_i \in \mathbb{R}^{n_{x_i}}} f_i(x_i) + \sum_{p \in \mathcal{N}^{\mathbf{I}}(i)} \langle \mathbf{y}_{i,p}, \mathbf{A}_{p,i} x_i - a_{p,i} \rangle$.

A. Unicast rate allocation

We study a bandwidth allocation problem with fixed routing [26], [43], here modeled as a GNE problem – see Figure 2 for an illustration. Consider an undirected connected communication network $\mathcal{G}^C = (\mathcal{I}, \mathcal{E}^C)$. From each node $i \in \mathcal{I}$, a user sends data with rate $x_i \in [0, 1]$, over a path \mathcal{L}_i – i.e., a sequence of consecutive edges over the graph \mathcal{G}^C . User i aims to choose x_i to minimize the cost function

$$J_i(x_i, x_{-i}) = J_i(x_i, \{\sigma_l\}_{l \in \mathcal{L}_i}) = -U(x_i) + \sum_{l \in \mathcal{L}_i} c_l(x_i, \sigma_l)$$

$$\sigma_l := \sum_{j | l \in \mathcal{L}_j} x_j,$$

where U_i is an utility function, σ_l represents the aggregative rate over the link (i.e., edge) l , and c_l is a penalty related to link l (e.g., quantifying the loss of service quality due to congestion [43] or a tax imposed by a network manager [26]). Furthermore, the capacity of each link l is bounded by the coupling constraints $\sigma_l \leq a_l$, for some $a_l > 0$. Our objective is to seek a v-GNE of the resulting generalized game, when the users can only communicate over the graph \mathcal{G}^C .

Let us relabel the “active” edges $\bigcup_{i \in \mathcal{I}} \{l \in \mathcal{L}_i\}$ (i.e., the edges of \mathcal{G}^C hosting at least one path) as $\{1, 2, \dots, P\} =: \mathcal{P}$; further, let us define for all $p \in \mathcal{P}$ and $i \in \mathcal{I}$,

$$A_{p,i} = B_{p,i} = \begin{cases} 1, & \text{if } p \in \mathcal{L}_i \text{ (user } i \text{ uses link } p) \\ 0, & \text{otherwise,} \end{cases}$$

the so-called *routing matrix* [43]. With these definitions, the problem retrieves an aggregative game of the type described in Section III-B (although with *inequality* coupling constraints), with $\mathcal{M} = \mathcal{Q} = \mathcal{P}$. In particular, only the aggregative variables and constraints relative to the links in \mathcal{L}_i directly affect agent i , i.e., $\mathcal{N}^{1,\sigma}(i) = \mathcal{N}^{1,\lambda}(i) = \mathcal{L}_i$.¹¹

A similar setup was considered in [22], [26] but modeled as a (non-aggregative) non-generalized game, and further assuming that the graphs $\{\mathcal{G}^C|_{\mathcal{N}^1(p)}\}_{p \in \mathcal{P}}$ are connected, cf. Figure 2 (see also Example 6 in Appendix A). Here, to compute a v-GNE, we employ a modification of Algorithm (24), where the right-hand side of (24d) is replaced by its positive part, to deal with inequalities coupling constraints.¹² In particular, we fix $W_p^{D,\sigma} = W_p^{D,\lambda} =: W_p^D$ for all $p \in \mathcal{P}$, and we compare the performance of the algorithm for two different choices of the design graphs:

- *Standard*: W_p^D 's are chosen as in (3), i.e., each agent estimates the whole dual variable, and aggregative value: the problem sparsity is ignored;
- *Customized*: W_p^D 's are chosen to minimize the per-iteration communication cost, by solving Problem 1(i) with: “(iii) \mathcal{G}_p^D is connected; \mathcal{G}_p^D has minimal number of edges” (this corresponds to a ST problem, see Appendix A).

We choose $U_i(x_i) = 10 \cdot \log(x_i + 1)$, $c_l(x_i, \sigma_l) = \psi_l \frac{x_i}{1 + e^{-\sigma_l}}$ with ψ_l sampled randomly uniformly in the interval $[0, 1]$ (Assumption 3 is satisfied in the feasible set, invariant for

¹¹The setup also fits more general cases where from a node i multiple distinct flows $x_{i,1}, \dots, x_{i,n_{x_i}}$ are sent over distinct paths $\mathcal{L}_{i,1}, \dots, \mathcal{L}_{i,n_{x_i}}$, by either a single user (adjusting the cost function) or by multiple competitive users (considering an augmented communication graph $\mathcal{G}^{C'} \supset \mathcal{G}^C$).

¹²Correctness and convergence of the resulting algorithm can be proven analogously to Appendix B.3: the argument is standard [18], [19] and omitted.

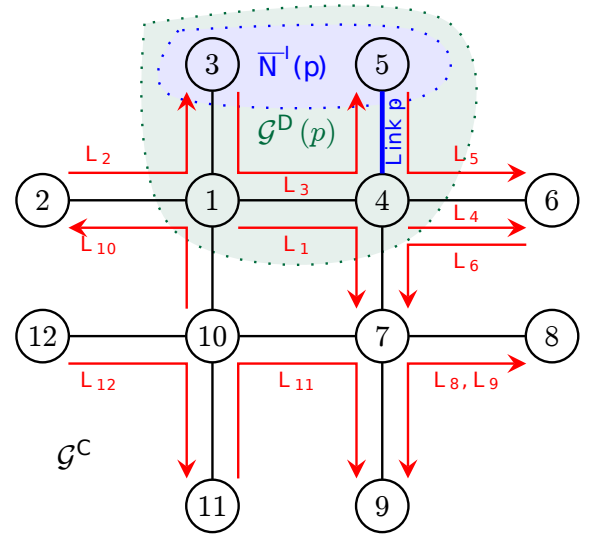


Fig. 2: Unicast rate allocation game. No flow is sent from node 7, which works only as a communication node (formally, \mathcal{L}_7 has length zero). Link (4, 5) – labeled p – is used by users 3 and 5 (i.e., $\mathcal{N}^1(p) = \{3, 5\}$), that are not communication neighbors.

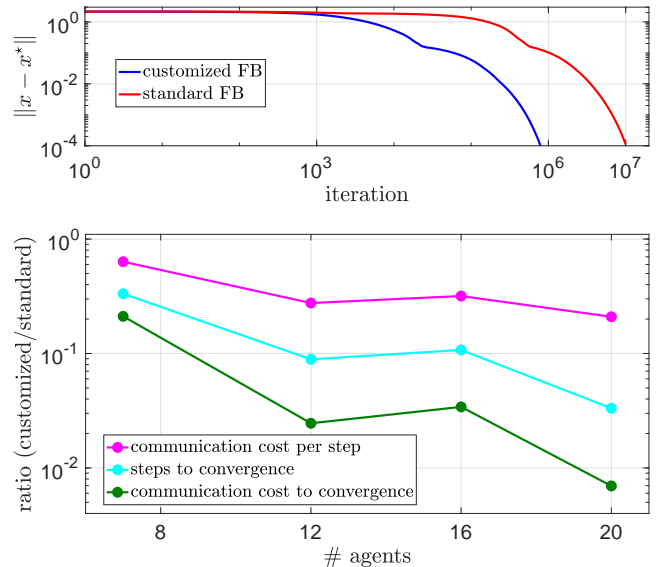


Fig. 3: Unicast rate allocation via algorithm (24), for the scheme in Figure 2 (top) and for different randomly generated networks, with maximal path length 4 and stopping criterion $\|x - x^*\| \leq 10^{-2}$ (bottom).

(24)), Metropolis-Hastings weights for every graph, $\alpha = 0.1$, $\beta = 10^{-3}$. The results are illustrated in Figure 3. In our first experiment, we consider the scenario in Figure 2, with $I = P = 12$. The customized algorithm converges to the unique v-GNE x^* over 10 times faster than the standard version; the communication burden at each step is also reduced, as the mean size of the (aggregative/dual) estimates kept and transmitted by each agent is 2.6, instead of $P = 12$. Since the latter quantity grows with the problem dimension, we expect the gap between the two methods to increase for larger networks. Simulations with $I = 7, 12, 16, 20$ ($P = 7, 16, 18, 26$) confirm this intuition: for the case $I = 20$, the

customized algorithm saves 99% of the communication cost (where sending one scalar value to *one* neighbor on \mathcal{G}^C costs 1, in unicast fashion). Finally, for the selected parameters and $I \geq 24$, the standard algorithm fails to converge in our simulations, while the customized algorithm converges (at least) up to $I = 50$ – suggesting tolerance to larger step sizes, with upper bounds less affected by the problem dimension.

In conclusion, while requiring some initial design effort, the customized method can result in substantial efficiency improvement, especially if the v-GNE problem is solved multiple times due to time-varying cost parameters or link capacities (e.g., if the edges of \mathcal{G}^C are only active intermittently [43]).

B. Optimal estimation in wireless sensor networks

We study a regression problem with sparse measurements [7], [16], arising from distributed estimation in wireless and ad-hoc sensor networks. Let us consider some sensors $\{1, 2, \dots, I\} =: \mathcal{I}$ and some sources $\{1, 2, \dots, P\} =: \mathcal{P}$, spatially distributed on a plane in the square $[0, 1] \times [0, 1]$. Each source p emits a signal $\bar{y}_p \in \mathbb{R}$, sensed by all the sensors in a radius $r_s > 0$; in turn, each sensor i measures

$$h_i := H_i \text{col}((\bar{y}_p)_{p \in \mathcal{N}^I(i)}) + w_i, \quad (40)$$

where $h_i \in \mathbb{R}^{n_{h_i}}$, H_i is a known output matrix, w_i is the measurement noise, and $\mathcal{N}^I(i)$ is the set of sources positioned less than r_s away from sensor i . Sensor i can send information to all the peers in a radius r_c^i (e.g., proportional to the sensor specific power); this induces a directed communication network $\mathcal{G}^C = (\mathcal{I}, \mathcal{E}^C)$ among the sensors, which we assume to be *strongly connected* (see Figure 4 for an illustration).

1) *Linear regression*: In our first simulation, the sensors' goal is to collaboratively solve the least square problem

$$\min_{y \in \mathbb{R}^P} \sum_{i \in \mathcal{I}} \left\| h_i - H_i \text{col}((y_p)_{p \in \mathcal{N}^I(i)}) \right\|^2, \quad (41)$$

which is in the form (26). We seek a solution via algorithm (37), comparing the performance for two choices of the design graphs:

- *Standard*: W_p^D 's are chosen as in (3);
- *Customized*: W_p^D 's are chosen by (approximately) solving Problem 1(i) with: “(iii) $\mathcal{G}_p^D = \mathcal{G}^C|_{\mathcal{N}^E(p)}$ is strongly connected and has minimal number of nodes” (solved as a SCSS problem, see Appendix A).

We set $I = 100$, $P = 20$, and randomly generate sensor/sources positions as in Figure 4. We choose $r_s = 0.2$, and draw each r_c^i uniformly in $[r_c^{\min}, r_c^{\min} + 0.1]$. For all $i \in \mathcal{I}$, we fix $n_{h_i} = 10$, we generate H_i by first uniformly drawing entries in $[0, 1]$ and then normalizing the rows to unitary norm, we draw each element of w_i from an unbiased normal distribution with variance 0.1; each signal \bar{y}_p is uniformly randomly chosen in $[0, 1]$; the step size is set as $\gamma^k = k^{-0.51}$ in (37).¹³ The advancement is evaluated via the merit function $\mathfrak{V}(\mathbf{y}) :=$

¹³Although the bounded subgradient assumption in Theorem 4 fails, boundedness of the sequences generated by (37), and hence convergence, can be established based on coercivity of the cost function.

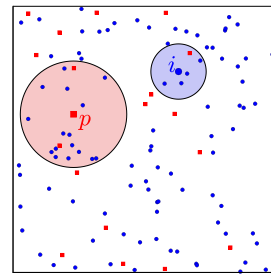


Fig. 4: Distribution of sources (red) and sensors (blue): the sensors in the red circle receive signal from source p , while all those in the blue circle can receive by (but not necessarily sent to) sensor i .

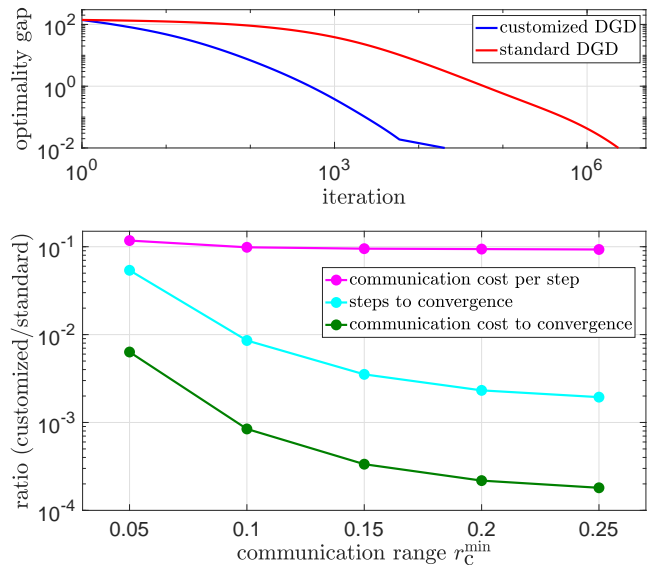


Fig. 5: Linear regression via algorithm (37), for different values of the minimum sensor communication radius r_c^{\min} and stopping criterion $\mathfrak{V}(\mathbf{y}) \leq 10^{-2}$ (bottom), and the trajectories obtained with $r_c^{\min} = 0.1$ (top).

$\max\{\|\text{diag}((\frac{1}{N_p} \mathbf{I})_{p \in \mathcal{P}}) \Pi_{\perp} \mathbf{y}\| \|\nabla_{\mathbf{y}} \mathbf{f}(\mathbf{y}^*)\|, \|\mathbf{f}(\Pi_{\parallel} \mathbf{y}) - \mathbf{f}(\mathbf{y}^*)\|\}$, where $\mathbf{y}^* = \mathcal{C}(\mathbf{y}^*)$ and \mathbf{y}^* solves (41). Figure 5 shows the results for different values of r_c^{\min} , where a higher value induces a denser graph \mathcal{G}^C . For $r_c^{\min} = 0.1$, the customized method is 15 times faster than the standard one. Increasing r_c^{\min} only marginally reduces the per-iteration communication cost of the customized method. In fact already for $r_c^{\min} = 0.25$, the graph $\mathcal{G}^C|_{\mathcal{N}^I(p)}$ is strongly connected for all $p \in \mathcal{P}$, so $\mathcal{G}^E = \mathcal{G}^I$ can be chosen: in other terms, the condition in Example 6, (Appendix A) are satisfied, similarly to the situation assumed – for *undirected* graphs – in the numerical examples in [15], [16]. In this situation, the customized method achieves a reduction of the communication cost (where sending a variable to *all* the neighbors on \mathcal{G}^C has a cost of 1, in a broadcast fashion) of over 99.9%.

2) *LASSO*: We assume that only 30% of the sources emits a signal at a given instant (the vector $\bar{\mathbf{y}}$ is sparse). The agents collaboratively solve the following problem, regularized to promote sparsity,

$$\min_{y \in \mathbb{R}^P} \|y\|_1 + \sum_{i \in \mathcal{I}} \left\| h_i - H_i \text{col}(y_p)_{p \in \mathcal{N}^I(i)} \right\|^2,$$

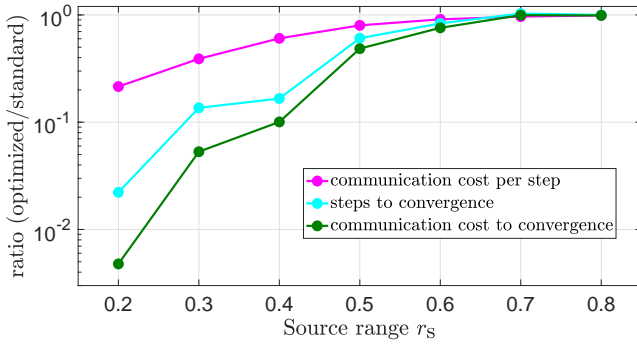


Fig. 6: LASSO via algorithm (37), and different source ranges r_s .

where $\|\cdot\|_1$ is the ℓ_1 norm. By defining $f_i((y_p)_{p \in \mathcal{N}^I(i)}) = \|h_i - H_i \text{col}((y_p)_{p \in \mathcal{N}^I(i)})\|^2 + \sum_{p \in \mathcal{N}^I(i)} \frac{1}{|\mathcal{N}^I(p)|} |y_p|$, we retrieve the form (26). We set $I = 10$, $P = 20$, $r_c^{\min} = 0.1$, $n_{h_i} = 1$ for all i , generate random positions for the sensors and sources, and choose the other parameters as above, for both the standard and customized methods. Figure 6 compares the results for different values of r_s . For larger r_s , the interference graph \mathcal{G}^I is denser, and the gap between customized and standard method decreases: in fact, for $r_s = 0.8$ the two algorithms coincide, as \mathcal{G}^I is complete.

VI. CONCLUSION

We presented END, a graph-theoretic language of consensus in distributed iterations. END algorithms allow for unprecedented flexibility in the exchange of variables, while introducing little technical complication in the analysis with respect to their standard counterparts. From a design perspective, END enables exploiting the intrinsic sparsity of a specific problem to improve scalability and reduce communication and memory bottlenecks. Besides the equilibrium seeking and optimization instances we considered, END can find application in virtually any distributed decision problem, for example common fixed point computation [6], multi-cluster games, aggregative optimization [44].

In principle, END algorithms could also be combined with other communication-reduction techniques, such as data sparsification or compression [45], to further enhance efficiency. Future work should focus on computationally efficient and distributed methods to perform the allocation of the estimates; in particular, it would be highly valuable to dynamically assign the estimates online, thus avoiding the need for any a priori design.

APPENDIX

A. Examples of the END design phase

In this section, we present some examples of Problem 1(i) and discuss choices for the design and estimate graphs.

1) *Minimal memory allocation*: We consider the problem of minimizing, for each \mathcal{P} , the number of copies of y_p , provided that the conditions in Problem 1(i) and 1(ii) are satisfied and the graphs $\{\mathcal{G}_p^D\}_{p \in \mathcal{P}}$ enjoy some connectivity properties. In particular, consider Problem 1 with

(iii) for each $p \in \mathcal{P}$, \mathcal{G}_p^D is rooted at $r_p \in \mathcal{I}$ [respectively, \mathcal{G}_p^D is strongly connected / \mathcal{G}_p^D is undirected and connected]; the number $|\overline{\mathcal{N}}^E(p)|$ of nodes in \mathcal{G}_p^D is minimal (provided that all the other specifications are satisfied).

If the problem is feasible, then by definition a solution is given by choosing each¹⁴ \mathcal{G}_p^D as a solution of $\text{UDST}(\mathcal{G}^C, r_p, \overline{\mathcal{N}}^I(p))$ [respectively, a solution of $\text{SCSS}(\mathcal{G}^C, \overline{\mathcal{N}}^I(p))$ / a solution of $\text{UST}(\mathcal{G}^C, \overline{\mathcal{N}}^I(p))$] (see Section I-A.4). In fact, this is the design choice suggested in [14], [16] (for the case of undirected graphs). A sufficient condition for the existence of a solution is that the graph \mathcal{G}^C is strongly connected [respectively, the graph \mathcal{G}^C is strongly connected / the graph \mathcal{G}^C is undirected and connected]. A simple example is also illustrated in Figure 1.

Note that the solution is generally not unique. For example, let $\mathcal{G}^{\text{UDST}} = (\mathcal{V}^{\text{UDST}}, \mathcal{E}^{\text{UDST}})$ be a solution of $\text{UDST}(\mathcal{G}^C, r_p, \overline{\mathcal{N}}^I(p))$; then any graph \mathcal{G}' such that $\mathcal{G}^{\text{UDST}} \subseteq \mathcal{G}' \subseteq \mathcal{G}^C \downarrow_{\mathcal{V}^{\text{UDST}}}$ is also a solution for Problem 1. In simple terms, we can add edges to $\mathcal{G}^{\text{UDST}}$, an extra degree of freedom that can be employed to improve connectivity or robustness to link failures (possibly at the cost of extra communication).

2) *Other criteria*: One can impose a different connectedness/efficiency specification on each graphs \mathcal{G}_p^D (see Figure 1). Concerning the efficiency specifications, instead of minimizing the overall dimension of \tilde{y} , it can be convenient to promote allocations where the memory occupation (or the communication requirements) are partitioned equally among the agents: for example, assuming that undirected connected graphs are required, this could be achieved by sequentially designing the graphs \mathcal{G}_p^D 's as solutions of a Steiner tree problem, but penalizing unbalanced allocations by opportunely choosing the edge weights for each p . Bandwidth constraints can be addressed similarly, to avoid overloading some channels of the communication network \mathcal{G}^C .

3) *Designing the communication graph*: In this paper, we consider the graph \mathcal{G}^C as given, which is natural for ad-hoc networks or when relying on existing infrastructures. Yet, other works [22], [23], [26] assume that the communication network can be freely designed. In the END framework, this case is addressed by formally assuming that \mathcal{G}^C is complete; then the graphs $\{\mathcal{G}_p^D\}_{p \in \mathcal{P}}$ can be chosen to fulfill some specifications (e.g., minimize the number of active edges in \mathcal{G}^C – which determines the physical channels/edges actually needed).

4) *Computational cost*: Many of the design problems considered in this section can be cast as Steiner problems (see Section I-A.4), for which off-the-shelf algorithms are available [46], sometimes even distributed [47]. While this is good news, it also reveals that solving Problem 1 can be, by itself, computationally demanding¹⁵. Let us emphasize that Problem 1 is still part of the development of an algorithm, to be subsequently used to solve an underlying decision problem. Are the benefits of an efficient estimate allocation – in terms

¹⁴Note that in this case Problem 1 splits into P independent problems, as Problem 1(ii) is equivalent to "(ii) $\overline{\mathcal{N}}^I(p) \subseteq \overline{\mathcal{N}}^E(p)$, for all $p \in \mathcal{P}$ ".

¹⁵The Steiner problems considered are NP-hard, but polynomial algorithms are available to approximate a solution. Note that generally it is not necessary to solve Problem 1 to optimality, as long as the approximated solution ensures the feasibility conditions (e.g., connectedness).

of algorithm execution – worth the additional initial design effort?

If \mathcal{G}^1 is dense, it may be convenient to settle for a suboptimal,¹⁶ but readily available, choice – for instance, ignoring the sparsity of \mathcal{G}^1 , as in (3) (which is the standard solution in literature [8], [18]). On the contrary, for *repeated* problems like distributed optimal estimation or model predictive control [14] (where the same function is minimized multiple times, but for different values of some parameters/measurements), a careful a priori design is advantageous, despite the initial (one-time) computational cost of solving Problem 1. Finally, in many relevant applications, the specific problem structure renders the choice of optimal graphs \mathcal{G}_p^D straightforward, as exemplified next.

Example 5 (Partitioned optimization): Motivated by distributed estimation and resource allocation applications, the works [10]–[12] solve optimization problems of the form

$$\min_{y_i \in \mathbb{R}^{n_{y_i}}, i \in \mathcal{I}} \sum_{i \in \mathcal{I}} f_i(y_i, (y_j)_{j \in \mathcal{N}^C(i)}), \quad (42)$$

where the cost f_i of agent i depends on its local action y_i and on the actions of its neighbors over the undirected communication network \mathcal{G}^C : this is a special case of Example 1, with $\mathcal{P} = \mathcal{I}$, $\overline{\mathcal{N}}^1(i) = \mathcal{N}^C(i) \cup \{i\}$. Consider Problem 1, with “(iii) $\forall i \in \mathcal{I}$, \mathcal{G}_i^D is connected; \mathcal{G}_i^D has minimum number of nodes (provided that all other specifications are met)”. A solution is to fix each \mathcal{G}_i^D as the undirected star graph centered in i with vertices $\mathcal{V}_i^D = \overline{\mathcal{N}}^1(i)$: then agent i keeps all and only proxies of the actions that affect its cost. In fact, this is the solution employed in [10]–[12]. \square

Example 6 ($\mathcal{G}^E = \mathcal{G}^E$): With the goal of minimizing the overall memory allocation, consider the choice

$$\mathcal{G}_p^D = \mathcal{G}^C|_{\mathcal{N}^1(p)}, \quad \forall p \in \mathcal{P}. \quad (43)$$

In this case, $\mathcal{G}^E = \mathcal{G}^1$, i.e., each agent only estimates the minimum amount of variables needed for local computation. This is only a viable option if the resulting graphs $\{\mathcal{G}_i^D\}_{i \in \mathcal{I}}$ ensure the desired connectedness properties in Problem 1(iii), which cannot be expected in general (see \mathcal{G}_1^D in Figure 1), but holds in some cases (e.g., Example 5, \mathcal{G}_2^D in Figure 1; see also [22, Asm. 5], [23, Asm. 6] for sufficient conditions in the context of NE seeking). \square

B. Proofs

1) Proof of Theorem 1: We study convergence of (14) in the space weighted by $\Xi \succ 0$. Let $\mathbf{y}^* := \mathcal{C}(x^*)$, where x^* is the NE of (10). Our proof is based on the following lemma.

Lemma 3: Let $\mathcal{F}(\mathbf{y}) := \mathbf{W}^D \mathbf{y} - \alpha \mathbf{R}^\top \mathbf{F}(\mathbf{W}^D \mathbf{y})$. Then, for any $\mathbf{y} \in \mathbb{R}^{n_{\mathbf{y}}}$, it holds that

$$\|\mathcal{F}(\mathbf{y}) - \mathcal{F}(\mathbf{y}^*)\|_{\Xi} \leq \sqrt{\rho_\alpha} \|\mathbf{y} - \mathbf{y}^*\|_{\Xi}. \quad \square$$

Proof: Let $\mathbf{y} = \mathbf{y}_\parallel + \mathbf{y}_\perp$, where $\mathbf{y}_\parallel := \text{diag}(((\mathbf{1}_{N_i} q_i^D)^\top \otimes \mathbf{I}_{n_{x_i}})_{i \in \mathcal{I}}) \mathbf{y} \in \mathcal{C}$, and thus $\mathbf{y}_\parallel = \mathcal{C}(\mathbf{y}_\parallel)$ for some $\mathbf{y}_\parallel \in \mathbb{R}^{n_{\mathbf{y}}}$. Let $\hat{\mathbf{y}} := \mathbf{W}^D \mathbf{y} = \mathbf{y}_\parallel + \hat{\mathbf{y}}_\perp$, where $\hat{\mathbf{y}}_\perp := \mathbf{W}^D \mathbf{y}_\perp = \mathbf{W}^D \text{diag}(((\mathbf{I} -$

$\mathbf{1}_{N_i} q_i^D)^\top) \otimes \mathbf{I}_{n_{x_i}})_{i \in \mathcal{I}}) \mathbf{y}$ and we used that $\mathbf{W}^D \mathbf{y}_\parallel = \mathbf{y}_\parallel = \mathcal{C}(\mathbf{y}_\parallel)$ (by row stochasticity). By Assumption 5, we have $q_i^D \mathbf{1}_{N_i}^\top \mathbf{Q}_i \mathbf{W}_i^D (\mathbf{I} - \mathbf{1}_{N_i} q_i^D)^\top = \mathbf{0}$, and hence $\langle \mathbf{y}_\parallel, \hat{\mathbf{y}}_\perp \rangle_{\Xi} = 0$. Therefore

$$\begin{aligned} & \|(\hat{\mathbf{y}} - \alpha \mathbf{R}^\top \mathbf{F}(\hat{\mathbf{y}})) - (\mathbf{y}^* - \alpha \mathbf{R}^\top \mathbf{F}(\mathbf{y}^*))\|_{\Xi}^2 \\ &= \|\mathbf{y}_\parallel - \mathbf{y}^*\|_{\Xi}^2 + \|\hat{\mathbf{y}}_\perp\|_{\Xi}^2 \\ & \quad + \alpha^2 \|\mathbf{R}^\top (\mathbf{F}(\hat{\mathbf{y}}) - \mathbf{F}(\mathbf{y}_\parallel)) + \mathbf{F}(\mathbf{y}_\parallel) - \mathbf{F}(\mathbf{y}^*)\|_{\Xi}^2 \\ & \quad - 2\alpha \langle \hat{\mathbf{y}}_\perp, \mathbf{R}^\top (\mathbf{F}(\hat{\mathbf{y}}) - \mathbf{F}(\mathbf{y}^*)) \rangle_{\Xi} \\ & \quad - 2\alpha \langle \mathbf{y}_\parallel - \mathbf{y}^*, \mathbf{R}^\top (\mathbf{F}(\hat{\mathbf{y}}) - \mathbf{F}(\mathbf{y}_\parallel)) \rangle_{\Xi} \\ & \quad - 2\alpha \langle \mathbf{y}_\parallel - \mathbf{y}^*, \mathbf{R}^\top (\mathbf{F}(\mathbf{y}_\parallel) - \mathbf{F}(\mathbf{y}^*)) \rangle_{\Xi} \\ & \leq \|\mathbf{y}_\parallel - \mathbf{y}^*\|_{\Xi}^2 + \|\hat{\mathbf{y}}_\perp\|_{\Xi}^2 + \alpha^2 (\bar{\theta} \|\hat{\mathbf{y}}_\perp\|_{\Xi} + \theta \bar{\gamma} \|\mathbf{y}_\parallel - \mathbf{y}^*\|_{\Xi})^2 \\ & \quad + 2\alpha \bar{\theta} \|\hat{\mathbf{y}}_\perp\|_{\Xi} (\|\mathbf{y}_\parallel - \mathbf{y}^*\|_{\Xi} + \|\hat{\mathbf{y}}_\perp\|_{\Xi}) \\ & \quad + 2\alpha \theta \bar{\gamma} \|\mathbf{y}_\parallel - \mathbf{y}^*\|_{\Xi} \|\hat{\mathbf{y}}_\perp\|_{\Xi} - 2\alpha \mu \underline{\gamma}^2 \|\mathbf{y}_\parallel - \mathbf{y}^*\|_{\Xi}^2 \end{aligned} \quad (44)$$

where the last inequality follows by the Cauchy–Schwarz inequality and using that $\|\mathbf{R}^\top v\|_{\Xi}^2 \leq \max_{i \in \mathcal{I}} \{[\mathbf{Q}_i]_{i_i, i_i}\} \|v\|^2$ for all $v \in \mathbb{R}^{n_x}$, because $\mathbf{R} \Xi \mathbf{R}^\top = \text{diag}([\mathbf{Q}_i]_{i_i, i_i})_{i \in \mathcal{I}}$; that \mathbf{F} is θ -Lipschitz continuous if \mathbf{F} is (see [48, Lem. 3]); finally, that $\|\mathbf{F}(\mathbf{y}_\parallel) - \mathbf{F}(\mathbf{y}^*)\|^2 = \|\mathbf{F}(\mathbf{y}_\parallel) - \mathbf{F}(x^*)\|^2 \leq \theta^2 \|\mathbf{y}_\parallel - x^*\|^2 = \theta^2 \|\mathbf{y}_\parallel - \mathbf{y}^*\|^2 \text{diag}((\mathbf{Q}_i \otimes \mathbf{I} / (\mathbf{1}^\top \mathbf{Q}_i \mathbf{1}))_{i \in \mathcal{I}})$ (the last equality due to $(\mathbf{y}_\parallel - \mathbf{y}^*) \in \mathcal{C}$ and similarly that $\langle \mathbf{y}_\parallel - \mathbf{y}^*, \mathbf{R}^\top (\mathbf{F}(\mathbf{y}_\parallel) - \mathbf{F}(\mathbf{y}^*)) \rangle_{\Xi} = \langle \mathbf{y}_\parallel - x^*, \mathbf{F}(\mathbf{y}_\parallel) - \mathbf{F}(x^*) \rangle \geq \mu \|\mathbf{y}_\parallel - x^*\|^2 = \mu \|\mathbf{y}_\parallel - \mathbf{y}^*\|^2 \text{diag}((\mathbf{Q}_i \otimes \mathbf{I} / (\mathbf{1}^\top \mathbf{Q}_i \mathbf{1}))_{i \in \mathcal{I}})$, (by using the normalization $[\mathbf{1}^\top \mathbf{Q}_i]_{i_i} = 1$ in Assumption 5). In addition, by Assumption 4, we have $\|\hat{\mathbf{y}}_\perp\|_{\Xi} = \|\mathbf{W}^D \mathbf{y}_\perp\|_{\Xi} \leq \bar{\sigma} \|\mathbf{y}_\perp\|_{\Xi}$; together with (44), this yields

$$\begin{aligned} \|\mathcal{F}(\mathbf{y}) - \mathcal{F}(\mathbf{y}^*)\|_{\Xi} & \leq \left[\frac{\|\mathbf{y}_\parallel - \mathbf{y}^*\|_{\Xi}}{\|\mathbf{y}_\perp\|_{\Xi}} \right]^\top \mathbf{M}_\alpha \left[\frac{\|\mathbf{y}_\parallel - \mathbf{y}^*\|_{\Xi}}{\|\mathbf{y}_\perp\|_{\Xi}} \right] \\ & \leq \lambda_{\max}(\mathbf{M}_\alpha) (\|\mathbf{y}_\parallel - \mathbf{y}^*\|_{\Xi}^2 + \|\mathbf{y}_\perp\|_{\Xi}^2) \\ & = \lambda_{\max}(\mathbf{M}_\alpha) \|\mathbf{y} - \mathbf{y}^*\|_{\Xi}^2. \end{aligned} \quad \blacksquare$$

To conclude the proof of Theorem 1, we note that (14) is equivalently written as $\mathbf{y}^{k+1} = \text{proj}_{\Omega}^{\Xi} (\mathbf{W}^D \mathbf{y}^k - \alpha \mathbf{R}^\top \mathbf{F}(\mathbf{W}^D \mathbf{y}^k))$, where $\text{proj}_{\Omega}^{\Xi}$ is the projection in the space weighted by Ξ . In fact, $\text{proj}_{\Omega} = \text{proj}_{\Omega}^{\Xi}$ block-wise under either Assumption 5(i) (due to block diagonality of \mathbf{Q}_i and the rectangular structure of Ω) or Assumption 5(ii) (trivially). Moreover, \mathbf{y}^* is a fixed point for (14). By nonexpansiveness of the projection operator [29, Prop. 12.28], we can finally write

$$\begin{aligned} \|\mathbf{y}^{k+1} - \mathbf{y}^*\|_{\Xi} &= \|\text{prox}_{\mathcal{G}}^{\Xi}(\mathcal{F}(\mathbf{y})) - \text{prox}_{\mathcal{G}}^{\Xi}(\mathcal{F}(\mathbf{y}^*))\|_{\Xi} \\ &\leq \|\mathcal{F}(\mathbf{y}) - \mathcal{F}(\mathbf{y}^*)\|_{\Xi}, \end{aligned}$$

and the conclusion follows by Lemma 3. \blacksquare

2) Proof of Theorem 2 (sketch): We can rewrite (24) in terms of the variable $\mathbf{s} := \boldsymbol{\sigma} - \mathbf{B} \mathbf{x} - \mathbf{b}$ by replacing $\boldsymbol{\sigma}^k$ with $\mathbf{s}^k + \mathbf{B} \mathbf{x}^k + \mathbf{b}$ in (24a), and (24b) with

$$\mathbf{s}^{k+1} = \mathbf{s}^k - \beta \mathbf{L}^{D, \sigma} (\mathbf{s}^k + \mathbf{B} \mathbf{x}^k + \mathbf{b}), \quad (45)$$

¹⁶Namely, ensuring the *feasibility* conditions in Problem 1(iii) (hard constraints), but not efficient in terms of memory/communication requirements.

and $s^0 = \mathbf{0}$. Let us define $\omega := \text{col}(x, s, z, \lambda)$,

$$\mathfrak{A}(\omega) := \underbrace{\begin{bmatrix} \alpha \tilde{\mathbf{F}}(x, \sigma) + \mathbf{B}^\top \mathbf{L}^{\text{D}, \sigma} \sigma \\ \mathbf{L}^{\text{D}, \sigma} \sigma \\ \mathbf{0} \\ \mathbf{b} \end{bmatrix}}_{:= \mathfrak{A}_1} + \underbrace{\begin{bmatrix} \mathbf{A}^\top \lambda \\ \mathbf{0} \\ -\mathbf{L}^{\text{D}, \lambda} \lambda \\ \mathbf{L}^{\text{D}, \lambda} z - \mathbf{A}x \end{bmatrix}}_{:= \mathfrak{A}_2} + \underbrace{\begin{bmatrix} \mathbf{N}_\Omega \\ \mathbf{0} \\ \mathbf{0} \\ \mathbf{0} \end{bmatrix}}_{:= \mathfrak{A}_3} \quad (46)$$

$$\Phi := \begin{bmatrix} \beta^{-1} \mathbf{I} & \mathbf{0} & \mathbf{0} & \mathbf{A}^\top \\ \mathbf{0} & \beta^{-1} \mathbf{I} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \beta^{-1} \mathbf{I} & \mathbf{L}^{\text{D}, \lambda} \\ -\mathbf{A} & \mathbf{0} & \mathbf{L}^{\text{D}, \lambda} & \beta^{-1} \mathbf{I} \end{bmatrix}, \quad (47)$$

where σ is not a variable but just shorthand notation for $\sigma = s + \mathbf{B}x + \mathbf{b}$. We assume that $\beta > 0$ is chosen small enough, such that $\Phi \succ 0$. The proof is based on the following auxiliary results.

Lemma 4 (Invariance): For all $k \in \mathbb{N}$, $\Pi_{\parallel}^\sigma s^k = \mathbf{0}$. \square

Proof: It follows by induction, by using (25) and (45). \blacksquare

Lemma 5 (Algorithm derivation): The iteration in (24), with (24b) replaced by (45), can be written as

$$\mathfrak{A}_2(\omega^{k+1}) + \mathfrak{A}_3(\omega^{k+1}) = \mathfrak{A}_1(\omega^k) + \Phi(\omega^{k+1} - \omega^k), \quad (48)$$

with $\mathfrak{A}_1, \mathfrak{A}_2, \mathfrak{A}_3$ as in (46). \square

Proof: It follows by expanding the terms, and by recalling that $(\text{Id} + \mathbf{N}_\Omega)^{-1} = \text{proj}_{\Omega}$. \blacksquare

Lemma 6 (Fixed points): The fixed points of (48) coincide with $\text{zer}(\mathfrak{A})$. The set $\text{zer}(\mathfrak{A}) \cap \Sigma := \{\omega \mid \Pi_{\parallel}^\sigma s = \mathbf{0}\}$ is nonempty. Moreover, for any $\omega^* = (x^*, s^*, z^*, \lambda^*) \in \text{zer}(\mathfrak{A}) \cap \Sigma$, we have that $\sigma^* := s^* + \mathbf{B}x^* + \mathbf{b} = \mathcal{C}(\sigma(x^*))$, $\lambda^* = \mathcal{C}(\lambda^*)$, where (x^*, λ^*) solve (17), hence x^* is the v-GNE of the game in (10). \square

Proof: (48) is the FB algorithm [29, §26.5] applied to the operator $\Phi^{-1}\mathfrak{A}$; it is known that its fixed points are the zeros of \mathfrak{A} [18, Lem. 2]. Consider any $\omega^* \in \text{zer}(\mathfrak{A}) \cap \Sigma$. Note that $\sigma^* = \Pi_{\parallel}^\sigma \sigma^* = \Pi_{\parallel}^\sigma s^* + \Pi_{\parallel}^\sigma \mathbf{B}x^* + \Pi_{\parallel}^\sigma \mathbf{b} = \mathcal{C}^\sigma(\sigma(x^*))$, where the first equality follows by the second row in (46) and Assumption 6 (and Lemma 1), and the second by definition of \mathbf{B} , \mathbf{b} and Π_{\parallel}^σ . By the third row in (46), $\lambda^* \in \mathcal{C}^\lambda$; in turn, the first row retrieves the first KKT condition in (17). The second condition in (17) is obtained by left-multiplying the last row in (46) by Π_{\parallel}^λ . Conversely, $\text{zer}(\mathfrak{A}) \cap \Sigma \neq \emptyset$ can be shown similarly to [19, Lem. 10]. \blacksquare

Lemma 7 (Monotonicity properties): The operator $\mathfrak{A}_2 + \mathfrak{A}_3$ is monotone. For any α small-enough, the operator \mathfrak{A}_1 is η -restricted cocoercive, for some $\eta > 0$: for all $\omega \in \Sigma$ and all $\omega^* \in \text{zer}(\mathfrak{A}) \cap \Sigma$, $\langle \mathfrak{A}_1(\omega) - \mathfrak{A}_1(\omega^*), \omega - \omega^* \rangle \geq \eta \|\mathfrak{A}_1(\omega) - \mathfrak{A}_1(\omega^*)\|^2$. \square

Proof: For the first part, \mathfrak{A}_1 is monotone because it is a skew-symmetric linear operator [29, Ex 20.35], \mathfrak{A}_2 is monotone because \mathbf{N}_Ω is [29]. The second statement follows as in [33, Lemma 4] by using Lemma 2, that $\tilde{\mathbf{F}}$ is Lipschitz, that $\tilde{\mathbf{F}}(x, \Pi_{\parallel}^\sigma \sigma) = F(x)$ and $F(x)$ is strongly monotone. \blacksquare Lemma 5 recasts (24) as a preconditioned FB algorithm [18], applied to the operators $\mathfrak{A}_1, \mathfrak{A}_2 + \mathfrak{A}_3$, with preconditioning matrix Φ . Then, with Lemma 7 in place and restricting the analysis to the invariant subspace Σ , the convergence of (48) to a fixed point can be shown in the space \mathcal{H}_Φ analogously to

[18, Th. 2]; finally, Lemmas 4 and 6 characterize such a fixed point as per statement. \blacksquare

3) Proof of Theorem 3: We adapt the proof of [9, Th. 24]. We note that $z^0 = \mathbf{0}_{n_y} \in \text{range}(\mathbf{B})$; by the conditions (a) and (d), the update in (30), and an induction argument, we have $y^k, z^k \in \text{range}(\mathbf{B})$, for all $k \geq 1$. Hence, we rewrite (30) as

$$y^k = \mathbf{B} \underline{y}^k, \quad z^k = \gamma \mathbf{B} \underline{z}^k \quad (49a)$$

$$\underline{y}^{k+1} = \mathbf{D} \underline{y}^k - \gamma (\nabla_{\mathbf{y}} f(\underline{y}^k) + \underline{z}^k) \quad (49b)$$

$$\underline{z}^{k+1} = \underline{z}^k + \frac{1}{\gamma} \mathbf{C} \underline{y}^{k+1} \quad (49c)$$

for all $k \geq 1$. Let $\Phi(\mathbf{y}, z) := f(\mathbf{y}) + \langle \mathbf{y}, z \rangle$; the form in (49) can be exploited to prove the following lemma.

Lemma 8: Let $(y^k, \underline{y}^k, \underline{z}^k)$ be a sequence generated by (49). Then, for all $\mathbf{y} \in \mathcal{C}$, $z \in \mathcal{C}_\perp$, it holds that:

$$\Phi(\mathbf{y}_{\text{avg}}^{k+1}, z) - \Phi(\mathbf{y}, z) \leq \frac{1}{2k} h(\mathbf{y}, z),$$

where $h(\mathbf{y}, z) := \frac{1}{\gamma} \|\mathbf{y}^0 - \mathbf{y}\|_{\mathbf{D}}^2 + \gamma \frac{\|\mathbf{B} - \Pi_{\parallel}\|}{\underline{\lambda}} \|z\|^2$ and $\underline{\lambda} := \min\{(\lambda_2(\mathbf{C}_p))_{p \in \mathcal{P}}\}$. \square

Proof: The proof is analogous to that of [9, Lemma 23], and omitted here. Note that [9] uses a matrix notation (i.e., $\mathbf{y} \in \mathbb{R}^{I \times n}$), while we need a stacked notation (as the vectors $(\mathbf{y}_i)_{i \in \mathcal{I}}$ are not homogeneous in size). Nonetheless, (49) matches [9, Eq. (33)], which allows us to repeat all the steps in [9, Lem. 23] (with the only precaution of replacing J , $\text{span}(\mathbf{1}_m)$, $\lambda_2(\mathbf{C})$ in [9] with Π_{\parallel} , \mathcal{C} , $\underline{\lambda}$). \blacksquare

For all $z \in \mathcal{C}_\perp$ (so that $\langle z, \mathbf{y}^* \rangle = 0$), setting $\mathbf{y} = \mathbf{y}^*$ in Lemma 8, together with the definition of Φ , yields $f(\mathbf{y}_{\text{avg}}^k) - f(\mathbf{y}^*) + \langle \mathbf{y}_{\text{avg}}^k, z \rangle \leq \frac{1}{2k} h(\mathbf{y}^*, z)$. Further choosing $z = 2 \frac{\Pi_{\perp} \mathbf{y}_{\text{avg}}^k}{\|\Pi_{\perp} \mathbf{y}_{\text{avg}}^k\|} \|z^*\|$, with $z^* := -\nabla_{\mathbf{y}} f(\mathbf{y}^*)$, leads to

$$f(\mathbf{y}_{\text{avg}}^k) - f(\mathbf{y}^*) + 2 \|z^*\| \|\Pi_{\perp} \mathbf{y}_{\text{avg}}^k\| \leq \frac{1}{2k} h(\mathbf{y}^*, 2z^*). \quad (50)$$

By convexity and since $z^* \in \mathcal{C}_\perp$ (by optimality conditions), it holds that $f(\mathbf{y}_{\text{avg}}^k) - f(\mathbf{y}^*) \geq -\langle \mathbf{y}_{\text{avg}}^k - \mathbf{y}^*, z^* \rangle = -\langle \Pi_{\perp} \mathbf{y}_{\text{avg}}^k, z^* \rangle \geq -\|\Pi_{\perp} \mathbf{y}_{\text{avg}}^k\| \|z^*\|$; the latter inequality and (50) imply $\mathfrak{M}(\mathbf{y}_{\text{avg}}^k) \leq \frac{1}{2k} h(\mathbf{y}^*, 2z^*)$. \blacksquare

4) Proof of Theorem 4: Note that, for each $p \in \mathcal{P}$, (37) is the standard perturbed push-sum protocol [8, Eq. (4)], with perturbation term $-\gamma^k \mathbf{g}_{i,p}^{k+1}$. Therefore, since $\mathbf{g}_{i,p}^{k+1}$ is uniformly bounded by assumption and by the choice of $(\gamma^k)_{k \in \mathbb{N}}$, we can apply [8, Lem. 1] to infer that, for all $i \in \mathcal{I}$, $p \in \mathcal{N}^{\mathbb{E}}(i)$

$$\lim_{k \rightarrow \infty} \|\mathbf{y}_{i,p}^k - \bar{z}_p^k\| = 0, \quad (51)$$

$$\sum_{k=0}^{\infty} \gamma^k \|\mathbf{y}_{i,p}^k - \bar{z}_p^k\| = 0, \quad (52)$$

where $\bar{z}_p^k := \frac{1}{N_p} \sum_{i \in \mathcal{N}^{\mathbb{E}}(p)} z_{i,p}^k \in \mathbb{R}^{n_{y_p}}$, for all $k \in \mathbb{N}$. Let us also define $\bar{z}^k := \text{col}((\bar{z}_p^k)_{p \in \mathcal{P}}) \in \mathbb{R}^{n_y}$. By (37) and Assumption 7(ii), it follows that

$$\bar{z}_p^{k+1} = \bar{z}_p^k - \gamma^k \frac{1}{N_p} \sum_{i \in \mathcal{N}^{\mathbb{E}}(p)} \mathbf{g}_{i,p}^{k+1}. \quad (53)$$

We next show that $\lim_{k \rightarrow \infty} \bar{z}^k = \mathbf{y}^* \in \mathcal{Y}^*$; then, the theorem follows by (51). The main complication with respect to the proof of [8, Th. 1] is that we need a modification of [8, Lem. 8] to cope with the non-homogeneity of the estimates.

Lemma 9: For all $y^* \in \mathcal{Y}^*$, for all $k \in \mathbb{N}$, it holds that

$$\begin{aligned} \|\bar{z}^{k+1} - y^*\|_D^2 &\leq \|\bar{z}^k - y^*\|_D^2 - 2\gamma^k (f(\bar{z}^k) - f(y^*)) \\ &\quad + 4L\gamma^k \sum_{i \in \mathcal{I}} \sum_{p \in \bar{\mathcal{N}}^E(i)} \|\bar{z}_p^k - \tilde{y}_{i,p}^{k+1}\| \\ &\quad + (\gamma^k)^2 IL^2, \end{aligned}$$

where $D := \text{diag}((N_p I_{n_p})_{p \in \mathcal{P}})$. \square

Proof: By (53), we have

$$\begin{aligned} \|\bar{z}^{k+1} - y^*\|_D^2 &= \|\bar{z}^k - y^*\|_D^2 \\ &\quad - 2\gamma^k \sum_{p \in \mathcal{P}} \left\langle \bar{z}_p^k - y_p^*, \sum_{i \in \bar{\mathcal{N}}^E(p)} \mathbf{g}_{i,p}^{k+1} \right\rangle \\ &\quad + (\gamma^k)^2 \sum_{p \in \mathcal{P}} \frac{1}{N_p} \left\| \sum_{i \in \bar{\mathcal{N}}^E(p)} \mathbf{g}_{i,p}^{k+1} \right\|^2. \end{aligned} \quad (54)$$

The third addend on the right-hand side of (54) is bounded above by $(\gamma^k)^2 IL^2$. For the second addend, we have

$$\begin{aligned} &\sum_{p \in \mathcal{P}} \left\langle \bar{z}_p^k - y_p^*, \sum_{i \in \bar{\mathcal{N}}^E(p)} \mathbf{g}_{i,p}^{k+1} \right\rangle \\ &= \sum_{i \in \mathcal{I}} \sum_{p \in \bar{\mathcal{N}}^E(i)} \langle (\bar{z}_p^k - \mathbf{y}_{i,p}^{k+1}) + (\mathbf{y}_{i,p}^{k+1} - y_p^*), \mathbf{g}_{i,p}^{k+1} \rangle \\ &\stackrel{(a)}{\geq} \sum_{i \in \mathcal{I}} -L \|\text{col}((\bar{z}_p^k)_{p \in \bar{\mathcal{N}}^E(i)} - \tilde{\mathbf{y}}_i^{k+1})\| + f_i(\tilde{\mathbf{y}}_i^{k+1}) - f_i(y^*) \\ &\stackrel{(b)}{\geq} \sum_{i \in \mathcal{I}} -2L \|\text{col}((\bar{z}_p^k)_{p \in \bar{\mathcal{N}}^E(i)} - \tilde{\mathbf{y}}_i^{k+1})\| + f_i(\bar{z}^{k+1}) - f_i(y^*), \end{aligned}$$

where in (a) we used that $\mathbf{g}_{i,p}^{k+1} \in \partial_{\tilde{\mathbf{y}}_i} f_i(\tilde{\mathbf{y}}_i^{k+1})$ and convexity of f_i , and (b) follows by adding and subtracting (inside the sum) $f_i((\bar{z}_p^{k+1})_{p \in \bar{\mathcal{N}}^E(i)}) = f_i(\bar{z}^{k+1})$ and by L -Lipschitz continuity of f_i . The result follows by substituting the bound back into (54). \blacksquare

We finally note that, due to (52) and the choice of $(\gamma_k)_{k \in \mathbb{N}}$, the inequality in Lemma 9 satisfies all the conditions of [8, Lem. 7], in the norm $\|\cdot\|_D$; hence we can conclude that $\bar{z}^k \rightarrow y^*$, for some $y^* \in \mathcal{Y}^*$. \blacksquare

REFERENCES

- [1] S. Boyd, N. Parikh, E. Chu, B. Peleato, and J. Eckstein, "Distributed optimization and statistical learning via the alternating direction method of multipliers," *Foundations and Trends in Machine Learning*, vol. 3, 2010.
- [2] F. Facchinei and J. Pang, "Nash equilibria: the variational approach," in *Convex Optimization in Signal Processing and Communications*, D. P. Palomar and Y. C. Eldar, Eds. Cambridge University Press, 2009, p. 443–493.
- [3] M. Rabbat and R. Nowak, "Distributed optimization in sensor networks," in *Third International Symposium on Information Processing in Sensor Networks (IPSN)*, 2004, pp. 20–27.
- [4] A. Nedić, A. Olshevsky, and W. Shi, "Achieving geometric convergence for distributed optimization over time-varying graphs," *SIAM Journal on Optimization*, vol. 27, no. 4, pp. 2597–2633, 2017.
- [5] D. Gadjov and L. Pavel, "A passivity-based approach to Nash equilibrium seeking over networks," *IEEE Transactions on Automatic Control*, vol. 64, pp. 1077–1092, 3 2019.
- [6] D. Fullmer and A. S. Morse, "A distributed algorithm for computing a common fixed point of a finite family of paracontractions," *IEEE Transactions on Automatic Control*, vol. 63, no. 9, pp. 2833–2843, 2018.
- [7] I. Necoara and D. Clipici, "Parallel random coordinate descent method for composite minimization: Convergence analysis and error bounds," *SIAM Journal on Optimization*, vol. 26, no. 1, pp. 197–226, 2016.
- [8] A. Nedić and A. Olshevsky, "Distributed optimization over time-varying directed graphs," *IEEE Transactions on Automatic Control*, vol. 60, no. 3, pp. 601–615, 2015.
- [9] J. Xu, Y. Tian, Y. Sun, and G. Scutari, "Distributed algorithms for composite optimization: Unified framework and convergence analysis," *IEEE Transactions on Signal Processing*, vol. 69, pp. 3555–3570, 2021.
- [10] I. Notarnicola, R. Carli, and G. Notarstefano, "Distributed partitioned big-data optimization via asynchronous dual decomposition," *IEEE Transactions on Control of Network Systems*, vol. 5, no. 4, pp. 1910–1919, 2018.
- [11] T. Erseghe, "A distributed and scalable processing method based upon ADMM," *IEEE Signal Processing Letters*, vol. 19, no. 9, pp. 563–566, 2012.
- [12] M. Todescato, N. Bof, G. Cavraro, R. Carli, and L. Schenato, "Partition-based multi-agent optimization in the presence of lossy and asynchronous communication," *Automatica*, vol. 111, p. 108648, 2020.
- [13] E. Dall'Anese, H. Zhu, and G. B. Giannakis, "Distributed optimal power flow for smart microgrids," *IEEE Transactions on Smart Grid*, vol. 4, no. 3, pp. 1464–1475, 2013.
- [14] J. F. Mota, J. M. Xavier, P. M. Aguiar, and M. Puschel, "Distributed optimization with local domains: Applications in MPC and network flows," *IEEE Transactions on Automatic Control*, vol. 60, no. 7, pp. 2004–2009, 2015.
- [15] S. A. Alghunaim, K. Yuan, and A. H. Sayed, "A proximal diffusion strategy for multiagent optimization with sparse affine constraints," *IEEE Transactions on Automatic Control*, vol. 65, no. 11, pp. 4554–4567, 2020.
- [16] S. A. Alghunaim and A. H. Sayed, "Distributed coupled multiagent stochastic optimization," *IEEE Transactions on Automatic Control*, vol. 65, no. 1, pp. 175–190, 2020.
- [17] M. Ye and G. Hu, "Distributed Nash equilibrium seeking by a consensus based approach," *IEEE Transactions on Automatic Control*, vol. 62, no. 9, pp. 4811–4818, 2017.
- [18] L. Pavel, "Distributed GNE seeking under partial-decision information over networks via a doubly-augmented operator splitting approach," *IEEE Transactions on Automatic Control*, vol. 65, no. 4, pp. 1584–1597, 2020.
- [19] M. Bianchi, G. Belgioioso, and S. Grammatico, "Fast generalized Nash equilibrium seeking under partial-decision information," *Automatica*, vol. 136, p. 110080, 2022.
- [20] J. Koshal, A. Nedić, and U. V. Shanbhag, "Distributed algorithms for aggregative games on graphs," *Operations Research*, vol. 64, pp. 680–704, 2016.
- [21] F. Parise, S. Grammatico, B. Gentile, and J. Lygeros, "Distributed convergence to Nash equilibria in network and average aggregative games," *Automatica*, vol. 117, p. 108959, 2020.
- [22] F. Salehisadaghiani and L. Pavel, "Distributed Nash equilibrium seeking in networked graphical games," *Automatica*, vol. 87, 2018.
- [23] —, "Nash equilibrium seeking with non-doubly stochastic communication weight matrix," *EAI Endorsed Transactions on Collaborative Computing*, vol. 4, pp. 3–15, 2020.
- [24] —, "Distributed Nash equilibrium seeking: A gossip-based algorithm," *Automatica*, vol. 72, pp. 209–216, 2016.
- [25] M. Bianchi and S. Grammatico, "Nash equilibrium seeking under partial-decision information over directed communication networks," in *2020 59th IEEE Conference on Decision and Control (CDC)*, 2020, pp. 3555–3560.
- [26] E. Eslami, H. Kebriaei, H. Atrianfar, and F. Farhadi, "Incentive mechanism design for unicast service provisioning with network aggregative game," *IEEE Transactions on Automatic Control*, doi: 10.1109/TAC.2022.3144132, p. 1, 2022.
- [27] T. Tatarenko, W. Shi, and A. Nedić, "Geometric convergence of gradient play algorithms for distributed Nash equilibrium seeking," *IEEE Transactions on Automatic Control*, vol. 66, no. 11, pp. 5342–5353, 2021.
- [28] M. Bianchi and S. Grammatico, "Fully distributed Nash equilibrium seeking over time-varying communication networks with linear convergence rate," *IEEE Control Systems Letters*, vol. 5, no. 2, pp. 499–504, 2021.
- [29] H. H. Bauschke and P. L. Combettes, *Convex Analysis and Monotone Operator Theory in Hilbert Spaces*. Springer New York, 2017.
- [30] F. Facchinei and C. Kanzow, "Generalized Nash equilibrium problems," *4OR*, vol. 5, pp. 461–464, 2007.
- [31] G. Belgioioso and S. Grammatico, "Semi-decentralized generalized Nash equilibrium seeking in monotone aggregative games," *IEEE Transactions on Automatic Control*, doi: 10.1109/TAC.2021.3135360, 2021.

- [32] S. Grammatico, "Dynamic control of agents playing aggregative games with coupling constraints," *IEEE Transactions on Automatic Control*, vol. 62, pp. 4537–4548, 2017.
- [33] D. Gadjov and L. Pavel, "Single-timescale distributed GNE seeking for aggregative games over networks via forward-backward operator splitting," *IEEE Transactions on Automatic Control*, vol. 66, no. 7, pp. 3259–3266.
- [34] N. Bastianello, R. Carli, L. Schenato, and M. Todescato, "Asynchronous distributed optimization over lossy networks via relaxed ADMM: Stability and linear convergence," *IEEE Transactions on Automatic Control*, vol. 66, no. 6, pp. 2620–2635.
- [35] C. A. Uribe, S. Lee, A. Gasnikov, and A. Nedić, "A dual approach for optimal algorithms in distributed optimization over networks," *Optimization Methods and Software*, vol. 36, pp. 1–37, 2021.
- [36] W. Shi, Q. Ling, G. Wu, and W. Yin, "EXTRA: An exact first-order algorithm for decentralized consensus optimization," *SIAM Journal on Optimization*, vol. 25, no. 2, pp. 944–966, 2015.
- [37] P. D. Lorenzo and G. Scutari, "NEXT: In-network nonconvex optimization," *IEEE Transactions on Signal and Information Processing over Networks*, vol. 2, no. 2, pp. 120–136.
- [38] Z. Li, W. Shi, and M. Yan, "A decentralized proximal-gradient method with network independent step-sizes and separated convergence rates," *IEEE Transactions on Signal Processing*, vol. 67, no. 17, pp. 4494–4506.
- [39] J. Xu, S. Zhu, Y. C. Soh, and L. Xie, "Augmented distributed gradient methods for multi-agent optimization under uncoordinated constant stepsizes," in *2015 54th IEEE Conference on Decision and Control (CDC)*, 2015, pp. 2055–2060.
- [40] G. Qu and N. Li, "Harnessing smoothness to accelerate distributed optimization," *IEEE Transactions on Control of Network Systems*, vol. 5, pp. 159–166, 2018.
- [41] A. Falsone, I. Notarnicola, G. Notarstefano, and M. Prandini, "Tracking-ADMM for distributed constraint-coupled optimization," *Automatica*, vol. 117, p. 108962, 2020.
- [42] X. Li, G. Feng, and L. Xie, "Distributed proximal algorithms for multiagent optimization with coupled inequality constraints," *IEEE Transactions on Automatic Control*, vol. 66, no. 3, pp. 1223–1230, 2021.
- [43] T. Alpcan and T. Basar, "A game-theoretic framework for congestion control in general topology networks," in *41st IEEE Conference on Decision and Control (CDC)*, vol. 2, 2002, pp. 1218–1224.
- [44] X. Li, L. Xie, and Y. Hong, "Distributed aggregative optimization over multi-agent networks," *IEEE Transactions on Automatic Control*, vol. 67, no. 6, pp. 3165–3171, 2022.
- [45] A. Koloskova, S. U. Stich, and M. Jaggi, "Decentralized stochastic optimization and gossip algorithms with compressed communication," in *36th International Conference on Machine Learning (ICML) 2019*, 2019, pp. 3478–3487.
- [46] M. Charikar, C. Chekuri, T. yat Cheung, Z. Dai, A. Goel, S. Guha, and M. Li, "Approximation algorithms for directed Steiner problems," *Journal of Algorithms*, vol. 33, pp. 73–91, 1999.
- [47] J. C. Parinya and Fakcharoenphol, "Simple distributed algorithms for approximating minimum Steiner trees," L. Wang, Ed. Springer Berlin Heidelberg, 2005, pp. 380–389.
- [48] M. Bianchi and S. Grammatico, "A continuous-time distributed generalized Nash equilibrium seeking algorithm over networks for double-integrator agents," in *2020 European Control Conference (ECC)*, 2020, pp. 1474–1479.



Mattia Bianchi is a Ph.D. candidate in the Delft Center for Systems and Control, TU Delft (NL). He received the Bachelor's degree in Information Engineering and the Master's degree in Control Systems Engineering, both from University of L'Aquila (IT), in 2016 and 2018, respectively. In 2018 he visited the Control Systems Technology group, TU Eindhoven (NL). In 2021-2022 he visited the Mechanical and Aerospace Engineering Department, University of California San Diego (USA). His research interests include game theory and operator theory to solve decision and control problems for complex systems of systems, in the presence of network coupling and uncertainty. He is recipient of the 2021 Roberto Tempo Best Paper Award at the IEEE Conference on Decision and Control.



Sergio Grammatico is an Associate Professor at the Delft Center for Systems and Control, TU Delft, The Netherlands. Born in 1987, he received the Bachelor's degree in Computer Engineering, the Master's degree in Automatic Control Engineering, and the Ph.D. degree in Automatic Control, all from the University of Pisa, Italy, in February 2008, October 2009, and March 2013 respectively. He also received a Master's degree in Engineering Science from the Sant'Anna School of Advanced Studies, the Italian Superior Graduate School (Grande École) for Applied Sciences, in November 2011. In 2013–2015, he was a postdoc researcher in the Automatic Control Laboratory, ETH Zurich, Switzerland. In 2015–2018, he was an Assistant Professor in the Department of Electrical Engineering, Control Systems, TU Eindhoven. He was awarded a 2005 F. Severi B.Sc. Scholarship by the Italian High-Mathematics National Institute, and a 2008 M.Sc. Fellowship by the Sant'Anna School of Advanced Studies. He is a recipient of the 2021 Roberto Tempo Best Paper Award at the IEEE Conference on Decision and Control. He is currently an Associate Editor of the IEEE Trans. on Automatic Control (2018–present) and of Automatica (2020–present).