

Identifying Dominant Industrial Sectors in Market States of the S&P 500 Financial Data

Tobias Wand^{1,2,*}Martin Heßler^{1,2}Oliver Kamps²¹Westfälische Wilhelms-Universität Münster, Institut für Theoretische Physik, Germany²Westfälische Wilhelms-Universität Münster, Center for Nonlinear Science, Germany*Corresponding author: t_wand01@wwu.de

August 2022

Abstract

Understanding and forecasting changing market conditions in complex economic systems like the financial market is of great importance to various stakeholders such as financial institutions and regulatory agencies. Based on the finding that the dynamics of sector correlation matrices of the S&P 500 stock market can be described by a sequence of distinct states via a clustering algorithm, we try to identify the industrial sectors dominating the correlation structure of each state. For this purpose, we use a method from Explainable Artificial Intelligence (XAI) [18] on daily S&P 500 stock market data from 1992 to 2012 to assign relevance scores to every feature of each data point. To compare the significance of the features for the entire data set we develop an aggregation procedure and apply a Bayesian change point analysis to identify the most significant sector correlations. We show that the correlation matrix of each state is dominated only by a few sector correlations. Especially the energy and IT sector are identified as key factors in determining the state of the economy. Additionally we show that a reduced surrogate model, using only the eight sector correlations with the highest XAI-relevance, can replicate 90% of the cluster assignments. In general our findings imply an additional dimension reduction of the dynamics of the financial market.

Keywords: Econophysics, Finance, Explainable AI, Clustering, Market States

1 Introduction

The economy is an example of a complex system with a large number of interacting parts [23]. Its non-stationarity makes the analysis much more difficult than for a stationary system. Nevertheless the time evolution of many non-stationary complex systems can be described as a sequence of transient states i.e. the system passes through a sequence of states where it

remains for a short time and then makes a transition to the next state. Since this represents an enormous reduction of the dimensionality of the system the identification of these states might open the possibility for a better prediction and control of the system. Examples can be found in such diverse fields as e.g. neurodynamics [2] and fluid dynamics [7]. Since in many cases an underlying mathematical description is not available one has to rely on data driven methods to find such states, e.g. via clustering or similar methods [15, 10]. Due to the increasing availability of data for the economy nowadays such methods can also be applied in this field of research. In [31] the authors tried to identify such states in the economy by analysing correlation matrices of daily S&P 500 data. Generally, the correlation matrix between the returns of the different stocks is an object of extensive research [4, 19, 24, 25, 26, 32]. In [31, 34, 40] the correlation matrices of the daily S&P 500 data could be sorted into eight clusters, which can be interpreted as states of the economy corresponding to e.g. economic growth phases or crises [31] and show locally stable behaviour [34, 40]. Further research showed that subtracting the dominant market mode identified in [19, 32] from the correlation matrix leads to a reduced-rank correlation matrix that highlights the differences between different market states and allows to identify exogenous events, precursors for crises and collectivity of industrial sectors [12, 11, 13].

While [31] qualitatively discussed the differences between the market states by comparing their centroids, there has not yet been a quantitative analysis of what differentiates the market states from each other. In this paper our goal is to identify the dominant factors within the different economic states by using a method [18] from the emerging field of Explainable Artificial Intelligence (XAI) which can be understood as a collection of methods that shed light on the black box that most AI methods seem to be from the user's perspective [29, 36]. XAI is nowadays considered for applications in finance [3] and in particular, financial regulators have already embraced the methods of XAI to increase transparency for customers with regards to AI-supported business decisions of financial institutions [8].

Here, based on the hypothesis that the dynamics of the financial market can be described by passing through a sequence of a limited number of transient states, we use the k-means clustering method to identify the clusters. While most of the above clustering analysis use a hierarchical k-means clustering, we use regular k-means clustering. This has a big advantage because it can be reformulated to allow the use of XAI, which can analyse the decisions of the clustering algorithm [18]. This allows us to reveal the dominant factors of the different market states and to compare the market states quantitatively, thereby improving the qualitative comparison depicted in figure 2 of [31].

The remainder of this article is structured as follows: Section 2 explains how the S&P 500 data was collected and preprocessed so that it could be used for our analysis. Section 3 introduces the clustering method and the used XAI method before interpreting the XAI results. Also, it discusses a reduced model which only uses the features with the best XAI values to learn the

clustering classification to test the usefulness of XAI analyses for reducing the dimensionality of the data. Finally, section 4 summarises the results and suggests follow-up research.

2 Data Preparation

The S&P 500 is a stock index containing 500 large US companies traded at American stock exchanges. Daily stock data from these companies were downloaded via the Python package *yfinance* [1] for the time period between 1992 and 2012, which is the same time period as in [34]. Only stock data of companies that were part of the S&P 500 index during at least 99.5% of the time were used for this analysis. Following the approach in [40], the data is aggregated according to the 10 GICS (Global Industry Classification Standard) sectors representing individual parts of the economy [16]. Stock prices from companies of the same GICS sector were added to calculate representative time series $(S_t)_{t=1,\dots,T}$ for each of the 10 sectors. This drastically reduces the number of free parameters $N(N-1)/2$ in the $N \times N$ correlation matrix from an order of 10^4 to exactly 45 to ensure that there is enough data to estimate each correlation, i.e. that the estimation is not underdetermined. If a company's time series is not available for the full time period, the remaining 0.5% of the data are interpolated linearly with the *.interpolate()* method in *pandas* [33, 28]. Overall, there are 249 companies' time series for 5291 trading days. Each sector's returns $R_t = (S_{t+1} - S_t)/S_t$ are locally normalised to remedy the impact of sudden changes in the drift of the time series with the method introduced in [39] as

$$r_t = \frac{R_t - \langle R_t \rangle_n}{\sqrt{\langle R_t^2 \rangle_n - \langle R_t \rangle_n^2}}. \quad (1)$$

Here, $\langle \dots \rangle_n$ denotes a local mean across the n most recent data points, i.e. r_t is subjected to a standard normalisation transformation with respect to the local mean and standard deviation (i.e. volatility σ). Following [31], $n = 13$ was chosen for the daily data. For each time step t and each pair of sectors i, j the local correlation coefficients

$$C_{i,j} = \frac{\langle r_t^{(i)} r_t^{(j)} \rangle_\tau - \langle r_t^{(i)} \rangle_\tau \langle r_t^{(j)} \rangle_\tau}{\sigma_\tau^{(i)} \sigma_\tau^{(j)}} \quad (2)$$

are calculated over a time period of $\tau = 40$ trading days like in [31] (the 40 working days correspond to 2 trading months) with the local standard deviations $\sigma_\tau^{(i)}$. This approach is similar to the sector analysis in [34], where the correlations between the individual companies' stock time series are averaged within their GICS sectors. However, our procedure of first computing the GICS sector time series and then the correlation ensures that larger companies are given more weight in the resulting correlation matrix than smaller ones.

It has to be stressed that the GICS sector classification has changed over the considered time period. E.g. when [34] was published, there were only 10 GICS sectors, whereas nowadays,

there are 11. During the data period from 1992 to 2012, the exact composition of sectors and subsectors has also changed which poses additional problems in sorting a company into a sector. Here, the historical data is sorted into the sectors according to the companies' GICS classification at the end of the time period in 2012, reflecting the same sectors as the ones used in [31].

3 Identifying the most relevant sector correlations within a market state

In this section we first give an overview of the clustering method, before using XAI to shed light on how the clustering algorithm arrives at its results. Then, the XAI results are discussed and interpreted. Finally, a reduced surrogate model that only uses the highest-XAI features is used to see whether the reduction to features with high XAI preserves most of the clustering algorithm's information.

3.1 Identifying Market States via K-Means Clustering

Because the analyses [31, 34, 40] unanimously revealed eight market states for the time period analysed in this article, we set the number of clusters for the k-means algorithm to eight. In contrast to the procedure in the literature, however, regular k-means clustering is used instead of a hierarchical binary k-means clustering in order to make the cluster centres amenable to the XAI method suggested in [18]. The regular k-means clustering method starts with a predefined number of k clusters and randomly selects k initial cluster centres before iteratively assigning each daily correlation matrix to its nearest cluster centre and updating the centres by setting them as the cluster's centroid until their centroid positions converge [22]. The market correlation matrix \mathbf{C} belongs to cluster j , if for the cluster centroids $(\mathbf{C}_l)_{l=1,\dots,k}$ the inequality

$$\|\mathbf{C} - \mathbf{C}_j\| < \min_{l \neq j} \|\mathbf{C} - \mathbf{C}_l\| \quad (3)$$

holds for a suitable distance metric $\|\dots\|$. Here, the Euclidean distance is used.

The time series of the resulting clusters is depicted in figure 1 and shows a qualitatively similar behaviour to those in [31, 34, 40]. In the observed time period, some clusters cease to appear more than sporadically in the data after some years (clusters 0, 1 and 5) and some only start to appear more than sporadically years after the start of the observation time period (cluster 6, 7 and again 5). However, figure 1 shows some quantitative differences compared to the aforementioned literature, in particular because the clusters in figure 1 often appear for a very brief period of time isolated before or after their main emergence period. This may be attributed to the slightly different clustering technique used for this article and the three clustering analyses [31, 34, 40] also show differences in their plots of clusters against time.

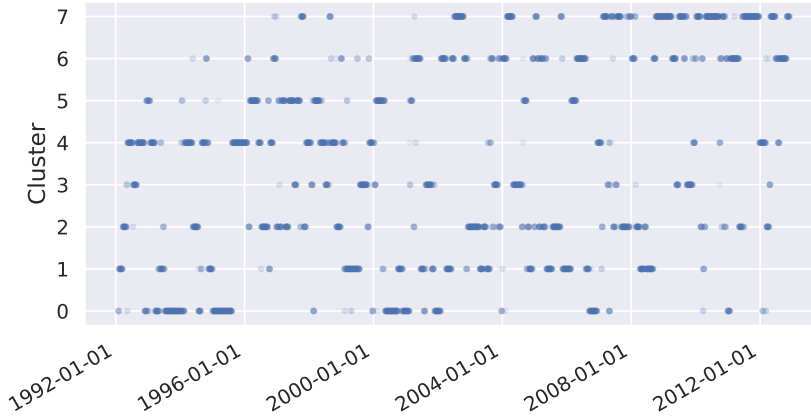


Figure 1: This figure shows which cluster state is occupied by the market at which point in time. Individual data points are depicted with low opacity and the slight overlap between adjacent points increases the opacity and may appear like a solid line.

3.2 Explainable AI for Clustering

Given the results for the clusters we now want to explore whether the clusters are dominated by certain industrial sectors and, if this is the case, which sectors are significant for the identification of the market states represented by the clusters. To this end we use the method developed in [18] to analyse k-means through the lens of XAI. Therefore two steps are necessary [18]: First, the clustering classifier has to be neuralised, i.e. rewritten as a neural network. Then, an XAI method for neural networks is used for analysing the neuralised clustering algorithm, namely the Layer-wise Relevance Propagation (LRP) [30]. For each instance (data point), the XAI algorithm estimates how much the values of its features contributed to the neural network’s decision for this instance. It answers the question which particular feature values led to $\mathbf{C}(t)$ being sorted into cluster j instead of any other cluster. The contribution of the i^{th} feature is quantified in a relevance score ρ_i which is calculated according to equations (2) and (4) from [18] for each instance with respect to its cluster assignment j for all features i .

3.2.1 XAI: From Local to Global Relevances

This method produces relevance scores ρ_i for each feature i (for the correlation between sectors) for every instance (i.e. for each trading day), as depicted in the inset of figure 2 for the first day of cluster 2. However, we wish to focus on the aggregated relevance of one specific feature to understand which sector correlations are more important for the market state than others. As an example, figure 2 shows the histogram of XAI relevances for the correlation Energy/Materials for all trading days in cluster 2. Are such values particularly high? Does the correlation between Energy and Materials matter more for cluster 2 than other correlations? To answer such question, one has to use the XAI values of each instance (local values) for a global

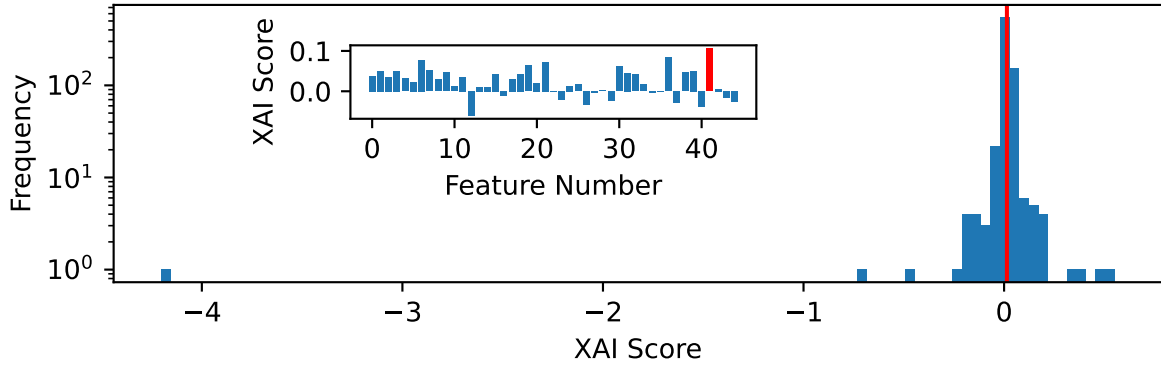


Figure 2: Inset: Barplot of the XAI importance scores for the the first day in cluster 2, showing how much each feature contributed to the classification. The mode (feature with highest XAI score) is depicted in red. Main figure: Histogram of the XAI importance of the correlation Energy/Materials for all instances (trading days) in cluster 2. Outliers like the one visible on the far left of this histogram distort the mean. The median value is depicted in red.

aggregation to compare the aggregated influence of the Energy/Materials correlation with other correlations. Using the mean relevances of each sector seems reasonable, but the mean is distorted by some instances with very high absolute values for some of their relevances. Hence, one can instead focus on the median of each feature’s relevance for each cluster’s instances. Alternatively, one can identify each instance’s feature with the highest ρ_i and then concentrate on the features that are most frequently the most important feature of an instance within each cluster. Because it regards the statistical mode (i.e. the most frequently observed value) and calculates the mode of the mode of each instance’s ρ_i , we chose to name this method "mode-mode". The next sections addresses the question, which of these aggregation methods is more suitable for the data.

3.2.2 Determining Relevant Correlations

For each individual cluster, the XAI relevances of each instance are aggregated to analyse the importance of any feature for the clustering decision via two methods: Either the median $\hat{\rho}_i$ of the i^{th} feature or the mode-mode method is used. The latter method calculates how often n_i the i^{th} feature is the most relevant feature of an instance and ranks the features according to their value n_i . Both the $(\hat{\rho}_i)_i$ and $(n_i)_i$ values are sorted ascendingly as shown in a sample plot in figure 3. These plots can be approximated by piecewise linear segments and sometimes, they show a characteristic elbow shape: They start at a long plateau of low values and later experience a drastic increase, resulting in an almost rectangular shape (cf. figure 3, right). This shape allows to divide the features into two groups. Therefore, a change point analysis can identify the most drastic change in the slope of those plots and help us to achieve a clear threshold between important features with high $\hat{\rho}_i$ or n_i and features with little importance

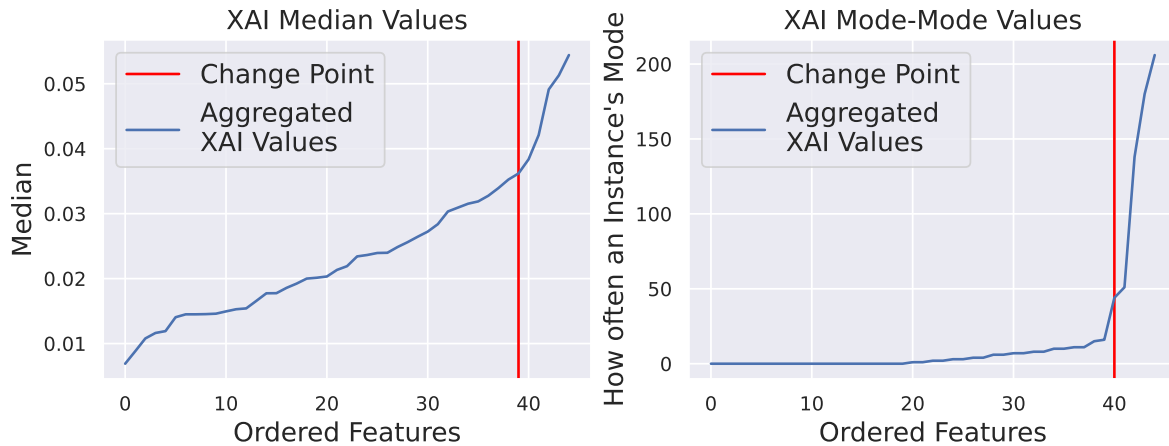


Figure 3: Comparison of ascendingly plotting the features according to the median values XAI (left) and mode-mode XAI (right) in blue and their respective change point estimation with *antiCPy* in red. Plots for the other clusters are included as supplementary material in the appendix A.

[20]. Here we use the Bayesian change point analysis implemented in the *antiCPy* package [14] based on the ideas in [6].

Like depicted in figure 3, the mode-mode values usually show a much more pronounced elbow that makes change point selection easier and their estimated change point is often at a much higher feature number than for the median method. Therefore, if features on the right-hand side of the change point are to be interpreted as highly relevant features, then the mode-mode method allows for a more trustworthy and exhaustive feature reduction than the median method.

Because the mode-mode method usually leads to a more parsimonious feature reduction and therefore, to higher interpretability, and because its change points are often much more clearly visible in the data, we use it to differentiate between relevant and irrelevant correlations. Note that a relevant correlation is not necessarily unusually strong or weak, but rather particularly useful to differentiate between this cluster and the others. As an example, figure 4 shows the centroid (left), the aggregated XAI values (centre) and the change point selection of relevant features (right) for cluster 2. The relevant features cannot be detected trivially by e.g. just identifying particularly high or low values in the centroid, but follow from a comparison to the other centroids. Hence, the change point analysis of relevant values does not follow trivially from the cluster’s centroids, but uncovers new information about the data and yields a parsimonious selection of relevant economic sector correlations.

A plot of all relevant correlations for each cluster is shown in figure 5 The correlations of the Energy sector appear in states associated with clusters 1 and 6, the Utilities sector in 1 and 4 and the Telecommunication sector in 3 and 4. The IT sector dominates cluster 5, influences cluster 0 and, alongside Telecommunication Services, also influences cluster 2. States in cluster 7 only have a high relevance for the correlations between Energy/Financial Services and

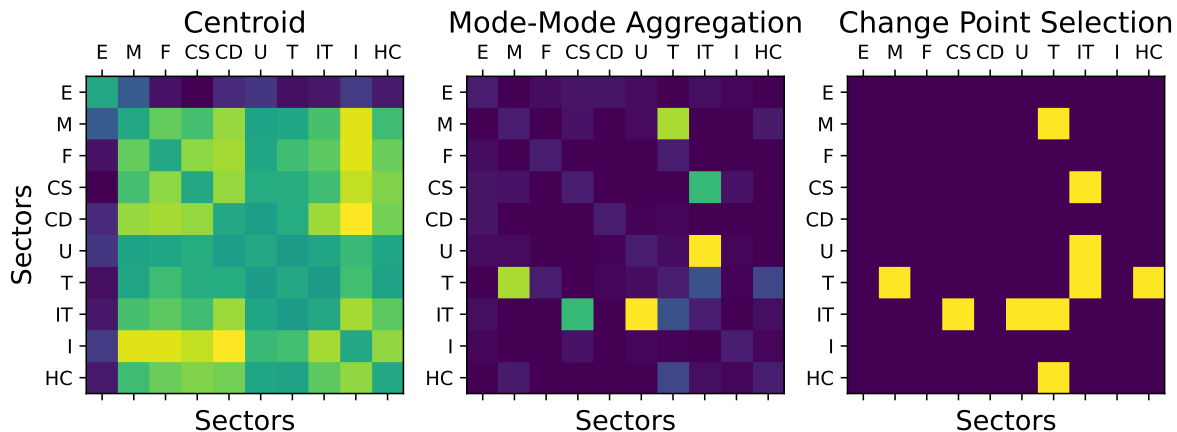


Figure 4: Visualisation of different matrices that represent cluster 2: Comparison between the cluster’s centroid, the mode-based aggregated XAI values and the binary antiCPy-selected relevant XAI values. Brighter colours denote higher values. Because the diagonal’s correlation values are always 1, their values have been set to the matrices’ averages.

IT/Telecommunication. Other clusters show a high influence of Utilities and Telecommunication Services, which are both tied to the Energy or IT sector, respectively: the Utilities sector includes companies which distribute gas and electricity, while Telecommunication Services are related to the physical infrastructure of information transportation.

3.3 Dimensionality Reduction for all Clusters

It makes sense to assume that features with a high relevance should be particularly useful for predicting the original classifier. In particular, this might reveal that only few features are necessary to predict the majority of the cluster assignments. If we only wish to classify one cluster vs. all others, then the relevant features selected by the cutoff in figure 3 are a reasonable choice for reducing the dimensionality of the data. But for an all vs. all classifier, choosing all relevant features of all clusters would barely reduce the number of features at all, because clusters 1 and 4 (cf. figures 8 and 10) would already each contribute more than ten features to this list of relevant features. Instead, one can restrict the analysis to the single best feature for each cluster, resulting in eight features instead of the original 45. This also constitutes a second chance of compare the mode-mode selection with the median selection. If a model trained on such a dimensionality reduction predicts most of the cluster assignments correctly, it will serve as a self-consistency check by indicating that features with high XAI relevance are also highly useful for predicting.

To test, whether a dimensionality reduction is possible, we train a neural network as a surrogate model that should predict the original clustering decisions, but restrict its data to only some of the original features (cf. [29, chapter 8.6]). For each of the eight clusters, only the feature that has the highest XAI relevance score is used to train a neural network as a surrogate model. To

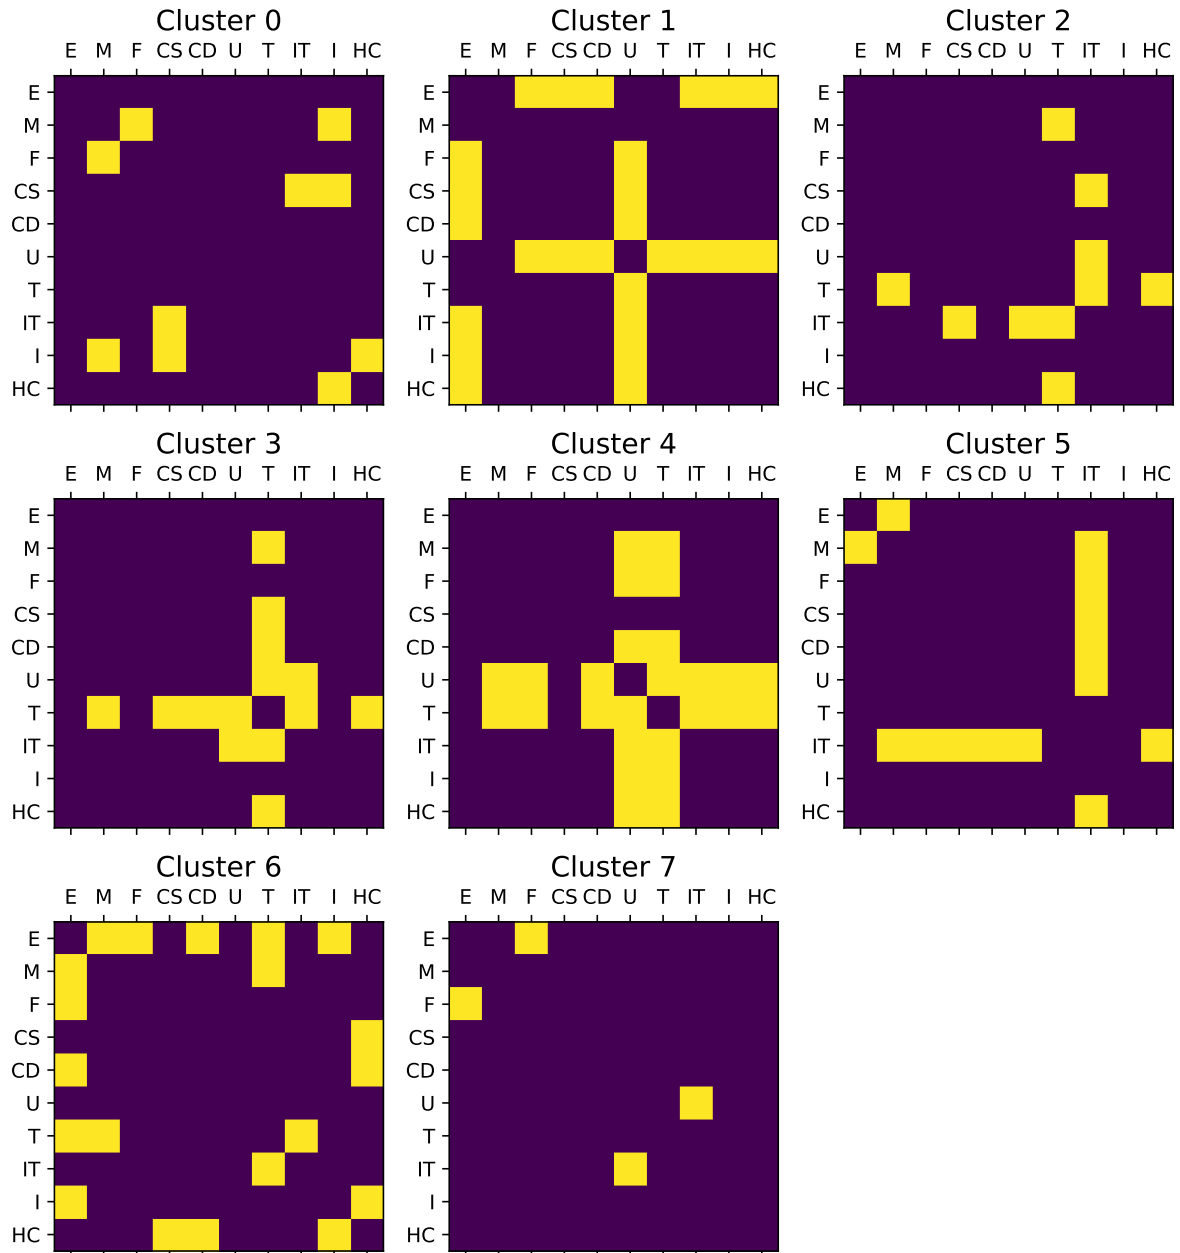


Figure 5: Relevant correlations (yellow) of the sectors for the 8 clusters in figure 1. Relevance selection was done via the change point analysis explained in section 3.2.1 on the mode-mode XAI values. The sectors' abbreviations are E: Energy, M: Materials, F: Financial Services, CS: Consumer Staples, CD: Consumer Discretionary, U: Utilities, T: Telecommunication Services, IT: Information Technology, I: Industrials and HC: Health Care. Note that the diagonal has been set to zero relevance by default because its correlations are always 1.

Layer	Dense	Dense	Dense	Dense	Dense	Dropout	Dense
Units	256	128	128	1024	128	-	8
Activation	selu	relu	relu	LeakyReLu	LeakyReLu	-	softmax
Parameter	-	-	-	0.05	0.01	0.3	-

Table 1: Architecture of the neural network with 100 training epochs for the surrogate model in section 3.2 from left to right. There are eight input units for the eight features of the surrogate model and eight output units for the eight clusters.

test, if this surrogate model has a high accuracy with respect to the original classifier, we also train neural networks with eight features randomly selected from the leftover features. Neural networks with the architecture shown in table 1 were implemented with *tensorflow.keras* [5, 27]. Training, test and validation data each contained $\frac{1}{3}$ of the full data. The networks were trained on (a) the eight optimal mode-mode features, (b) the eight optimal median features and (c) eight randomly selected features and 100 networks were trained for each group. For each of the 100 networks, a different random seed was used to marginally change the performances in the groups (a) and (b). Also, each network in group (c) has a different selection of random features. This results in a distribution of network accuracies for each of the three groups. The eight correlations used for the mode-mode method are: E/M, E/F, E/HC, M/U, F/IT, CS/IT, U/T and U/IT (cf. the caption of figure 5 for the abbreviations).

The accuracy of predicting the original clustering label out of the eight clusters was chosen as a goodness criterion for the different feature selections. The results are depicted in the kernel density plots in figure 6, which are smoothed histograms of the 100 accuracy values for each neural network. The random feature selection achieves noticeably worse results than the two XAI based selection methods. While the mode-mode ($\mu_{mode} \pm \sigma_{mode} = 0.895 \pm 0.004$) is slightly better than the median method ($\mu_{median} \pm \sigma_{median} = 0.882 \pm 0.005$), their confidence intervals (CIs) overlap at the 2σ level. Therefore, one cannot safely conclude that one of them is better than the other. However, their CIs for one σ do not overlap and the mode-mode criterion possesses superior explainability for the individual clusters as demonstrated in figure 3 and therefore, it is recommended to use the mode-mode instead of the median.

4 Discussion

The goal of the research presented in this article was to answer the question whether it is possible to identify sector correlations that dominate the assignment of a trading day to a market state. To this end we used a clustering procedure that allows for an interpretation by a method from the field of XAI. We designed an aggregation procedure to combine these local explanations to global feature relevances for the entire data. The resulting relevance curves show pronounced elbow plots for the mode-mode aggregation like in figure 3 which can be analysed with a change point identification method to define cutoffs between irrelevant and

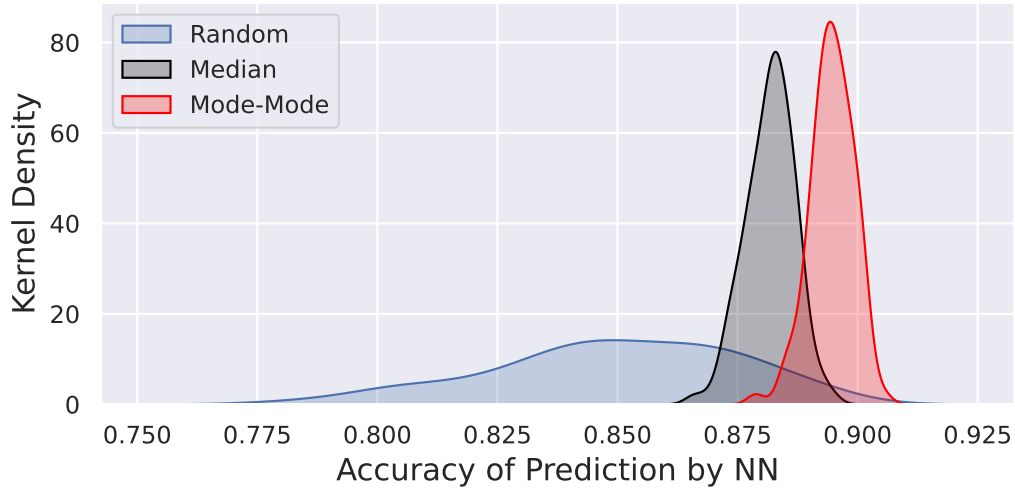


Figure 6: With the eight mode-mode features, the eight best median features and eight random features, 100 neural networks were trained each with a different seed. Kernel density estimations show that the mode-mode and median networks achieve a much higher accuracy than the randomly selected suboptimal features.

relevant features.

Using the described methodology it is possible to show that the assignment of a certain trading day of the S&P 500 market to a cluster (i.e. to a market state) is dominated by only a few sector correlations. The correlations involving the Energy or IT sector each make up three of the eight best features selected by the mode-mode XAI aggregation, respectively, but E/IT is not one of the eight best mode-mode features. Note that in figure 5, clusters 1, 2, 5 and 6 also show a high influence of IT and/or Energy. The frequent occurrence of the IT sector among the highly relevant correlations may be traced back to the fact that the observation period includes the build-up, the the emergence and burst of the dot-com bubble which saw the rise and rapid decline of many IT companies. This is also reflected in the analyses in [31] and [40]. The high importance of the energy sector implies that this sector has major influence in determining whether the economy is in a state of crisis or growth, probably because all other economic activity requires energy for e.g. transportation or production. While the high importance of the IT sector might have to be attributed to the dot-com bubble, the continued influence of the energy sector on the economic state might be a more reasonable conclusion from this analysis. These results support previous studies that have identified the energy sector as a key influence in economic activity [9, 17, 21].

We also showed that a neural network which is only trained on the features with the highest XAI relevance scores can predict the trading day’s cluster with a high degree of accuracy. In general our results imply that a further dimensionality reduction for the description of the dynamics of the financial market is possible. This can be particularly useful in high frequency

trading applications, where the time span of interest lies within the life expectancy of a cluster. In this case, when data needs to be processed very quickly, it may be too slow to work with the complete correlation matrix. Nevertheless, our findings suggest that a reduced matrix only containing the most informative correlations for this cluster can lower the computation times without sacrificing too much accuracy.

While this article used a standard k-means clustering algorithm and therefore deviated from the hierarchical clustering in [31, 34, 40], this opens up another possibility for follow-up research by combining these methods: using a hierarchical clustering and using the XAI on each split in the hierarchy may increase our understanding even further via XAI as an addition to the intrinsic interpretability of hierarchical algorithms. This would potentially tie together the explainability of XAI with the paradigm of interpretable models presented in [35].

Despite the insightful analyses of financial correlation matrices in [31, 34, 40] and in this article, one has to keep in mind that the analysis of the states is based on the matrix of Pearson's correlation coefficients between financial time series. Although this method is frequently used in financial research [25, 19, 32, 26], it has been subject to criticism: As noted in [37], Pearson's correlation only provides inference on linear correlation, but not on nonlinear correlations. This can also be seen in the stylised fact that returns are uncorrelated, but squared returns are strongly correlated [23]. Instead, Spearman's correlation may provide another view on correlations and include nonlinear effects [38] and therefore can be used as another starting point for follow-up research. Additionally, as already mentioned in section 2, the GICS classification has been updated over time to reflect changes in the economy's structure. Because these updates also happened during the regarded 20 year time period, they may have affected the results of this analysis. Moreover, there is a more subtle problem about the data that can be referred to as a survivorship bias: Like [31, 34, 40], we only regard companies whose stock prices are available for the entire time period. Companies that went bankrupt or were merged into another company during the time period are therefore completely disregarded by these analyses, although their bankruptcies or takeovers certainly contain valuable information about the state of the economy.

Acknowledgements

Tobias Wand thanks Shanshan Wang, Henrik Bette (both University of Duisburg-Essen) and Katrin Schmietendorf (WWU Münster) for their valuable suggestions. Tobias Wand and Martin Heßler are funded by the Studienstiftung des deutschen Volkes.

References

- [1] Ran Aroussi. yfinance 0.1.70. Jan. 2022.
- [2] Peter Ashwin and Marc Timme. “When instability makes sense”. In: Nature 436.7047 (2005), pp. 36–37.
- [3] Martin van den Berg and Ouren Kuiper. XAI in the Financial Sector. A Conceptual Framework for Explainable AI (XAI). Sept. 2020.
- [4] Stephen J. Brown. “The Number of Factors in Security Returns”. In: The Journal of Finance 44.5 (Dec. 1989), pp. 1247–1262.
- [5] Francois Chollet et al. Keras. 2015.
- [6] Volker Dose and Annette Menzel. “Bayesian analysis of climate change impacts in phenology”. In: Global Change Biology 10.2 (Feb. 2004), pp. 259–272.
- [7] Daniel Fernex, Bernd R. Noack, and Richard Semaan. “Cluster-based network modeling—From snapshots to complex dynamical systems”. In: Science Advances 7.25 (June 2021).
- [8] BaFin - Federal Agency for Financial Services Supervision. Big data meets artificial intelligence. Challenges and implications for the supervision and regulation of financial services. 2018.
- [9] Giray Gozgor, Chi Keung Marco Lau, and Zhou Lu. “Energy consumption and economic growth: New evidence from the OECD countries”. In: Energy 153 (2018), pp. 27–34.
- [10] Peter beim Graben and Axel Hutt. “Detecting Recurrence Domains of Dynamical Systems by Symbolic Dynamics”. In: Phys. Rev. Lett. 110 (15 Apr. 2013), p. 154101.
- [11] Anton J Heckens and Thomas Guhr. “A new attempt to identify long-term precursors for endogenous financial crises in the market correlation structures”. In: Journal of Statistical Mechanics: Theory and Experiment 2022.4 (Apr. 2022), p. 043401.
- [12] Anton J Heckens, Sebastian M Krause, and Thomas Guhr. “Uncovering the dynamics of correlation structures relative to the collective market motion”. In: Journal of Statistical Mechanics: Theory and Experiment 2020.10 (Oct. 2020), p. 103402.
- [13] Anton J. Heckens and Thomas Guhr. “New collectivity measures for financial covariances and correlations”. In: Physica A: Statistical Mechanics and its Applications 604 (2022), p. 127704. ISSN: 0378-4371.
- [14] Martin Heßler and Oliver Kamps. “Bayesian on-line anticipation of critical transitions”. In: New Journal of Physics 24.6 (June 2022), p. 063021.

- [15] Axel Hutt et al. “Detection of fixed points in spatiotemporal signals by clustering method”. In: Physical Review. E 61 (June 2000), R4691–3.
- [16] S&P Dow Jones Indices. Sector Classification. <https://www.msci.com/documents/10199/4547797/Effective+Until+February+28,+2014.xls>. [Online; accessed 3 March 2022]. 2018.
- [17] Rafał Kasperowicz. “Electricity Consumption and Economic Growth: Evidence from Poland”. In: Journal of International Studies 1 (May 2014), pp. 46–57.
- [18] Jacob Kauffmann et al. “From Clustering to Cluster Explanations via Neural Networks”. In: IEEE Transactions on Neural Networks and Learning Systems (2022), pp. 1–15.
- [19] Laurent Laloux et al. “Noise Dressing of Financial Correlation Matrices”. In: Phys. Rev. Lett. 83 (7 Aug. 1999), pp. 1467–1470.
- [20] Wolfgang von der Linden, Volker Dose, and Udo von Toussaint. Bayesian Probability Theory. Applications in the Physical Sciences. Cambridge University Press, 2014.
- [21] Wen-Cheng Lu. “Electricity Consumption and Economic Growth: Evidence from 17 Taiwanese Industries”. In: Sustainability 9.1 (2017).
- [22] J. MacQueen. “Some methods for classification and analysis of multivariate observations”. In: Proc. of the Fifth Berkeley Symposium on Mathematical Statistics and Probability 5.1 (1967), pp. 281–297.
- [23] Rosario Mantegna and H. Stanley. An Introduction to Econophysics. Correlations and Complexity in Finance. Cambridge University Press, 2000.
- [24] Rosario Nunzio Mantegna. “Degree of correlation inside a financial market”. In: AIP Conference Proceedings 411.1 (1997), pp. 197–202.
- [25] Harry Markowitz. “Portfolio Selection”. In: The Journal of Finance 7.1 (Mar. 1952), p. 77.
- [26] Gautier Marti et al. “A Review of Two Decades of Correlations, Hierarchies, Networks and Clustering in Financial Markets”. In: Progress in Information Geometry: Theory and Applications. Ed. by Frank Nielsen. Springer International Publishing, 2021, pp. 245–274.
- [27] Martín Abadi et al. TensorFlow: Large-Scale Machine Learning on Heterogeneous Systems. Software available from tensorflow.org. 2015.
- [28] Wes McKinney. “Data Structures for Statistical Computing in Python”. In: Proceedings of the 9th Python in Science Conference. Ed. by Stéfan van der Walt and Jarrod Millman. 2010, pp. 56–61.

- [29] Christoph Molnar. Interpretable Machine Learning. A Guide for Making Black Box Models Explainable. 2nd ed. 2022.
- [30] Grégoire Montavon et al. “Layer-Wise Relevance Propagation: An Overview”. In: Explainable AI. Interpreting, Explaining and Visualizing Deep Learning. Ed. by Wojciech Samek et al. Springer International Publishing, 2019, pp. 193–209.
- [31] Michael C. Münnix et al. “Identifying States of a Financial Market”. In: Scientific Reports 2.1 (Sept. 2012).
- [32] Vasiliki Plerou et al. “Universal and Nonuniversal Properties of Cross Correlations in Financial Time Series”. In: Phys. Rev. Lett. 83 (7 Aug. 1999), pp. 1471–1474.
- [33] Jeff Reback et al. pandas-dev/pandas: Pandas 1.4.3. 2022.
- [34] Philip Rinn et al. “Dynamics of quasi-stationary systems: Finance as an example”. In: EPL (Europhysics Letters) 110.6 (June 2015), p. 68003.
- [35] Cynthia Rudin. “Stop explaining black box machine learning models for high stakes decisions and use interpretable models instead”. In: Nature Machine Intelligence 1.5 (May 2019), pp. 206–215.
- [36] Wojciech Samek et al., eds. Explainable AI. Interpreting, Explaining and Visualizing Deep Learning. Springer International Publishing, 2019.
- [37] Leonidas Sandoval. “A map of the Brazilian stock market”. In: Advances in Complex Systems 15.05 (2012), p. 1250042.
- [38] Leonidas Sandoval and Italo De Paula Franca. “Correlation of financial markets in times of crisis”. In: Physica A 391.1 (2012), pp. 187–208.
- [39] Rudi Schäfer and Thomas Guhr. “Local normalization. Uncovering correlations in non-stationary financial time series”. In: Physica A 389.18 (2010), pp. 3856–3865.
- [40] Yuriy Stepanov et al. “Stability and hierarchy of quasi-stationary states: financial markets as an example”. In: Journal of Statistical Mechanics: Theory and Experiment 2015.8 (Aug. 2015), P08011.

A Appendix: Elbow Plots

The same plots as in figure 3 are depicted in this section for the other seven clusters. While a pronounced elbow is visible for all clusters in the mode-mode aggregation, the median method often shows a continuum.

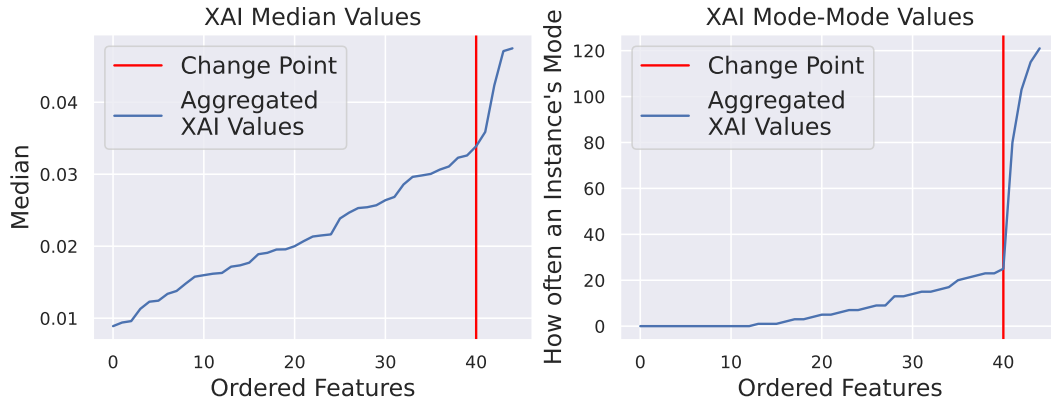


Figure 7: The same figures as in figure 3, but now for cluster 0.

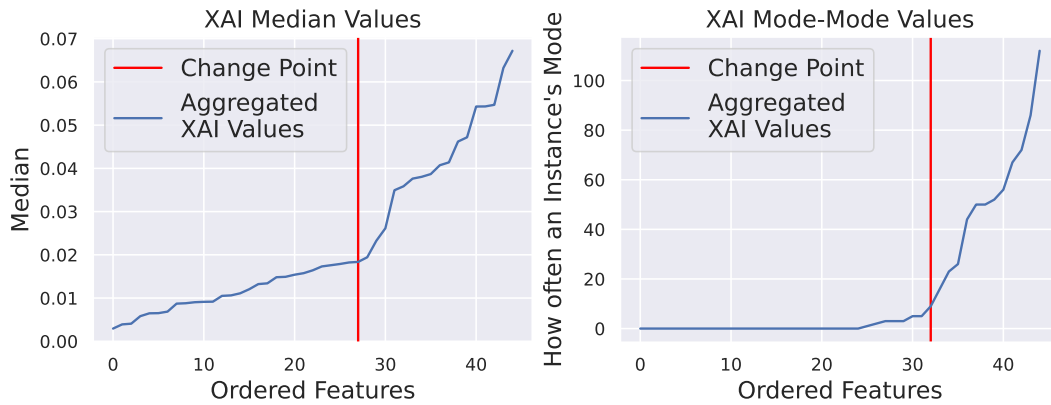


Figure 8: The same figures as in figure 3, but now for cluster 1.

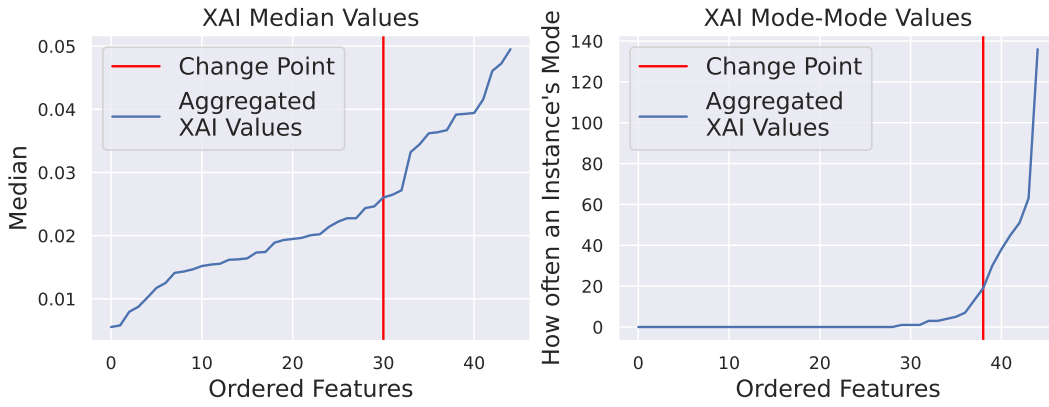


Figure 9: The same figures as in figure 3, but now for cluster 3.

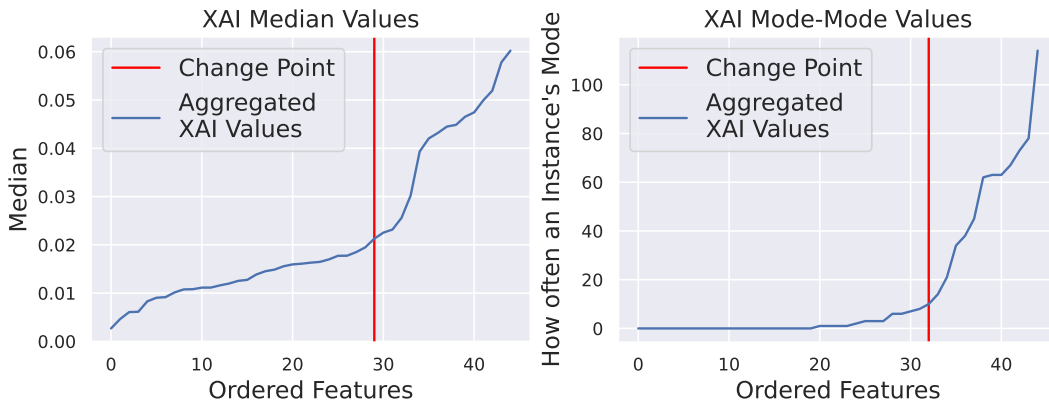


Figure 10: The same figures as in figure 3, but now for cluster 4.

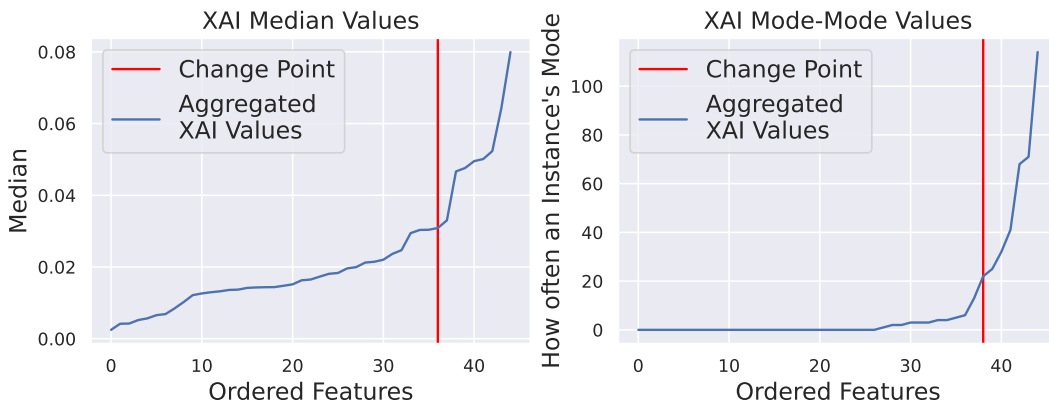


Figure 11: The same figures as in figure 3, but now for cluster 5.

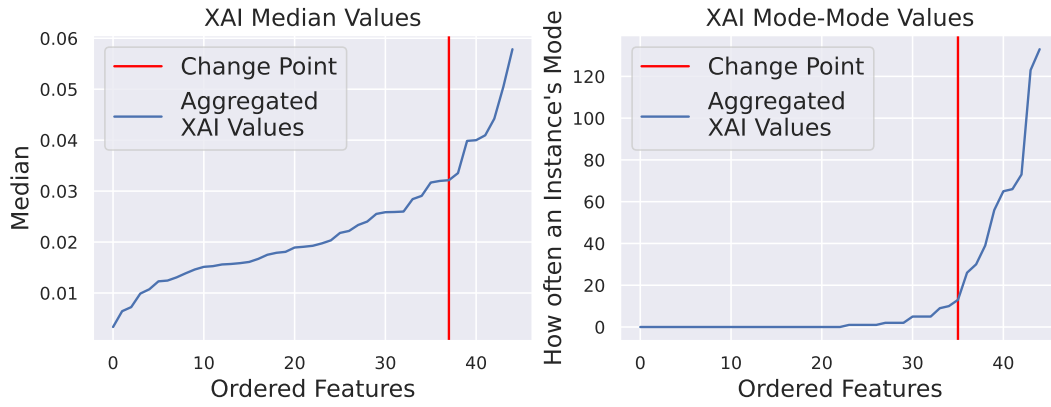


Figure 12: The same figures as in figure 3, but now for cluster 6.

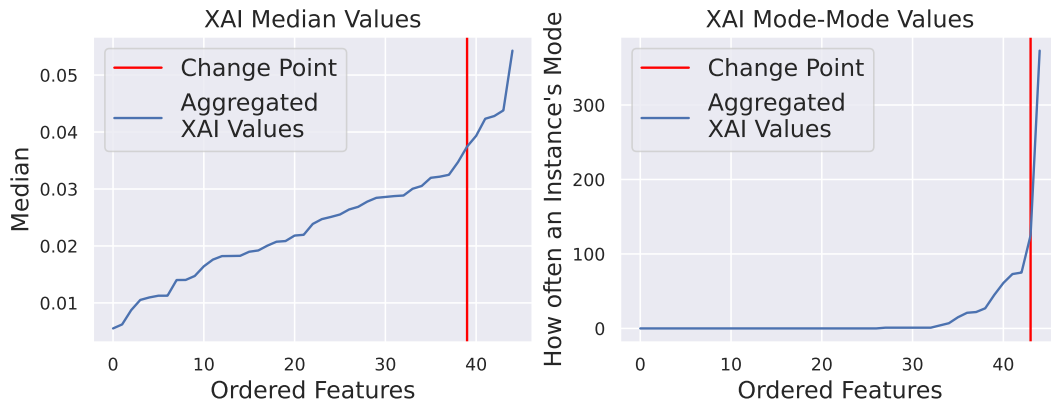


Figure 13: The same figures as in figure 3, but now for cluster 7.