

Making Quantum Local Verifiers Simulable with Potential Applications to Zero-Knowledge

Lijie Chen*

Ramis Movassagh[†]

September 23, 2022

Abstract

Recently Chen and Movassagh proposed the quantum Merkle tree [CM21b], which is a quantum analogue of the well-known classical Merkle tree. It gives a succinct verification protocol for quantum state commitment. Although they only proved security against semi-honest provers, they conjectured its general security.

Using the proposed quantum Merkle tree, [CM21b] gave a quantum analogue of Kilian’s succinct argument for NP, which is based on probabilistically checkable proofs (PCPs). A nice feature of Kilian’s argument is that it can be extended to a zero-knowledge succinct argument for NP, if the underlying PCP is zero-knowledge. Hence, a natural question is whether one can also make the quantum succinct argument by Chen and Movassagh zero-knowledge as well.

This work makes progress on this problem. We generalize the recent result of Broadbent and Grilo [BG20] to show that any local quantum verifier can be made *simulable* with a minor reduction in completeness and soundness. Roughly speaking, a local quantum verifier is simulable if in the yes case, the local views of the verifier can be computed without knowing the actual quantum proof; it can be seen as the quantum analogue of the classical zero-knowledge PCPs. Hence we conjecture that applying the proposed succinct quantum argument of [CM21b] to a simulable local verifier is indeed zero-knowledge.

1 Introduction

Chen and Movassagh [CM21b] recently proposed the quantum Merkle tree, together with a candidate quantum succinct argument construction for the Gap- k -LH problem.

Definition 1.1. (Gap- k -Local Hamiltonian Problem) Given α, β with $0 < \alpha < \beta \leq 1$ and a k -local Hamiltonian with m local terms $\{H_i\}_{i \in [m]}$ such that $0 \leq H_i \leq I$, decide whether $\lambda_{\min}(\sum_{i=1}^m H_i)$ is at most αm or at least βm . Below we abbreviate this problem by (α, β) - k -LH.

Motivation: making the Chen-Movassagh construction zero-knowledge? Assuming the quantum PCP conjecture, which says the above problem is QMA-complete for some constants $\alpha < \beta$ (see Section 2.5), the proposed quantum succinct argument applies to all of QMA. The construction from [CM21b] can be seen as a quantum analogue of the well-known succinct argument for NP by Kilian [Kil92], which is based on probabilistically checkable proofs (PCPs). An important feature

*Miller Institute for Basic Research in Science, University of California Berkeley, Berkeley, CA, 94720, U.S.A.

[†]IBM Quantum Research, MIT-IBM Watson AI Research Lab, Cambridge, MA, 02142, U.S.A.

of the construction of [Kil92] is that if the underlying PCP is zero-knowledge [DFK⁺92, KPT97], then so is the succinct argument.¹

A natural question, which is asked explicitly in [CM21b], is whether one can make their candidate quantum succinct argument zero-knowledge as well. Recall that a language $L \in \text{NP}$ admits a succinct classical zero-knowledge PCP, if there is a *local verifier* V_L that queries $\text{polylog}(n)$ bits of a given proof π such that (1) if $x \in L$, given a corresponding witness w , a poly-time algorithm can sample a proof π from a distribution $\mathcal{D}_{x,w}$, such that V_L accepts π with probability $1 - \text{negl}(n)$, yet the local views of V_L can be simulated *without knowing* the proof π and (2) if $x \notin L$, then V_L accepts any proof π with probability at most $\text{negl}(n)$; see [CMS19, Section 3.4] for a formal definition. To summarize, L admits a zero-knowledge PCP if there is a *locally simulable verifier* V_L for L with $1 - \text{negl}(n)$ completeness and $\text{negl}(n)$ soundness.

Hence, the first step of making their construction zero-knowledge, is to obtain a quantum analogue of a simulable local verifier for the Gap- k -LH problem. Recently, [BG20] proved that every language $L \in \text{QMA}$ has a *locally simulable verifier* V_L , such that (1) V_L only queries $O(1)$ qubits in the witness; (2) given a yes instance $x \in L_{\text{yes}}$, there exists a witness σ that makes V_L accepts with probability $1 - n^{-\omega(1)}$, such that V_L 's local views² can be simulated *without knowing* σ ; (3) for every no instance $x \in L_{\text{no}}$, V_L rejects with probability at least $1/n^c$, for some constant $c \geq 3$. In other words, they proved $\text{QMA} \subseteq O(1)\text{-SimQMA}_{1-n^{-c}, 1-n^{-\omega(1)}}$ (see Definition 2.7 for the formal definition). [BG20]'s construction works for all of QMA but it has a very poor soundness of $1 - 1/n^c$. One may hope that it can achieve the require $\text{negl}(n)$ soundness if we apply it only to the Gap- k -LH problem instead of QMA in general.

Our result: locally simulable verifiers with minor loss in parameters. [BG20]'s result builds on the techniques of simulable codes/proofs from [GSY19]. It gives a transformation from a general quantum verifier V for $L \in \text{QMA}$ to a locally simulable verifier V_L for L . However, due to the use of the Feynman-Kitaev clock construction [KSV02], the rejection probability of V_L in the no case is *only inverse polynomial*, even if we apply their construction to the Gap- k -LH problem instead of QMA in general. Thus, it is not immediately clear how to use their construction of locally simulable verifier for our purpose.

In this paper, we generalize the result of [BG20] and show that if one starts from a local verifier V for L with a constant completeness/soundness gap (e.g., the natural local verifier for the Gap- k -LH problem), we can obtain a *locally simulable verifier* with a constant completeness/soundness gap, at the cost of increasing the adaptivity by 1.

Formally, we use (k, γ) -LocalQMA $_{s,c}$ to denote all languages with a local verifier V such that (1) V queries at most k qubits non-adaptively, and then applies a γ -size quantum circuit on the queried qubits to decide to accept or not, and (2) V has completeness c and soundness s (see Definition 2.6 for the formal definition). We also use (k, ℓ) -SimQMA to denote all languages with a locally simulable verifier that can ask ℓ rounds of queries (see Definition 2.7).

Theorem 1.2. *For every $k, \gamma \in \mathbb{N}$, $0 < \beta < 1$, and negligible function α , there are $s \in (0, 1)$ and $c: \mathbb{N} \rightarrow [0, 1]$ such that $1 - c(n) \leq \text{negl}(n)$ and the following holds*

$$(k, \gamma)\text{-LocalQMA}_{\beta, 1-\alpha(n)} \subseteq (O(\log n), 2)\text{-SimQMA}_{s, c(n)}.$$

Techniques. We remark that it is not clear how to directly adapt [BG20]'s transformation to prove Theorem 1.2. Indeed, we have to apply the Feynman-Kitaev clock construction together

¹It is zero-knowledge even in the quantum random oracle model (QROM); see [CMS19].

²If V_L decides to query an $O(1)$ -size subset S , then her local view is $\text{Tr}_S[\sigma]$.

with the simulable codes to a sequence of *non-local unitaries* (see [Section 3.2.1](#)). The crucial observation we made here is that the local simulation of simulable codes in [\[BG20, GSY19\]](#) indeed works for every subset S that has small intersections with every encoding block (see [Lemma 3.5](#)). See [Section 3](#) for a proof of [Theorem 1.2](#).

Application to quantum zero-knowledge PCP and zero-knowledge succinct quantum arguments. The quantum PCP conjecture can be equivalently stated as follows³:

Conjecture 1.3 (Quantum PCP conjecture with almost perfect completeness, an equivalent formulation). *There are constants $k, \gamma \in \mathbb{N}$ and $s \in (0, 1)$ such that $\text{QMA} \subseteq (k, \gamma)\text{-LocalQMA}_{s, 1 - \text{negl}(n)}$.*

The following is an immediate corollary of [Theorem 1.2](#).

Corollary 1.4. *Assuming [Conjecture 1.3](#) holds, $\text{QMA} \subseteq (O(\log n), 2)\text{-SimQMA}_{s, 1 - \text{negl}(n)}$ for some constants $s \in (0, 1)$.*

The above corollary can be interpreted as quantum PCPs implies quantum *zero-knowledge* PCPs.

Finally, applying the candidate quantum succinct argument from [\[CM21b\]](#) to $(O(\log n), 2)\text{-SimQMA}$, we obtain a candidate construction of quantum succinct zero-knowledge argument in QHROM; see [Section 4](#) for more details.

1.1 Related Works

Zero-knowledge protocols for QMA. Zero-knowledge protocols for QMA were recently studied in various works. Most of these works need assumptions stronger than the existence of post-quantum OWFs, such as the quantum hardness of LWE (QLWE), the existence of quantum-secure Fully-Homomorphic Encryption (QFHE), and the existence of quantum-secure indistinguishability obfuscation (QiO) (or combinations of them) [\[ACGH20, CVZ20, BS20, BM21, Shm20, CCY20, CM21a, BKL⁺22\]](#). We refer the interested readers to these papers for more details.

Succinct arguments against quantum adversaries. [\[CMS19\]](#) proved that the succinct arguments for NP in [\[Kil92, Mic00\]](#) are also secure in QROM. Recently, it was proved that Kilian’s four-message succinct argument for NP [\[Kil92\]](#) is secure in the standard model against quantum adversaries under QLWE [\[CMSZ21\]](#). In [\[CCY20\]](#), under QLWE, QFHE, QiO, and some other assumptions, a succinct argument for $\text{QTIME}(T)$ was constructed, in which the communication between the prover and the verifier is *classical*. Later, in [\[BKL⁺22\]](#), the same succinct argument was constructed under only QLWE and QiO.

Organization

In [Section 2](#), we provide the necessary preliminaries for this paper. In [Section 3](#), we show that every local verifier can be made simulable and prove [Theorem 1.2](#). In [Section 4](#), we present our candidate zero-knowledge succinct argument for the Gap- k -LH problem.

³For technical reason, we will need a stronger version with $1 - \text{negl}(n)$ completeness.

2 Preliminaries

2.1 Notation

We always denote by \log the logarithm in base 2. We denote by $[n]$ the set of integers $\{1, 2, \dots, n\}$. Let reg be a register of n qubits. For each $i \in [n]$, $\text{reg}(i)$ denotes the i -th qubit in reg , and $\text{reg}[\ell, r]$ denotes the qubits from $\text{reg}(\ell)$ to $\text{reg}(r)$. The corresponding Hilbert space is denoted by \mathcal{H}_{reg} . For k pairwise-disjoint sets S_1, \dots, S_k , we use $\bigsqcup_{i \in [k]} S_i$ to denote their union. We say a function $\alpha: \mathbb{N} \rightarrow [0, 1]$ satisfies $\alpha(n) \leq \text{negl}(n)$ (i.e., α is negligible), if for all constant $k \geq 1$, $\lim_{n \rightarrow \infty} \alpha(n) \cdot n^k = 0$ (i.e., $\alpha(n) = o(1/n^k)$ for every $k \in \mathbb{N}$).

For a quantum state σ on n qubits and a subset $S \subseteq [n]$, $\sigma_S \equiv \text{Tr}_{[n] \setminus S}[\sigma]$ is the reduced density matrix. For a quantum state $|\psi\rangle \in \mathcal{H}_{\text{reg}}$, for simplicity we sometimes use ψ to denote the corresponding density matrix $\psi = |\psi\rangle\langle\psi|$. Given a unitary sequence U_1, \dots, U_T , we write $U_{[\ell, r]}$ to denote the product $U_r U_{r-1} \dots U_\ell$ for ease of notation.

For two quantum states σ and ρ , we use $\|\sigma - \rho\|_1$ to denote their trace distance. We also write $x \in_{\mathbb{R}} A$ to mean that x is drawn from the set A uniformly at random.

2.2 History States and History Hamiltonians

We will use the Feynman-Kitaev clock construction [KSV02] in this paper. Below we introduce the definitions and some important related results.

For $T \in \mathbb{N}$ and $t \in \{0, 1, \dots, T\}$, we define the T -qubit state $\text{unary}(t, T)$ as

$$|\text{unary}(t, T)\rangle = |1^t\rangle \otimes |0^{(T-t)}\rangle.$$

For simplicity, we often write it as $\text{unary}(t)$ when T is clear from the context.

Definition 2.1 (History states). Let U be a unitary that acts on $\mathcal{H}_{\text{state}} = \mathcal{H}_{\text{witness}} \otimes \mathcal{H}_{\text{ancilla}}$, with n_1 qubits in witness and n_2 qubits in ancilla. Let U_1, \dots, U_T be a sequence of unitaries such that $U = U_T \dots U_1$ (note that these U_i 's may not be local). Then a state $|\Psi\rangle \in \mathcal{H}_{\text{clock}} \otimes \mathcal{H}_{\text{state}}$ is a history state, if

$$|\Psi\rangle = \frac{1}{\sqrt{T+1}} \sum_{t=0}^T |\text{unary}(t)\rangle_{\text{clock}} \otimes |\psi_t\rangle_{\text{state}},$$

where $|\psi_t\rangle = U_{[1,t]}|\psi_0\rangle$, and $|\psi_0\rangle = |\phi\rangle_{\text{witness}} \otimes |0^{n_2}\rangle_{\text{ancilla}}$ for some n_1 -qubit state $|\phi\rangle$.

Definition 2.2 (History Hamiltonians). Let U be a unitary that acts on $\mathcal{H}_{\text{state}} = \mathcal{H}_{\text{witness}} \otimes \mathcal{H}_{\text{ancilla}}$, with n_1 qubits in witness and n_2 qubits in ancilla. Let S_1, \dots, S_B be a partition of $[n_2]$ (i.e., $[n_2] = \bigsqcup_{i \in [B]} S_i$). Let U_1, \dots, U_T be a sequence of unitaries such that $U = U_T \dots U_1$.

We define the following Hamiltonians:

- Propagation terms:

$$H_1^{\text{prop}} \equiv \frac{1}{2} \left(|0\rangle\langle 0|_{\text{clock}(1)} + |10\rangle\langle 10|_{\text{clock}[1,2]} - U_1|1\rangle\langle 0|_{\text{clock}(1)} - U_1^\dagger|0\rangle\langle 1|_{\text{clock}(1)} \right), \quad (1)$$

$$H_T^{\text{prop}} \equiv \frac{1}{2} \left(|10\rangle\langle 10|_{\text{clock}[T-1,T]} + |1\rangle\langle 1|_{\text{clock}(T)} - U_T|1\rangle\langle 0|_{\text{clock}(T)} - U_T^\dagger|0\rangle\langle 1|_{\text{clock}(T)} \right), \quad (2)$$

and for $t \in \{2, \dots, T-1\}$, we set

$$H_t^{\text{prop}} \equiv \frac{1}{2} \left(|10\rangle\langle 10| + |11\rangle\langle 11| - U_t|11\rangle\langle 10| - U_t^\dagger|10\rangle\langle 11| \right)_{\text{clock}[t-1,t]} \otimes |0\rangle\langle 0|_{\text{clock}(t+1)}. \quad (3)$$

- For each $t \in [T - 1]$, we set the t -th stabilizing Hamiltonian as

$$H_t^{\text{stab}} = |01\rangle\langle 01|_{\text{clock}[t,t+1]}.$$

- For each $i \in [B]$, we set the i -th initialization Hamiltonian as

$$H_i^{\text{in}} := (I - |0^{|S_i|}\rangle\langle 0^{|S_i|}|)_{\text{ancilla}(S_i)} \otimes |0\rangle\langle 0|_{\text{clock}(1)}.$$

- We then define the *History* Hamiltonian as

$$H := H^{\text{prop}} + H^{\text{in}} + H^{\text{stab}},$$

where

$$H^{\text{prop}} := \sum_{t \in [T]} H_t^{\text{prop}}, \quad H^{\text{in}} := \sum_{i \in [B]} H_i^{\text{in}}, \quad H^{\text{stab}} := \sum_{t \in [T-1]} H_t^{\text{stab}}.$$

We call H the history Hamiltonian of sequence U_1, \dots, U_T . At times we slightly abuse notation and call H the history Hamiltonian of the unitary U for simplicity.

We also need the following lemma stating that every state with a low energy with respect to the history Hamiltonian is close to some history state.

Lemma 2.3 ([NVY18, Theorem 21]). *Let U be a unitary that acts on $\mathcal{H}_{\text{state}} = \mathcal{H}_{\text{witness}} \otimes \mathcal{H}_{\text{ancilla}}$, with n_1 qubits in witness and n_2 qubits in ancilla. Let S_1, \dots, S_B be a partition of $[n_2]$. Let U_1, \dots, U_T be a sequence of unitaries such that $U = U_T \dots U_1$, and H be the history Hamiltonian of U on $\mathcal{H}_{\text{clock}} \otimes \mathcal{H}_{\text{state}}$. Then for every state $|\psi\rangle \in \mathcal{H}_{\text{clock}} \otimes \mathcal{H}_{\text{state}}$ such that $\langle \psi | H | \psi \rangle \leq \delta$, there is a history state $|\eta\rangle$ such that*

$$\| |\eta\rangle\langle \eta| - |\psi\rangle\langle \psi| \|_1 \leq \text{poly}(T, B) \cdot \sqrt{\delta}.$$

Remark 2.4. *We remark that our the definition of the initialization term H^{in} in our construction above is slightly different from the standard construction used in [NVY18, Theorem 21]. But nonetheless, their proof easily goes through.*

2.3 The Quantum Haar Random Oracle Model

We will consider the *Quantum Haar random oracle model* (QHROM), introduced by [CM21b], in which every agent (prover and verifier) gets access to a Haar random oracle \mathcal{G} acting on λ qubits and its inverse \mathcal{G}^\dagger , where λ is the so-called *security parameter*.

We denote by $\mathbb{U}(N)$ the set of all $N \times N$ unitaries. By $\mathcal{G} \in_{\mathbb{R}} \mathbb{U}(N)$ we mean that \mathcal{G} is an $N \times N$ unitary drawn from the Haar measure.

Definition 2.5. An interactive protocol Π between the prover \mathcal{P} and verifier \mathcal{V} is a proof system for a promise problem $L = (L_{\text{yes}}, L_{\text{no}})$ with completeness $c(n, \lambda)$ and soundness $s(n, t, \lambda)$ in QHROM, if the following holds:

\mathcal{P} and \mathcal{V} : \mathcal{P} and \mathcal{V} are both given an input $x \in L_{\text{yes}} \cup L_{\text{no}}$. \mathcal{V} is polynomial-time and outputs a classical bit indicating acceptance or rejection of x , and \mathcal{P} is unbounded. Both \mathcal{V} and \mathcal{P} are given access to a Haar random quantum oracle \mathcal{G} and its inverse \mathcal{G}^\dagger that act on λ qubits (that is, $\mathcal{G} \in_{\mathbb{R}} \mathbb{U}(2^\lambda)$). Let $n = |x|$.

Completeness: If $x \in L_{\text{yes}}$,

$$\mathbb{E}_{\mathcal{G} \in_{\mathbb{R}} \mathbb{U}(2^\lambda)} \Pr[(\mathcal{V}^{\mathcal{G}, \mathcal{G}^\dagger} \Leftrightarrow \mathcal{P}^{\mathcal{G}, \mathcal{G}^\dagger})(x) = 1] \geq c(n, \lambda),$$

where we use \Leftrightarrow to denote the interactive nature of the protocol between \mathcal{P} and \mathcal{V} .

Soundness: If $x \in L_{\text{no}}$, for every $t \in \mathbb{N}$ and any unbounded prover \mathcal{P}^* making at most t total queries to \mathcal{G} and \mathcal{G}^\dagger , we have that

$$\mathbb{E}_{\mathcal{G} \in_{\mathbb{R}} \mathbb{U}(2^\lambda)} [(\mathcal{V}^{\mathcal{G}, \mathcal{G}^\dagger} \Leftrightarrow (\mathcal{P}^*)^{\mathcal{G}, \mathcal{G}^\dagger})(x) = 1] \leq s(n, t, \lambda).$$

Computational zero-knowledge: For any $x \in L_{\text{yes}}$ and any polynomial-time \mathcal{V}^* that receives the inputs x and some state ζ , there is a polynomial-time quantum channel $\mathcal{S}_{\mathcal{V}^*}$ that also receives x and ζ as inputs such that for all polynomial-time quantum algorithms D that takes a quantum state and outputs a single bit, we have

$$\left| \Pr_{\mathcal{G} \in_{\mathbb{R}} \mathbb{U}(2^\lambda)} [D(\text{View}_{\mathcal{V}^*}((\mathcal{V}^*)^{\mathcal{G}, \mathcal{G}^\dagger} \Leftrightarrow \mathcal{P}^{\mathcal{G}, \mathcal{G}^\dagger})(x)) = 1] - \Pr_{\mathcal{G} \in_{\mathbb{R}} \mathbb{U}(2^\lambda)} [D(\mathcal{S}_{\mathcal{V}^*}^{\mathcal{G}, \mathcal{G}^\dagger}(x, \zeta)) = 1] \right| \leq \text{negl}(n),$$

where $\text{View}_{\mathcal{V}^*}(\mathcal{V}^* \Leftrightarrow \mathcal{P})(x)$ denotes the quantum state of \mathcal{V}^* at the end of protocol.

We remark that in the soundness part, the only restriction on a malicious prover \mathcal{P}^* is the number of queries it can make to \mathcal{G} and \mathcal{G}^\dagger . In particular, this means that even if \mathcal{P}^* has unbounded computational power, as long as it makes a small number of queries to \mathcal{G} and \mathcal{G}^\dagger , it cannot fool the verifier.

2.4 Local Proofs and Locally simulable Proofs

Next, we provide formal definitions of LocalQMA and SimQMA.

Definition 2.6 ($((k, \gamma)$ -LocalQMA). For $k: \mathbb{N} \rightarrow \mathbb{N}$ and $\gamma: \mathbb{N} \rightarrow \mathbb{N}$, a promise problem $L = (L_{\text{yes}}, L_{\text{no}})$ is in the complexity class $((k, \gamma)$ -LocalQMA with soundness $s(n)$ and completeness $c(n)$ if there are polynomials m, p such that the following hold:

A k -local verifier V_L : Let $n = |x|$. There is a verifier V_L that acts as follows:

1. V_L gets access to a $p(n)$ -qubit proof σ for L , it also draws $i \in_{\mathbb{R}} [m(n)]$, V_L then computes in $\text{poly}(n, k, \gamma)$ time a k -size subset $S_i \subseteq [p(n)]$ and a $\gamma(n)$ -size quantum circuit C_i that is over the Clifford + T gate-set and acts on k qubits. C_i may use γ ancilla qubits, with the first ancilla qubit being the output qubit.
2. V_L next applies C_i to the restriction of σ on qubits in S_i and measures the first ancilla qubit. V_L accepts if the outcome is 1 and rejects otherwise.

Completeness: If $x \in L_{\text{yes}}$, there is a $p(n)$ -qubit state σ such that V_L accepts σ with probability at least $c(n)$.

Soundness: If $x \in L_{\text{no}}$, V_L accepts every $p(n)$ -qubit state σ with probability at most $s(n)$.

Strongly explicit: Moreover, we say that V_L is strongly explicit, if V_L computes S_i and C_i in $\text{poly}(\log n, k, \gamma)$ time instead of $\text{poly}(n, k, \gamma)$ time.

We will use $((k, \gamma)$ -LocalQMA $_{s,c}$ to denote the class above for notational convenience.

Definition 2.7 ($((k, \ell)$ -SimQMA). For $k: \mathbb{N} \rightarrow \mathbb{N}$ and $\ell \in \mathbb{N}$, a promise problem $L = (L_{\text{yes}}, L_{\text{no}})$ is in the complexity class $((k, \ell)$ -SimQMA with soundness $s(n)$ and completeness $c(n)$ if there are polynomials m, p and a negligible function $\varepsilon: \mathbb{N} \rightarrow [0, 1]$ such that the following hold:

An ℓ -adaptive verifier V_L : Let $n = |x|$. There is a verifier V_L that acts as follows:

1. V_L gets access to a $p(n)$ -qubit proof σ for L , it also draws $\tau_0 \in_R [m(n)]$. Then V_L proceeds in ℓ rounds. In the i -th round V_L performs some measurements and obtains an outcome τ_i . We use $\tau_{\leq i}$ to denote the sequence τ_0, \dots, τ_i .
2. At the beginning of the i -th round, based on $\tau_{\leq i-1}$, V_L computes in $\text{poly}(n, k, \gamma)$ time a subset $S_i \subseteq [p(n)]$ such that $S_i \cap S_j = \emptyset$ for all $j < i$ and $|S_i| \leq k(n)$, together with a POVM $\{\Pi_j\}_{j \in [m(n)]}$ on $|S_i|$ qubits.
3. V_L next measures σ_{S_i} with the $\{\Pi_j\}_{j \in [m(n)]}$, and sets $\tau_i = j$ if it sees Π_j .
4. Finally, V_L decides whether it accepts or not based on the sequence $\tau_{\leq \ell}$.

Simulable completeness: If $x \in L_{\text{yes}}$, there is a $p(n)$ -qubit state σ such that:

1. V_L accepts σ with probability at least $c(n)$.
2. Let $t \in [\ell]$. For every possible sequence $\tau_{\leq t-1} \in [m(n)]^t$, let S_1, \dots, S_t be the corresponding query sets of V_L (they are uniquely determined from $\tau_{\leq t-1}$) and $S_{\leq t} = \bigsqcup_{i \in [t]} S_i$, one can compute the classical description of a density matrix σ' in $\text{poly}(n, 2^{|S_{\leq t}|})$ time, such that $\|\sigma' - \sigma_{S_{\leq t}}\|_1 \leq \varepsilon(n)$.

We call the σ above the *simulable witness* of V_L given the input x .

Soundness: If $x \in L_{\text{no}}$, V_L accepts every $p(n)$ -qubit state σ with probability at most $s(n)$.

Strongly explicit: Moreover, we say that V_L is strongly explicit, if V_L computes S_i and measures $\{\Pi_j\}_{j \in [m(n)]}$ in $\text{poly}(\log n, k, \gamma)$ time instead of $\text{poly}(n, k, \gamma)$ time.

We will also use (k, ℓ) -SimQMA $_{s,c}$ to denote the class above for notational convenience. We remark that our definition of (k, ℓ) -SimQMA is a generalization of k -SimQMA in [BG20], which corresponds to the non-adaptive case that $\ell = 1$.

2.5 The Quantum PCP Conjecture

We first recall the quantum PCP conjecture [AALV09, AAV13].

Conjecture 2.8 (QPCP conjecture). *There are constants $k \in \mathbb{N}$ and α, β satisfying $0 < \alpha < \beta \leq 1$ such that (α, β) - k -LH is QMA-complete.*

In particular, the following corollary is immediate from the definition of (α, β) - k -LH.

Corollary 2.9. *If QPCP holds, then there are constants $k, \gamma \in \mathbb{N}$ and $c, s \in [0, 1]$ satisfying that $s < c$, such that*

$$\text{QMA} \subseteq (k, \gamma)\text{-LocalQMA}_{s,c}.$$

We will also consider the following slightly stronger version of QPCP.

Conjecture 2.10 (QPCP $_{\text{negl}}$ conjecture). *There are constants $k \in \mathbb{N}$ and $\beta \in (0, 1)$ and a negligible function α such that (α, β) - k -LH is QMA-complete.*

That is, here we require that in the yes case of k -LH, the minimum energy is negligible. We find QPCP $_{\text{negl}}$ plausible since (1) it was proved that $(\alpha, \Theta(n^{-3}))$ - $O(1)$ -LH is QMA-complete [KSV02, KR03, KKR06] for some $\alpha = n^{-\omega(1)}$, and a (potential) proof for QPCP via gap amplification is likely to keep α negligible; (2) it is consistent with the situation of classical PCP, where one can even set $\alpha = 0$.

Similarly, we have the following corollary.

Corollary 2.11. *If $\text{QPCP}_{\text{negl}}$ holds, then there are constants $k, \gamma \in \mathbb{N}$ and $s \in (0, 1)$, and a function $c: \mathbb{N} \rightarrow [0, 1]$ satisfying that $1 - c$ is negligible, such that*

$$\text{QMA} \subseteq (k, \gamma)\text{-LocalQMA}_{s,c}.$$

3 Making Every Local Verifiers Simulable

In this section, we prove [Theorem 1.2](#). We first define the following problem (k, γ) -QSAT.

Definition 3.1 ((k, γ) -QSAT). Given integers $n, m \in \mathbb{N}$, m subsets $S_1, \dots, S_m \subseteq [n]$, and m γ -size quantum circuits C_1, \dots, C_m over the Clifford + T gate-set such that for every $i \in [m]$, C_i acts on $|S_i|$ qubits and uses at most γ ancilla qubits. We write an instance \mathcal{I} as $\mathcal{I} = (n, m, \{S_i\}_{i \in [m]}, \{C_i\}_{i \in [m]})$.

For an n -qubit quantum state σ , we define

$$\text{val}_{\mathcal{I}}(\sigma) := \mathbb{E}_{i \in_{\mathbb{R}}[m]} \left[\Pr[C_i(\sigma_{S_i}) = 1] \right],$$

where $\Pr[C_i(\sigma_{S_i}) = 1]$ denotes the probability that after applying C_i to the restriction of σ to S_i , measuring the first ancilla qubit, and seeing outcome 1. We also define

$$\text{val}(\mathcal{I}) := \sup_{\sigma \text{ is an } n\text{-qubit state}} \text{val}_{\mathcal{I}}(\sigma).$$

3.1 QECCs and Locally simulable QECCs

For $n > k$, an $[[N, K]]$ quantum error correcting code (QECC) is a mapping from a K -qubit state $|\psi\rangle$ into an N -qubit state $\text{Enc}(|\psi\rangle)$. The distance of an $[[N, K]]$ QECC is D if for an arbitrary quantum operation \mathcal{E} acting on $(D - 1)/2$ qubits, the original state $|\psi\rangle$ can be recovered from $\mathcal{E}(\text{Enc}(|\psi\rangle))$, and in this case we call it an $[[N, K, D]]$ QECC. For an $[[N, 1, D]]$ -QECC and its encoding Enc , we overload notation and for a k -qubit system ϕ we write $\text{Enc}(\phi) := \text{Enc}^{\otimes k}(\phi)$.

We begin by recalling the definition of *locally simulable codes* introduced in [\[GSY19\]](#), which is also used in [\[BG20\]](#). The following definition is from [\[BG20\]](#).

Definition 3.2. Let \mathcal{C} be an $[[N, 1, D]]$ -QECC that allows universal quantum computation on the encoded data by applying logical gates from a universal gate set \mathcal{G} with transversal gates (and possibly with the help of magic states). Let $G \in \mathcal{G}$ be a logical gate acting on k_G qubits, $U_1^{(G)}, \dots, U_{\ell}^{(G)}$ be the transversal circuit that is applied to the physical qubits of the encoding of a k_G -qubit state which logically applies G to the data through $\ell_G = \text{poly}(N)$ physical gates with the aid of an m_G -qubit magic state τ_G .

We say that \mathcal{C} is *s-simulable* if there exists a deterministic algorithm $\text{Sim}_{\mathcal{C}}$ whose input is $G \in \mathcal{G}$, a value $0 \leq t \leq \ell_G$, and a subset $S \subseteq [N(m_G + k_G)]$ with $|S| \leq s$. $\text{Sim}_{\mathcal{C}}(G, t, S)$ then runs in time $\text{poly}(2^N)$, and outputs the classical description of an $|S|$ -qubit density matrix $\rho(G, t, S)$ such that for every k_G -qubit state σ

$$\rho(G, t, S) = \left((U_t^{(G)} \dots U_1^{(G)}) \text{Enc}(\sigma \otimes \tau_G) (U_t^{(G)} \dots U_1^{(G)})^\dagger \right)_S.$$

Remark 3.3. *In this work, we take that $\mathcal{G} = \{\text{CNOT}, \text{P}, \text{H}, \text{T}\}$, and use magic state $|T\rangle := \text{T}|+\rangle$ to compute T-gates. Notice that the gates $U_1^{(G)}, \dots, U_{\ell}^{(G)}$ are publicly known, and therefore they do not need to be a parameter for $\text{Sim}_{\mathcal{C}}$.*

The following lemma from [GSY19] says that the folded Steane codes are locally simulable. We refer the readers to [BG20] for a simplified proof.

Lemma 3.4 ([GSY19]). *For every $k > \log(s + 3)$, the k -fold concatenated Steane code is s -simulable.*

In the rest of the section, we will use \mathcal{C} to denote the 5-fold concatenated Steane code and Enc to be its encoding map. We also set $N = 7^5$ and $D = 3^5$, and note that \mathcal{C} is an $[[N, 1, D]]$ -QECC. By Lemma 3.4, it follows that \mathcal{C} is 28-simulable.

We note that the encoding algorithm Enc for \mathcal{C} can be implemented by the following unitary U^{Enc} : For an N -qubit register state. Given $|\psi\rangle_{\text{state}} = |\phi\rangle_{\text{state}(1)} \otimes |0^{N-1}\rangle_{\text{state}[2,N]}$, we have

$$U^{\text{Enc}}|\psi\rangle_{\text{state}} = \text{Enc}(|\phi\rangle)_{\text{state}}.$$

The decoding algorithm for \mathcal{C} can similarly be implemented by $U^{\text{Dec}} = (U^{\text{Enc}})^\dagger$. Furthermore, U^{Enc} can be written as the product of $\ell_{\text{Enc}} = \text{poly}(N)$ two-local gates as follows

$$U^{\text{Enc}} = U_{\ell_{\text{Enc}}}^{\text{Enc}} \dots U_1^{\text{Enc}},$$

similarly, we write

$$U^{\text{Dec}} = U_{\ell_{\text{Dec}}}^{\text{Dec}} \dots U_1^{\text{Dec}}.$$

Given a state $|\psi\rangle_{\text{state}}$ on N qubits, let the syndrome be an $(N - 1)$ -qubit register. We also define a unitary U^{Chk} acting on $\mathcal{H}_{\text{state}} \otimes \mathcal{H}_{\text{syndrome}}$ such that U^{Chk} measures the syndromes of the code block in state to syndrome. We write

$$U^{\text{Chk}} = U_{\ell_{\text{Chk}}}^{\text{Chk}} \dots U_1^{\text{Chk}},$$

where all U_i^{Chk} 's are 2-local.

Given a Clifford gate G acting on k_G qubits, we use $U_1^{(G)}, \dots, U_{\ell_G}^{(G)}$ to denote the fault-tolerant version of G acting on $k_G \cdot N$ physical qubits, where $\ell_G = \text{poly}(N)$.

Notation. For simplicity, for an $n \cdot N$ -qubit register reg and $i \in [n]$, we use $\text{reg}\{i\}$ to denote $\text{reg}[(i - 1) \cdot N + 1, i \cdot N]$, which is the set of qubits corresponding to the i -th block. We also use $\text{reg}\{\ell, r\}$ to denote $\text{reg}[(\ell - 1) \cdot N + 1, r \cdot N]$, which is the set of qubits from the ℓ -th block to the r -th block. We say that a subset S has at most b intersections per block with reg , if $|S \cap \text{reg}\{i\}| \leq b$ for every $i \in [n]$.

We will need the following additional property of locally simulable codes.

Lemma 3.5. *Let \mathcal{C} be s -simulable and $G \in \mathcal{G}$. Let $n \in \mathbb{N}$, reg be an $n \cdot (k_G \cdot N)$ -qubit register, and reg_m be an $n \cdot (m_G \cdot N)$ -qubit register. For every $j \in [\ell_G]$, let*

$$U_j^{(G^{\otimes n})} = \prod_{i \in [n]} (U_j^{(G)})_{\text{reg}\{(i-1) \cdot k_G + 1, i \cdot k_G\}, \text{reg}_m\{(i-1) \cdot m_G + 1, i \cdot m_G\}}.$$

There is an algorithm $\text{Sim}_{\mathcal{C}^{\otimes n}}$ that receives as input $G \in \mathcal{G}$, an integer $0 \leq t \leq \ell_G$ and a subset $S \subseteq (\text{reg} \cup \text{reg}_m)$ that has s intersections per block with $\text{reg} \cup \text{reg}_m$, runs in time $\text{poly}(2^N, n)$, and outputs the classical description of an $|S|$ -qubit density matrix $\rho(G^{\otimes n}, t, S)$ such that for every $n \cdot k_G$ -qubit state σ

$$\rho(G^{\otimes n}, t, S) = \left((U_t^{(G^{\otimes n})} \dots U_1^{(G^{\otimes n})}) \text{Enc}(\sigma \otimes \tau_G^{\otimes n \cdot m_G}) (U_t^{(G^{\otimes n})} \dots U_1^{(G^{\otimes n})})^\dagger \right)_S.$$

In above, $\text{Enc}(\sigma \otimes \tau_G^{\otimes n \cdot m_G})$ puts the encoded σ in the register reg and the encoded $\tau_G^{\otimes n \cdot m_G}$ in the register reg_m .

Proof. We simply set

$$\rho(G^{\otimes n}, t, S) = \otimes_{i \in [n]} \rho(G, t, S \cap (\text{reg}\{i\} \cup \text{reg}_m\{i\})),$$

where $\rho(G, t, S \cap (\text{reg}\{i\} \cup \text{reg}_m\{i\}))$ is the output of $\text{Sim}_{\mathcal{C}}$ in [Definition 3.2](#), and we interpret $S \cap (\text{reg}\{i\} \cup \text{reg}_m\{i\})$ as a subset of $[N(m_G + k_G)]$ by shifting.

To see the lemma, we first note that it holds when $\sigma = \otimes_{i \in [n]} \sigma_i$, where each σ_i is an k_G -qubit state. The lemma follows from the fact that a general $n \cdot k_G$ -qubit state σ can be written as a linear combination of many product states. \square

Let the parameter $t = 0$ and the gate type be H in [Lemma 3.5](#) so that $m_H = 0$ and $k_H = 1$, we have the following corollary.

Corollary 3.6. *Let \mathcal{C} be s -simulable, $n \in \mathbb{N}$, and reg be an $(n \cdot N)$ -qubit register, there is an algorithm $\text{Sim}_{\mathcal{C}^{\otimes n}}$ that receives a subset $S \subseteq \text{reg}$ that has s intersections per block with reg , and outputs the classical description of a density matrix $\rho(G^{\otimes n}, S)$ such that*

$$\rho(G^{\otimes n}, S) = \text{Enc}(\sigma)_S,$$

for every n -qubit state σ .

3.2 The Encoded Verifier \mathcal{V}^{enc} for (k, γ) -QSAT

We consider the following encoded verifier for (k, γ) -QSAT. In fact, it is the fault-tolerant version.

The encoded verifier \mathcal{V}^{enc} for (k, γ) -QSAT

- **(Input.)** \mathcal{V}^{enc} is given a (k, γ) -QSAT instance $\mathcal{I} = (n, m, \{S_i\}_{i \in [m]}, \{C_i\}_{i \in [m]})$. Without loss of generality, we can assume that $|S_i| = k$ for every $i \in [m]$. We also require that m is a power of 2.
- **(Witness.)** \mathcal{V}^{enc} expects an $(3 \cdot N \cdot n)$ -qubit encoded witness in an $(N \cdot n)$ -qubit register Edata and a $(2 \cdot N \cdot n)$ -qubit register Eotp . Further, let $n_{\text{wit}} = 3 \cdot N \cdot n$, and $\text{witness} = \text{Eotp} \cup \text{Edata}$.

\mathcal{V}^{enc} expects the Edata register to encode an n -qubit witness $|\phi\rangle$ to \mathcal{I} with a uniformly random quantum encoded one-time pad in Eotp . (The purpose of this one-time pad is to ensure that all encoded qubits are maximally mixed. This is required later when showing $\mathcal{V}^{\text{enc-H}}$ is simulable.) Formally, the encoding is expected to be

$$\phi^{\text{otp}} = \frac{1}{2^{2n}} \sum_{a, b \in \{0, 1\}^n} \text{Enc}(|a, b\rangle\langle a, b| \otimes X^a Z^b |\phi\rangle\langle \phi| Z^b X^a)_{\text{Eotp}, \text{Edata}}. \quad (4)$$

- **(Ancilla.)** \mathcal{V}^{enc} also uses $(2 \log m + 2\gamma) \cdot N + 3k \cdot (N - 1)$ ancilla qubits consisting of $3k \cdot (N - 1)$ qubits in register Echk , $\log m \cdot N$ qubits in register Eidx , $\log m \cdot N$ qubits in register Emidx , $\gamma \cdot N$ qubits in Emagic , and $\gamma \cdot N$ qubits in Eanc . For notational convenience, we also use $\text{Echk}\{i\}$ to denote $\text{Echk}[(i - 1)(N - 1) + 1, i(N - 1)]$.

Also, all ancilla states are expected to be initialized to $|0\rangle$. We also let $n_{\text{anc}} = (2 \log m + 2\gamma) \cdot N + k \cdot (N - 1)$, and $\text{ancilla} = \text{Echk} \cup \text{Eidx} \cup \text{Emidx} \cup \text{Emagic} \cup \text{Eanc}$.

In the following, we describe how \mathcal{V}^{enc} operates.

- **(Set-up magic states.)** \mathcal{V}^{enc} first applies $T \cdot H$ to the first qubit of $E_{\text{magic}}\{i\}$ for every $i \in [\gamma]$. (Note that $T \cdot H|0\rangle = T|+\rangle = |T\rangle$.)
- **(Encoding.)** \mathcal{V}^{enc} then encodes the registers $E_{\text{id}x}$, $E_{\text{mid}x}$, E_{out} , and E_{magic} by Enc . Now, $\text{id}x$ and $\text{mid}x$ are simply $\text{Enc}(|0^{\log m}\rangle|0^{\log m}\rangle)$.
- **(Encoded Hadamard.)** Next, \mathcal{V}^{enc} uses fault tolerance computation (transversal H gate) to apply H to each logical qubits encoded in $\text{id}x$. Now, $\text{id}x$ and $\text{mid}x$ are $\text{Enc}(|+\rangle^{\otimes \log m}|0^{\log m}\rangle)$.
- **(Encoded CNOT.)** \mathcal{V}^{enc} then uses fault tolerance computation (transversal CNOT gate) to apply CNOT on corresponding logical qubits in $\text{id}x$ and $\text{mid}x$. Now, $E_{\text{id}x}$ and $E_{\text{mid}x}$ are $\text{Enc}\left(\frac{1}{\sqrt{m}}\sum_{i=1}^m|i\rangle|i\rangle\right)$.
- **(Check encoding.)** Next, \mathcal{V}^{enc} applies the following three unitaries $U_{\text{checkE}}^{(1)}$, $U_{\text{checkE}}^{(2)}$, and $U_{\text{checkE}}^{(3)}$, defined as

$$U_{\text{checkE}}^{(1)} = \prod_{\tau \in [k]} \sum_{i \in [m]} (U^{\text{Chk}})_{E_{\text{data}}\{S_{i,\tau}\}, E_{\text{chk}}\{i\}} \otimes |\text{Enc}(i)\rangle\langle \text{Enc}(i)|_{E_{\text{id}x}},$$

$$U_{\text{checkE}}^{(2)} = \prod_{\tau \in [k]} \sum_{i \in [m]} (U^{\text{Chk}})_{E_{\text{otp}}\{S_{i,\tau}\}, E_{\text{chk}}\{i\}} \otimes |\text{Enc}(i)\rangle\langle \text{Enc}(i)|_{E_{\text{id}x}},$$

$$U_{\text{checkE}}^{(3)} = \prod_{\tau \in [k]} \sum_{i \in [m]} (U^{\text{Chk}})_{E_{\text{otp}}\{S_{i,\tau+n}\}, E_{\text{chk}}\{i\}} \otimes |\text{Enc}(i)\rangle\langle \text{Enc}(i)|_{E_{\text{id}x}},$$

Namely, this step checks whether the corresponding blocks in E_{data} , E_{otp} for qubits in S_i are corrected encoded by measuring all syndromes on the corresponding $3k$ N -qubit blocks into E_{chk} .

- **(Encoded U_{test} .)** Now \mathcal{V}^{enc} applies a unitary U_{etest} acting on $E_{\text{id}x}$, E_{otp} , E_{data} and E_{out} as follows:

$$U_{\text{etest}} = \sum_{i \in [m]} \text{Enc}(V_{C_i})_{E_{\text{otp}}, E_{\text{data}}, E_{\text{magic}}, E_{\text{anc}}} \otimes |\text{Enc}(i)\rangle\langle \text{Enc}(i)|_{E_{\text{id}x}}.$$

In above, $\text{Enc}(V_{C_i})$ acts as follows:

1. It first undoes the one-time pad on blocks of E_{data} corresponding to S_i by transversally applying CNOT between $E_{\text{otp}}\{u\}$ and $E_{\text{data}}\{u\}$, and then transversally applying C-Z between $E_{\text{otp}}\{u+n\}$ and $E_{\text{data}}\{u\}$, for every $u \in S_i$.
 2. Next, it applies the fault-tolerant version of C_i on blocks of E_{data} corresponding to S_i , E_{anc} , and E_{magic} . Clifford gates are implemented transversally; T gates are implemented using the encoded $|T\rangle$ gates in E_{magic} together with transversal Clifford gates; it uses (encoded) ancilla qubits in E_{anc} .
- **(Decoding $E_{\text{anc}}\{1\}$.)** Then, \mathcal{V}^{enc} decodes $E_{\text{anc}}\{1\}$ by applying U^{Dec} to $E_{\text{anc}}\{1\}$.
 - **(Decision.)** Finally, \mathcal{V}^{enc} measures $E_{\text{anc}}(1)$ and E_{chk} in the computational basis to obtain an outcome $w_1 \in \{0, 1\}^1$ and $w_2 \in \{0, 1\}^{k \cdot (N-1)}$, it **accepts** if $w_1 = 1$ and $w_2 = 0^{k \cdot (N-1)}$, and **rejects** otherwise.

We will use $\mathcal{V}_{\mathcal{I}}^{\text{enc}}$ to denote the above verifier when given the (k, γ) -QSAT instance \mathcal{I} . We need the following claim.

Claim 3.7. *If there is an n_{wit} -qubit state σ that makes $\mathcal{V}_{\mathcal{I}}^{\text{enc}}$ accept with probability α , then $\text{val}(\mathcal{I}) \geq \alpha$.*

Proof. We first note that without loss of generality, we can assume σ to be a pure state $|\psi\rangle$. Let Π be the projection onto the $3n$ -dimensional encoded subspace of witness. Let $|\phi\rangle$ be

$$|\phi\rangle = \frac{\Pi|\psi\rangle}{\|\Pi|\psi\rangle\|}.$$

Since $\mathcal{V}_{\mathcal{I}}^{\text{enc}}$ rejects immediately if the measurement outcome on Chk is not $0^{k(N-1)}$, we can see that $\mathcal{V}_{\mathcal{I}}^{\text{enc}}$ accepts $|\phi\rangle$ with probability at least α . Now we have

$$|\phi\rangle = \text{Enc}(|\phi_0\rangle)$$

for some $3n$ -qubit state $|\phi_0\rangle$. Next let otp be a $2n$ -qubit register and data be an n -qubit register. We assume that $|\phi_0\rangle$ is stored in otp and data . We also assume that each qubit in otp is encoded as a block in Eotp , and each qubit in data is encoded as a block in Edata .

Now we define the following state $|\psi_0\rangle$

$$|\psi_0\rangle = \left(\prod_{i=1}^n \text{C-Z}_{\text{otp}(i+n), \text{data}(i)} \right) \left(\prod_{i=1}^n \text{CNOT}_{\text{otp}(i), \text{data}(i)} \right) |\phi_0\rangle.$$

From the definition of \mathcal{V}^{enc} , it follows that the acceptance probability of \mathcal{V}^{enc} on $|\phi\rangle$ is exactly $\text{val}_{\mathcal{I}}(|\psi_0\rangle)$. Hence we have $\text{val}(\mathcal{I}) \geq \text{val}_{\mathcal{I}}(|\psi_0\rangle) \geq \alpha$. \square

In the following, we first decompose the unitary \mathcal{V}^{enc} into a product of constantly many sub-unitaries and then construct the corresponding history Hamiltonian with respect to [Definition 2.2](#).

3.2.1 Decomposing \mathcal{V}^{enc} into a Product of Constant Many Sub-Unitaries

We let $U_1^{\text{magic}} = \text{H} \otimes I^{\otimes(N-1)}$, $U_2^{\text{magic}} = \text{T} \otimes I^{\otimes(N-1)}$, and $\ell_{\text{magic}} = 2$.

We deal with each phase of \mathcal{V}^{enc} separately.

(1. Set-up magic states) For each $j \in [\ell_{\text{magic}}]$, we set

$$\mathcal{V}_{1,j}^{\text{enc}} = \prod_{i=1}^{\gamma} (U_j^{\text{magic}})_{\text{Emagic}\{i\}}.$$

(2. Encoding) For each $j \in [\ell_{\text{Enc}}]$, we set

$$\mathcal{V}_{2,j}^{\text{enc}} = \prod_{i=1}^{\gamma} (U_j^{\text{Enc}})_{\text{Eanc}\{i\}} \cdot \prod_{i=1}^{\gamma} (U_j^{\text{Enc}})_{\text{Emagic}\{i\}} \cdot \prod_{i=1}^{\log m} (U_j^{\text{Enc}})_{\text{Eidx}\{i\}} \cdot \prod_{i=1}^{\log m} (U_j^{\text{Enc}})_{\text{Emidx}\{i\}}.$$

(3. Encoded Hadamard) Next, for each $j \in [\ell_H]$, we set

$$\mathcal{V}_{3,j}^{\text{enc}} = \prod_{i=1}^{\log m} (U_j^{(H)})_{\text{Eidx}\{i\}}.$$

(4. **Encoded CNOT**) For each $j \in [\ell_{\text{CNOT}}]$, we set

$$\mathcal{V}_{4,j}^{\text{enc}} = \prod_{i=1}^{\log m} (U_j^{\text{CNOT}})_{\text{Eid}_x\{i\}, \text{Emid}_x\{i\}}.$$

(5. **Check encoding**) For each $j \in [\ell_{\text{Chk}}]$, $i \in [m]$, and $\tau \in [k]$, we set

$$\mathcal{V}_{5,(\tau-1)\cdot\ell_{\text{Chk}}+j}^{\text{enc}} = \sum_{i \in [m]} (U_j^{\text{Chk}})_{\text{Edata}\{S_{i,\tau}\}, \text{Echk}\{\tau\}} \otimes |\text{Enc}(i)\rangle\langle\text{Enc}(i)|_{\text{id}_x},$$

and

$$\mathcal{V}_{5,(\tau-1)\cdot\ell_{\text{Chk}}+j,i}^{\text{enc}} = (U_j^{\text{Chk}})_{\text{Edata}\{S_{i,\tau}\}, \text{Echk}\{\tau\}} \otimes |\text{Enc}(i)\rangle\langle\text{Enc}(i)|_{\text{id}_x}.$$

Let

$$\mathcal{V}_{5,(\tau-1+k)\cdot\ell_{\text{Chk}}+j}^{\text{enc}} = \sum_{i \in [m]} (U_j^{\text{Chk}})_{\text{Eotp}\{S_{i,\tau}\}, \text{Echk}\{\tau+k\}} \otimes |\text{Enc}(i)\rangle\langle\text{Enc}(i)|_{\text{id}_x},$$

and

$$\mathcal{V}_{5,(\tau-1+2k)\cdot\ell_{\text{Chk}}+j}^{\text{enc}} = \sum_{i \in [m]} (U_j^{\text{Chk}})_{\text{Eotp}\{S_{i,\tau+n}\}, \text{Echk}\{\tau+2k\}} \otimes |\text{Enc}(i)\rangle\langle\text{Enc}(i)|_{\text{id}_x}.$$

We further set $\mathcal{V}_{5,(\tau-1+k)\cdot\ell_{\text{Chk}}+j,i}^{\text{enc}}$ and $\mathcal{V}_{5,(\tau-1+2k)\cdot\ell_{\text{Chk}}+j,i}^{\text{enc}}$ similarly, for every $i \in [m]$.

(6. **Encoded U_{test}**) Let $\ell_{\text{etest}} = c_{\text{test}} \cdot \gamma$ for a sufficiently large constant $c_{\text{test}} \in \mathbb{N}$. By adding dummy identity gates, we can assume that all $\text{Enc}(V_{\Pi_i})$ are implemented by ℓ_{etest} gates, and we write

$$\text{Enc}(V_{\Pi_i}) = U_{\ell_{\text{etest}}}^{(V_{\Pi_i})} \cdots U_1^{(V_{\Pi_i})}.$$

Finally, for each $j \in [\ell_{\text{etest}}]$ and $i \in [m]$, we set

$$\mathcal{V}_{6,j}^{\text{enc}} = \sum_{i \in [m]} U_j^{(V_{\Pi_i})} \otimes |\text{Enc}(i)\rangle\langle\text{Enc}(i)|_{\text{Eid}_x},$$

and

$$\mathcal{V}_{6,j,i}^{\text{enc}} = U_j^{(V_{\Pi_i})} \otimes |\text{Enc}(i)\rangle\langle\text{Enc}(i)|_{\text{Eid}_x}.$$

(7. **Decoding $\text{Eanc}\{1\}$**) For each $j \in [\ell_{\text{Dec}}]$, we set

$$\mathcal{V}_{7,j}^{\text{enc}} = (U_j^{\text{Dec}})_{\text{Eanc}\{1\}}.$$

Now, for $i \in [7]$, we let $\ell^{(i)}$ be the i -th number in the sequence $\ell_{\text{magic}}, \ell_{\text{Enc}}, \ell_H, \ell_{\text{CNOT}}, 3k \cdot \ell_{\text{Chk}}, \ell_{\text{etest}}, \ell_{\text{Dec}}$.

Note that the above decomposed \mathcal{V}^{enc} into a product of $T = \sum_{i \in [7]} \ell^{(i)}$ sub-unitaries as follows:

$$\begin{aligned} \mathcal{V}^{\text{enc}} = & (\mathcal{V}_{7,\ell^{(7)}}^{\text{enc}} \cdots \mathcal{V}_{7,1}^{\text{enc}}) \cdot (\mathcal{V}_{6,\ell^{(6)}}^{\text{enc}} \cdots \mathcal{V}_{6,1}^{\text{enc}}) \cdot (\mathcal{V}_{5,\ell^{(5)}}^{\text{enc}} \cdots \mathcal{V}_{5,1}^{\text{enc}}) \\ & (\mathcal{V}_{4,\ell^{(4)}}^{\text{enc}} \cdots \mathcal{V}_{4,1}^{\text{enc}}) \cdot (\mathcal{V}_{3,\ell^{(3)}}^{\text{enc}} \cdots \mathcal{V}_{3,1}^{\text{enc}}) \cdot (\mathcal{V}_{2,\ell^{(2)}}^{\text{enc}} \cdots \mathcal{V}_{2,1}^{\text{enc}}) \cdot (\mathcal{V}_{1,\ell^{(1)}}^{\text{enc}} \cdots \mathcal{V}_{1,1}^{\text{enc}}). \end{aligned} \quad (5)$$

3.2.2 Constructing the History Hamiltonian

We decompose the $(2 \log m + 2\gamma) \cdot N + k \cdot (N - 1)$ ancilla qubits into 5 subsets:

$$\begin{aligned} S_1 &= \{\text{Eid}_x(i)\}_{i \in [\log m \cdot N]}, \quad S_2 = \{\text{Emid}_x(i)\}_{i \in [\log m \cdot N]}, \\ S_3 &= \{\text{Eanc}(i)\}_{i \in [\gamma \cdot N]}, \quad S_4 = \{\text{Emagic}(i)\}_{i \in [\gamma \cdot N]}, \quad S_5 = \{\text{Echk}(i)\}_{i \in [k \cdot (N-1)]}. \end{aligned}$$

Let H^{history} be the history Hamiltonian of \mathcal{V}^{enc} with $B = 5$ and S_1, \dots, S_5 as above. We will use state to denote witness \cup ancilla, and clock to denote the clock registers for H^{enc} . Let

$$H^{\text{out}} = (I - |10^{k(N-1)}\rangle\langle 10^{k(N-1)}|)_{\text{Eanc}(1), \text{Echk}} \otimes |1\rangle\langle 1|_{\text{clock}(T)}$$

Finally, let

$$H^{\text{enc}} = H^{\text{history}} + H^{\text{out}} = H^{\text{prop}} + H^{\text{in}} + H^{\text{stab}} + H^{\text{out}}.$$

We use $H_{i,j}^{\text{prop}}$ to denote the term in H^{prop} that corresponds to the unitary $\mathcal{V}_{ij}^{\text{enc}}$. Then we have

$$H^{\text{prop}} = \sum_{i \in [7]} \sum_{j \in [\ell^{(i)}]} H_{i,j}^{\text{prop}},$$

and

$$H^{\text{enc}} = \sum_{i \in [7]} \sum_{j \in [\ell^{(i)}]} H_{i,j}^{\text{prop}} + \sum_{i \in [B]} H_i^{\text{in}} + \sum_{t \in [T-1]} H_t^{\text{stab}} + H^{\text{out}} + H^{\text{check}}.$$

We call H^{enc} the *encoded Hamiltonian* of \mathcal{I} . We will use $H^{\text{enc}}(\mathcal{I})$ to denote the encoded Hamiltonian of \mathcal{I} .

Let $M = \sum_{i \in [7]} \ell^{(i)} + B + T - 1 + 2 = 2T + B + 1$ be the number of terms in H^{enc} . We note that $\ell^{(1)}, \ell^{(2)}, \ell^{(3)}, \ell^{(4)}, \ell^{(7)}$ are constants, $\ell^{(5)} = 3k \cdot \ell_{\text{chk}}$, and $\ell^{(6)} = c_{\text{test}} \cdot \gamma$. Hence, there are three constants $a^M, b^M, c^M \in \mathbb{N}$ such that

$$M = a^M \cdot k + b^M \cdot \gamma + c^M.$$

Now, notice that except for the $H_{5,j}^{\text{prop}}$'s and the $H_{6,j}^{\text{prop}}$'s, all other $M - \ell^{(5)} - \ell^{(6)}$ terms above are at most $O(\log m)$ -local.

3.2.3 Analysis of The Extended Hamiltonian H^{enc}

Here we prove the following lemma relating the minimum energy of $H^{\text{enc}}(\mathcal{I})$ to \mathcal{I} .

Lemma 3.8. *There is a universal polynomial p such that for every (k, γ) -QSAT instance \mathcal{I} ,*

$$\left(\frac{1 - \text{val}(\mathcal{I})}{p(k, \gamma)} \right)^2 \leq \lambda_{\min}(H^{\text{enc}}(\mathcal{I})) \leq 1 - \text{val}(\mathcal{I}).$$

Lemma 3.8 is an immediate corollary of the following [Lemma 3.9](#) and [Lemma 3.10](#).

Lemma 3.9 (Soundness). *There is a universal polynomial p such that for every (k, γ) -QSAT instance \mathcal{I} , if there is a state $|\Phi\rangle \in \mathcal{H}_{\text{clock}} \otimes \mathcal{H}_{\text{state}}$ such that $\langle \Phi | H^{\text{enc}}(\mathcal{I}) | \Phi \rangle \leq \delta$, then $\text{val}(\mathcal{I}) \geq 1 - p(k, \gamma) \cdot \sqrt{\delta}$.*

Proof. By [Lemma 2.3](#), there is a universal polynomial q and a history state $|\Psi\rangle$ such that

$$\| |\Psi\rangle\langle\Psi| - |\Phi\rangle\langle\Phi| \|_1 \leq q(B, T) \cdot \sqrt{\delta}. \quad (6)$$

Recall that $B = 5$ and $T = O(k + \gamma)$. So there is a universal polynomial p_1 such that $q(B, T) \leq p_1(k, \gamma)$.

Let $H^{\text{enc}} = H^{\text{enc}}(\mathcal{I})$ for simplicity. From (6) and the fact that $|\Psi\rangle\langle\Psi|$ is a history state, it follows that

$$\langle\Psi|H^{\text{enc}}|\Psi\rangle = \langle\Psi|H^{\text{out}}|\Psi\rangle \leq p_1(k, \gamma) \cdot \sqrt{\delta}.$$

We write

$$|\Psi\rangle = \frac{1}{\sqrt{T+1}} \sum_{t=0}^T |\text{unary}(t)\rangle_{\text{clock}} \otimes |\psi_t\rangle_{\text{state}},$$

where $|\psi_t\rangle = \mathcal{V}_{[1\dots t]}^{\text{enc}}|\psi_0\rangle$, and $|\psi_0\rangle = |\phi\rangle_{\text{witness}} \otimes |0^{n_{\text{anc}}}\rangle_{\text{ancilla}}$.

Recall that

$$H^{\text{out}} = (I - |10^{k(N-1)}\rangle\langle 10^{k(N-1)}|)_{\text{Eanc}(1), \text{Echk}} \otimes |1\rangle\langle 1|_{\text{clock}(T)};$$

we have

$$\langle\Psi|H^{\text{out}}|\Psi\rangle = \frac{1}{T} \cdot \langle\psi_T|(I - |10^{k(N-1)}\rangle\langle 10^{k(N-1)}|)_{\text{Eanc}(1), \text{Echk}}|\psi_T\rangle.$$

From the definition of \mathcal{V}^{enc} , we can see $\langle\psi_T|(I - |10^{k(N-1)}\rangle\langle 10^{k(N-1)}|)_{\text{Eanc}(1), \text{Echk}}|\psi_T\rangle$ is the probability that \mathcal{V}^{enc} rejects the witness $|\phi\rangle$.

Hence, it follows that \mathcal{V}^{enc} rejects $|\phi\rangle$ with probability at most $T \cdot p_1(k, \gamma)$. Recall that $T = O(k + \gamma)$, so there is a universal polynomial p such that $T \cdot p_1(k, \gamma) \leq p(k, \gamma)$. Then by [Claim 3.7](#), it follows that $\text{val}(\mathcal{I}) \geq 1 - p(k, \gamma) \cdot \sqrt{\delta}$. \square

Lemma 3.10 (Completeness). *For every (k, γ) -QSAT instance \mathcal{I} , it holds that*

$$\lambda_{\min}(H^{\text{enc}}(\mathcal{I})) \leq 1 - \text{val}(\mathcal{I}).$$

Proof. Let $|\psi\rangle$ be the quantum state such that $\text{val}_{\mathcal{I}}(|\psi\rangle) = \text{val}(\mathcal{I})$. We let ψ^{otp} be as in \mathcal{V}^{enc} , and let $|\Psi\rangle$ be the history state such that

$$|\Psi\rangle = \frac{1}{\sqrt{T+1}} \sum_{t=0}^T |\text{unary}(t)\rangle_{\text{clock}} \otimes |\psi_t\rangle_{\text{state}},$$

where $|\psi_t\rangle = \mathcal{V}_{[1\dots t]}^{\text{enc}}|\psi_0\rangle$, and $|\psi_0\rangle = |\phi\rangle_{\text{witness}} \otimes |0^{n_{\text{anc}}}\rangle_{\text{ancilla}}$.

Since it is a history state, we have

$$\langle\Psi|H^{\text{enc}}|\Psi\rangle = \langle\Psi|H^{\text{out}}|\Psi\rangle.$$

By a similar calculation as in the proof of [Lemma 3.10](#), we further have

$$\langle\Psi|H^{\text{out}}|\Psi\rangle = \frac{1}{T} \cdot \langle\psi_T|(I - |10^{k(N-1)}\rangle\langle 10^{k(N-1)}|)_{\text{Eanc}(1), \text{Echk}}|\psi_T\rangle.$$

Since $\langle\psi_T|(I - |10^{k(N-1)}\rangle\langle 10^{k(N-1)}|)_{\text{Eanc}(1), \text{Echk}}|\psi_T\rangle$ is the probability that \mathcal{V}^{enc} rejects the witness $|\phi\rangle$, we have

$$\langle\Psi|H^{\text{enc}}|\Psi\rangle \leq \frac{1}{T} \cdot (1 - \text{val}(\mathcal{I})).$$

The lemma follows from the fact that $T \geq 1$. \square

3.3 The Encoded History Verifier $\mathcal{V}^{\text{enc-H}}$ for (k, γ) -History-ELH

We now define the problem (k, γ) -History-ELH.

Definition 3.11 ((k, γ) -History-ELH $_{\alpha, \beta}$). For $\alpha, \beta: \mathbb{N} \rightarrow [0, 1]$, the (k, γ) -History-ELH $_{\alpha, \beta}$ problem is defined as follows: Given a Hamiltonian $H^{\text{enc}} = H^{\text{enc}}(\mathcal{I})$ for some (k, γ) -QSAT instance $\mathcal{I} = (n, n, \{S_i\}_{i \in [n]}, \{C_i\}_{i \in [n]})$, where n is a power of 2.⁴ The goal is to distinguish between the following two cases:

(Yes) $\lambda_{\min}(H^{\text{enc}}) \leq \alpha(n)$ or

(No) $\lambda_{\min}(H^{\text{enc}}) \geq \beta(n)$.

Next, we introduce the encoded history verifier $\mathcal{V}^{\text{enc-H}}$ for (k, γ) -History-ELH.

The encoded history verifier $\mathcal{V}^{\text{enc-H}}$ for (k, γ) -History-ELH

- **(Input.)** $\mathcal{V}^{\text{enc-H}}$ is given a (k, γ) -QSAT instance $\mathcal{I} = (n, n, \{S_i\}_{i \in [n]}, \{C_i\}_{i \in [n]})$, where n is a power of 2. Without loss of generality, we can assume that $|S_i| = k$ for every $i \in [n]$. Let $H^{\text{enc}} = H^{\text{enc}}(\mathcal{I})$.

- **(Witness.)** $\mathcal{V}^{\text{enc-H}}$ is given a witness $|\Phi\rangle \in \mathcal{H}_{\text{clock}} \otimes \mathcal{H}_{\text{state}}$ that is supposed to be a history state of \mathcal{V}^{enc} .

$\mathcal{V}^{\text{enc-H}}$ operates as follows:

- It picks a term J in H^{enc} uniformly at random, and proceeds according to the following two cases:

1. If J is not one of the $H_{5,j}^{\text{prop}}$'s or the $H_{6,j}^{\text{prop}}$'s, it measures $\{J, I - J\}$ and **rejects** if it sees J , and **accepts** otherwise.

2. Otherwise, $J = H_{t,j}^{\text{prop}}$ for some $t \in \{5, 6\}$ and $j \in [\ell^{(t)}]$. We write

$$J = \sum_{i \in [n]} J_i \otimes |\text{Enc}(i)\rangle \langle \text{Enc}(i)|_{\text{Eid}_x},$$

where $J_i = H_{t,j,i}^{\text{prop}}$, for each $i \in [n]$.

$\mathcal{V}^{\text{enc-H}}$ first measures Eid_x in the basis $\{|\text{Enc}(i)\rangle\}_{i \in [n]}$ to obtain $i \in [n]$, and then measures $\{J_i, I - J_i\}$. It **rejects** if it sees J_i and **accepts** otherwise. (We can add additional states orthogonal to $\{|\text{Enc}(i)\rangle\}_{i \in [n]}$ to make it a complete basis over qubits in Eid_x . If those added orthogonal vectors are obtained as measurement outcomes, then $\mathcal{V}^{\text{enc-H}}$ **accepts**.)

3.3.1 Analysis of $\mathcal{V}^{\text{enc-H}}$

The following lemma shows that the rejecting probability of $\mathcal{V}^{\text{enc-H}}$ is proportional to the energy of the given state regarding $H^{\text{enc}}(\mathcal{I})$.

⁴That is, here we assume that the (k, γ) -QSAT instance has the same number of qubits and local checks.

Lemma 3.12. $\mathcal{V}^{\text{enc-H}}$ rejects $|\Phi\rangle \in \mathcal{H}_{\text{clock}} \otimes \mathcal{H}_{\text{state}}$ with probability

$$\frac{1}{M} \langle \Phi | H^{\text{enc}} | \Phi \rangle.$$

Proof. From the definition of $\mathcal{V}^{\text{enc-H}}$, when J is not one of the $H_{5,j}^{\text{prop}}$'s or the $H_{6,j}^{\text{prop}}$'s, $\mathcal{V}^{\text{enc-H}}$ rejects with probability $\langle \Phi | J | \Phi \rangle$.

Otherwise, we can write

$$J = \sum_{i \in [n]} J_i \otimes |\text{Enc}(i)\rangle \langle \text{Enc}(i)|_{\text{Eid}_x},$$

Let $\text{other} = (\text{clock} \cup \text{state}) \setminus \text{Eid}_x$. We write

$$|\Phi\rangle = \sum_{i=1}^m \sqrt{p_i} |\eta_i\rangle_{\text{other}} |\text{Enc}(i)\rangle_{\text{Eid}_x} + \sqrt{q} |\Psi\rangle_{\text{other}, \text{Eid}_x}.$$

One can see in this case, $\mathcal{V}^{\text{enc-H}}$ rejects with probability

$$\sum_{i \in [n]} p_i \cdot \langle \eta_i | J_i | \eta_i \rangle = \langle \Phi | J | \Phi \rangle.$$

Hence, overall $\mathcal{V}^{\text{enc-H}}$ rejects with probability

$$\frac{1}{M} \langle \Phi | H^{\text{enc}} | \Phi \rangle. \quad \square$$

3.3.2 $\mathcal{V}^{\text{enc-H}}$ is Simulable

Theorem 3.13. For every $k, \gamma \in \mathbb{N}$ and every $\alpha, \beta: \mathbb{N} \rightarrow [0, 1]$ such that α is negligible, it holds that:

$$(k, \gamma)\text{-History-ELH}_{\alpha, \beta} \subseteq (O(\log n), 2)\text{-SimQMA}_{1-\beta(n)/M, 1-\alpha(n)/M}$$

where $M = a^M \cdot k + b^M \cdot \gamma + c^M$.

We say that two states ϕ and ψ are perfectly distinguishable if $F(\phi, \psi) = 0$.⁵ We will need the following standard fact.

Lemma 3.14. For two perfectly distinguishable states σ and ρ , let $\sigma = \sum_{i \in [n]} \alpha_i |\phi_i\rangle \langle \phi_i|$ and $\rho = \sum_{j \in [m]} \beta_j |\psi_j\rangle \langle \psi_j|$ be any decomposition of σ and ρ such that $\alpha_i, \beta_j \in (0, 1]$, $\{\phi_i\}$ and $\{\psi_j\}$ are both orthonormal, we have $\langle \phi_i | \psi_j \rangle = 0$ for every $i, j \in [n] \times [m]$.

Proof. Recall that $F(\rho, \sigma) = (\text{tr} \sqrt{\sqrt{\rho} \sigma \sqrt{\rho}})^2$. Since σ and ρ are perfectly distinguishable, we have $\text{tr} \sqrt{\sqrt{\rho} \sigma \sqrt{\rho}} = 0$. Note that (1) for a positive matrix $A \geq 0$, $\text{tr} A = 0 \Leftrightarrow A = 0$ and (2) $\sqrt{\rho} \sigma \sqrt{\rho} \geq 0$ since both σ, ρ are positive, we further have $\sqrt{\sqrt{\rho} \sigma \sqrt{\rho}} = 0$, and consequently $\sqrt{\rho} \sigma \sqrt{\rho} = 0$ and hence $\text{tr}(\sqrt{\rho} \sigma \sqrt{\rho}) = 0$.

⁵Equivalently, there is a quantum algorithm that always outputs 0 (resp. 1) when given ϕ (resp. ψ).

Using the decomposition of σ and ρ , using $\text{tr}(\sqrt{\rho}\sigma\sqrt{\rho}) = 0$, we have

$$\begin{aligned}
\text{tr}(\sqrt{\rho}\sigma\sqrt{\rho}) &= \text{tr} \left[\sum_{i \in [m]} \sqrt{\beta_i} |\psi_i\rangle \langle \psi_i| \cdot \sum_{j \in [n]} \alpha_j |\phi_j\rangle \langle \phi_j| \cdot \sum_{k \in [m]} \sqrt{\beta_k} |\psi_k\rangle \langle \psi_k| \right] \\
&= \sum_{i,k \in [m]} \text{tr} [|\psi_i\rangle \langle \psi_k|] \cdot \sum_{j \in [n]} \left(\sqrt{\beta_i \beta_k} \cdot \alpha_j \cdot \langle \psi_i | \phi_j \rangle \cdot \langle \phi_j | \psi_k \rangle \right) \\
&= \sum_{i \in [m]} \sum_{j \in [n]} (\beta_i \cdot \alpha_j \cdot \langle \psi_i | \phi_j \rangle \cdot \langle \phi_j | \psi_i \rangle) \\
&= \sum_{i \in [m]} \sum_{j \in [n]} (\beta_i \cdot \alpha_j \cdot \|\langle \psi_i | \phi_j \rangle\|^2) \\
&= 0
\end{aligned}$$

Since all the α_i and β_j are positive, it follows that $\langle \phi_i | \psi_j \rangle = 0$ for every $i, j \in [n] \times [m]$, which completes the proof. \square

We next prove the following lemma.

Lemma 3.15. *For two n -qubit pure states $|\phi\rangle$ and $|\psi\rangle$, and a subset $S \subseteq [n]$, if $\phi_{\bar{S}}$ and $\psi_{\bar{S}}$ are perfectly distinguishable, then $(|\phi\rangle\langle\psi|)_S = 0$.*

Proof. We write

$$|\phi\rangle = \sum_i \alpha_i \cdot |\phi_i^A\rangle \otimes |\phi_i^B\rangle,$$

where $|\phi_i^A\rangle$ and $|\phi_i^B\rangle$ are pure quantum states on S and \bar{S} , respectively, and $\alpha_i \in (0, 1]$. Moreover, $\{|\phi_i^A\rangle\}$ and $\{|\phi_i^B\rangle\}$ are both orthonormal.

Similarly, we write

$$|\psi\rangle = \sum_j \beta_j \cdot |\psi_j^A\rangle \otimes |\psi_j^B\rangle,$$

where $|\psi_j^A\rangle$ and $|\psi_j^B\rangle$ are pure quantum states on S and \bar{S} , respectively, and $\beta_j \in (0, 1]$. Moreover, $\{|\psi_j^A\rangle\}$ and $\{|\psi_j^B\rangle\}$ are both orthonormal.

Note that $\phi_{\bar{S}} = \sum_i \alpha_i^2 \cdot \phi_i^B$ and $\psi_{\bar{S}} = \sum_j \beta_j^2 \cdot \psi_j^B$. Since they are perfectly distinguishable, apply [Lemma 3.14](#), it follows that for every i, j , $\langle \phi_i^B | \psi_j^B \rangle = 0$.

Hence,

$$(|\phi\rangle\langle\psi|)_S = \sum_{i,j} \alpha_i \beta_j \cdot |\phi_i^A\rangle \langle \psi_j^A| \cdot \langle \phi_i^B | \psi_j^B \rangle = 0. \quad \square$$

Corollary 3.16. *Let reg be an $n \cdot N$ -qubit register, and $S \subseteq \text{reg}$ be such that S has at most $(D-1)/2$ intersections per block with reg . For every two distinct string $a, b \in \{0, 1\}^n$, we have*

$$\text{Enc}(|a\rangle\langle b|)_S = 0.$$

Proof. By the definition of Enc , we have

$$\text{Enc}(|a\rangle\langle b|)_S = \bigotimes_{i \in [n]} \text{Enc}(|a_i\rangle\langle b_i|)_{S \cap \text{reg}\{i\}}$$

Since $a \neq b$, there exists $i \in [n]$ such that $a_i \neq b_i$. We now fix such an i . We note that $\text{Enc}(|a_i\rangle\langle b_i|)_{S \cap \text{reg}\{i\}}$ and $\text{Enc}(|b_i\rangle\langle a_i|)_{S \cap \text{reg}\{i\}}$ are perfectly distinguishable (since one can decode a_i or b_i from them). Hence, it follows that $\text{Enc}(|a_i\rangle\langle b_i|)_{S \cap \text{reg}\{i\}} = 0$ by [Lemma 3.15](#), which further implies $\text{Enc}(|a\rangle\langle b|)_S = 0$. \square

Lemma 3.17. Let $k, \gamma \in \mathbb{N}$ be two constants, n be a power of 2, $\mathcal{I} = (n, n, \{S_i\}_{i \in [n]}, \{C_i\}_{i \in [n]})$ be a (k, γ) -QSAT instance, $H^{\text{enc}} = H^{\text{enc}}(\mathcal{I})$, and $\alpha = 1 - \text{val}(\mathcal{I})$. Let $|\phi\rangle$ be an n -qubit pure state such that $\text{val}_{\mathcal{I}}(\phi) = \text{val}(\mathcal{I})$, and let $|\Phi\rangle \in \mathcal{H}_{\text{clock}} \otimes \mathcal{H}_{\text{state}}$ be the history state for \mathcal{V}^{enc} given the $3 \cdot n \cdot N$ -qubit witness ϕ^{otp} that is defined according to (4). For every $t \in \{0, 1, \dots, T\}$, and for any subset $S \subseteq \text{clock} \cup \text{state}$ such that the following holds

- S has at most 10 intersections per block with $E_{\text{data}}, E_{\text{otp}}, E_{\text{midx}}, E_{\text{anc}},$ and E_{magic} .

Let $|\phi_t\rangle = \mathcal{V}_{[1,t]}^{\text{enc}} \text{Enc}(|\phi\rangle)_{E_{\text{data}}} \otimes |0^{\text{ancilla}}\rangle_{\text{ancilla}}$, one can compute an $|S|$ -qubit state ρ such that

$$\|(\phi_t)_S - \rho\|_1 \leq \alpha$$

in $\text{poly}(n, 2^{|S|})$ time.

Proof. For every $u \in [7]$ and $j \in [\ell^{(u)}]$, we define $t_{u,j} = j + \sum_{i=1}^{u-1} \ell^{(i)}$. That is, $t_{u,j}$ is the index of $\mathcal{V}_{u,j}^{\text{enc}}$ in the sequence of unitaries (5) that computes \mathcal{V}^{enc} .

We write

$$|\Psi\rangle = \frac{1}{\sqrt{T+1}} \sum_{t=0}^T |\text{unary}(t)\rangle_{\text{clock}} \otimes |\phi_t\rangle_{\text{state}} \quad ,$$

where $|\phi_t\rangle = U_{[1,t]}|\phi_0\rangle$, and $|\phi_0\rangle = |\phi^{\text{otp}}\rangle \otimes |0^{\text{ancilla}}\rangle_{\text{ancilla}}$. Recall that

$$|\phi^{\text{otp}}\rangle = \frac{1}{2^n} \sum_{a,b \in \{0,1\}^n} \text{Enc}\left(|a, b\rangle \otimes X^a Z^b |\phi\rangle\right)_{E_{\text{otp}}, E_{\text{data}}} \quad .$$

We now prove the lemma by considering the following cases separately. We remark that in the first three cases, we can indeed compute $(\phi_t)_S$ exactly. Only for the last case, we can only compute an approximation to $(\phi_t)_S$.

Case 1: $t \in [0, t_{4, \ell^{(4)}}]$. During this period, no gates have been applied to witness yet, hence qubits in witness and qubits in ancilla are unentangled. So we have

$$(\phi_t)_{S \cap (\text{witness} \cup \text{ancilla})} = (\phi_t)_{S \cap \text{witness}} \otimes (\phi_t)_{S \cap \text{ancilla}} \quad .$$

$(\phi_t)_{S \cap \text{witness}}$ can be computed exactly in $\text{poly}(2^{|S|})$ time by noting that qubits in witness are correctly encoded and then applying [Corollary 3.6](#). Also, $(\phi_t)_{S \cap \text{ancilla}}$ can be computed by a straightforward classical simulation in $\text{poly}(n)$ time since $|\text{ancilla}| \leq O(\log n)$. Hence, both computations can be done in $\text{poly}(n, 2^{|S|})$ time.

Notation and analysis for Case 2, 3, 4. From now on, we can assume $t \geq t_{4, \ell^{(4)}}$. Let us set up the notation and perform preliminary analysis that will be useful for the remaining three cases. Let $\text{other} = \text{witness} \setminus (\text{idX} \cup \text{midX})$ for notational convenience, we write

$$|\phi_t\rangle = \frac{1}{\sqrt{n}} \sum_{i \in [n]} \text{Enc}(|i\rangle)_{E_{\text{idX}}} \text{Enc}(|i\rangle)_{E_{\text{midX}}} |\phi_{t,i}\rangle_{\text{other}} \quad .$$

We also have

$$\phi_t = \frac{1}{n} \sum_{i,j \in [n]} \text{Enc}(|i\rangle\langle j|) \otimes \text{Enc}(|i\rangle\langle j|) \otimes |\phi_{t,i}\rangle\langle\phi_{t,j}| \quad .$$

From [Corollary 3.16](#) and the fact that S has at most 10 intersections per block with Emidx and $10 \leq (D-1)/2 = (3^5-1)/2$, it follows that

$$(\phi_t)_S = \frac{1}{n} \sum_{i \in [n]} \text{Enc}(|i\rangle\langle i|)_{S \cap \text{Eidx}} \otimes \text{Enc}(|i\rangle\langle i|)_{S \cap \text{Emidx}} \otimes (|\phi_{t,i}\rangle\langle\phi_{t,i}|)_{S \cap \text{other}}.$$

Let $S' = S \cap \text{other}$. Note that $|\text{Eidx}| = |\text{Emidx}| \leq O(\log n)$, for every $i \in [n]$, we can compute $\text{Enc}(|i\rangle\langle i|)_{S \cap \text{Eidx}} \otimes \text{Enc}(|i\rangle\langle i|)_{S \cap \text{Emidx}}$ in $\text{poly}(n)$ -time by a classical simulation. Hence, it suffices to compute $(\phi_{t,i})_{S'}$ for every $i \in [n]$.

Case 2: $t \in (t_{4,\ell^{(4)}}, t_{5,\ell^{(5)}}]$. During this period, \mathcal{V}^{enc} checks whether the encoding of the relevant qubits in witness are correct. Let $j \in [\ell^{(5)}]$ be such that $t = t_{5,j}$. We also let $\tau \in [3k]$ such that $j \in [(\tau-1)\ell_{\text{chk}} + 1, \tau\ell_{\text{chk}}]$ (Recall that $\ell^{(5)} = 3k \cdot \ell_{\text{chk}}$.) Let \mathcal{L} be the list

$$(\text{Edata}\{S_{i,1}\}, \dots, \text{Edata}\{S_{i,k}\}, \text{Eotp}\{S_{i,1}\}, \dots, \text{Eotp}\{S_{i,k}\}, \text{Eotp}\{S_{i,1+n}\}, \dots, \text{Eotp}\{S_{i,k+n}\}).$$

That is, for each $i \in [n]$, $|\phi_{t,i}\rangle$ records the state that \mathcal{V}^{enc} have checked the encodings of $\mathcal{L}_1, \dots, \mathcal{L}_{\tau-1}$, and is currently checking the encoding of \mathcal{L}_τ . Since all qubits in witness are correctly encoded, we have

$$(\phi_{t,i})_{\text{Echk}\{u\}} = |0^{N-1}\rangle\langle 0^{N-1}|$$

for every $u \in ([3k] \setminus \{\tau\})$.

Let $t^0 = t_{4,\ell^{(4)}}$, the only difference between $\phi_{t,i}$ and $\phi_{t^0,i}$ is the unfinished checking and its partial results on $\text{Edata}\{S_{i,\tau}\}$ and $\text{Echk}[(\tau-1)(N-1)+1, \tau(N-1)]$. Since we already know how to compute $(\phi_{t^0,i})_{S'}$, now we only need to compute

$$(\phi_{t,i})_{S' \cap (\text{Edata}\{S_{i,\tau}\} \cup \text{Echk}[(\tau-1)(N-1)+1, \tau(N-1)])}.$$

Note that in ϕ^{otp} , every block is an encoding of the maximally mixed single-qubit state. Thus, the above can be directly computed by a simulation in $\text{poly}(n)$ time.

Case 3: $t \in (t_{5,\ell^{(5)}}, t_{6,\ell^{(6)}}]$. By previous discussions, it suffices to compute $(\phi_{t,i})_{S'}$ for every $i \in [n]$.

Note that since all the qubits in witness are correctly encoded and the checking phase is already completed, $(\phi_{t,i})_{S' \cap \text{Echk}} = |0^{|S' \cap \text{Echk}}\rangle\langle 0^{|S' \cap \text{Echk}}|$. So we only need to compute $(\phi_{t,i})_{S' \cap (\text{other} \setminus \text{Echk})}$ for every $i \in [n]$.

By our assumption on S , we know that S' has at most 10 intersections per block with $\text{other} \setminus \text{Echk}$. Since \mathcal{C} is 28-simulable, we can compute $(\phi_{t,i})_{S' \cap (\text{other} \setminus \text{Echk})}$ in $\text{poly}(n, 2^{|S|})$ time by applying [Lemma 3.5](#).

Case 4: $t \in (t_{6,\ell^{(6)}}, t_{7,\ell^{(7)}}]$. Let $t_0 = t_{6,\ell^{(6)}}$. The only difference between ϕ_t and ϕ_{t_0} is the partial decoding on $\text{Eanc}\{1\}$. Hence we have

$$(\phi_t)_S = (\phi_{t_0})_{S \cap (\text{state} \setminus \text{Eanc}\{1\})} \otimes (\phi_t)_{S \cap \text{Eanc}\{1\}}.$$

Since t_0 belongs to case 3 and $S \cap (\text{state} \setminus \text{Eanc}\{1\})$ also satisfies our requirement since it has less elements than S , we can compute $(\phi_{t_0})_{S \cap (\text{state} \setminus \text{Eanc}\{1\})}$ in $\text{poly}(n, 2^{|S|})$ time. So we only need to approximate $(\phi_t)_{S \cap \text{Eanc}\{1\}}$.

Let $t' = t - t_0$ and $V = U_{t'}^{\text{Dec}} \cdot U_{t'-1}^{\text{Dec}} \cdots U_1^{\text{Dec}}$, we have

$$(\phi_t)_{\text{Eanc}\{1\}} = V(\phi_{t_0})_{\text{Eanc}\{1\}} V^\dagger.$$

Now, since $\text{val}_{\mathcal{I}}(\phi) = \text{val}(\mathcal{I})$, it follows that

$$\|(\phi_{t_0})_{\text{Eanc}\{1\}} - \text{Enc}(|1\rangle\langle 1|)\|_1 \leq \alpha,$$

which further implies that

$$\|(\phi_t)_{\text{Eanc}\{1\}} - V\text{Enc}(|1\rangle\langle 1|)V^\dagger\|_1 \leq \alpha.$$

From above, we can compute an α -approximation to $(\phi_t)_{S \cap \text{Eanc}\{1\}}$, which completes the proof. \square

The following two lemmas can be proved in a similar way as [BG20, Lemma 4.9 and Lemma 3.5], we omit the proofs here since they are repetitive.

Lemma 3.18. *Let $k, \gamma \in \mathbb{N}$ be two constants, n a power of 2, $\mathcal{I} = (n, n, \{S_i\}_{i \in [n]}, \{C_i\}_{i \in [n]})$ a (k, γ) -QSAT instance, $H^{\text{enc}} = H^{\text{enc}}(\mathcal{I})$, and $\alpha = 1 - \text{val}(\mathcal{I})$. Let $|\phi\rangle$ be an n -qubit pure state such that $\text{val}_{\mathcal{I}}(\phi) = \text{val}(\mathcal{I})$, and let $|\Phi\rangle \in \mathcal{H}_{\text{clock}} \otimes \mathcal{H}_{\text{state}}$ be the history state for \mathcal{V}^{enc} given the $3 \cdot n \cdot N$ -qubit witness ϕ^{otp} that is defined according to (4). For every $t_1, t_2 \in \{0, 1, \dots, T\}$ such that $t_1 \leq t_2 \leq t_1 + 3$, and for any subset $S \subseteq \text{clock} \cup \text{state}$ such that the following holds*

- S has at most 2 intersections per block with $\text{Edata}, \text{Eotp}, \text{Emidx}, \text{Eanc},$ and Emagic .

Let $|\phi_t\rangle = \mathcal{V}_{[1,t]}^{\text{enc}} \text{Enc}(|\phi\rangle)_{\text{Edata}} \otimes |0^{\text{ancilla}}\rangle_{\text{ancilla}}$, one can compute an $|S|$ -qubit state ρ such that

$$\left\| \left(\sum_{t,t' \in \{t_1, \dots, t_2\}} |\phi_t\rangle\langle \phi_{t'}| \right)_S - \rho \right\|_1 \leq \alpha.$$

in $\text{poly}(n, 2^{|S|})$ time.

Lemma 3.19. *Let $k, \gamma \in \mathbb{N}$ be two constants, n a power of 2, $\mathcal{I} = (n, n, \{S_i\}_{i \in [n]}, \{C_i\}_{i \in [n]})$ a (k, γ) -QSAT instance, $H^{\text{enc}} = H^{\text{enc}}(\mathcal{I})$, and $\alpha = 1 - \text{val}(\mathcal{I})$. Let $|\phi\rangle$ be an n -qubit pure state such that $\text{val}_{\mathcal{I}}(\phi) = \text{val}(\mathcal{I})$, and let $|\Phi\rangle \in \mathcal{H}_{\text{clock}} \otimes \mathcal{H}_{\text{state}}$ be the history state for \mathcal{V}^{enc} given the $3 \cdot n \cdot N$ -qubit witness ϕ^{otp} that is defined according to (4). For every term J in H^{enc} , the following hold:*

- If J is not one of the $H_{5,j}^{\text{prop}}$ or the $H_{6,j}^{\text{prop}}$, $(\Phi)_{\text{supp}(J)}$ can be computed in $\text{poly}(n)$ time.
- If J is one of the $H_{5,j}^{\text{prop}}$ or the $H_{6,j}^{\text{prop}}$, then $J = \sum_{i \in [n]} J_i \otimes |\text{Enc}(i)\rangle\langle \text{Enc}(i)|_{\text{Eidx}}$. For every $i \in [n]$, $(\Phi)_{\text{supp}(J_i) \cup \text{Eidx}}$ can be computed in $\text{poly}(n)$ time.

Now we are ready to prove [Theorem 3.13](#) (restated below).

Reminder of Theorem 3.13. *For every $k, \gamma \in \mathbb{N}$ and every $\alpha, \beta: \mathbb{N} \rightarrow [0, 1]$ such that α is negligible, it holds that:*

$$(k, \gamma)\text{-History-ELH}_{\alpha, \beta} \subseteq (O(\log n), 2)\text{-SimQMA}_{1-\beta(n)/M, 1-\alpha(n)/M}$$

where $M = a^M \cdot k + b^M \cdot \gamma + c^M$.

Proof. Let n be a power of 2, $\mathcal{I} = (n, n, \{S_i\}_{i \in [n]}, \{C_i\}_{i \in [n]})$ a (k, γ) -QSAT instance, and $H^{\text{enc}} = H^{\text{enc}}(\mathcal{I})$ a (k, γ) -History-ELH $_{\alpha, \beta}$ instance.

We let $\mathcal{V}^{\text{enc-H}}$ be the verifier. We will show $\mathcal{V}^{\text{enc-H}}$ is a locally simulable verifier for (k, γ) -History-ELH $_{\alpha, \beta}$. We first show the completeness and soundness:

1. If $\text{val}(\mathcal{I}) \leq \alpha(n)$, then by [Lemma 3.12](#), $\mathcal{V}^{\text{enc-H}}$ accepts with probability at least $1 - \alpha(n)/M$.
2. If $\text{val}(\mathcal{I}) \geq \beta(n)$, then again by [Lemma 3.12](#), $\mathcal{V}^{\text{enc-H}}$ accepts with probability at most $1 - \beta(n)/M$.

Next, from its definition, $\mathcal{V}^{\text{enc-H}}$ is 2-adaptive, and at each round, it queries $O(\log n)$ qubits. It is simulable from [Lemma 3.19](#) and the assumption that α is negligible. \square

3.4 Proof of [Theorem 1.2](#)

Finally, we are ready to prove [Theorem 1.2](#) (restated below).

Reminder of [Theorem 1.2](#). *For every $k, \gamma \in \mathbb{N}$, $0 < \beta < 1$, and negligible function α , there are $s \in (0, 1)$ and $c: \mathbb{N} \rightarrow [0, 1]$ such that $1 - c(n) \leq \text{negl}(n)$ and the following holds*

$$(k, \gamma)\text{-LocalQMA}_{\beta, 1-\alpha(n)} \subseteq (O(\log n), 2)\text{-SimQMA}_{s, c(n)}.$$

Proof. Let $L = (L_{\text{yes}}, L_{\text{no}}) \in (k, \gamma)\text{-LocalQMA}_{\alpha(n), \beta}$. Let m, p be the polynomials in the definition of LocalQMA (see [Definition 2.6](#)). By repeating a local check multiple times and adding dummy qubits, we can assume that $m = p$. For simplicity we will also use m to denote $m(n)$.

Given an input $x \in \{0, 1\}^n$, we then construct a (k, γ) -QSAT instance $\mathcal{I} = (m, m, \{\mathcal{S}_i\}_{i \in [m]}, \{\mathcal{C}_i\}_{i \in [m]})$ such that (1) $x \in L_{\text{yes}}$ implies that $\text{val}(\mathcal{I}) \geq 1 - \alpha(n)$ and (2) $x \in L_{\text{no}}$ implies that $\text{val}(\mathcal{I}) \leq \beta$.

Now, let $m' = m'(n) = 2^{\lceil \log m(n) \rceil}$ be the smallest power of 2 that is larger than m . We create another instance \mathcal{I}' by adding $m' - m$ dummy circuits \mathcal{C}_i that always outputs 1 into \mathcal{I} . Note that we have

$$\text{val}(\mathcal{I}') = \frac{m' - m}{m'} + \frac{m}{m'} \cdot \text{val}(\mathcal{I}).$$

Note that $m \leq m' \leq 2m$, it follows that (1) $x \in L_{\text{yes}}$ implies that $\text{val}(\mathcal{I}') \geq 1 - \alpha(n)$ and (2) $x \in L_{\text{no}}$ implies that $\text{val}(\mathcal{I}') \leq 1/2 + \beta/2$. We let $\beta' = 1/2 + \beta/2$.

Let $H^{\text{enc}} = H^{\text{enc}}(\mathcal{I}')$. By [Lemma 3.8](#), we further have that (1) $x \in L_{\text{yes}}$ implies that $\lambda_{\min}(H^{\text{enc}}) \leq \alpha(n)$ and (2) $x \in L_{\text{yes}}$ implies that $\lambda_{\min}(H^{\text{enc}}) \geq (1 - \beta')^2 / p_1(k, \gamma)^2$, where p_1 is the polynomial in [Lemma 3.8](#).

Now we set $\bar{\alpha}$ so that $\bar{\alpha}(m'(n)) = \alpha(n)$ and $\bar{\beta} = (1 - \beta')^2 / p_1(k, \gamma)^2$, which is a constant. Hence, we have obtained a polynomial-time reduction (since m' is bounded by a polynomial) from L to $(k, \gamma)\text{-History-ELH}_{\bar{\alpha}, \bar{\beta}}$. The theorem then follows from [Theorem 3.13](#) and the fact that $\bar{\alpha}$ is negligible since α is negligible and m' is bounded by a polynomial. \square

4 A Candidate Zero-Knowledge Succinct Argument for SimQMA in QHRM

In this section, we present a candidate zero-knowledge succinct argument for SimQMA in QHRM. Combining with [Theorem 1.2](#), this also extends to all of LocalQMA with $1 - \text{negl}(n)$ completeness. Assuming QPCP_{negl}, this further extends to all of QMA.

Our candidate construction is a simple adaption of the Quantum-Merkle-tree-based candidate succinct argument Π_{succinct} for LocalQMA from [\[CM21b\]](#). The quantum Merkle tree in [\[CM21b\]](#) only allows one round of queries. We will need a natural modification of it to simulate the local verifier for a language from $(O(\log n), 2)\text{-SimQMA}_{s, c(n)}$, which has 2 rounds of queries.

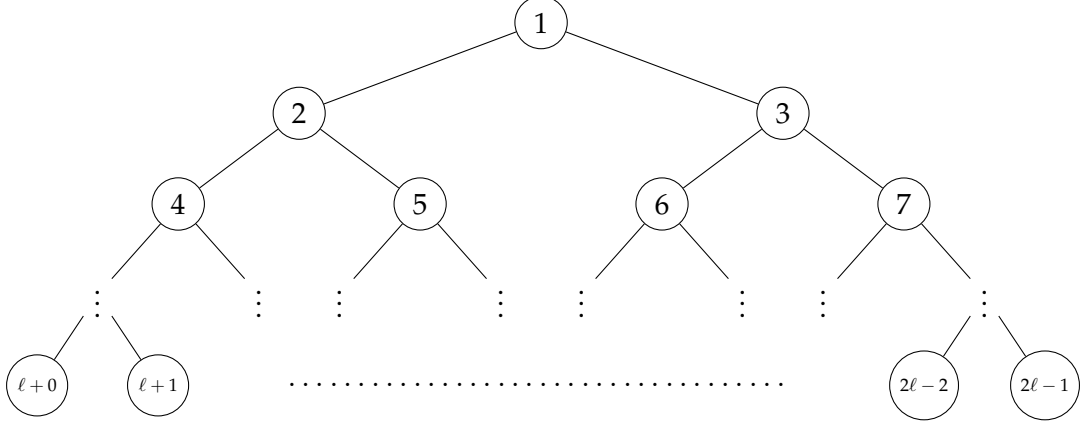


Figure 1: An illustration of the labeling of the nodes in the tree T_ℓ with ℓ leaves

4.1 The Zero-Knowledge Succinct Protocol Π_{zk}

Notation. Let $L = (L_{\text{yes}}, L_{\text{no}}) \in (k(n), \ell_L(n))\text{-SimQMA}_{s(n), c(n)}$ for locality and round parameters $k(n), \ell_L(n) \in \mathbb{N}$ and soundness and completeness parameters $s(n), c(n) \in [0, 1]$ such that $s(n) < c(n)$. We will always assume that $k(n) \cdot \ell_L(n) \leq O(\log n)$. Let m_L and p_L be the polynomials and V_L be the $k(n)$ -local verifier in [Definition 2.7](#). Throughout this section, we will always use n to denote the length of an input to L , $N = p_L(n)$ to denote the number of qubits in a witness for V_L , and λ to denote the security parameter. When the meaning is clear, we will often use k to denote $k(n)$ for simplicity (similarly for $\ell_L(n), s(n)$, and $c(n)$).

We also set $b = \lambda/3$, and $\ell = N$. We assume that b is an integer and ℓ is a power of 2 for simplicity and without loss of generality since one can always add dummy qubits to the witness.

The perfect binary tree T_ℓ . We will consider a perfect binary tree T_ℓ of ℓ leaves (see [Figure 1](#) for an illustration). Note that T_ℓ has $\log \ell$ layers. We label the nodes in T_ℓ first from root to leaves and then from left to right, starting with 1.

For a node u in T_ℓ , we observe that u 's parent is $\lfloor u/2 \rfloor$ if u is not the root (i.e., $u \neq 1$) and u 's two children are $2u$ and $2u + 1$ if u is not a leaf (i.e., $u < \ell$). We use P_u to denote the set of nodes consisting of u and all ancestors of u . Formally, we have

$$P_u = \begin{cases} \{u\} & \text{if } u = 1, \\ \{u\} \cup P_{\lfloor u/2 \rfloor} & \text{if } u > 1. \end{cases}$$

We also define R_u as follows:

$$R_u = \{u \in P_u \text{ or } \lfloor u/2 \rfloor \in P : u \in [2\ell - 1]\}.$$

That is, a node v belongs to R_u if either v is in P_u or the parent of v is in P_u . Also, for a set of nodes $S \subseteq [2\ell - 1]$, we set $R_S = \bigcup_{u \in S} R_u$. To avoid nested subscripts, we sometimes use $R(S)$ to denote R_S .

Given an N -qubit state σ , we first recall the following commitment algorithm ([Algorithm 1](#)) from [\[CM21b\]](#). Below we change the procedure slightly so that one leaf of the tree only stores a

single qubit from the N -qubit quantum state.

Algorithm 1: Algorithm for committing to an N -qubit quantum state

```

1 Function commit $^{\mathcal{G}}$ ( $\sigma, N, \lambda$ )
   Input:  $\sigma$  is an  $N$ -qubit quantum state;  $\lambda$  is the security parameter (recall that  $\lambda = 3b$ )
2   Let  $\ell = N$ ;
3   For each node  $u$  in  $T_\ell$ , create a  $b$ -qubit register state $^{(u)}$ ;
4   Store  $\sigma$  in state $^{(\ell)}(1), \text{state}^{(\ell+1)}(1), \dots, \text{state}^{(2\ell-1)}(1)$ , other qubits of these registers are
   initialized to the all-zero state;
5   for  $u$  from  $\ell - 1$  down to 1 do
6     Initialize state $^{(u)}$  as  $|0^b\rangle$ ;
7     Apply  $\mathcal{G}$  on state $^{(2u)}, \text{state}^{(2u+1)}$ , and state $^{(u)}$ ;
8   return all qubits in  $\{\text{state}^{(u)}\}_{u \in [2\ell-1]}$ ;

```

Next, we describe the following local decommitment algorithm (Algorithm 2), which allows multiple rounds of queries.

Algorithm 2: Algorithm for recovering part of the original quantum state; it supports multiple rounds of queries

```

1 Function decommit $^{\mathcal{G}^\dagger}$ ( $N, \lambda, S^{\text{old}}, S^{\text{new}}, \{\eta_u\}_{u \in R(S^{\text{new}}) \cup R(S^{\text{old}})}$ )
   Input:  $S^{\text{old}}, S^{\text{new}} \subseteq \{\ell, \ell + 1, \dots, 2\ell - 1\}$  are two subsets of leaves in  $T_\ell$ ,  $S^{\text{old}}$  denotes the
   subset that is already known and  $S^{\text{new}}$  denotes the subset we are going to
   decommit;
   for each  $u \in R(S^{\text{new}}) \cup R(S^{\text{old}})$ ,  $\eta_u$  is a  $b$ -qubit quantum state;  $\lambda$  is the security
   parameter
2   Let  $\ell = N$ ;
3   For each node  $u$  in  $R(S^{\text{new}}) \cup R(S^{\text{old}})$ , create a  $b$ -qubit register state $^{(u)}$ , and store  $\eta_u$  in
   state $^{(u)}$ ;
4   for  $u \in (R(S^{\text{new}}) \setminus R(S^{\text{old}})) \cap [\ell - 1]$ , from the smallest to the largest do
5     Apply  $\mathcal{G}^\dagger$  on state $^{(2u)}, \text{state}^{(2u+1)}$ , and state $^{(u)}$ ;
6     Measure state $^{(u)}$  in the computational basis to obtain an outcome  $z \in \{0, 1\}^b$ ;
7     if  $z \neq 0^b$  then return  $\perp$ ;
8   return all qubits in  $\{\text{state}^{(u)}\}_{u \in S}$ ;

```

Finally, we are ready to specify the following candidate zero-knowledge succinct argument for $L \in (k, \ell_L)$ -SimQMA $_{s,c}$.

The candidate zero-knowledge succinct argument Π_{zk} for $L \in (k, \ell_L)$ -LocalQMA $_{s,c}$

- Both prover (\mathcal{P}) and verifier (\mathcal{V}) get access to a Haar random quantum unitary \mathcal{G} acting on $3b = \lambda$ qubits and its inverse \mathcal{G}^\dagger . They also both get an input $x \in \{0, 1\}^n$ to L . The goal for the prover is to convince the verifier that $x \in L_{\text{yes}}$.
Let $\ell = N$ and we assume that $\ell = 2^d$ for $d \in \mathbb{N}$.
- **(First message: $\mathcal{P} \rightarrow \mathcal{V}$)** The honest prover \mathcal{P} acts as follows: If $x \in L_{\text{no}}$, \mathcal{P} aborts immediately. Otherwise, \mathcal{P} finds an N -qubit state σ such that V_L accepts with probability

at least c , and runs $\text{commit}(\sigma, N, \lambda)$ to obtain qubits $\{\eta_u\}_{u \in [2^{\ell-1}]}$.

\mathcal{P} then sends η_1 to \mathcal{V} .

- **(Simulation of V_L)** \mathcal{V} now simulates the local verifier V_L . It first draws $\tau_0 \in_R [m_L(n)]$.

Next for each $i \in [\ell_L]$:

1. **(First turn: $\mathcal{V} \rightarrow \mathcal{P}$)** \mathcal{V} first simulates V_L to compute a subset $S_i \subseteq [N]$, given previous outcomes $\tau_{\leq i-1}$, together with a POVM $\{\Pi_j\}_{j \in [m_L(n)]}$ on $|S_i|$ qubits. Note that $S_i \cap S_j = \emptyset$ for all $j < i$. It then sends τ_{i-1} to \mathcal{P} .

Let W_i be the set of leaves in T_ℓ that contains the qubits indexed by S_i . That is,

$$W_i = \{\ell + u - 1 : u \in S_i\}.$$

Let $\text{Sent}_{\leq i}$ to denote $\bigcup_{j \in [i]} W_j$. For simplicity, we let $\text{Sent}_{\leq 0} = \text{Sent}_0 = \{1\}$.

2. **(Second turn: $\mathcal{P} \rightarrow \mathcal{V}$)** The honest prover \mathcal{P} sends the following to \mathcal{V} ^a

$$\{\eta_u\}_{u \in R(W_i) \setminus R(\text{Sent}_{\leq i-1})}.$$

3. **(Checking)** \mathcal{V} then runs $\text{decommit}(N, \lambda, \text{Sent}_{\leq i-1}, W_i, \{\eta_u\}_{u \in R(\text{Sent}_{\leq i})})$. Note that \mathcal{V} already has $\{\eta_u\}_{u \in \text{Sent}_{\leq i-1}}$. If decommit returns \perp , \mathcal{V} rejects immediately. Otherwise, \mathcal{V} continues the simulation of V_L by measuring $\{\Pi_j\}_{j \in [m_L(n)]}$ on the corresponding qubits from the η_u 's to obtain an outcome τ_i .

- **(Final decision)** Finally, \mathcal{V} simulates V_L based on the sequence $\tau_{\leq \ell_L}$ to decide whether it accepts or not.

^aGiven τ_{i-1} , \mathcal{P} would be able to compute the set S_i and thus W_i . \mathcal{P} also already knows $\text{Sent}_{\leq i-1}$.

4.2 Analysis of Π_{zk}

Now we prove the completeness and succinctness of Π_{zk} .

Theorem 4.1. *Let Π_{zk} be the protocol between \mathcal{P} and \mathcal{V} for the promise language $L \in (k, \ell_L)$ -SimQMA $_{s,c}$. For every $x \in \{0, 1\}^n$, the following hold:*

Completeness: *If $x \in L_{\text{yes}}$, then for every $\mathcal{G} \in \mathbb{U}(2^\lambda)$,*

$$\Pr[(\mathcal{V}^{\mathcal{G}, \mathcal{G}^+} \rightleftharpoons \mathcal{P}^{\mathcal{G}, \mathcal{G}^+})(x) = 1] \geq c.$$

Succinctness: *\mathcal{P} and \mathcal{V} communicate at most $O(k \cdot \ell_L \cdot \log n \cdot \lambda)$ qubits in total.*

Efficiency: *\mathcal{V} runs in $\text{poly}(n, k, \gamma)$ time. If V_L is strongly explicit, then \mathcal{V} runs in $O(k \cdot \ell_L \cdot \log n \cdot \lambda + \text{poly}(\log n, k, \gamma))$ time.*

Proof. We first establish the succinctness part. Examining the protocol Π_{zk} , one can see that the first message takes $O(\lambda)$ qubits. For the later ℓ_L rounds, the message of the first turn takes $O(\log m_L(n)) = O(\log n)$ classical bits, and the message of the second turn takes at most $O(|R_{W_i}| \cdot \lambda)$ qubits. Note that $|R_{W_i}| \leq |W_i| \cdot O(\log \ell) \leq k \cdot O(\log N) \leq O(k \cdot \log n)$, the total communication complexity is thus bounded by $O(k \cdot \ell_L \cdot \log n \cdot \lambda)$.

For the running time of \mathcal{V} , one can see that its running time is dominated by the running time of decommit and the running time of V_L computing W_i and $\{\Pi_j\}$, which are at most $O(k \cdot \log N \cdot \lambda)$ and $\text{poly}(n, k, \gamma)$ ($\text{poly}(\log n, k, \gamma)$ if V_L is strongly explicit), respectively.

Now we prove the completeness. Let $\mathcal{G}_{(u)}$ be a \mathcal{G} gate applying on registers $\text{state}^{(2u)}$, $\text{state}^{(2u+1)}$, and $\text{state}^{(u)}$. Then we know for the honest prover \mathcal{P} , when $x \in L_{\text{yes}}$, it prepares an N -qubit state σ that makes V_L accepts with probability at least c , and then applies $U_{\text{com}} := \mathcal{G}_{(1)} \cdot \dots \cdot \mathcal{G}_{(\ell-1)}$ to $\sigma \otimes |0\rangle\langle 0|_{\text{state}^{(1)}, \dots, \text{state}^{(\ell-1)}}$.

Let $U_{\text{decom}} := U_{\text{com}}^\dagger = \mathcal{G}_{(\ell-1)}^\dagger \cdot \dots \cdot \mathcal{G}_{(1)}^\dagger$. Recall that verifier \mathcal{V} at the i -th round simulates V_L only on registers in $\{\text{state}^{(u)}\}_{u \in W_i}$. We now argue that \mathcal{V} is effectively simulating V_L on

$$U_{\text{decom}}^\dagger U_{\text{com}} \sigma \otimes |0\rangle\langle 0|_{\text{state}^{(1)}, \dots, \text{state}^{(\ell-1)}} = \sigma \otimes |0\rangle\langle 0|_{\text{state}^{(1)}, \dots, \text{state}^{(\ell-1)}}.$$

First, we can see that when $i = 1$ and $\text{Sent}_{\leq i-1} = \{1\}$, $\text{decommit}(N, \lambda, \text{Sent}_{\leq i-1}, W_i, \{\eta_u\}_{u \in R(\text{Sent}_{\leq i})})$ performs all gates in U_{decom} that lies in the lightcone of the registers $\{\text{state}^{(u)}\}_{u \in W_i}$ in the chronological order (see Line 4 of Algorithm 2). Also, since \mathcal{P} starts with the state $\sigma \otimes |0\rangle\langle 0|_{\text{state}^{(1)}, \dots, \text{state}^{(\ell-1)}}$, decommit never outputs \perp . For $i > 1$, we also observe that $\text{decommit}(N, \lambda, \text{Sent}_{\leq i-1}, W_i, \{\eta_u\}_{u \in R(\text{Sent}_{\leq i})})$ performs the additional gates in U_{decom} in the correct order so that all gates in U_{decom} that lie in the lightcone of the registers $\{\text{state}^{(u)}\}_{u \in \text{Sent}_{\leq i}}$ are performed in the chronological order. Therefore, \mathcal{V} is simulating V_L faithfully on σ , meaning that it accepts with probability at least c . \square

Similarly to [CM21b], we conjecture that the soundness also holds.

Conjecture 4.2 (Π_{zk} is sound in QHRM). *Let Π_{zk} be the protocol between \mathcal{P} and \mathcal{V} for the promise language $L \in (k, \ell_L)$ -SimQMA $_{s,c}$. For every $x \in \{0, 1\}^n$, the following hold:*

Soundness: *If $x \in L_{\text{no}}$, then for every $t \in \mathbb{N}$ and all (potentially malicious) \mathcal{P}^* that make at most t total queries to \mathcal{G} and \mathcal{G}^\dagger , for some $\delta = \delta(t, \lambda) = \text{poly}(t) / 2^{\Omega(\lambda)}$, it holds that*

$$\Pr_{\mathcal{G} \in \mathbb{R}^{\mathbb{U}(2^\lambda)}} \left[\Pr[(\mathcal{V}^{\mathcal{G}, \mathcal{G}^\dagger} \Leftrightarrow (\mathcal{P}^*)^{\mathcal{G}, \mathcal{G}^\dagger})(x) = 1] \geq s + \delta \right] \leq \delta.$$

Finally, we conjecture that Π_{zk} is zero knowledge.

Conjecture 4.3. Π_{zk} is computational zero knowledge in the QHRM.

Similarly to [CM21b], we remark that (1) the constant soundness in Conjecture 4.2 and the constant completeness in Theorem 4.1 can be easily amplified to $n^{-\omega(1)}$ and $1 - n^{-\omega(1)}$ by repeating the protocols $\log^2 n$ times, and (2) assuming QPCP, the protocol works for all languages in QMA.

Corollary 4.4. *Assuming Conjecture 4.2 and Conjecture 4.3, there is a computational zero-knowledge protocol for $L \in (k, \ell_L)$ -SimQMA $_{s,c}$ with $\lambda \cdot \text{polylog}(n)$ communication complexity, completeness $1 - n^{-\omega(1)}$ and soundness $n^{-\omega(1)}$ in QHRM. Also, if V_L is strongly explicit, then the verifier running time of the protocol is also bounded by $\lambda \cdot \text{polylog}(n)$.*

Moreover, if we further assume that QPCP holds, then the aforementioned succinct zero-knowledge protocol exists for every $L \in \text{QMA}$.

Acknowledgments

L.C. would like to thank Jiahui Liu and Qipeng Liu for helpful discussions and pointing out many related works. This work was done while L.C. did an internship at IBM Quantum Research.

References

- [AALV09] Dorit Aharonov, Itai Arad, Zeph Landau, and Umesh V. Vazirani. The detectability lemma and quantum gap amplification. In *Proceedings of the 41st Annual ACM Symposium on Theory of Computing, STOC 2009, Bethesda, MD, USA, May 31 - June 2, 2009*, pages 417–426. ACM, 2009.
- [AAV13] Dorit Aharonov, Itai Arad, and Thomas Vidick. Guest column: the quantum PCP conjecture. *SIGACT News*, 44(2):47–79, 2013.
- [ACGH20] Gorjan Alagic, Andrew M. Childs, Alex B. Grilo, and Shih-Han Hung. Non-interactive classical verification of quantum computation. In Rafael Pass and Krzysztof Pietrzak, editors, *Theory of Cryptography - 18th International Conference, TCC 2020, Durham, NC, USA, November 16-19, 2020, Proceedings, Part III*, volume 12552 of *Lecture Notes in Computer Science*, pages 153–180. Springer, 2020.
- [BG20] Anne Broadbent and Alex B. Grilo. QMA-hardness of consistency of local density matrices with applications to quantum zero-knowledge. In *61st IEEE Annual Symposium on Foundations of Computer Science, FOCS 2020, Durham, NC, USA, November 16-19, 2020*, pages 196–205. IEEE, 2020.
- [BKL⁺22] James Bartusek, Yael Tauman Kalai, Alex Lombardi, Fermi Ma, Giulio Malavolta, Vinod Vaikuntanathan, Thomas Vidick, and Lisa Yang. Succinct classical verification of quantum computation. *CoRR*, abs/2206.14929, 2022.
- [BM21] James Bartusek and Giulio Malavolta. Indistinguishability obfuscation of null quantum circuits and applications. *CoRR*, abs/2106.06094, 2021.
- [BS20] Nir Bitansky and Omri Shmueli. Post-quantum zero knowledge in constant rounds. In Konstantin Makarychev, Yury Makarychev, Madhur Tulsiani, Gautam Kamath, and Julia Chuzhoy, editors, *Proceedings of the 52nd Annual ACM SIGACT Symposium on Theory of Computing, STOC 2020, Chicago, IL, USA, June 22-26, 2020*, pages 269–279. ACM, 2020.
- [CCY20] Nai-Hui Chia, Kai-Min Chung, and Takashi Yamakawa. Classical verification of quantum computations with efficient verifier. In Rafael Pass and Krzysztof Pietrzak, editors, *Theory of Cryptography - 18th International Conference, TCC 2020, Durham, NC, USA, November 16-19, 2020, Proceedings, Part III*, volume 12552 of *Lecture Notes in Computer Science*, pages 181–206. Springer, 2020.
- [CM21a] Orestis Chardouvelis and Giulio Malavolta. The round complexity of quantum zero-knowledge. *IACR Cryptol. ePrint Arch.*, page 918, 2021.
- [CM21b] Lijie Chen and Ramis Movassagh. Quantum merkle trees. *CoRR*, abs/2112.14317, 2021.
- [CMS19] Alessandro Chiesa, Peter Manohar, and Nicholas Spooner. Succinct arguments in the quantum random oracle model. In Dennis Hofheinz and Alon Rosen, editors, *Theory of Cryptography - 17th International Conference, TCC 2019, Nuremberg, Germany, December 1-5, 2019, Proceedings, Part II*, volume 11892 of *Lecture Notes in Computer Science*, pages 1–29. Springer, 2019.

- [CMSZ21] Alessandro Chiesa, Fermi Ma, Nicholas Spooner, and Mark Zhandry. Post-quantum succinct arguments. *CoRR*, abs/2103.08140, 2021.
- [CVZ20] Andrea Coladangelo, Thomas Vidick, and Tina Zhang. Non-interactive zero-knowledge arguments for qma, with preprocessing. In Daniele Micciancio and Thomas Ristenpart, editors, *Advances in Cryptology - CRYPTO 2020 - 40th Annual International Cryptology Conference, CRYPTO 2020, Santa Barbara, CA, USA, August 17-21, 2020, Proceedings, Part III*, volume 12172 of *Lecture Notes in Computer Science*, pages 799–828. Springer, 2020.
- [DFK⁺92] Cynthia Dwork, Uriel Feige, Joe Kilian, Moni Naor, and Shmuel Safra. Low communication 2-prover zero-knowledge proofs for NP. In *Advances in Cryptology - CRYPTO '92, 12th Annual International Cryptology Conference, Santa Barbara, California, USA, August 16-20, 1992, Proceedings*, volume 740 of *Lecture Notes in Computer Science*, pages 215–227. Springer, 1992.
- [GSY19] Alex Bredariol Grilo, William Slofstra, and Henry Yuen. Perfect zero knowledge for quantum multiprover interactive proofs. In *60th IEEE Annual Symposium on Foundations of Computer Science, FOCS 2019, Baltimore, Maryland, USA, November 9-12, 2019*, pages 611–635. IEEE Computer Society, 2019.
- [Kil92] Joe Kilian. A note on efficient zero-knowledge proofs and arguments (extended abstract). In S. Rao Kosaraju, Mike Fellows, Avi Wigderson, and John A. Ellis, editors, *Proceedings of the 24th Annual ACM Symposium on Theory of Computing, May 4-6, 1992, Victoria, British Columbia, Canada*, pages 723–732. ACM, 1992.
- [KKR06] Julia Kempe, Alexei Y. Kitaev, and Oded Regev. The complexity of the local hamiltonian problem. *SIAM J. Comput.*, 35(5):1070–1097, 2006.
- [KPT97] Joe Kilian, Erez Petrank, and Gábor Tardos. Probabilistically checkable proofs with zero knowledge. In *Proceedings of the Twenty-Ninth Annual ACM Symposium on the Theory of Computing, El Paso, Texas, USA, May 4-6, 1997*, pages 496–505. ACM, 1997.
- [KR03] Julia Kempe and Oded Regev. 3-local hamiltonian is QMA-complete. *Quantum Inf. Comput.*, 3(3):258–264, 2003.
- [KSV02] Alexei Y. Kitaev, A. H. Shen, and Mikhail N. Vyalyi. *Classical and Quantum Computation*, volume 47 of *Graduate studies in mathematics*. American Mathematical Society, 2002.
- [Mic00] Silvio Micali. Computationally sound proofs. *SIAM J. Comput.*, 30(4):1253–1298, 2000.
- [NVY18] Chinmay Nirkhe, Umesh V. Vazirani, and Henry Yuen. Approximate low-weight check codes and circuit lower bounds for noisy ground states. In *45th International Colloquium on Automata, Languages, and Programming, ICALP 2018, July 9-13, 2018, Prague, Czech Republic*, volume 107 of *LIPICs*, pages 91:1–91:11. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2018.
- [Shm20] Omri Shmueli. Multi-theorem (malicious) designated-verifier NIZK for QMA. *CoRR*, abs/2007.12923, 2020.

This figure "graph.png" is available in "png" format from:

<http://arxiv.org/ps/2209.10798v1>

This figure "history.png" is available in "png" format from:

<http://arxiv.org/ps/2209.10798v1>

This figure "img.jpg" is available in "jpg" format from:

<http://arxiv.org/ps/2209.10798v1>