

# Analysis of Gradient Descent with Varying Step Sizes using Integral Quadratic Constraints

Ram Padmanabhan and Peter Seiler

**Abstract**—In this paper, we present an analysis of the convergence rate of gradient descent with a varying step size, on strongly convex functions. We assume that a line search has been carried out and produces a step size that varies in a known interval. The algorithm is then handled as a linear, parameter-varying (LPV) system. Building on prior work that uses Integral Quadratic Constraints (IQCs) to analyze optimization algorithms, we construct a linear matrix inequality (LMI) condition to numerically obtain convergence rates. For the LPV system, this condition is solved by a gridding approach on the step size interval. Our results indicate that the algorithm converges in a restricted set within the step size interval. Further, when this interval reduces to a point, i.e., when a constant step size is used, the algorithm recovers the gradient rate corresponding to constant step sizes.

## I. INTRODUCTION

There exist numerous iterative algorithms to solve unconstrained optimization problems, particularly under the assumption of strong convexity. Some of these include first-order methods such as gradient descent [1], [2], Polyak's heavy-ball algorithm [3] and Nesterov's accelerated method [4], as well as second-order methods such as Newton's method [2] and quasi-Newton methods including BFGS and DFP [2], [5], [6]. Each of these algorithms can be implemented using either constant or varying step sizes. A disadvantage of using constant step sizes is that this usually requires additional information to guarantee performance, such as knowledge of the Lipschitz constant  $L$  of the gradient.

A popular technique to implement varying step sizes in optimization algorithms is known as a *line search*. In this method, a step size is chosen at each iteration according to pre-defined conditions. For instance, the condition in an Armijo line search [7] is that the function must sufficiently decrease along the direction of movement, and the largest step size satisfying this is chosen. The Wolfe line search [8] includes an additional condition (known as the curvature condition) that the gradient must decrease along the direction of movement. While these algorithms are computationally more intensive, they do not require any prior knowledge about function parameters and do not result in a reduction in performance.

In this paper, we present an analysis of a restricted class of line search algorithms using the notion of Integral Quadratic Constraints (IQCs) from robust control theory. IQCs were first introduced by Yakubovich [9] in the context of imposing

quadratic constraints on an infinite-horizon control problem. The basic configuration considered is a known, linear system in feedback with a nonlinear component that we wish to analyze. In [10], Megretski and Rantzer unified the approach to robustness analysis using IQCs, covering passivity and dissipativity arguments and presenting a list of IQCs for common nonlinear components. Using the Kalman-Yakubovich-Popov (KYP) lemma [11], it was shown that verifying stability reduces to solving a linear matrix inequality (LMI). While these results were primarily in the frequency domain, the idea of time-domain IQCs was pursued in [12] for verifying stability.

In [13], Lessard et al. developed a framework for analyzing first-order optimization algorithms using IQCs, when the objective function is  $m$ -strongly convex with  $L$ -Lipschitz gradients. The IQC framework was presented in discrete-time, and a number of IQCs for convex functions were derived. In particular, a class of  $\rho$ -hard IQCs were introduced for characterizing convergence rates. It was shown that an upper bound on the convergence rates of these algorithms can be numerically obtained by solving a small semidefinite program (SDP). This framework is also strongly tied to the work in [14], where a frequency-domain approach is used to certify exponential stability in discrete-time linear, time-invariant (LTI) systems. In [15], analytical and numerical solutions of the SDP were obtained for the heavy-ball algorithm. More recently, IQCs have been used to analyze robustness and transient properties of accelerated methods such as the heavy-ball algorithm and Nesterov's method [16], [17].

In this work, we analyze the convergence of gradient descent using a line search for strongly convex functions, based on the framework developed in [13]. We assume a line search has been carried out, and produces a step size that lies in a restricted interval about  $\alpha = \frac{1}{L}$ . Note that this step size is a popular choice for gradient descent on strongly convex functions. The algorithm is no longer time-invariant, but is now a linear, parameter-varying (LPV) system. In [18], [19], the robustness of an LPV system was analyzed in terms of its worst-case  $\mathcal{L}_2$  gain. Here, we combine those approaches with the technique in [13] to obtain convergence rates for the parameter-varying algorithm. The algorithm is first represented in its LPV form, and the convergence theorem in [13] is adapted for the considered formulation. The resulting SDP is solved by gridding over the step size interval. Finally, the results of our study are discussed, using a simple sector IQC on the gradient.

The remainder of this paper is organized as follows. In

The authors are with Department of Electrical Engineering and Computer Science, University of Michigan, Ann Arbor, MI 48105, USA. Emails: {rampad, pseiler}@umich.edu

Section II, we provide some background on IQCs, a few example IQCs for convex functions, and state the main convergence theorem from [13]. In Section III, the details of our algorithm are presented and characterized as an LPV system. Our main result is stated and proved, and a few implementation details are provided. Section IV discusses the results of our study, in terms of the variation of convergence rate with condition number of the objective function and with different step size intervals. Finally, concluding remarks are provided in Section V, and a few avenues for future work are discussed.

Throughout this paper,  $I_n$  denotes the  $n \times n$  identity matrix and  $0_n$  denotes the  $n \times n$  matrix of zeros. For a vector  $x = [x_1, \dots, x_n] \in \mathbb{R}^n$ ,  $\|x\|$  denotes the Euclidean norm.

## II. PRELIMINARIES

The goal of unconstrained optimization is to solve the following problem:

$$\min_{x \in \mathbb{R}^n} f(x), \quad (1)$$

where  $f : \mathbb{R}^n \rightarrow \mathbb{R}$ . We assume that  $f$  has  $L$ -Lipschitz gradients and is  $m$ -strongly convex, i.e., for all  $x, y \in \mathbb{R}^n$ ,

$$\|\nabla f(y) - \nabla f(x)\| \leq L\|y - x\|, \quad (2)$$

and

$$f(y) \geq f(x) + \nabla f(x)^T(y - x) + \frac{m}{2}\|y - x\|^2, \quad (3)$$

where  $\nabla f(x)$  denotes the gradient of  $f$  at the point  $x$ . The class of functions  $f$  that satisfy (2) and (3) is denoted  $\mathcal{S}(m, L)$ , and every  $f \in \mathcal{S}(m, L)$  has a unique solution  $x^*$  to (1). We assume, without loss of generality, that this optimal point occurs at the origin.

Numerous methods exist to solve (1), and one of the simplest is gradient descent:

$$\xi_{k+1} = \xi_k - \alpha \nabla f(\xi_k), \quad (4)$$

where  $\alpha$  is the step size, or learning rate. This algorithm can be represented as a linear, time-invariant (LTI) system  $G$ :

$$\begin{aligned} \xi_{k+1} &= A_G \xi_k + B_G u_k \\ y_k &= C_G \xi_k + D_G u_k, \end{aligned}$$

with

$$A_G = I_n; B_G = -\alpha I_n; C_G = I_n; D_G = 0_n,$$

and  $y_k = \xi_k$ ,  $u_k = \nabla f(y_k) = \nabla f(\xi_k)$ .

A feedback representation of gradient descent is shown in Fig. 1, depicting the LTI system  $G$  in feedback with a nonlinear component  $\phi = \nabla f$ , where  $u = \phi(y) = \nabla f(y)$ . Such a representation can be analyzed using the framework of Integral Quadratic Constraints (IQCs) [10], [13]. This framework is developed from constraints imposed by a nonlinear component  $\phi$  on the input-output pair  $(u, y)$ .

Fig. 2 illustrates the general representation used for the IQC framework. Here,  $\Psi$  is a stable LTI system that constructs an auxiliary sequence  $z_k$  from  $y_k$  and  $u_k$ , and can be written as:

$$\Psi = \left[ \begin{array}{c|cc} A_\Psi & B_\Psi^y & B_\Psi^u \\ \hline C_\Psi & D_\Psi^y & D_\Psi^u \end{array} \right].$$

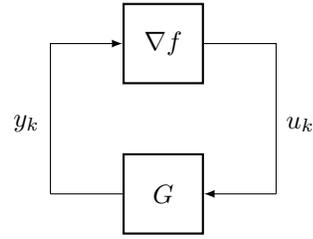


Fig. 1. Feedback representation for Gradient Descent.

$\phi$  is a static, memoryless nonlinear function that we wish to analyze, and is simply equal to  $\nabla f$  in the problem we consider. We now define the two important classes of IQCs for analyzing convergence rates.

*Definition 1:* Consider the sequence  $z_k = \Psi(y_k, u_k)$ , where  $u = \phi(y)$ .  $\phi$  is said to satisfy the pointwise IQC defined by  $(\Psi, M)$  if for all  $k \geq 0$ ,

$$z_k^T M z_k \geq 0, \quad (5)$$

and this is written as  $\phi \in IQC(\Psi, M)$ .

*Definition 2:* Let  $\rho > 0$  be given. Consider the sequence  $z_k = \Psi(y_k, u_k)$ , where  $u = \phi(y)$ .  $\phi$  is said to satisfy the  $\rho$ -hard IQC defined by  $(\Psi, M, \rho)$  if for all  $y \in \ell_{2e}$  and  $k \geq 0$ ,

$$\sum_{k=0}^{\infty} \rho^{-2k} z_k^T M z_k \geq 0, \quad (6)$$

and this is written as  $\phi \in IQC(\Psi, M, \rho)$ .

Note that if  $\phi$  satisfies a pointwise IQC defined by  $(\Psi, M)$ , it also satisfies the  $\rho$ -hard IQC defined by  $(\Psi, M, \rho)$  for all  $\rho < 1$ . If the dimension of  $z$  is  $n_z$ , then the dimension of the system  $\Psi$  is  $n_z \times 2n$ , and  $M$  is a symmetric matrix of dimension  $n_z \times n_z$ . Typically,  $M$  is indefinite.

We now provide three examples of IQCs for convex functions, adapted from [13], [14].

*Lemma 1 (Sector IQC, [13]):* Let  $f \in \mathcal{S}(m, L)$ , and  $\phi = \nabla f$ . Then,  $\nabla f$  satisfies the pointwise IQC defined by:

$$\Psi = \begin{bmatrix} LI_n & -I_n \\ -mI_n & I_n \end{bmatrix}; \quad M = \begin{bmatrix} 0_n & I_n \\ I_n & 0_n \end{bmatrix}. \quad (7)$$

$\Psi$  is simply a static map in this case, and does not include a state or possess dynamics.

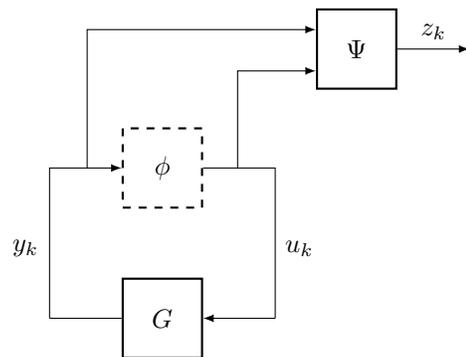


Fig. 2. Representation of the IQC framework.  $\phi$  is a nonlinear component and is simply equal to  $\nabla f$  in the optimization setting.

*Lemma 2 (Weighted Off-by-1 IQC, [13]):* Let  $f \in \mathcal{S}(m, L)$ , and  $\phi = \nabla f$ . Then, for any  $h_1 \in [0, \rho^2]$ ,  $\nabla f$  satisfies the  $\rho$ -hard IQC defined by:

$$\Psi = \begin{bmatrix} 0_n & -LI_n & I_n \\ h_1 I_n & LI_n & -I_n \\ 0_n & -mI_n & I_n \end{bmatrix}; \quad M = \begin{bmatrix} 0_n & I_n \\ I_n & 0_n \end{bmatrix}. \quad (8)$$

*Lemma 3 (Zames-Falb  $\rho$ -IQC, adapted from [14]):* Let  $f \in \mathcal{S}(m, L)$ , and  $\phi = \nabla f$ . Let  $h_1, h_2, \dots, h_k$  be any sequence of real numbers that satisfies:

- (i)  $0 \leq h_j \leq 1$  for all  $j = 1, 2, \dots, k$ .
- (ii)  $\sum_{j=1}^k \rho^{-2j} h_j \leq 1$ .

Then,  $\nabla f$  satisfies the  $\rho$ -hard IQC defined by:

$$\Psi = \begin{bmatrix} 0_n & 0_n & \dots & 0_n & -LI_n & I_n \\ I_n & 0_n & \dots & 0_n & 0_n & 0_n \\ \vdots & \ddots & \ddots & \vdots & \vdots & \vdots \\ 0_n & \dots & I_n & 0_n & 0_n & 0_n \\ \hline h_1 I_n & h_2 I_n & \dots & h_k I_n & LI_n & -I_n \\ 0_n & 0_n & \dots & 0_n & -mI_n & I_n \end{bmatrix}; \quad (9)$$

$$M = \begin{bmatrix} 0_n & I_n \\ I_n & 0_n \end{bmatrix}.$$

The Zames-Falb  $\rho$ -IQC is also known as the ‘‘off-by- $k$ ’’ IQC, where  $k$  is the number of non-zero components in the sequence  $\{h_j\}_{j=1,2,\dots,k}$ . When  $k = 1$ , the off-by- $k$  IQC (9) reduces to the weighted off-by-1 IQC (8), as expected. Note that if  $h_1 = 0$  in (8), or if  $h_j = 0$  for each  $j$  in (9), both the weighted off-by-1 IQC and the Zames-Falb  $\rho$ -IQC reduce to the sector IQC in (7).

We now state the main result from [13], the convergence theorem for the representation in Fig. 2. First, recall that the systems  $G$  and  $\Psi$  have the following forms:

$$G = \left[ \begin{array}{c|c} A_G & B_G \\ \hline C_G & 0_n \end{array} \right] \quad \text{and} \quad \Psi = \left[ \begin{array}{c|cc} A_\Psi & B_\Psi^y & B_\Psi^u \\ \hline C_\Psi & D_\Psi^y & D_\Psi^u \end{array} \right]. \quad (10)$$

Note that in most optimization algorithms, the system  $G$  does not have a feedthrough term. Let  $\xi$  denote the state of  $G$ , and  $\eta$  denote the state of  $\Psi$ . Let  $x \triangleq \begin{bmatrix} \xi \\ \eta \end{bmatrix}^T$  denote the augmented state. Then, on eliminating  $y_k$ , the representation in Fig. 2 has the following dynamics:

$$\begin{aligned} x_{k+1} &= Ax_k + Bu_k, \\ z_k &= Cx_k + Du_k, \end{aligned} \quad (11)$$

where:

$$\begin{aligned} A &= \begin{bmatrix} A_G & 0 \\ B_\Psi^y C_G & A_\Psi \end{bmatrix}; \quad B = \begin{bmatrix} B_G \\ B_\Psi^u \end{bmatrix} \\ C &= \begin{bmatrix} D_\Psi^y C_G & C_\Psi \end{bmatrix}; \quad D = \begin{bmatrix} D_\Psi^u \end{bmatrix} \end{aligned}$$

The main result in [13] can be stated as follows:

*Theorem 1 ([13]):* Suppose  $\phi$  satisfies the  $\rho$ -hard IQC defined by  $(\Psi, M, \rho)$ , and suppose the following LMI is feasible for some  $P \succ 0$  and  $\lambda \geq 0$ :

$$\begin{bmatrix} A^T P A - \rho^2 P & A^T P B \\ B^T P A & B^T P B \end{bmatrix} + \lambda \begin{bmatrix} C & D \end{bmatrix}^T M \begin{bmatrix} C & D \end{bmatrix} \preceq 0, \quad (12)$$

where  $A, B, C$  and  $D$  are defined above. Then, for any  $\xi_0$ , we have:

$$\|\xi_k\| \leq \sqrt{\text{cond}(P)} \rho^k \|\xi_0\|. \quad (13)$$

*Proof:* The proof follows from defining a storage function

$$V(x_k) = x_k^T P x_k,$$

and showing that

$$V(x_k) \leq \rho^{2k} V(x_0),$$

using the system (11) and the LMI (12). Further details are provided in [13]. ■

Using the gradient method and the sector IQC (7), it was shown in [13] that eq. (12) reduces to:

$$\begin{bmatrix} (1 - \rho^2) & -\alpha \\ -\alpha & \alpha^2 \end{bmatrix} + \lambda \begin{bmatrix} -2mL & L + m \\ L + m & -2 \end{bmatrix} \preceq 0, \quad (14)$$

with  $\lambda \geq 0$ . Using Schur complements and simplifying, it was shown that  $\rho = \max\{|1 - \alpha m|, |1 - \alpha L|\}$ . Note that on setting  $\alpha = \frac{1}{L}$ , a popular choice of step size for gradient descent on convex functions, we obtain:

$$\rho = 1 - \frac{m}{L} = 1 - \frac{1}{\kappa}, \quad (15)$$

where  $\kappa = \frac{L}{m}$  is the condition number of the function  $f$ . This rate bound is tighter than the bound proven in [4]. While this bound was also proven in [20],  $f$  was assumed to be twice differentiable. In contrast, the only assumption we make about  $f$  here is that  $\nabla f$  satisfies the sector IQC (7). Further, note that since the sector constraint is pointwise, this bound holds for any any sequence of functions  $f_k$  as long as each  $f_k$  satisfies the sector constraint. In other words,  $f_k$  can vary in any manner – stochastically, adversarially or otherwise, and the bound still holds if each  $\nabla f_k$  satisfies (7).

### III. ALGORITHM

In Section II, we reviewed the core concepts of IQCs and their application to optimization algorithms from [13]. However, the technique proposed in [13] is for the constant step size variants of different optimization algorithms, including gradient descent. In this section, we present the details of a strategy that addresses varying step sizes in gradient descent, which considers the algorithm to be a linear parameter-varying (LPV) system  $G_\alpha$ .

One of the most common methods to incorporate varying step sizes in optimization algorithms is using a line search [2]. The Armijo line search [7] and the Wolfe line search [8] are two popular examples of this technique. In our setup, we assume that a line search has been carried out, and produces a step size  $\alpha$  at each time step  $k$ , that satisfies the following condition:

$$\alpha = \frac{1}{cL} \leq \alpha_k \leq \frac{c}{L} = \bar{\alpha}, \quad (16)$$

where  $c > 0$  is some constant. In other words, the step size  $\alpha$  is not constant in time, but takes a value in this interval at each time step  $k$ . The rationale behind this approach is that a gridding approach can be used between these bounds to analyze convergence rates. While conditions on the step

size after carrying out a Wolfe line search can be derived, the resulting bounds can be too conservative to be useful, particularly for high condition numbers.

Let  $\mathcal{A} \triangleq [\underline{\alpha}, \bar{\alpha}]$ . Consider gradient descent with a varying step size:

$$\xi_{k+1} = \xi_k - \alpha_k \nabla f(\xi_k). \quad (17)$$

This algorithm can now be represented as an LPV system  $G_\alpha$ , where

$$A_G = I_n; B_G(\alpha) = -\alpha I_n; C_G = I_n; D_G = 0_n,$$

where  $B_G$  depends on the parameter  $\alpha \in \mathcal{A}$ . As before, we can construct Fig. 2 to represent the IQC framework, and construct dynamics similar to (11):

$$\begin{aligned} x_{k+1} &= Ax_k + B(\alpha)u_k, \\ z_k &= Cx_k + Du_k, \end{aligned} \quad (18)$$

where:

$$\begin{aligned} A &= \begin{bmatrix} A_G & 0 \\ B_\Psi^y C_G & A_\Psi \end{bmatrix}; \quad B(\alpha) = \begin{bmatrix} B_G(\alpha) \\ B_\Psi^u \end{bmatrix} \\ C &= \begin{bmatrix} D_\Psi^y C_G & C_\Psi \end{bmatrix}; \quad D = \begin{bmatrix} D_\Psi^u \end{bmatrix} \end{aligned}$$

Note that the augmented input matrix  $B$  is now parameter dependent, as  $B_G$  is parameter dependent. The procedure of constructing the augmented system is unchanged.

We can now restate Theorem 1 for the LPV system (18) as follows:

*Theorem 2:* Suppose  $\phi$  satisfies the  $\rho$ -hard IQC defined by  $(\Psi, M, \rho)$ , and suppose there exists  $P \succ 0$  and  $\lambda \geq 0$  such that:

$$\begin{bmatrix} A^T P A - \rho^2 P & A^T P B(\alpha) \\ B^T(\alpha) P A & B^T(\alpha) P B(\alpha) \end{bmatrix} + \lambda \begin{bmatrix} C & D \end{bmatrix}^T M \begin{bmatrix} C & D \end{bmatrix} \preceq 0 \quad (19)$$

is feasible for all  $\alpha \in \mathcal{A}$ . Then, for any  $\xi_0$ , we have:

$$\|\xi_k\| \leq \sqrt{\text{cond}(P)} \rho^k \|\xi_0\|.$$

*Proof:* Define a storage function

$$V(x_k) \triangleq x_k^T P x_k. \quad (20)$$

Multiply the LMI (19) on the left and right by  $[x_k^T, u_k^T]$  and its transpose, respectively. Then, (19) simplifies to:

$$V(x_{k+1}) - \rho^2 V(x_k) + \lambda z_k^T M z_k \leq 0. \quad (21)$$

Multiplying this by  $\rho^{-2k}$  for each  $k$ , and summing the resulting equations over  $k$ , notice that the first two terms telescope and the third term is non-negative:

$$\sum_{j=0}^{k-1} \rho^{-2j} z_j^T M z_j \geq 0,$$

as  $\phi$  satisfies the  $\rho$ -hard IQC defined by  $(\Psi, M, \rho)$ . Then, eq. (21) simplifies to:

$$V(x_k) \leq \rho^{2k} V(x_0), \quad (22)$$

and hence, from the definition (20), we have  $\|x_k\| \leq \sqrt{\text{cond}(P)} \rho^k \|x_0\|$ . As  $x_k = \begin{bmatrix} \xi_k \\ \eta_k \end{bmatrix}^T$ , we finally have:

$$\|\xi_k\| \leq \sqrt{\text{cond}(P)} \rho^k \|\xi_0\|. \quad (23)$$

Observe that the LMI (19) is an infinite family of constraints, as it must be satisfied for every  $\alpha \in \mathcal{A}$ . For implementation purposes, this is addressed by approximating  $\mathcal{A}$  by a finite number of grid points. Thus, if  $N_{\text{grid}}$  points are used for gridding in  $\mathcal{A}$ , (19) is a family of  $N_{\text{grid}}$  constraints. As with the LMI (12), the best upper bound on the convergence rate  $\rho$  is obtained by a bisection search, solving the LMI (19) at each fixed  $\rho$ .

Further, note that the proof of Theorem 2 is very similar to that of Theorem 1. This follows from the fact that the matrix  $P$  used in (19) is constant, and hence the storage function  $V(x_k)$  is independent of the parameter  $\alpha$ . We can reformulate the LMI (12) with a parameter dependent matrix  $P(\alpha)$ , and enforce the constraint  $P(\alpha) \succeq 0$  for all  $\alpha \in \mathcal{A}$ . This addresses bounded rates of variation of  $\alpha$ , as discussed in [21]. However, the decision variable  $P$  is now parameter dependent, and must be restricted to a finite-dimensional subspace. A common approach is to restrict  $P(\alpha)$  as follows:

$$P(\alpha) = \sum_{i=1}^{N_b} h_i(\alpha) P_i,$$

where the  $h_i(\alpha)$  act as basis functions, and  $P_i$  are decision variables constrained to be positive semi-definite. This approach is currently under investigation for the considered problem.

#### IV. RESULTS

In this section, we present the results of our study on the convergence rate of gradient descent with varying step sizes. First, we plot the convergence rate obtained by solving the SDP (19), as a function of the condition number  $\kappa = \frac{L}{m}$ . We use  $N_{\text{grid}} = 10$  points for approximating the set  $\mathcal{A} = [\frac{1}{cL}, \frac{c}{L}]$ , and use a bisection search on  $\rho$  to solve (19).  $\mathcal{A}$  depends on the constant  $c$ , and we choose three values of  $c$  to test:  $c = 1$ ,  $c = 1.4$  and  $c = 1.8$ . Note that  $c = 1$  implies that  $\alpha_k = \alpha = 1/L$ , which is a popular constant step size variant of gradient descent. We expect the algorithm to recover the theoretical rate bound from (15) in this case. We test the sector IQC (7) in all experiments. While our results are generated for  $m = 1$ , these results are unchanged for other values of  $m$ . This is because for any  $f \in \mathcal{S}(m, L)$ , we can use a scaling argument to define a function  $g \in \mathcal{S}(1, \kappa)$  such that  $f(x) = mg(x)$ , with  $\nabla f(x) = m \nabla g(x)$ . Note that the IQC for  $\nabla g(x)$  depends only on the condition number  $\kappa$ . An algorithm of the form (17) to minimize  $f(x)$  is equivalent to an algorithm of the form:

$$\xi_{k+1} = \xi_k - \beta_k \nabla g(\xi_k)$$

that minimizes  $g(x)$ , where  $\frac{1}{c\kappa} \leq \beta_k \leq \frac{c}{\kappa}$ . As we can see, the entire procedure has been recast into one that depends only on  $\kappa$ .

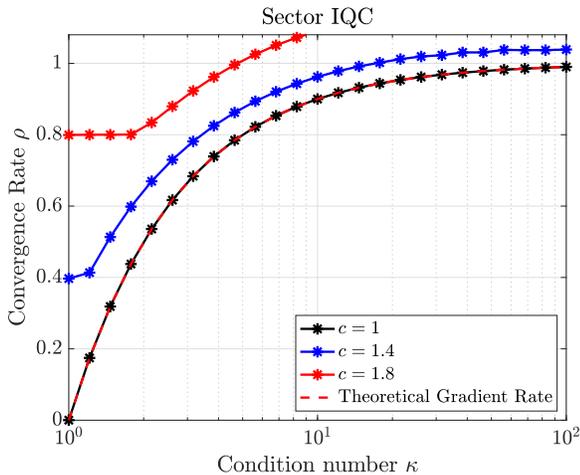


Fig. 3. Variation of convergence rate with condition number for gradient descent with a varying step size, using the sector IQC. The dashed red curve represents the theoretical rate bound in (15), and coincides with  $c = 1$ .

Fig. 3 shows the results for variation of convergence rate  $\rho$  with condition number  $\kappa$ , for different values of the constant  $c$  while using the sector IQC. As expected, when  $c = 1$ , the algorithm recovers the gradient rate in (15), and  $\rho \rightarrow 1$  as  $\kappa \rightarrow \infty$ . This is shown by the black curve coinciding with the dashed red curve that represents the gradient rate. For larger values of  $c$ , the convergence rate is generally worse. This is because the gridding approach to solve (19) has to cover a larger set  $\mathcal{A}$  when  $c$  increases, and this can introduce some conservatism in the rate bound. For  $c = 1.4$ , the algorithm converges until  $\kappa \approx 18$ , and for  $c = 1.8$ , the algorithm converges until  $\kappa \approx 5$ .

A few additional points are worth noting. Convergence is obtained only when  $c \leq 2$ , even if  $\kappa = 1$ . In other words, there is no value of  $\rho < 1$  for which the SDP (19) is feasible at each grid point in  $\mathcal{A}$ , when  $c > 2$ . As  $c$  increases, the condition number  $\kappa^*$  for which  $\rho < 1$  decreases, and the convergence rates for a given condition number worsen. We also note that the convergence rates do not improve when using dynamic IQCs such as the weighted off-by-1 or off-by- $k$  IQC. This is partly because the rate bound in (15) was obtained using the sector IQC, and dynamic IQCs do not improve that rate. Further investigation is required to understand this behavior for other values of  $c$ .

Finally, note the saturation in convergence rate as  $\kappa \rightarrow 1$ , for a given  $c > 1$ . This is most noticeable when  $c = 1.8$  in Fig. 3. As the condition number decreases, the convergence rate does not seem to decrease beyond a threshold. This is explained as follows. Note that for a particular value of  $\alpha$ , eq. (19) is a single LMI and not a family of LMIs, and is hence identical to (12). As discussed earlier, the solution to this is given by  $\rho = \max\{|1 - \alpha m|, |1 - \alpha L|\}$ . When  $\kappa \rightarrow 1$ , this simplifies to  $\rho = |1 - \alpha L|$  as  $L \rightarrow m$ . Now, using (16), we have  $\frac{1}{c} \leq \alpha L \leq c$  for a particular value of  $\alpha \in \mathcal{A}$ . Finally, as  $c \in [1, 2]$ ,  $1 - \frac{1}{c} \leq \rho \leq |1 - c|$ . Thus, the upper bound on the convergence rate  $\rho$  saturates at around  $|1 - c|$ , which is seen in Fig. 3.

Fig. 4 illustrates the variation of convergence rate with  $c$ ,

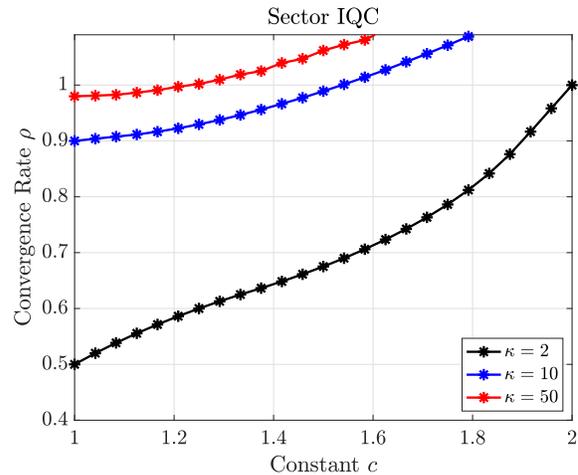


Fig. 4. Variation of convergence rate with constant  $c$  for gradient descent with a varying step size, using the sector IQC. The convergence rate worsens with both increasing  $c$  and increasing  $\kappa$ .

for different condition numbers. When  $c = 1$ , as before, we see that  $\rho = 1 - \frac{1}{\kappa}$ . For increasing values of  $c$ , the convergence rate worsens for a given  $\kappa$ . As was seen in Fig. 3, when  $\kappa$  increases, the convergence rate worsens for a given value of  $c$ . When  $\kappa = 2$ , the algorithm converges for all values of  $c \in [1, 2]$ , but diverges at  $c \approx 1.25$  and  $c \approx 1.55$  for  $\kappa = 10$  and  $\kappa = 50$  respectively.

## V. CONCLUDING REMARKS

In this paper, we analyzed the convergence rate of gradient descent with a varying step size obtained based on a line search, applied to strongly convex functions. The algorithm is now an LPV system, and we used a gridding approach on the set of possible step sizes to certify convergence rates. Building on previous results by Lessard et al. [13], we used the IQC framework to construct an SDP that numerically obtains upper bounds on the convergence rate of this algorithm. Our results indicate that the algorithm converges in a restricted set around  $\alpha = 1/L$ , and recovers the corresponding gradient rate when the set reduces to the point  $1/L$ .

Further work is underway on using a parameter-dependent storage function  $V(x_k, \alpha)$  to prove convergence in Theorem 2, which will address bounded rates of variation of  $\alpha$ . Another avenue under investigation is incorporating  $\alpha$  into the nonlinear component  $\phi$  in Fig. 2. This would result in the use of two IQCs, one for  $\nabla f$  and one for  $\alpha$ , and the algorithm would reduce to an LTI system. Throughout this paper, we have used the step size choice  $\alpha = \frac{1}{L}$  as a benchmark and to construct the set  $\mathcal{A}$ . However, the optimal step size for gradient descent on strongly convex functions is  $\alpha^* = \frac{2}{L+m}$ , as discussed in [13]. We intend to investigate the behavior of our algorithm when the set  $\mathcal{A}$  is constructed around this optimal step size. Other avenues include investigating the behavior of dynamic IQCs for the gradient method for different values of  $c$ , and explaining the negligible improvement in performance when using them compared to the sector IQC. The behavior of this gridding approach can also be investigated when the

set  $\mathcal{A}$  is asymmetric about the central point. For instance, using  $\alpha = 1/L$ , we can construct  $\mathcal{A} = \left[ \frac{1}{c_1 L}, \frac{c_2}{L} \right]$  where  $c_1 \neq c_2$ , and analyze the algorithm.

#### REFERENCES

- [1] S. Boyd and L. Vandenberghe, *Convex Optimization*. Cambridge, United Kingdom: Cambridge University Press, 2004.
- [2] J. Nocedal and S. J. Wright, *Numerical Optimization*, 2nd ed. New York, NY, USA: Springer Science + Business Media, 2006.
- [3] B. T. Polyak, "Some methods of speeding up the convergence of iteration methods," *USSR Computational Mathematics and Mathematical Physics*, vol. 4, no. 5, pp. 1–17, 1964.
- [4] Y. Nesterov, *Introductory Lectures on Convex Optimization*. New York, NY, USA: Springer Science + Business Media, 2004.
- [5] J. E. Dennis and J. J. Moré, "Quasi-newton methods, motivation and theory," *SIAM Review*, vol. 19, no. 1, pp. 46–89, 1977.
- [6] R. Fletcher, *Practical Methods of Optimization*. New York, NY, USA: John Wiley and Sons, 1987.
- [7] L. Armijo, "Minimization of functions having Lipschitz continuous first partial derivatives," *Pacific Journal of Mathematics*, vol. 16, no. 1, pp. 1–3, Jan. 1966.
- [8] P. Wolfe, "Convergence conditions for ascent methods," *SIAM Review*, vol. 11, no. 2, pp. 226–235, 1969.
- [9] V. A. Yakubovich, "Nonconvex optimization problem: The infinite-horizon linear-quadratic control problem with quadratic constraints," *Systems and Control Letters*, vol. 19, no. 1, pp. 13–22, July 1992.
- [10] A. Megretski and A. Rantzer, "System analysis via integral quadratic constraints," *IEEE Transactions on Automatic Control*, vol. 42, no. 6, pp. 819–830, June 1997.
- [11] A. Rantzer, "On the Kalman—Yakubovich—Popov lemma," *Systems and Control Letters*, vol. 28, no. 1, pp. 7–10, June 1996.
- [12] P. Seiler, "Stability analysis with dissipation inequalities and integral quadratic constraints," *IEEE Transactions on Automatic Control*, vol. 60, no. 6, pp. 1704–1709, June 2015.
- [13] L. Lessard, B. Recht, and A. Packard, "Analysis and design of optimization algorithms via integral quadratic constraints," *SIAM Journal on Optimization*, vol. 26, no. 1, pp. 57–95, 2016.
- [14] R. Boczar, L. Lessard, and B. Recht, "Exponential convergence bounds using integral quadratic constraints," in *2015 IEEE 54th Annual Conference on Decision and Control*, Osaka, Japan, Dec. 2015, pp. 7516–7521.
- [15] A. Badithela and P. Seiler, "Analysis of the heavy-ball algorithm using integral quadratic constraints," in *2019 American Control Conference (ACC)*, Philadelphia, PA, USA, July 2019, pp. 4081–4085.
- [16] H. Mohammadi, M. Razaviyayn, and M. R. Jovanović, "Robustness of accelerated first-order algorithms for strongly convex optimization problems," *IEEE Transactions on Automatic Control*, vol. 66, no. 6, pp. 2480–2495, June 2021.
- [17] H. Mohammadi, S. Samuelson, and M. R. Jovanović, "Transient growth of accelerated optimization algorithms," *IEEE Transactions on Automatic Control*, pp. 1–8, 2022, early access.
- [18] H. Pfifer and P. Seiler, "Robustness analysis of linear parameter varying systems using integral quadratic constraints," *International Journal of Robust and Nonlinear Control*, vol. 25, no. 15, pp. 2843–2864, Oct. 2015.
- [19] —, "Integral quadratic constraints for delayed nonlinear and parameter-varying systems," *Automatica*, vol. 56, pp. 36–43, June 2015.
- [20] B. T. Polyak, *Introduction to Optimization*. New York, NY, USA: Optimization Software, 1987.
- [21] F. Wu, "Control of linear parameter varying systems," Ph.D. dissertation, University of California, Berkeley, 1995.