

# On the Salient Limitations of the Methods of Assembly Theory and their Classification of Molecular Biosignatures

Abicumaran Uthamacumaran<sup>†1,2</sup>, Felipe S. Abrahão<sup>‡3,4,8</sup>,  
Narsis A. Kiani<sup>§7,8,9</sup>, and Hector Zenil<sup>\*5,6,7,8</sup>

<sup>1</sup> Concordia University, Department of Physics, Montreal, Quebec, Canada.

<sup>2</sup> McGill University, McGill Genome Center, Majewski Lab, Canada.

<sup>3</sup> Centre for Logic, Epistemology and the History of Science, University of Campinas, Brazil.

<sup>4</sup> Data Extreme Lab, National Laboratory for Scientific Computing, Brazil.

<sup>5</sup> Machine Learning Group, Department of Chemical Engineering and Biotechnology, University of Cambridge, U.K.

<sup>6</sup> Kellogg College, The University of Oxford, Oxford, U.K.

<sup>7</sup> Algorithmic Dynamics Lab, Center for Molecular Medicine, Karolinska Institutet, Sweden.

<sup>8</sup> Algorithmic Nature Group, LABORES for the Natural and Digital Sciences, Paris, France.

<sup>9</sup> Department of Oncology-Pathology, Center for Molecular Medicine, Karolinska Institutet, Sweden

## Abstract

A recently introduced approach termed “Assembly Theory”, featuring a computable index based on basic principles of statistical compression has been claimed to be a novel and superior approach to classifying and distinguishing living from non-living systems and the complexity of molecular biosignatures. Here, we demonstrate that the assembly pathway method underlying this index is a suboptimal restricted version of Huffman’s encoding (Shannon-Fano type), widely adopted in computer science in the 1950s, that is comparable (or inferior) to other popular statistical and computable compression schemes. We show how simple modular instructions can mislead the assembly index, leading to failure to capture subtleties beyond trivial statistical properties that are not realistic in biological systems. We present cases whose low complexities can arbitrarily diverge from the random-like appearance to which the assembly pathway method would assign arbitrarily high statistical significance, and show that it fails in simple cases (synthetic or natural). Our theoretical and empirical results imply that the assembly index, whose computable nature we show is not an advantage, does not offer any substantial advantage over existing concepts and methods computable or (semi) uncomputable. Alternatives are discussed.

---

\*Corresponding author. Email: hector.zenil@cs.ox.ac.uk

# 1 Introduction

The distinction between life and non-life has been a matter that has long fascinated both scientists and philosophers. This question has been germane to the area of complex systems science since its inception, with the concept of complexity having long been hypothesised as being deeply connected to the life vs. non-life distinction [2, 18, 23], as also to matters such as emergence and self-organisation, which have exercised scientists concurrently [19]. First to take up this nexus of issues was Erwin Schrödinger in his book “What is Life?”, exploring the physical aspect of life and cells, followed by Claude Shannon with his concept of entropy, driven by the pressing challenge of identifying the distinctiveness of certain configurations of atoms or molecules assembled non-randomly, and quantifying the many ways in which swapping these molecules could explain a whole system. Later would come the concepts of algorithmic information, algorithmic randomness and algorithmic probability that formalised what constituted a discretely-describable random object at the limit—a problem which had challenged mathematicians for decades or centuries—by abstracting it away from statistics and recasting it in terms of fundamental mathematical first principles. These foundations are the underpinnings of both computable and uncomputable compression methods, and they are ultimately what explain and justify their application as a generalisation of Shannon’s information theory which is subsumed into Algorithmic Information Theory.

Building upon algorithmic information, Charles Bennett put forward a measure of sophistication to capture complex systems, in particular life and the byproducts of living systems. Bennett’s concept of logical depth [4] focuses on the lengths of the shortest computer programs that best compress data. Characterisations in terms of thermodynamics [14, 24] have further enriched these measures beyond statistical pattern recognition and number of steps, circling back to some original ideas related to what are believed to be the principles of living systems. One characteristic of measures based on symbolic computation, that goes beyond statistical pattern matching, is that these measures are either semi- or uncomputable (we will call them ‘stronger’ as they are a generalisation of computable statistical measures).

These stronger measures allow estimations from weaker computable versions that can easily be formulated from their uncomputable counterparts, one example being resource-bounded algorithmic complexity [7, 21, 31]. Some of these are represented by popular compression schemes such as Lempel-Ziv-Welch (LZW) and cognates, with simple coding schemes such as run-length encoding (RLE) and Huffmann codings [10] underlying many of these.

A major problem in science is that of reproducibility and lack of proper

control experiments. In proposing a new complexity measure, the central claim advanced in [17] is that molecules with high molecular assembly index (MA) values “are very unlikely to form abiotically, and the probability of abiotic formation goes down as MA increases”. In other words, “high MA molecules cannot form in detectable abundance through random and unconstrained processes, implying that the existence of high MA molecules depends on additional constraints imposed on the process” [17].

At the core of Assembly Theory is a elementary compression scheme. Compression has been widely applied in the context of living systems including a landmark paper published in 2005 that was not only able to characterise DNA as a biosignature but was able to reconstruct the main branches of an evolutionary phylogenetic tree from the compressibility ratio of mammalian mtDNA sequences [11]. Just as with Assembly Theory and their index, the work in [11] was weak on basic control experiments given that in the field of genetics it is widely known that similar species will have similar genomic GC content and therefore a simple Shannon entropy approach on a uniform distribution of G and C nucleotides, effectively simply counting GC content [12], would have yielded the tree. Nevertheless, the work in [11] demonstrates that compression schemes have been at the centre of the discussion of and applications to living organisms and their information signatures for decades.

Note that, depending on variations in application and context, the same measure behind Assembly Theory has had several names or can be called in different ways from pathway assembly (PA), object assembly (OA) or molecular assembly index (MA) as in [15, 16]. We choose to employ the latter nomenclature in the present article, but our results and conclusion hold across all and the same index behind Assembly Theory.

The underlying intuition is that such an assembly index (by virtue of minimising the length of the path necessary for an extrinsic agent to assemble the object) would afford “a way to rank the relative complexity of objects made up of the same building units on the basis of the pathway, exploiting the combinatorial nature of these combinations” [15].

In order to support their central claim, Marshall et al. [17] state that “MA tracks the specificity of a path through the combinatorically vast chemical space” and that, as presented in [16], it “leads to a measure of structural complexity that accounts for the structure of the object and how it could have been constructed, which is in all cases computable and unambiguous”. The authors propose that molecules with high MA detected in contexts or samples generated by random processes in which there are minimal (or no) biases in the formation of the objects, display a smaller frequency of occurrence in comparison to the frequency of occurrence of molecules in alternative configurations, where extrinsic agents or a set of biases (such as those brought

into play by evolutionary processes) play a significant role.

However, we found that what the authors have called Assembly Theory [17] is a measure that mirrors the working of previous coding algorithms, without attribution.

Furthermore, our results show that the claim that this measure may help not only to distinguish life from non-life but also to identify non-terrestrial life, is a major overstatement. At best what the Assembly Theory amounts to is a re-purposing of existing elementary algorithms in computer science. But some of these algorithms themselves have been advanced in the context of identifying the complexity of living systems [4, 25], hence even the claim to novelty of application is in question.

While the calculation of MA may be prone to false negatives—due to partial fragmentation in energy collision analysis and the restriction to counting only valence rules in molecule synthesis (ignoring other chemical conditions)—this does not pose a challenge to the central claim raised in [17]. Instead, MA aims at avoiding underestimation of the amount of molecules that result from random or abiotic processes. Thus in the present article, instead of studying both positives and false negatives, we only focus on investigating the existence of false positives, which directly tackles the central claim. The limitations and drawbacks here identified extend to all applications of these methods developed in [15–17, 20].

A first type of life-like formal idea using computation was proposed by von Neumann, featuring a universal replicator, where a function (e.g. a cellular automaton) gets as input the instruction blueprint for its own construction. This type of computation is deeply related to universal computation, which in turn implies uncomputability. What Turing and others proved was that for an arbitrary blueprint (e.g. genetic instructions for life) to be reproduced, an uncomputable universal mechanism would be required. The concept of modularity of structure and recursive reconstruction from elementary building blocks has been also a feature long associated with life. In [9], we proved that modularity can be built up from computation alone, and can therefore be characterised in a recursive fashion. However, the complexity of living systems also immediately suggests that simple measures such as Huffman schemes or Assembly Theory are unable to characterise the complexity of life. Modularity also goes hand in hand with generative functions, in particular of the recursive type. In other words, modularity, computability, and fundamental features of life have been richly intertwined and explored in tandem in the last century.

## 2 Results

### 2.1 MA classification exhibit lower performance than existing algorithms

Here we first compare the performance of ‘Molecular Assembly’ (MA) with other measures under the four mass spectroscopy (MS) categories. The T-test and Kolmogorov-Smirnov test have been used for this purpose. Unlike the t-test statistic, the Kolmogorov-Smirnov test provides a non-parametric goodness of fit test assuming the data does not come from a Gaussian (Normal) distribution.

For the unpaired (two-samples/independent measures) t-test with Welch’s correction, at a degree of freedom (df) of 100, a critical t-value of 3.390 is expected for a two-tail P-value of 0.001 (i.e., 99.9% confidence). The t-value closest to 3.39 was found for the 1D-BDM and 2D-BDM [30, 31], with a t-value of 6.410 and 6.561, respectively ( $P < 0.0001$ ), both within the critical region of statistical significance. All complexity measures obtained a non-parametric Kolmogorov-Smirnov test value of  $P < 0.0001$ ; the Kolmogorov-Smirnov distance D was smallest for the 1D-BDM and 2D-BDM, with both returning a value of 0.707. MA and Shannon entropy had a similar statistical significance in classifying the mass spectroscopy (MS) data into their four distinct categories, with t-values of 15.96 and 20.96, respectively at  $df = 100$ . The Kolmogorov-Smirnov distances were 0.828 and 1, respectively. Lastly, the LZW compression was found to be non-significant in the classification ( $P = 0.8466$ ).

Through these statistical assessments, the 1D-BDM and 2D-BDM at a binary conversion threshold of 3 were found to be robust discriminants of molecular complexity in classifying living vs. non-living molecules. The result is shown in Fig. 2.

Both 1D-RLE and 1D-Huffman coding show a strong statistical correlation and linear correspondence with MA (Fig. 1). The one-dimensional RLE and Huffman code compression lengths showed the strongest Pearson correlations with MA at R-values of 0.9001 and 0.896, respectively. The two-dimensional distance matrices of the mass spectroscopy (MS) data were binary converted at a threshold of 3 and subjected to the compression algorithms. The 2D-RLE and 2D-Huffman code compression lengths obtained Spearman correlation values of 0.7967 and 0.7537 respectively with MA (the Pearson scores were comparable). The gzip compression showed a weaker correlation with MA, at a Pearson score of 0.4761 and a Spearman correlation of 0.804.

A strong Pearson correlation with an R-value of 0.8823 was observed

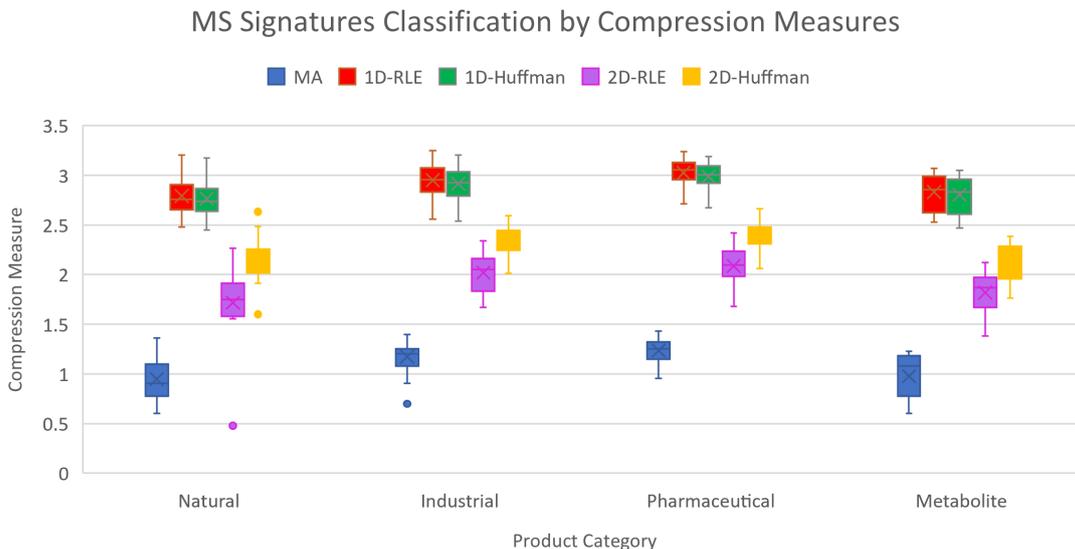


Figure 1: Correlation plot between ‘Molecular Assembly’ (MA) and Compression Algorithms. The strongest positive correlation was identified between MA and 1D-RLE compression ( $R= 0.9001$ ), which is one of the most basic compression schemes and among the most similar to the original definition of MA. Other compression algorithms, including the Huffman coding ( $R = 0.896$ ), also show a strong positive correlation with MA. As seen, the compression values of both 1D-RLE and 1D-Huffman coding show overlapping and nearly identical medians (horizontal line at center) and ranges on the whisker plot. Our analysis reveals the similarity in behaviour of MA and popular statistical lossless compression algorithms that are based on the same counting principles.

between 1D-BDM and MA for the 99 molecules in the MS data set (Fig. 2). The LZW compression shared a close Pearson correlation score of 0.8738 with MA. All correlation measures obtained a statistically significant one-tailed p-value ( $P < 0.0001$ ).

These findings suggest that the methods behind the so-called ‘Assembly Theory,’ on which ‘Molecular Assembly’ (MA) is based, can easily be replaced by one of the first and simplest compression schemes, 1D-RLE, in the classification of mass spectroscopy (MS) complexity. The so-called Molecular Assembly indices did not show any significant advantage when compared with other measures that were introduced several decades ago when computer compression algorithms were designed based upon the same modular statistical principle of repetition and modular counting re-introduced by MA. Nor were the MA indices able to show any particular advantage over in-

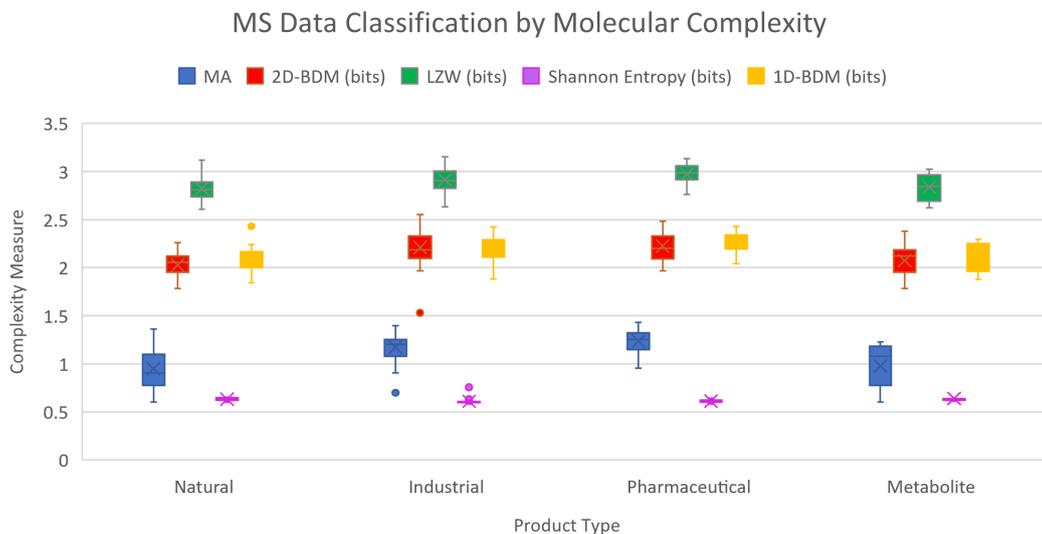


Figure 2: Classification of Complexity measures by mass spectroscopy (MS) profiles (log-scale). Both 1D and 2D BDM better distinguish living from non-living molecules in the MS dataset than MA, as shown by a clearer variability in the complexity measures between the molecular subgroups. MA does not display any particular advantage when compared against proper control experiments and performs similarly to the simplest of the statistical algorithms.

trices that are non-computable but capable of being approximated from above and based on resource-bounded variants of algorithmic complexity (such as BDM [30, 31]) which the authors of MA disqualify a priori without any evidence or control experiments by virtue of their semi-computable nature.

## 2.2 Comparison of correlation with molecular weight

The comparison of measures across the four categories of MS molecules is shown in Table 1 with respect to increasing the molecular weight (MW) to better visualise the trends across living and non-living bio-signatures. The Pearson correlation test was assessed on the various complexity and compression measures in relation to molecular weight (MW) with an alpha value of 0.01 (99 percent confidence interval) for which the one-tailed p-values were significant ( $P < 0.0001$ ) for all five measures compared in Table 1. The one-tail P-value tests were performed instead of the two-tail tests since our (previous) analyses inferred a unidirectional linear relationship in the trend patterns. As shown in Table 1, 1D-BDM had the highest Pearson correlation

Statistics	MA	LZW	1D-BDM
Pearson Correlation (R)	0.897	0.902	0.905
99% confidence interval	0.832 - 0.938	0.84 - 0.941	0.845 - 0.943
R squared	0.805	0.815	0.820

Table 1: Table of Pearson Correlation values of MA and other indices across the four categories of mass spectroscopy (MS) signatures. LZW and BDM are given in bits, meaning the length of the compressed description of the object, including the number of steps. Both LZW and BDM generate better statistics than MA without any adaptations or modifications.

with MW (R=0.9058), followed by LZW compression (R=0.9028). MA has a correlation score of 0.8055.

The correlation analysis suggests a stronger positive linear relationship between MW and measures from algorithmic information dynamics, such as BDM and LZW, in contrast to that between MW and MA. As such, the complexity measures we employ are better predictors of increasing molecular complexity in the MS signatures classification.

### 2.3 Comparison of computational optimality

The assembly method from the ‘Assembly Theory’ proposed by the original authors consists roughly in finding a pattern-matching generative grammar behind a string by traversing and counting the number of steps needed to generate its modular redundancies, decomposing it into the statistically smallest collection of components that reproduce it without loss of information by finding repetitions that reproduce the object from its compressed form.

For purposes of illustration, let us take the example of ABRACADABRA. For molecular assembly (MA) to succeed it needs to have a discriminator and classifier able to characterise each repetition of  $A$  and  $N$  as the same, where  $N$  is another character or some sub-unit of the structure with the same frequency as  $A$  (e.g., a two-letter unit containing  $A$ , such as  $AB$  or  $RA$ ). In the ABRACADABRA example, MA deconstructs the sequence into unique blocks of five possible characters by adding a new character in subsequent steps, such that the minimal number of steps, considering only the frequency of the largest repeated block size (ABRA), is obtained. The repeated binary or tertiary recursive structures (i.e., blocks of 2 or 3 letters) within the sequence, such as AB, RA, or BRA, are ignored in MA’s minimal path search. The proposed MA falls into the category of entropy encoding measures and is indistinguishable from an implementation motivated by algorithmic complex-

ity using methods such as LZW and cognates, except for perhaps meaningless variations. In Section 2.3 we have shown the marked similarity between Huffman coding and MA results. We found that the similarity depended on the fact that compression algorithms create unique blocks in generating the structure/system. However the Huffman coding provides the most optimal way of encoding—by finding the shortest number of steps (assembly pathways)—stochastic processes, such as those that are independent and identically distributed (i.i.d.). The algorithm’s purpose is compression efficiency, and as such it assigns shorter codes to more frequent blocks, hence affecting step economy (optimisation of the tree length). Thus, together with other popular statistical approaches, it has been universally used for data compression and estimations based on the principles of algorithmic complexity [13] and logical depth [21, 25]. Figure 3 shows an illustration of the standard operation

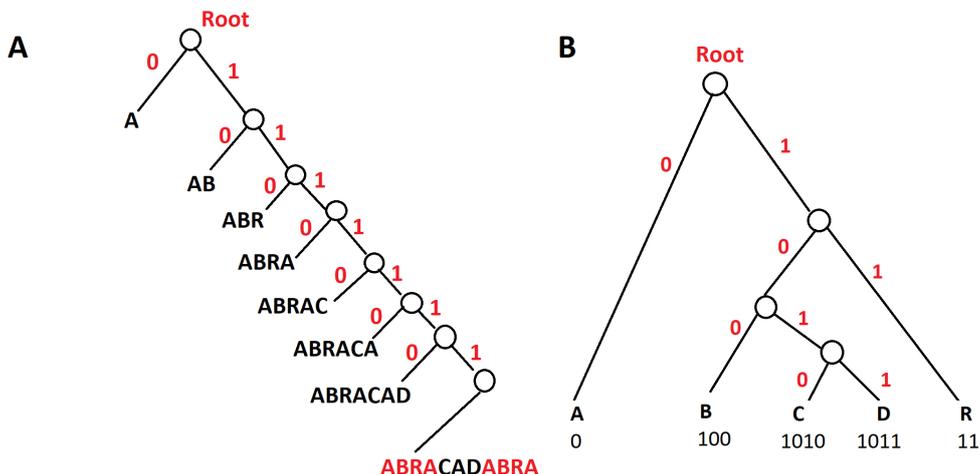


Figure 3: ABRACADABRA tree diagrams for Assembly theory (A) and dynamic Huffman coding (B), both computable measures trivial to calculate. Huffman’s is an optimal compression method able to characterise every statistical redundancy, including modularity. The (molecular) assembly index (to the left) is a suboptimal approximation of Huffman’s coding (to the right) or a Shannon–Fano algorithm as introduced in the 1950s. In this example, Huffman’s collapses the compression tree into a 4-level tree, while MA’s is a 7-level tree. In both cases, the resulting tree characterises the same word and is able to reconstruct it in full, without any loss of information, by exploiting redundancy and nestedness.

of Huffman coding in a typical example, compared to the principle advanced by the Assembly Theory authors [17]. Proposed in the 50s, the Huffman cod-

ing exploits block redundancy by parsing objects, counting block recurrence in a nested fashion [10].

As shown in Figure 3 featuring the ABRACADABRA example, to the left (1A), we see the reconstruction of the sequence from a root node by the method proposed by Assembly Theory in general, and in particular by this molecular application, when represented as a tree search diagram following binary branching rules. A bifurcation to the right denoted by 1 indicates a new assembly step, whereas a bifurcation to the left indicated by 0 from a node represents a fixed structure (block). The MA algorithm requires 7 assembly steps to derive the sequence of interest. However, as shown to the left in Fig 1B, the Huffman coding tree optimises the sequence reconstruction by principles of recursivity in its search compression, as evidenced by the nested bifurcations. Given that the Huffman tree is more compact (fewer assembly steps) than MA, we demonstrate that the Huffman tree is a more robust compression algorithm than MA when it comes to characterising the molecular complexity of complex structures such as biomolecular signatures.

The superior performance of the Huffman coding can be partially explained via its algorithmic framework. Huffman coding is a binary tree search algorithm. The binary structure allows bifurcations in the assembly process of the molecular structure, and bifurcations are precursors to tree-like recursive structures. MA lacks bifurcations in the assembly search and instead considers a combinatorial search space with a linear sequence progression. Hence, it shirks the quantification of emergent hierarchical or nested structures (i.e., modularity optimisation) and intermediate structures within the sequence decomposition/compression. In contrast to MA, the recursiveness observed in complex molecules and biosignatures is detected by Huffman coding, and it does this in the most optimal way by providing the shortest tree algorithm (assembly pathways) needed.

We suggest that the reason behind this is that modularity, ‘nestedness’, and recursion are inherent to the binary tree search framework of the Huffman coding algorithm. Thus, in our analyses MA was found to produce an expanded version of the Huffman coding tree, searching for the minimal path length (steps) to obtain a structure or sequence while considering only the frequency of the largest block size (e.g. ABRA) in the optimisation of the search. Even if modified, MA would only perform as well as a Shannon-Fano or Huffman coding. On the other hand, Huffman coding shows the emergence of all unique blocks, including recursive sub-structures (and their respective frequencies) in the shortest number of steps as a tree diagram with its shortest description. Hence, it is an optimal compression algorithm in the sense that the expected codeword length is minimal [6], and thus it provides a shorter statistical description of the information system (molecular biosignature).

## 2.4 Mischaracterisations

To understand the mathematical limitations underpinning Assembly Theory, first note that the pathway assemblages are characterised by functions of the form

$$g_k: \begin{array}{ccc} V(\Gamma) \times V(\Gamma) & \rightarrow & V(\Gamma) \\ (z, x) = (z, (w_1, \dots, w_k, \dots)) & \mapsto & g_k(z, x) = (w_1, \dots, f(z, w_k), \dots) \end{array},$$

where  $(w_1, \dots, w_k, \dots)$  denotes the object  $x$  in the assembly space  $(\Gamma, \phi)$  that results from the combination of other objects  $w_1, w_2, \dots, w_k$ , etc. also in  $\Gamma$  and function  $f: V(\Gamma) \times V(\Gamma) \rightarrow V(\Gamma)$  gives the result of combining object  $z$  with  $w_k$ . Being limited to joining operations—and this limitation becomes even more dramatic in the non-stochastic generative processes that we will discuss below—Assembly Theory cannot deal with any variation of  $x$  or  $f$  beyond successive simple constructions. In the general case, most computable objects would be missed by statistical methods (like entropy and cognates such as Assembly Theory). Since probability distribution uniformity does not guarantee randomness [3, 5, 26], most objects, both in theory and practice, cannot be recognised or characterised by weak computable measures, especially by those that are largely based on entropy measures such as statistical compression algorithms or Assembly Theory.

As mentioned in Section 1, such a mischaracterisation has its roots in the reason any particular statistical test may fail to capture a mathematical formalisation of randomness, an inadequacy which prompted the positing of algorithmic randomness [5, 8]. For every computable statistical test (e.g., obeying the law of large numbers or displaying Borel normality) for which there is a computably enumerable number of sequences that satisfy it, there are arbitrarily large initial segments of sequences that can be computed by a program, although these initial segments would be deemed random by statistical tests.

On the contrary, algorithmic randomness requires the sequence to be incompressible (and, as a consequence, uncomputable) across the board, or to pass *any* feasible statistical test. More formally, any sufficiently long initial segment of an algorithmically random infinite sequence is incompressible (except by a fixed constant) or, equivalently, the sequence does not belong to the infinite intersection of any Martin-Löf test [5, 8]. As a unidimensional example in the context of sequences, algorithmic complexity theorists very soon realised that an object such as 123456789101112... could be very misleading in terms of complexity. Note that this sequence in fact defines the Champernowne constant  $C_{10} = 0.123456789101112$ , a complexity-deceiving phenomenon from the Borel normal numbers [26] that is generated by one

of the most modular forms of a function type, recursion and iteration of a successor-type function  $f(x_0, x_i) = x_i + x_0 = x_{i+1}$  for  $x_0 = 1$ . The ZK graph[26] which is constructed using the Champernowne constant as the degree sequence, was shown to be a near-‘maximal entropy graph with low algorithmic complexity [26]. The reader is invited to note how such a mathematical concept motivated the construction of deceiving molecules in [22]. Indeed, as we move beyond the realm of pure stochastic processes, complexity distortions become even more problematic. As demonstrated in [22, Theorem 2.4 and Corollary 2.5], there are (sufficiently large) deceiving molecules the complexities of whose respective generative processes arbitrarily diverge from the assembly index that the assembly pathway method assigns to them. By a generative model [1] we mean here a model that can be implemented or emulated by the execution of a Turing machine (with one or multiple tapes or any other equivalent model) so that it generates the pathway assembly and its objects. Therefore, generally speaking, this proposed assembly index fails to capture the minimality that is necessary for a complexity measure that may be claimed to be unambiguous and observer-independent.

Additionally, MA in general fails to avoid false positives in the specific sense that it may not be able to distinguish a “complex” object that is in fact the result of randomly generated generative processes. Under the same assumptions as in [16, 17], we construct in [22, Theorem 2.4] a deceiving molecule that has a much larger MA value in comparison to the minimal information sufficient for a randomly generated generative process to single-handedly construct this molecule. Whatever arbitrarily chosen method is used to calculate the statistical significance level, the MA of this molecule is large enough to make the expected frequency of occurrence (estimated via the arbitrarily chosen Assembly Theory) diverge from the actual probability (which derives from the random generation of the computable processes). In this case, Assembly Theory would consider such a molecule “biotic”, resulting from extrinsic factors that increase biases toward certain pathways or that constrain the range of possible joining operations, although its sole underlying generative process in fact results from fair-coin-toss random events. This proven existence of false positives due to such a deceiving phenomenon is corroborated by our findings in Sections 2.3 and 2.4, which show that MA displays a behaviour that is both structurally and empirically similar to traditional statistical compression methods. Indeed, the latter methods are already known to present distorted values [26], performing worse than more recent algorithmic-based methods [28]. Thus, they are prone to overestimating complexity, and consequentially to presenting false positives for “high”-complexity objects.

The key rationale behind this result is the computable nature of MA, so

that given the set of biases and the joining operations allowed by the model, objects with much higher MA can be constructed by much simpler (and, therefore, more probable) computable generative processes. Thus, in this context, MA (or any computable ‘assembly’ measure of this basic statistical type) will underestimate the frequency of occurrence of objects with high MA that in fact were constructed by much simpler randomly generated processes. This means that MA would misidentify molecules as byproducts (or constituents) of living systems that resulted from evolutionary processes, while in fact these molecules might have been byproducts of single-handed computable systems (natural or artificial) that were randomly generated by a fair coin toss, and as such, are not the result of an evolutionary process of optimisation over time.

Nevertheless, note that it is true that there are computable (lossless) encodings of a source, such as Huffman coding, that are proven to be optimal on average, but only if one knows a priori that the underlying processes generating the objects are purely stochastic (in particular, when one knows beforehand that the conditions of the source coding theorem are satisfied [6]). In this case, one can show that the minimum expected size of the encoded object converges to its expected algorithmic complexity. However, pure stochasticity is too strong an assumption or does not realistically represent the generative processes of molecules. This is because, especially in the context of complex systems like living organisms, organic molecules may be the byproduct of intricate combinations or intertwinements of both deterministic/computable and stochastic processes that govern the behaviour of the entire organism [23, 27]. Moreover, as shown by [22, Corollary 2.5], the deceiving phenomena can be equally bad or even worse in case the molecules are byproducts of complex systems that are somehow capable of universal computation.

When processes that are not purely stochastic are also possible generative processes, there is no such thing as a generally optimal complexity measure that cannot be improved upon, since computable complexity measures are dependent on the observer (or the chosen formal theory) [1]. Without the necessary conditions being satisfied by the underlying stochastic process, one cannot generally guarantee such a convergence between the expected size of the encoded object and the expected algorithmic complexity that is assured by the source coding theorem. For example, in the case of advanced civilisations that are capable of artificially constructing living beings by computable processes, simplistic complexity measures such as MA can be intentionally misled with respect to what actually should be measured.

### 3 Discussion

We have shown that the method at the heart of the so-called Assembly Theory as advanced in [17] and several other papers from the same group, is a suboptimal weaker version of Shannon-Fano and Huffman’s encoding algorithms, the basis upon which most popular statistical lossless compression algorithms work. The concepts and ideas underpinning Assembly Theory, as well as the challenges it faces, are very much part and parcel of the decades-long history of research in complexity theory.

For example, Bennett faced the same sorts of problems that the authors believe they are facing for the first time, such as the differences between taking the shortest or average paths. The authors repurpose but do not properly cite essential work. We have shown, for example, that the characterisation of simpler molecules using mass spectrometry signatures is not a challenge for other statistically weak indexes, as alleged, and that as soon as these (including MA) are confronted with more complicated cases of non-linear modularity, they fail. We have shown that the best performance of molecular assembly does not outdistance other measures of a statistical nature.

Our theoretical and empirical results show that molecular assembly (MA), and its generalisation in Assembly Theory, is easily prone to false positives and fails to capture the notion of high-level complexity (non-trivial statistical repetitions) necessary for distinguishing a serendipitous extrinsic agent (e.g. a chemical reaction) that constructs, or generates, the molecule of interest from a simple or randomly generated configuration.

The empirical motivation of MA was appropriate for devising novel biosignature detection instruments and related technologies. However, lacking the capability of detecting essential features of complex structure formation that go beyond a linear and combinatorial sequence space (optimised for only the largest repeated block sizes), Assembly Theory and its simplistic (mathematical and computational) methods may return misleading values that would classify a low complexity molecule as being extrinsically constructed by a much more complex agent, thus failing to characterise extraterrestrial life, as the authors have widely claimed. In fact this extrinsic agent may be of a much simpler nature (e.g. a naturally occurring phenomenon).

The claim that Assembly Theory can quantify the emergence of natural selection and emergence is unfounded, as we clearly show how easy it is to mislead Assembly Theory with a simple recursive function that takes a module, iterates over a number of steps, and keeps adding a new module every number of steps to iterate over the new block. As matters stand, the bold claims regarding the capabilities of this Assembly Theory to characterise life, and even extraterrestrial life, seem misleading or hugely exaggerated,

attracting undeserved media attention to the detriment of both new and past research.

Stronger arguments regarding simplicity, recursivity and modularity in a better grounded theoretical and methodological framework were advanced in [9], where it was shown that exploiting approximations of strong complexity measures, modular properties could be explained.

In this way, the investigation of correlations between biosignature detection instruments and state-of-the-art complexity measures, such as those that, unlike MA, are not prone to known limitations of statistics, repeating patterns, or combinatorial operations, is a fruitful line of future research.

## 4 Methods

Various complexity measures were used to classify living vs. non-living molecules from the mass spectrometry (MS) data in a four-category scheme: natural compounds, metabolites, pharmaceuticals and industrial compounds, where the natural compounds include the amino acids. The results were subjected to statistical analyses such as the Kolmogorov-Smirnov test, one sample t-tests, and Pearson correlation analysis using GraphPad Prism v. 8.4.3.

The Mass Spectrometry (MS) data were further analysed using various complexity measures, including the 1D-string and 2D-matrix Block Decomposition Method (BDM) [27, 29], Shannon’s entropy, and compression algorithms, including Lempel-Ziv-Welch (LZW), Run Length Encoding (RLE), Huffman coding, and gzip. The InChID strings of the 99 molecules from (MW vs. MS data) and the 114 molecules from figure 3 (MS data standard curve) of the original paper were analysed using the OACC (Online Algorithmic Complexity Calculator) app in R, which computed the 1D-BDM (block size of 2, alphabet size of 2) and Shannon entropy scores. The LZW compression lengths were computed with an online LZW calculator using UTF-8 encoding for the 1D strings. Likewise, RLE and Huffman coding compression lengths were obtained using online calculators as additional lossless compression measures to assess the MS bio-signatures.

To perform the 2D-BDM on the MS signatures (molecules), the structural distance matrix was extracted from the 2D-molecular structure SDF files for each molecule using the PubChem database. Binary conversion was performed on the matrices in R at five different conversion thresholds (i.e., -1, 0, 1, 3 and 5). The binarised molecular distance matrices were processed by the PyBDM code (see [22]) to obtain the 2D-BDM scores for each molecule. Distance matrices at a binary conversion threshold of 3 were found to be

optimal in discriminant analysis of MS signatures into life vs. non-life categories. The matrices at a conversion threshold of 3 were used to compute the 2D-Huffman code and 2D-RLE compression lengths.

## Data availability

Mass spectrometry data is available at <https://pubchem.ncbi.nlm.nih.gov/>. Online Algorithmic Complexity Calculator (OACC) is available at: <http://www.complexity-calculator.com/>. Text to binary conversion is available at: <https://www.rapidtables.com/convert/number/ascii-to-binary.html> Results of compression algorithms can be reproduced using: <https://planetcalc.com/9069/> for the Lempel-Ziv-Welch (LZW); <https://www.dcode.fr/rle-compression> for the run-length encoding (RLE); <https://www.dcode.fr/huffman-tree-compression> for the Huffman Coding.

## Code availability

The pseudocode for the 2D-BDM is available in [22, Section 1]. Statistical correlation analysis was done using GraphPad Prism v. 8.4.3., available at <https://www.graphpad.com/scientific-software/prism/>. Further computational tools to reproduce our results are described in the section ‘Data availability’.

## References

- [1] Felipe S. Abrahão and Hector Zenil. Emergence and algorithmic information dynamics of systems and observers. *Philosophical Transactions of the Royal Society A: mathematical, physical and engineering sciences*, 380, 20200429, 2022.
- [2] Alyssa Adams, Hector Zenil, Paul C. W. Davies, and Sara Imari Walker. Formal Definitions of Unbounded Evolution and Innovation Reveal Universal Mechanisms for Open-Ended Evolution in Dynamical Systems. *Scientific Reports*, 7(1):997, dec 2017.
- [3] Verónica Becher and Santiago Figueira. An example of a computable absolutely normal number. *Theoretical Computer Science*, 270(1-2):947–958, 2002.

- [4] Charles H. Bennett. *Logical Depth and Physical Complexity*. The Universal Turing Machine— a Half-Century Survey. Oxford University Press, 1988.
- [5] Cristian S. Calude. *Information and Randomness: An algorithmic perspective*. Springer-Verlag, 2 edition, 2002.
- [6] Thomas M. Cover and Joy A. Thomas. *Elements of Information Theory*. John Wiley & Sons, Inc., Hoboken, NJ, USA, 2005.
- [7] Jean-Paul Delahaye and Hector Zenil. Numerical Evaluation of the Complexity of Short Strings: A Glance Into the Innermost Structure of Algorithmic Randomness. *Applied Mathematics and Computation*, 219pp. 63-772012.
- [8] Rod Downey and Denis R. Hirschfeldt. Algorithmic randomness. *Communications of the ACM*, 62(5):70–80, apr 2019.
- [9] Santiago Hernández-Orozco, Narsis A. Kiani, and Hector Zenil. Algorithmically probable mutations reproduce aspects of evolution, such as convergence rate, genetic memory and modularity. *Royal Society Open Science*, 5(8):180399, 2018.
- [10] David Huffman. A method for the construction of minimum-redundancy codes. *Proceedings of the IRE*, 40(9):1098–1101, 1952.
- [11] Li Clustering by Compression *IEEE Transactions on Information Theory*, 514:1523–1545, 2005.
- [12] Hector Zenil Generating Random DNA Sequences *Wolfram Demonstrations Project*, 2013. URL <http://demonstrations.wolfram.com/GeneratingRandomDNASequences/>.
- [13] Ming Li and Paul Vitányi. *An Introduction to Kolmogorov Complexity and Its Applications*. Texts in Computer Science. Springer, Cham, 4 edition, 2019.
- [14] Seth Lloyd and Heinz Pagels. Complexity as thermodynamic depth. *Annals of Physics*, 188(1):186–213, 1988.
- [15] Stuart M. Marshall, Alastair R. G. Murray, and Leroy Cronin. A probabilistic framework for identifying biosignatures using pathway complexity. *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 375(2109):20160342, 2017.

- [16] Stuart M. Marshall, Douglas Moore, Alastair R. G. Murray, Sara I. Walker, and Leroy Cronin. Quantifying the pathways to life using assembly spaces. *arXiv Preprints*, 2019. URL <http://arxiv.org/abs/1907.04649>.
- [17] Stuart M. Marshall, Cole Mathis, Emma Carrick, Graham Keenan, Geoffrey J. T. Cooper, Heather Graham, Matthew Craven, Piotr S. Gromski, Douglas G. Moore, Sara I. Walker, and et al. Identifying molecules as biosignatures with Assembly Theory and mass spectrometry. *Nature Communications*, 12(1), 2021.
- [18] Melanie Mitchell. *Complexity: A Guided Tour*. Oxford University Press, 2009. ISBN 9780195124415.
- [19] Mikhail Prokopenko, Fabio Boschetti, and Alex J. Ryan. An information-theoretic primer on complexity, self-organization, and emergence. *Complexity*, 15(1):11–28, 2009.
- [20] Abhishek Sharma and Dániel Czégel, Michael Lachmann, Christopher P. Kempes, Sara I. Walker and Leroy Cronin. Assembly Theory Explains and Quantifies the Emergence of Selection and Evolution, *arXiv:2206.02279 [physics.bio-ph]*, 2022.
- [21] Fernando Soler-Toscano, Hector Zenil, Jean-Paul Delahaye, and Nicolas Gauvrit. Calculating Kolmogorov complexity from the output frequency distributions of small Turing machines. *PLoS ONE*, 9(5), 2014.
- [22] Abicumaran Uthamacumaran, Felipe S. Abrahão, Narsis A. Kiani and Hector Zenil. Supplementary Information of the paper “*On the Limitations of the Methods of Assembly Theory and The Classification of Molecular Biosignatures*”. 2022.
- [23] Sara Imari Walker and Paul C. W. Davies. The Algorithmic Origins of Life. *Journal of The Royal Society Interface*, 10(79), 2012.
- [24] Hector Zenil, Carlos Gershenson, James A.R. Marshall, and David A. Rosenblueth. Life as thermodynamic evidence of algorithmic structure in natural environments. *Entropy*, (14 (11)):2173–2191, 2012.
- [25] Hector Zenil, Jean-Paul Delahaye, and Cédric Gaucherel. Image characterization and classification by physical complexity. *Complexity*, 17(3): 26–42, 2011.

- [26] Hector Zenil, Narsis A. Kiani, and Jesper Tegnér. Low-algorithmic-complexity entropy-deceiving graphs. *Physical Review E*, 96(1), 2017.
- [27] Hector Zenil, Narsis A. Kiani, Francesco Marabita, Yue Deng, Szabolcs Elias, Angelika Schmidt, Gordon Ball, and Jesper Tegnér. An Algorithmic Information Calculus for Causal Discovery and Reprogramming Systems. *iScience*, 19:1160–1172, sep 2019.
- [28] Hector Zenil. A Review of Methods for Estimating Algorithmic Complexity: Options, Challenges, and New Directions. *Entropy*, 22(6):612, 2020.
- [29] Hector Zenil, Narsis Kiani, Felipe S. Abrahão, and Jesper Tegnér. Algorithmic Information Dynamics. *Scholarpedia*, 15(7):53143, 2020.
- [30] Hector Zenil, Fernando Soler-Toscano, Jean-Paul Delahaye and Nicolas Gauvrit. Two-Dimensional Kolmogorov Complexity and Validation of the Coding Theorem Method by Compressibility. *PeerJ Computer Science*, 1:e23 2015.
- [31] Hector Zenil, Santiago Hernández-Orozco, Narsis A. Kiani, Fernando Soler-Toscano, Antonio Rueda-Toicen. A Decomposition Method for Global Evaluation of Shannon Entropy and Local Estimations of Algorithmic Complexity. *Entropy*, 20(8):605, 2018.

## Author contributions

Writing: A.U., H.Z. and F.S.A.; experimental design, methods and analysis: A.U. and H.Z.; conceptualisation: H.Z., A.U., and F.S.A.; formal analysis: A.U., F.S.A., and H.Z.; revision and reorganisation: N.A.K; supervision: H.Z. All authors have read and agreed to the published version of the manuscript.

## Competing interests

The authors attest to the absence of competing interests.

## Supplementary information

of the article:

---

# On the Salient Limitations of the Methods of Assembly Theory and Their Classification of Molecular Biosignatures

Abicumaran Uthamacumaran<sup>†1,2</sup>, Felipe S. Abrahão<sup>‡3,4,9</sup>,  
Narsis A. Kiani<sup>§7,8,9</sup>, and Hector Zenil<sup>\*5,6,7,8</sup>

<sup>1</sup> Concordia University, Department of Physics, Montreal, Quebec, Canada.

<sup>2</sup> McGill University, McGill Genome Center, Majewski Lab, Canada.

<sup>3</sup> Centre for Logic, Epistemology and the History of Science, University of Campinas, Brazil.

<sup>4</sup> DEXL, National Laboratory for Scientific Computing, Brazil.

<sup>5</sup> Machine Learning Group, Department of Chemical Engineering and Biotechnology, University of Cambridge, U.K.

<sup>6</sup> Kellogg College, The University of Oxford, Oxford, U.K.

<sup>7</sup> Algorithmic Dynamics Lab, Center for Molecular Medicine, Karolinska Institutet, Sweden.

<sup>8</sup> Algorithmic Nature Group, LABORES for the Natural and Digital Sciences, Paris, France.

<sup>9</sup> Department of Oncology-Pathology, Center for Molecular Medicine, Karolinska Institutet, Sweden

---

\*Corresponding author. Email: hector.zenil@cs.ox.ac.uk

## A Appendix

In recent papers, a method and measure have been proposed claiming to be capable of identifying and distinguishing molecules related to living systems versus non-living ones, among other capabilities. In the main article, we demonstrated that the assembly pathway method is a suboptimal restricted version of Huffman’s (Shannon-Fano type) encoding so that it falls into the category of a purely (weak) entropic measure for all purposes. This supplementary material contains more information about motivations, algorithms, code, methods, and theorems with respect to the article under the same title.

Having identified a lack of control experiments and a limited analysis offered, we compared other measures of statistical and algorithmic nature that perform similarly, if not better, than the proposed assembly one at identifying molecular signatures without making recourse to a new theory.

Previous work claimed that the computable nature and tree-like structure of Assembly Theory was an advantage with respect to classifying the complexity of biosignatures. This is, however, one of its main weaknesses with respect to both grasping the complexity of the object and distinguishing it from a stochastically random ensemble. We demonstrated that the assembly pathway method is a suboptimal restricted version of long-used compression algorithms and that the “assembly index” performs similar to, if not worse, than other popular statistical compression algorithms.

Simple modular instructions can outperform the pathway assembly index because it falls short to capture the subtleties of trivial modularity. In addition, there are deceiving molecules whose low complexities arbitrarily diverge from the “random-like appearance” that the assembly pathway method assigns to them with arbitrarily high statistical significance. Our theoretical and empirical results imply that pathway assembly index is not an optimal complexity measure in general, and can return false positives. We have also suggested how the previous empirical methods can be applied to improved complexity measures that can better take advantage of the computational resources available.

The group behind “Assembly Theory” are ignoring and neglecting decades of work in previous literature and resources such as work on resource-bounded complexity, self-assembly, modularity and self organization which is beyond the scope of this work. However, the challenges “Assembly Theory” is facing are what half a century of negative results in complexity theory have faced and (partially) solved by dealing with (semi) uncomputable measures after finding that computable measures, which fall into the trivial statistical ones, are of limited use, are ill-defined and can not only be highly misleading but a regression in the field.

---

## PyBDM Code for CTM and BDM

The Coding Theorem (CTM) and Block Decomposition Methods (BDM) are resource-bounded computable methods [15, 18] that attempt to approximate semi-computable measures that are a generalisation of statistical measures more powerful than the methods proposed in “Assembly Theory” as they combine global calculations of classical entropy with local estimations of algorithmic information content.

---

**Algorithm 1** Python implementation of 2D-Block Decomposition Method (PyBDM)

---

```
import numpy as np
from pybdm import BDM
import pandas as pd
X = pd.read_csv(r'file directory',dtype=int)
bdm = BDM(ndim=2)
Z=X.to_numpy()
bdm.bdm(Z)
```

---

## B Deceiving molecules (or objects in an assembly space) with high assembly indices

The main idea to achieve the following theoretical results is to construct a randomly generated program that receives a formal theory (which contains all the computable procedures and statistical criteria in assembly theory) as input. Then, it searches for a molecule (or object in an assembly space) with MA sufficiently high so as to make the pathway probability of spontaneous formation be sufficiently lower than the very own deceiving program’s algorithmic probability, so that the divergence between these two probability distributions become statistically significant according to the chosen statistical method and significance level.

One challenge to achieve such a result is to account for the cases in which only a subclass of possible computable processes is allowed to perform the assembly rules (e.g., those that are allowed by the currently known law of physics in the case of molecules) in order to construct molecules, and therefore we shall employ a variation of the traditional algorithmic complexity and algorithmic probability studied in AIT. In this case, not every type of computable function may represent what is an effective or feasible process that constructs a molecule. Thus, in some cases the range of generative processes

---

that can give rise to (or construct) a molecule may not comprise all possible computable functions. For this reason, we will employ a suboptimal form of the algorithmic complexity that is defined on non-universal programming languages (i.e., subrecursive classes). Nevertheless, in an ideal case in which the whole algorithm space indeed constitutes the set of all possible generative processes for constructing the assembly space (e.g., when biological systems achieve the capability of effecting universal computation in the real world [16]), then we show in Corollary B.5 that the deceiving phenomenon hold in the same way (or can even be worse).

A deceiving phenomenon akin to the one employed in Theorem B.4 can be found in [3] based upon the principles in [17], where sufficiently large datasets were constructed so that they deceive statistical machine learning methods into being able to find an optimal solution that in any event is considered global by the learning method of interest, although this optimal solution is in fact a simpler local optimum from which the more complex actual global optimum is unpredictable and diverges.

This phenomenon is also related to the optimality of the algorithmic complexity as an information content measure that takes into account the entire discrete space of computable measures [6, 8], or the maximality of the algorithmic probability as a probability semimeasure on the infinite discrete space of computably constructible objects, as demonstrated by the algorithmic coding theorem [5, 8, 11].

However, unlike in these previous cases, our proof is based on finding a deceiver algorithm that constructs an object with sufficiently high value of assembly index such that its expected frequency of occurrence is much lower than the algorithmic probability of the deceiver itself, and in this way passing the test of any statistical significance level the arbitrarily chosen formal theory may propose.

In order to achieve our results, we base our theorems on mathematical conditions that are consistent with the assumptions and results in [13, 14]. The first *assumption* that we specify with the purpose of studying a worst-case scenario is that the assembly space should be large enough so as to include those molecules (or objects) with sufficiently large MA (along with its associated sufficiently low pathway probability of spontaneous formation) relative to the algorithmic complexity of the deceiving program. For the sake of simplicity, we assume that the nested family  $\mathcal{S}$  of all possible finite assembly spaces from the same basis (i.e., the root vertex that represents the set of all basic building blocks) is infinite computably enumerable. However, an alternative proof can be achieved just with the former—and more general—assumption that the assembly space may be finite but only needs to be sufficiently large in comparison to the deceiving program. Indeed, our

---

assumption is in consonance with the authors’ motivation (and/or assumption) that “biochemical systems appear to be able to generate almost infinite complexity because they have information decoding and encoding processes that drive networks of complex reactions to impose the numerous, highly specific constraints needed to ensure reliable synthesis” [14]. Closely related to the first assumption, we also *assume* that there always are molecules with arbitrarily low path probabilities, which follows from the notion that, as infinitesimal as it might be, there is always a chance of randomly combining elements from an unlikely (but possible) sequence of events so as to give rise to a certain complex molecule.

Thirdly, in accordance with the arguments in [12–14] that the computability and feasibility of their methods is an actual advantage in comparison with other complexity measures, here we likewise *assume* that the following are computable procedures:

- deciding whether or not a finite assembly space (or subspace) is well formed according to the joining operation rules that are allowed to happen;<sup>1</sup>
- calculating MA of a finite molecule (i.e., a finite object) in a well-formed assembly space (or subspace);<sup>2</sup>
- calculating the chosen approximation of MA (e.g., the split-branch version) of a finite molecule in a well-formed assembly space (or subspace);<sup>3</sup>
- calculating an upper bound for the pathway probability of spontaneous formation of a molecule in the denumerable nested family of possible finite assembly spaces;<sup>4</sup>
- calculating the significance level for a frequency of occurrence of a molecule in a sample so that this empirical probability distribution (i.e., the type of the sample) diverges from the pathway probability distribution of spontaneous formation of the molecule;<sup>5</sup>

---

<sup>1</sup>For example, one can employ the same criteria and allow the same rules established in [14].

<sup>2</sup>For example, as defined in [13, Definition 19].

<sup>3</sup>For example, as in [14, SI] and [13, Section 4.2].

<sup>4</sup>For example, this can be done by employing the methods developed in [13, SI] and [14].

<sup>5</sup>For example, by using a maximum-likelihood method or using the probability that a sample occurs with KL divergence larger than  $\epsilon$  [7, 9].

In this manner, one can now demonstrate the following theorems. Besides the notation from [13] for assembly theory, we also employ the usual notation for Turing machines and algorithmic complexity.

Respectively, as in [13, Definition 11] and [13, Definition 15] respectively, let  $(\Gamma, \phi)$  denote either an *assembly space* or *assembly subspace*. From [13, Definition 19], we have that  $c_\Gamma(x)$  denotes the *assembly index* of the object  $x$  in the assembly space  $\Gamma$ .

Note that assembly spaces are finite. So, from our assumptions, we need to define a pathway assembly that can deal with arbitrarily large objects. To this end, let  $\mathcal{S} = (\mathbf{\Gamma}, \mathbf{\Phi}, \mathcal{F})$  be an *infinite assembly space*, where every assembly space  $\Gamma \in \mathbf{\Gamma}$  is finite,  $\mathbf{\Phi}$  is the set of the correspondent edge-labeling maps  $\phi_\Gamma$  of each  $\Gamma$ , and  $\mathcal{F} = (f_1, \dots, f_n, \dots)$  is the infinite sequence of embeddings [10] (in which each embedding is also an *assembly map* as in [13, Definition 17]) that ends up generating  $\mathcal{S}$ . That is, each  $f_i: \{\Gamma_i\} \subseteq \mathbf{\Gamma} \rightarrow \{\Gamma_{i+1}\} \subseteq \mathbf{\Gamma}$  is a particular type of assembly map that embeds a single assembly subspace into a larger assembly subspace so that the resulting sequence of nested assembly subspaces defines a total order  $\preceq_{\mathcal{S}}$ , where

$$(\Gamma_i, \phi_{\Gamma_i}) \preceq_{\mathcal{S}} (\Gamma_{i+1}, \phi_{\Gamma_{i+1}}) \text{ iff } f_i(\Gamma_i) = \Gamma_{i+1} .$$

Let  $\gamma = z \dots y$  denote an arbitrary path from  $z \in B_{\mathcal{S}}$  to some  $y \in V(\mathcal{S})$  in  $\mathcal{S}$ , where  $B_{\mathcal{S}}$  is the basis (i.e., the finite set of basic building blocks) of  $\mathcal{S}$  and  $V(\mathcal{S})$  is the set of vertices of  $\mathcal{S}$ . Let  $\gamma_x$  denote a path from some  $z \in B_{\mathcal{S}}$  to the object  $x \in V(\mathcal{S})$ .

Let  $\Gamma_x^*$  denote a minimum rooted assembly subspace of  $\Gamma$  from which the assembly index  $c_\Gamma(x)$  calculates the augmented cardinality and that its longest rooted path  $\gamma_x$  ends in the arbitrary object  $x \in V(\Gamma)$  as in [13, Definition 19].

As usual, let  $\mathbf{U}$  be a universal Turing machine on a universal programming language  $\mathbf{L}$ . Let  $\mathbf{U}(x)$  denote the output of the universal Turing machine  $\mathbf{U}$  when  $x \in \mathbf{L}$  is given as input in its tape. Let  $\langle \cdot, \cdot \rangle$  denote an arbitrary recursive bijective pairing function [8, 11] so that the bit string  $\langle \cdot, \cdot \rangle$  encodes the pair  $(x, y)$ , where  $x, y \in \mathbb{N}$ . Note that this notation can be recursively extended to  $\langle \cdot, \dots, \cdot \rangle$  in order to represent the encoding of  $n$ -tuples.

We have that the (prefix) *algorithmic complexity*, denoted by  $\mathbf{K}(x)$ , is the length of the shortest prefix-free (or self-delimiting) program  $x^* \in \mathbf{L}$  that outputs the encoded object  $x$  in a universal prefix Turing machine  $\mathbf{U}$ , i.e.,  $\mathbf{U}(x^*) = x$  and the length  $|x^*| = \mathbf{K}(x)$  of program  $x^*$  is minimum. In addition, the *algorithmic coding theorem* [5, 6, 8, 11] guarantees that

$$\mathbf{K}(x) = -\log \left( \sum_{\mathbf{U}(p)=x} \frac{1}{2^{|p|}} \right) \pm \mathbf{O}(1) , \quad (1)$$

where  $\sum_{\mathbf{U}(p)=x} 2^{-|p|}$  is the *universal a priori probability* of  $x$ , which gives the probability of randomly generating (by an i.i.d. stochastic process) a prefix-free (or self-delimiting) program that outputs  $x$ . We also have it that  $2^{-\mathbf{K}(x)}$  is called the *algorithmic probability* of  $x$ , which therefore converges to the universal a priori probability (except of an object-independent constant).

If the language  $\mathbf{L}'$  is a proper subset of  $\mathbf{L}$  such that language  $\mathbf{L}'$  running on  $\mathbf{U}$  is not able to decide every problem of Turing degree  $\mathbf{0}$ , then we have that  $\mathbf{L}'$  is *not* a universal programming language, and the machine  $\mathbf{U}$  defined upon language  $\mathbf{L}'$  is a *Turing submachine*  $\mathbf{U}/f$  [1], where  $f$  is the partial function that computes the function  $\mathbf{U}(x)$  for  $x \in \mathbf{L}'$  as input. In other words, a Turing submachine is a Turing machine that can receive inputs in its tape (and possibly simulate other machines), but it is not universal. Weaker than Turing degree  $\mathbf{0}$ , a submachine can only compute problems in a subrecursive class of problems [1]. Thus, note that resource-bounded machines or total Turing machines are particular cases of Turing submachines [1].

As a consequence of the above definitions, we define the (prefix) *sub-algorithmic complexity*<sup>6</sup>  $\mathbf{K}_f(x)$  to be the length of the shortest prefix-free (or self-delimiting) program  $x^* \in \mathbf{L}'$  that outputs the encoded object  $x$  when run on the Turing submachine  $\mathbf{U}/f$  (i.e.,  $\mathbf{U}/f(x^*) = x$  and  $|x^*|_f = \mathbf{K}_f(x) = \min\{|w| \mid \mathbf{U}(w) = x, w \in \mathbf{L}'\}$ ).<sup>7</sup> Thus, note that resource-bounded variants of the algorithmic complexity [4, 5, 11] are particular cases of sub-algorithmic complexity. Analogously, we will have that the *sub-universal* (a priori probability) distribution upon language  $\mathbf{L}'$  is defined on the *sub-universal* a priori probability for each value  $x$ , which are given by

$$\sum_{\substack{\mathbf{U}(p) = x; \\ p \in \mathbf{L}'}} C \frac{1}{2^{|p|}}, \quad (2)$$

where  $\mathbf{L}' \subseteq \mathbf{L}$  and  $C \geq 1$  is a normalizing constant as in [2, Definition 3.6, Section 3.2.1] to ensure it is a probability measure and not a probability semimeasure. Note that, if  $\mathbf{L}' = \mathbf{L}$ , then one obtains the usual universal distribution instead of its subrecursive version.

Following these notions, we can now define the submachine that compute the allowed generative processes of an assembly space. For the sake of simplifying notation, let  $\mathbf{U}_\Gamma$  denote the Turing submachine  $\mathbf{U}/f_\Gamma$ . In this case, the function  $f_\Gamma$  is the partial function that returns what  $\mathbf{U}$  can compute

<sup>6</sup>See also [1] where this terminology is also employed.

<sup>7</sup>If there is no program in  $\mathbf{L}'$  that can output an object  $x$ , then one defines  $\mathbf{K}_f(x) = \infty$ .

with some  $x \in \mathbf{L}_\Gamma$  as input, where  $\mathbf{L}_\Gamma \subseteq \mathbf{L}$  is a (non-)universal programming language such that every generative process of an assembly space is bijectively computed (or emulated) by  $\mathbf{U}(x)$ . In other words, for every generative process that can assemble objects into building another object, there is a program  $x \in \mathbf{L}_\Gamma$  that computes (or emulates) this process. In the case of infinite assembly spaces, one analogously defines language  $\mathbf{L}_\mathcal{S} \subseteq \mathbf{L}$ . In the special case in which the generative process of the assembly space  $\mathcal{S}$  are capable of universal computation, then one has that  $\mathbf{L}_\mathcal{S} = \mathbf{L}$  holds.

Additionally, for every  $x \in \mathbf{L}_\Gamma$ , there is a generative process which is computed (or emulated) by program  $x \in \mathbf{L}_\Gamma$ . Also for the sake of simplicity, let  $\mathbf{K}_\Gamma$  denote the sub-algorithmic complexity  $\mathbf{K}_{f_\Gamma}$ . That is,  $\mathbf{K}_\Gamma(x)$  gives the shortest program that can compute or emulate a generative process of the object  $x$  in the assembly space  $\Gamma$ . In the case of infinite assembly spaces, one analogously defines the sub-algorithmic complexity  $\mathbf{K}_\mathcal{S}$  and the sub-universal a priori probability upon language  $\mathbf{L}_\mathcal{S}$ .

**Lemma B.1.** *Let  $\mathcal{S}$  be infinite computably enumerable. Let  $\mathbf{F}$  be an arbitrary formal theory that contains assembly theory, including all the decidable procedures of the chosen method for calculating (or approximating MA) of an object for a nested subspace of  $\mathcal{S}$ , and the program that decides whether or not the criteria for building the assembly spaces are met. Let  $k \in \mathbb{N}$  be an arbitrarily large natural number. Then, there are a program  $p_y$ ,  $\Gamma \in \mathcal{S}$  and  $y \in V(\Gamma)$  such that*

$$\mathbf{K}(y) + k \leq |p_y| + k + \mathbf{O}(1) \leq c_\Gamma(y) , \quad (3)$$

where the function  $c_\Gamma: \Gamma \subset \mathcal{S} \rightarrow \mathbb{N}$  gives the MA of the object  $y$  in the assembly space  $\Gamma$  (or  $\mathcal{S}$ ) and  $\mathbf{U}(p_y) = y$ .

*Proof.* Let  $p$  be a bit string that represents an algorithm running on a prefix universal Turing machine  $\mathbf{U}$  that receives  $\mathbf{F}$  and  $k$  as inputs. Then, it calculates  $|p| + |\mathbf{F}| + \mathbf{O}(\log_2(k)) + k$  and enumerates  $\mathcal{S}$  while calculating  $c_\Gamma(x)$  of the object (or vertex)  $x \in V(\Gamma) \subset V(\mathcal{S})$  at each step of this enumeration. Finally, the algorithm returns the first object  $y \in V(\mathcal{S})$  for which

$$|p| + |\mathbf{F}| + \mathbf{O}(\log_2(k)) + k + \mathbf{O}(1) \leq c_\Gamma(y) \quad (4)$$

holds. In order to demonstrate that  $p$  always halts, just note that  $\mathcal{S}$  is infinite computably enumerable. Also, for any value of  $c_{\Gamma'}(z)$  for some  $z \in V(\Gamma') \subset V(\mathcal{S})$ , there is only a finite number of possible paths starting on any object in  $B_\mathcal{S}$  and ending on  $z$  in  $c_{\Gamma'}(z)$  steps, where  $B_\mathcal{S}$  is the basis (i.e., the finite set of basic building blocks [14, Definition 12]) of  $\mathcal{S}$ . This implies that there

is an infinite number of distinct values of  $c_{\Gamma'}(z)$ , whenever  $z \in V(\Gamma')$  and  $\Gamma' \subset \mathcal{S}$  is finite. Now, let  $p_y = \langle k, \mathbf{F}, p \rangle$ . Finally, from Equation 4 and basic properties in AIT, we have it that

$$\mathbf{K}(y) + k \leq |p_y| + k + \mathbf{O}(1) \leq |p| + |\mathbf{F}| + \mathbf{O}(\log_2(k)) + k + \mathbf{O}(1) \leq c_{\Gamma}(y) \quad (5)$$

holds for some sufficiently large  $k$ .  $\square$

**Lemma B.2.** *Let the conditions for Lemma B.1 be satisfied. Let*

$$\mathbf{P}: \{\Gamma' | \exists x (c_{\Gamma}(y) = x), \Gamma' \subseteq \Gamma \subset \mathcal{S} \text{ is rooted, and } y \in V(\Gamma')\} \rightarrow [0, 1]$$

*be an arbitrary probability measure on the set of pathways in  $\mathcal{S}$  and  $p_{\mathbf{P}}$  a program that computes a computable function that outputs an upper bound for  $\mathbf{P}$  such that for every  $\epsilon' > 0$  and  $\Gamma \subset \mathcal{S}$ , there are  $\Gamma' \subset \mathcal{S}$  and  $x \in V(\Gamma')$  with  $\Gamma \subseteq \Gamma'$  and  $\mathbf{P}(\Gamma^*_x) \leq \mathbf{U}(\langle \Gamma^*_x, p_{\mathbf{P}} \rangle) < \epsilon'$ . Let  $1 \geq \epsilon > 0$  be an arbitrary encodable real number. Let  $k \in \mathbb{N}$  be an arbitrarily large natural number. Then, there are a program  $p_{\epsilon}$ ,  $\Gamma \subset \mathcal{S}$ , and  $y \in V(\Gamma)$  such that Lemma B.1 is satisfied with  $y$  and*

$$\mathbf{K}(y) + k \leq |p_{\epsilon}| + k + \mathbf{O}(1) \leq c_{\Gamma}(y) \quad , \quad (6)$$

and

$$\mathbf{P}(\Gamma^*_y) \leq \mathbf{U}(\langle \Gamma^*_y, p_{\mathbf{P}} \rangle) < \epsilon \quad (7)$$

hold, where  $\mathbf{U}(p_{\epsilon}) = \Gamma^*_y$ .

*Proof.* Let  $p'$  be a bit string that represents an algorithm running on a prefix universal Turing machine  $\mathbf{U}$  that receives  $p_{\mathbf{P}}$ ,  $\epsilon$  and  $k$  as inputs. Then, it enumerates the assembly pathways  $\Gamma^*_x$  in  $\mathcal{S}$  such that  $|p| + |\mathbf{F}| + \mathbf{O}(\log_2(k)) + |p'| + |p_{\mathbf{P}}| + \mathbf{O}(\log_2(\epsilon)) + k + \mathbf{O}(1) \leq c_{\Gamma}(x)$ ,  $\mathbf{U}(\langle \Gamma^*_x, p_{\mathbf{P}} \rangle) < \epsilon$ , and Lemma B.1 holds for  $x$  given  $k$ . Finally, it returns this first  $\Gamma^*_x$  in this enumeration. Now, let  $p_{\epsilon} = \langle p_{\mathbf{P}}, \epsilon, k, p' \rangle$ . Therefore, in addition to the arguments in the proof of Lemma B.1, the desired theorem follows from the fact that program  $p'$  always halts because of our initial assumptions on program  $p_{\mathbf{P}}$  and the probability distribution given by  $\mathbf{P}$ .  $\square$

**Lemma B.3.** *Let the conditions for Lemmas B.1 and B.2 be satisfied. Let  $\mathbf{F}' \supseteq \mathbf{F}$  be a formal theory that also includes the chosen statistical method, the criteria for the arbitrarily chosen statistical significance level, the chosen computable method for approximating  $\mathbf{P}$  from above with program  $p_{\mathbf{P}}$ , and the acceptable maximum error  $\mathcal{E} \in \mathbb{N}$  for an overestimation of the complexity of an object in  $\mathcal{S}$ . Then, there are a program  $p_d$ ,  $\Gamma \subset \mathcal{S}$ , and  $y \in V(\Gamma)$  such that Lemma B.2 is satisfied with  $y$  and  $\mathbf{F}'$  decides that the divergence of the (sub-)universal distribution from  $\mathbf{P}$  is statistically significant, where  $\mathbf{U}(p_d) = \Gamma^*_y$  and  $|p_d| + \mathcal{E} < c_{\Gamma}(y)$  hold.*

*Proof.* Let  $p_d$  be a bit string that represents an algorithm running on a prefix universal Turing machine  $\mathbf{U}$  that includes the computation of  $p_k$  and  $p_\epsilon$  (which are programs defined in the proofs of Lemmas B.1 and B.2) as subroutines. Then, it searches for the first  $\Gamma^*_x$ , sufficiently small value of  $\epsilon$ , and sufficiently large value of  $k \geq \mathcal{E} + \mathbf{O}(1)$  such that Lemmas B.1 and B.2 are satisfied with  $x$ ,  $|p_d| + \mathcal{E} < |p| + |\mathbf{F}'| + \mathbf{O}(\log_2(k)) + |p'| + |p_{\mathbf{P}}| + \mathbf{O}(\log_2(\epsilon)) + k + \mathbf{O}(1) < c_\Gamma(x)$  holds, and the divergence of  $2^{-|p_d|}$  from  $\mathbf{U}(\langle \Gamma^*_x, p_{\mathbf{P}} \rangle)$  is statistically significant according to the formal theory  $\mathbf{F}'$ . Finally, the algorithm returns this first assembly pathway  $\Gamma^*_x$  as output. Note that, since the value of  $2^{-|p_d|}$  is fixed, one can always employ program  $p_{\mathbf{P}}$  and the statistical criteria in theory  $\mathbf{F}'$  to find an arbitrarily lower probability than  $2^{-|p_d|}$  so that the resulting probability distribution (i.e., the probability distribution given by  $\mathbf{P}$ ) diverges from the sub-universal (a priori probability) distribution. This holds because: of the algorithmic coding theorem, which implies that  $2^{-|p_d|}$  is a lower bound for the sub-universal a priori probability upon language  $\mathbf{L}'$ , where  $p_d \in \mathbf{L}' \subseteq \mathbf{L}$ ; and of the fact that  $p_{\mathbf{P}}$  is a program that computes a (computable) function that outputs an upper bound for  $\mathbf{P}$ .<sup>8</sup> Additionally, this divergence eventually becomes statistically significant (as the divergence increases) because the probability of occurrence of a sequence of events following an empirical probability distribution, which diverges from the original distribution that the events are generated, eventually decreases as the divergence sufficiently increases. Also note that  $|p_d| \leq |p_k| + |p_\epsilon| + \mathbf{O}(1)$ . Therefore, since  $k$  and  $\epsilon$  were arbitrary in Lemma B.2 and all the statistical methods in  $\mathbf{F}'$  are decidable by assumption, we have that  $p_d$  always halts.  $\square$

**Theorem B.4.** *Let the conditions for Lemma B.3 be satisfied. Let  $\mathcal{S}$  be an infinite assembly space whose set of randomly generated (computable) generative processes include one that can effect at least the computation of program  $p_d$ , where Lemma B.3 holds for  $p_d$  and  $y \in V(\mathcal{S})$ . Then:*

- *the complexity error is larger than  $\mathcal{E}$  (except for an independent constant);*
- *and this error implies a statistically significant (according to  $\mathbf{F}'$ ) distinct frequency of occurrence of  $y$  than it was expected from the chosen assembly theory.*

*Proof.* From Lemma B.3, we have it that  $\mathbf{U}(p_d) = \Gamma^*_y$ . Thus, from our assumptions and the definition of  $\mathbf{K}_{\mathcal{S}}$ , we have it that  $\mathbf{K}_{\mathcal{S}}(y) \leq |p_d| + \mathbf{O}(1)$ ,

---

<sup>8</sup>Also note that  $\mathbf{F}'$  does not actually need to be able to compute the value of the sub-universal a priori probability of  $x$  because one already knows  $2^{-|p_d|}$  is a lower bound for it and  $\mathbf{U}(\langle \Gamma^*_x, p_{\mathbf{P}} \rangle)$  is an upper bound for the *optimal* pathway probability of  $x$ .

which proves that the complexity error is larger than  $\mathcal{E}$  from Lemma B.3. We also have that the probability of an assembly pathway being constructed by a randomly generated computable process is given by the sub-universal a priori probability of  $\Gamma^*_y$  upon language  $\mathbf{L}_S$ , i.e.,

$$\sum_{\substack{\mathbf{U}(p) = \Gamma^*_y; \\ p \in \mathbf{L}_S}} C \frac{1}{2^{|p|}}. \quad (8)$$

Therefore, by replacing  $\mathbf{L}'$  with  $\mathbf{L}_S$  in the proof of Lemma B.3, we achieve a statistically significant (according to  $\mathbf{F}'$ ) distinct frequency of occurrence of  $y$  than it was expected from the chosen assembly theory.  $\square$

**Corollary B.5.** *Let the conditions for Lemma B.3 be satisfied. Let  $\mathcal{S}$  be an infinite assembly space whose randomly generated (computable) generative processes are capable of universal computation. Then:*

- *the complexity error is larger than  $\mathcal{E}$  (except for an independent constant);*
- *and this error implies a statistically significant (according to  $\mathbf{F}'$ ) distinct frequency of occurrence of  $y$  than it was expected from the chosen assembly theory.*

*Proof.* The proof follows directly from the fact that  $\mathbf{K}(y) \leq \mathbf{K}_f(y) + \mathbf{O}(1)$  and from replacing  $\mathbf{L}'$  with  $\mathbf{L}$  in the proof of Lemma B.3.  $\square$

## References

- [1] Felipe S. Abrahão. The “paradox” of computability and a recursive relative version of the Busy Beaver function. In Cristian Calude and Mark Burgin, editors, *Information and Complexity*, chapter 1, pages 3–15. World Scientific Publishing, Singapore, 1 edition, 2016. ISBN 978-9813109025. doi: 10.1142/9789813109032\_0001.
- [2] Felipe S. Abrahão, Klaus Wehmuth, and Artur Ziviani. Algorithmic networks: Central time to trigger expected emergent open-endedness. *Theoretical Computer Science*, 785:83–116, sep 2019. ISSN 03043975. doi: 10.1016/j.tcs.2019.03.008.
- [3] Felipe S. Abrahão, Hector Zenil, Fabio Porto, and Klaus Wehmuth. Algorithmic Probability of Large Datasets and the Simplicity Bubble Problem in Machine Learning. *Theoretical Computer Science (forthcoming)*, 2022. URL <http://arxiv.org/abs/2112.12275>.

- 
- [4] Mark Burgin. *Theory of Information: Fundamentality, Diversity and Unification*. World Scientific Publishing, 2009. ISBN 978-981-283-548-2 978-981-283-549-9. doi: 10.1142/7048.
- [5] Cristian S. Calude. *Information and Randomness: An algorithmic perspective*. Springer-Verlag, 2 edition, 2002. ISBN 3540434666.
- [6] Gregory Chaitin. *Algorithmic Information Theory*. Cambridge University Press, 3 edition, 2004. ISBN 0521616042.
- [7] Thomas M. Cover and Joy A. Thomas. *Elements of Information Theory*. John Wiley & Sons, Inc., Hoboken, NJ, USA, sep 2005. ISBN 9780471241959. doi: 10.1002/047174882X.
- [8] Rodney G. Downey and Denis R. Hirschfeldt. *Algorithmic Randomness and Complexity*. Theory and Applications of Computability. Springer New York, New York, NY, 2010. ISBN 978-0-387-95567-4. doi: 10.1007/978-0-387-68441-3.
- [9] Ian Goodfellow, Yoshua Bengio, and Aaron Courville. *Deep Learning*. MIT Press, 2016. <http://www.deeplearningbook.org>.
- [10] Wilfrid Hodges. *Model Theory*. Cambridge University Press, 1 edition, March 1993. ISBN 978-0-521-30442-9 978-0-521-06636-5 978-0-511-55157-4. doi: 10.1017/CBO9780511551574.
- [11] Ming Li and Paul Vitányi. *An Introduction to Kolmogorov Complexity and Its Applications*. Texts in Computer Science. Springer, Cham, 4 edition, 2019. ISBN 978-3-030-11298-1. doi: 10.1007/978-3-030-11298-1.
- [12] Stuart M. Marshall, Alastair R. G. Murray, and Leroy Cronin. A probabilistic framework for identifying biosignatures using pathway complexity. *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 375(2109):20160342, 2017. doi: 10.1098/rsta.2016.0342.
- [13] Stuart M. Marshall, Douglas Moore, Alastair R. G. Murray, Sara I. Walker, and Leroy Cronin. Quantifying the pathways to life using assembly spaces. *arXiv Preprints*, 2019. URL <http://arxiv.org/abs/1907.04649>.
- [14] Stuart M. Marshall, Cole Mathis, Emma Carrick, Graham Keenan, Geoffrey J. T. Cooper, Heather Graham, Matthew Craven, Piotr S. Gromski, Douglas G. Moore, Sara. I. Walker, and et al. Identifying molecules

- 
- as biosignatures with assembly theory and mass spectrometry. *Nature Communications*, 12(1), 2021. doi: 10.1038/s41467-021-23258-x.
- [15] Fernando Soler-Toscano, Hector Zenil, Jean-Paul Delahaye, and Nicolas Gauvrit. Calculating kolmogorov complexity from the output frequency distributions of small turing machines. *PLoS ONE*, 9(5), 2014. doi: 10.1371/journal.pone.0096223.
- [16] Sara Imari Walker and Paul C. W. Davies. The Algorithmic Origins of Life. *Journal of The Royal Society Interface*, 10(79), 2012. ISSN 1742-5689. doi: 10.1098/rsif.2012.0869.
- [17] Hector Zenil, Narsis A. Kiani, and Jesper Tegnér. Low-algorithmic-complexity entropy-deceiving graphs. *Physical Review E*, 96(1), 2017. doi: 10.1103/physreve.96.012308.
- [18] Hector Zenil, Narsis A. Kiani, Francesco Marabita, Yue Deng, Szabolcs Elias, Angelika Schmidt, Gordon Ball, and Jesper Tegnér. An algorithmic information calculus for causal discovery and reprogramming systems. *iScience*, 19:1160–1172, 2019. doi: 10.1016/j.isci.2019.07.043.