

Block size estimation for data partitioning in HPC applications using machine learning techniques

Riccardo Cantini*, Fabrizio Marozzo*, Alessio Orsino*, Domenico Talia*, Paolo Trunfio*,
Rosa M. Badia†, Jorge Ejarque†, Fernando Vazquez†

*DIMES, University of Calabria, Rende, Italy, e-mail: {rcantini, fmarozzo, aorsino, talia, trunfio}@dimes.unical.it

†Barcelona Supercomputing Center, Barcelona, Spain, e-mail: {rosa.m.badia, jorge.ejarque, fernando.vazquez}@bsc.es

Abstract—The extensive use of HPC infrastructures and frameworks for running data-intensive applications has led to a growing interest in data partitioning techniques and strategies. In fact, finding an effective partitioning, i.e. a suitable size for data blocks, is a key strategy to speed-up parallel data-intensive applications and increase scalability. This paper describes a methodology for data block size estimation in HPC applications, which relies on supervised machine learning techniques. The implementation of the proposed methodology was evaluated using as a testbed *dislib*, a distributed computing library highly focused on machine learning algorithms built on top of the PyCOMPSs framework. We assessed the effectiveness of our solution through an extensive experimental evaluation considering different algorithms, datasets, and infrastructures, including the MareNostrum 4 supercomputer. The results we obtained show that the methodology is able to efficiently determine a suitable way to split a given dataset, thus enabling the efficient execution of data-parallel applications in high performance environments.

Index Terms—data partitioning, high performance computing, data-parallel applications, machine learning, big data

I. INTRODUCTION

Data partitioning refers to splitting a dataset into small and fixed-size units, called blocks or chunks, to enable efficient data-parallel processing and storing in distributed-memory based systems. Several issues related to data partitioning must be addressed to reduce execution times and ensure good scalability of applications. For example, when a dataset is mapped on a set of nodes of a parallel/distributed computing system, two very critical problems are highlighted: (i) the choice of the destination node for a given block (i.e., the node where that block will be stored); and (ii) the selection of an appropriate block size. The first problem has been addressed in several studies [1]–[3], in which scheduling algorithms have been proposed to minimize the movement of data at run-time. The second problem, less studied in the literature and addressed in this work, requires to take a decision before the application is running as it strongly depends on the features of the input dataset, the algorithm, and the execution environment.

The block size can heavily affect the trade-off between single node efficiency and parallelism in data-intensive applications. Specifically, a larger size reduces parallelism (fewer blocks) but makes tasks larger. Although this can lead to an overhead reduction, it must be ensured that the block size does not exceed the memory available on the individual nodes, so as to avoid memory saturation. On the other hand, a smaller size leads to a finer exploitation of parallelism, while introducing

a larger overhead due to communication, synchronization, and task management, which can negatively impact performance.

Typically, block size estimation is not an easy task for programmers. In fact, they usually proceed by following a trial and error approach, only supported by simple heuristics and domain knowledge (i.e., the awareness of the behavior of the algorithm in a given distributed environment). As a result, this tuning process is often time-consuming and resource-intensive, especially when large datasets and complex hardware infrastructures are used. To cope with this issue, in this work we propose a novel methodology for data block size estimation in High Performance Computing (HPC) applications, aimed at determining a good estimate quickly, requiring a small amount of resources and domain knowledge.

The proposed methodology relies on machine learning techniques and follows a supervised approach, by leveraging a cascade of tree-based classifiers to determine the most suitable value for the block size, given an execution to be performed. The model is trained on a log of past executions, represented by a set of descriptive features, including algorithm and dataset characteristics, performed in a specific execution environment. Consequently, predictions are applicable to systems having the same infrastructure features, which makes our methodology effectively usable on large-scale homogeneous HPC systems.

The effectiveness of our methodology was assessed through an extensive experimental evaluation, using as a testbed *dislib*, a distributed computing library focused on machine learning algorithms. The experiments were performed on different execution environments, including MareNostrum 4 supercomputer (MN4) [4], located at the Barcelona Supercomputing Center (BSC). The results show the ability of the proposed methodology to efficiently predict a suitable value for the block size, thus supporting programmers in determining a correct data partitioning (on both rows and columns), which leads to a significant improvement in application performance.

The remainder of the paper is organized as follows. Section II discusses the main methods to data partitioning present in the literature. Section III describes the proposed methodology. Section IV describes the use case and testbed. Section V presents the experimental evaluation and results. Finally, Section VI concludes the paper.

II. RELATED WORK

In high performance computing, data partitioning is a crucial strategy to speed-up parallel data-intensive applications and increase scalability. In this section, we describe the main methods proposed in the literature and used in HPC infrastructures.

The data partitioning problem is generally addressed by using three main alternative techniques: horizontal, vertical or hybrid partitioning [5].

- *Horizontal partitioning.* This technique, also called sharding, divides the rows of the dataset into disjoint subsets so that each subset has the same number of columns as the whole dataset. This approach is used in many state-of-the-art frameworks for big data processing, such as Hadoop and Spark [6], [7].
- *Vertical partitioning.* In this approach, the columns of the dataset are divided into subsets, usually based on the columns on which data querying is more frequently performed, or a heuristic approach [8], [9].
- *Hybrid partitioning.* It combines the horizontal and vertical approaches, by aggregating data according to how it is used by the target application and/or system [10], [11]. It is also called functional partitioning.

Among all described strategies, horizontal partitioning is the one that is mostly used in big data applications and HPC systems, while the other two strategies are less used and therefore explored in the literature. Specifically, the horizontal partitioning can be further categorized into *hash-*, *range-* and *random-* based. The hash-based approach divides records into subsets by hashing the record key and then mapping the hash value of the key to a partition. A common method to do this mapping is using a round-robin algorithm, which guarantees a balanced partitioning among nodes and partitions of equivalent size. In hash-based partitioning records having the same key value must have the same hash value, and consequently, they will be mapped to the same partition. The range-based partitioning approach, instead, partitions a dataset according to a given range and distributes records having the keys within the same range on the same node. In distributed environments, how to set this range is often challenging, especially when dealing with large-scale data analysis. Finally, the random-based partitioning approach divides the records randomly into subsets using a random number generator to determine where to distribute each record, producing approximately subsets of equal size. As an example, Salloum et al. proposed the Random Sample Partition (RSP) data model to support distributed big data analysis [12]. In particular, this model represents a big dataset as a set of non-overlapping blocks, where each block is a random sample of the whole dataset. In addition, Wei et al. [13] proposed a two-stage algorithm to generate RSP data blocks from the Hadoop Distributed File System (HDFS).

Main approaches for data partitioning can be further categorized into *static* or *dynamic* [14]. Static approaches use a fixed-size when a block is selected, often defined in MB, and the partitioning is computed before starting the execution. As an example, data in HDFS is divided into fixed-size blocks,

obtained from a horizontal partitioning. Particularly, a typical block size is 128 MB, which means that if we have a 1 GB file, it will be partitioned into 8 blocks, each one of 128 MBs. Similarly, in Spark the HDFS blocks need to be loaded into an in-memory data structure, called Resilient Distributed Dataset (RDD) [15], which can be then partitioned using either the aforementioned strategies, such as hash and range, or a custom partitioning. Specifically, Spark runs a single task for every partition of an RDD, up to 2 – 3x times the number of cores in the cluster. Hence, a heuristic can be derived that determines the number of partitions as a small multiple of the total number of available cores. On the contrary, in the dynamic approaches, the dimension and shape of the blocks in which to partition the dataset are not chosen a priori, but at runtime. As an example, several dynamic strategies can be found in [14], specially designed for graph data partitioning. Both approaches present some issues. Static approaches define a priori how data should be partitioned, without taking into account any dataset characteristic or algorithm feature. On the other hand, dynamic approaches support adaptation to the actual workload at runtime, but they can introduce a significant overhead in dynamically adjusting data partitioning.

To overcome these issues, in this work we propose a hybrid and static data partitioning approach, able to determine how to adequately partition the dataset before the execution, thus avoiding the overhead introduced by dynamic approaches, while also taking into account dataset and algorithm characteristics and infrastructure features. Specifically, we determine the best size of data blocks by using a supervised machine learning technique, focusing on the estimation of two quantities, i.e. the number of partitions in which to divide dataset rows and columns. This allows to establish an adequate partitioning in order to make the most of the computational resources of the execution environment, thus improving the performance and scalability of the application.

III. A MACHINE LEARNING APPROACH FOR BLOCK SIZE ESTIMATION

Our methodology addresses the problem of data partitioning by finding a suitable estimate of data block size, allowing an effective hybrid partitioning of a given dataset.

In particular, we formulated the block size estimation task as follows. Let d be a dataset composed of n rows and m columns, and a the algorithm to be run on the execution environment e . We must determine the best number of rows and column partitions (p_r, p_c) , from which to derive the best block size $S = (n/p_r, m/p_c)$ that minimizes the execution time of algorithm a .

In our solution, the optimal partitioning is estimated by leveraging a classification-based approach. Particularly, the target classes are represented by the two discrete variables to be predicted, i.e. p_r and p_c , which range from 1 (i.e., a single partition) to a maximum number of partitions, usually defined as a small multiple of the total number of cores available. We selected this kind of approach as it results to be more stable compared to a regression-based one, in which the block size

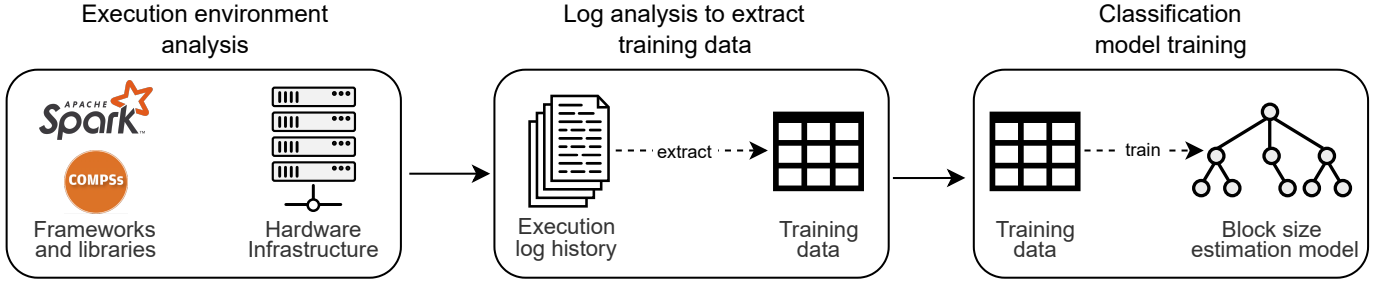


Fig. 1: Execution flow of the proposed methodology for block size estimation.

is directly predicted by identifying the number of elements of each block. In fact, the main problem of the regression-based approach is that its output is generally unconstrained, which may lead to a set of blocks with a non-uniform size. The classification-based approach, instead, is less affected by this problem, as it selects the number of partitions against a finite number of possible values. However, the ability to generalize heavily depends on the representativeness of the training data, which implies that the produced estimates are reliable for HPC systems having similar infrastructure features and datasets whose size is of the same order of magnitude as those seen during training. In the following, we provide a detailed description of the three main steps that make up the proposed methodology (see Figure 1).

A. Execution environment analysis

Given a distributed environment in which data analysis applications can be run, the proposed methodology aims to enable their efficient execution by identifying a proper size for data blocks. This can help programmers to make the most of all the computing and storage resources that are available in the environment, as they can efficiently obtain a suitable estimate for the block size, without the need for heavy tuning processes or domain knowledge. As a preliminary step, the execution environment must be carefully analyzed. Generally, it is characterized by a set of software features, such as the available frameworks and libraries, and infrastructure features, such as the number of nodes, cores per node, available memory and disk space.

B. Log analysis to extract training data

The proposed methodology leverages a log of past executions to extract the patterns that link a specific execution to the best block size, by training a supervised machine learning model. However, in order to learn effective patterns, raw logs must be adequately processed to extract an appropriate set of training data. The log \mathcal{L} consists of a collection of executions, performed by both standard users and domain experts, in which a single execution is described by the characteristics of the dataset (d), the algorithm (a), the execution environment (e), the applied partitioning along rows (p_r) and columns (p_c), the overall execution time (t), and other measurements such as main memory/disk usage. Formally, an execution in \mathcal{L} is represented by the tuple $\langle d, a, e, p_r, p_c, t \rangle$.

In order to generate the training dataset \mathcal{D} , all executions in \mathcal{L} are grouped by the triple $\langle d, a, e \rangle$. In this way, we can observe how, given a fixed configuration, execution time is affected by different block sizes. Afterwards, for each group, the best partitioning (p_r^*, p_c^*) that led to the minimum execution time is found and the tuple $\langle d, a, e, p_r^*, p_c^* \rangle$ is added to \mathcal{D} . At the end of the process, the dataset \mathcal{D} will contain the best partitioning found for each triple $\langle d, a, e \rangle$, specifically:

- Features related to algorithm a , dataset d (dimension in MB, number of rows, etc.) and execution environment e (number of cores, number of nodes, etc.).
- The optimal partitioning (p_r^*, p_c^*), i.e. the target variable.

Table I shows an example of an excerpt of \mathcal{D} obtained from the training data extraction step.

Although many frameworks provide accurate instrumentation tools for collecting a wide range of information, effectively exploitable for application performance monitoring, it is not always possible to have a representative log. To face this issue, training data can be generated and/or enriched by arranging a set of executions, with the aim of finding the block size that optimizes execution time for the considered configurations. This process is characterized by several degrees of freedom, as different algorithms (a) must be taken into account, as well as a wide range of input data (d) and infrastructure features of the execution environment (e), which leads to the need for an efficient search strategy. For this purpose, a grid search technique can be leveraged, in which several triples $\langle d, a, e \rangle$ are generated and annotated with the best block size found during the search. Specifically, for each triple, the following operations are performed.

- Given n_{cores} the number of available cores, a $k \times k$ grid \mathcal{G} is built, with $k = \log_s(n_{cores})$, where s is a search step such that $\log_s(n_{cores})$ is an integer number. The step s (set to 2 by default) can be used to control the trade-off between the cost of the grid search and the representativeness of the generated training samples.
- Each element $g_{i,j}$ in the grid \mathcal{G} , with i and j ranging from 1 to k , is determined as the time of executing algorithm a on the dataset d within the environment e , by splitting d using the $(p_r = s^i, p_c = s^j)$ partitioning. This means that the rows and columns of d will be divided into s^i and s^j blocks, respectively. The execution time in the case of failures (e.g., out-of-memory errors) is set to ∞ .

Algorithm	Dataset rows	Dataset columns	Dataset size (GB)	Infrastructure features			Best partitioning	
				# nodes	# cores	RAM	p_r^*	p_c^*
K-means	500,000	1000	2.39	4	64	256	32	4
RF	1000	500,000	2.92	4	64	256	32	8
SVM	10,000	10,000	1.1	4	64	256	16	16

TABLE I: Excerpt of the training set extracted by the log of executions.

- By exploring the grid, the best partitioning (p_r^*, p_c^*) for the triple $\langle d, a, e \rangle$ can be found, which leads to the minimum execution time. Formally, it is computed as the pair $(p_r^*, p_c^*) = (s^{i^*}, s^{j^*})$, where $(i^*, j^*) = \arg \min_{i,j} \mathcal{G}$.

Finally the triple $\langle d, a, e \rangle$ is labeled with (p_r^*, p_c^*) and added to the training dataset \mathcal{D} .

This approach for training data generation via execution monitoring was successfully leveraged in [16], whose purpose is to improve the in-memory execution of data-intensive workflows on parallel machines [17].

C. Classification model training

Given the dataset \mathcal{D} obtained in the previous step, a classification model is trained to learn the patterns that relate the execution features/parameters and the best partitioning (p_r^*, p_c^*) . Thus, the output of this step is a classification model capable of estimating the optimal number of partitions in which to split the rows and the columns of a given dataset, based on its characteristics, the algorithm to be run, and the underlying execution environment. Since the target variable to be predicted, i.e. the best partitioning (p_r^*, p_c^*) , is two-dimensional, we used a multi-output classification model based on a cascade of two different decision tree classifiers. The two classifiers, namely DT_r and DT_c , are used to predict the best number of rows and column blocks, respectively. In addition, as the two target variables are likely to be dependent on each other, we used a chained model to condition the DT_c predictions on the output of DT_r , as shown in Figure 2. We followed this order in chaining the two decision tree models since partitioning along the rows is generally more relevant. The training step is performed as follows:

- 1) We train the first decision tree DT_r with the training instances of \mathcal{D} to learn the patterns underlying the number of blocks p_r^* in which to partition dataset rows.
- 2) The second decision tree DT_c is trained with the training instances concatenated with the output of DT_r , with respect to the second target variable p_c^* , to learn the number of blocks in which to partition dataset columns.

Afterwards, the corresponding value of the block size can be determined as $(r^*, c^*) = (n/p_r^*, m/p_c^*)$, where n and m are the rows and columns of the considered dataset.

For the sake of clarity, we report an end-to-end example of computing the block size for a given input instance. Let $n = 51,200$ and $m = 256$ be the number of dataset rows and columns, respectively. Suppose we have to predict the block size related to the execution of a SVM algorithm, and that the

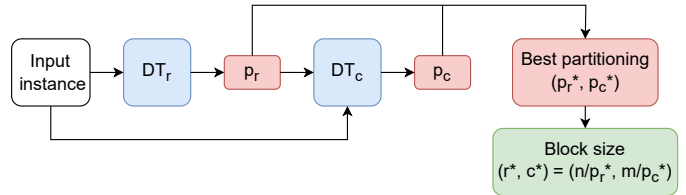


Fig. 2: Chained multi-output classification model.

result of the prediction is $(p_r^*, p_c^*) = (4, 16)$. Then the optimal block size can be computed as follows:

$$(r^*, c^*) = (n/p_r^*, m/p_c^*) = (12800, 16)$$

IV. USE CASE: BLOCK SIZE ESTIMATION IN DISLIB APPLICATIONS

The proposed methodology can be applied to a wide range of frameworks for distributed data processing [18]. In fact, the majority of these systems, such as Hadoop [6], Spark [7], DMCF [19] and PyCOMPSs [20], leverage a data-parallel approach that involves a data partitioning step for distributing the dataset across a set of working nodes. Consequently, our methodology can bring huge benefits, by suggesting an adequate partitioning that allows to effectively run distributed applications, reducing overhead while ensuring a good level of parallelism and throughput. Among the main frameworks and libraries of interest for distributed data processing, we selected as a testbed PyCOMPSs, focusing on dislib [21], a distributed computing library built on top of it that provides distributed machine learning algorithms. The early implementation, based on PyCOMPSs and dislib, is publicly available on Github¹.

PyCOMPSs [20], [22] is a task-based programming model that enables the parallel execution of sequential Python code in distributed computing platforms. By means of Python decorators, the developer identifies the function/methods to be considered tasks. PyCOMPSs also offers a small API for synchronization. It is based on a runtime able to identify the data dependencies that exist among tasks building a data dependency graph. The task-graph exposes the possible task concurrency that is exploited by the runtime, which manages the execution of the tasks in distributed infrastructures, scheduling them and performing all the necessary data transfers.

The Distributed Computing Library (dislib) [21], implemented on top of PyCOMPSs, provides various distributed

¹<https://github.com/eflows4hpc/dislib-block-size-estimation>

algorithms for several machine learning tasks, including classification, clustering, and dimensionality reduction. Dislib is inspired by scikit-learn and NumPy, and it comes with two primary programming interfaces: an API to manage data in a distributed way and an estimator-based interface to work with different machine learning models. Its main data structure is the distributed array (*ds-array*) that enables it to distribute the datasets in multiple nodes of a distributed infrastructure. A ds-array is a matrix divided into blocks, which can be a NumPy array or a SciPy CSR (Compressed Sparse Row) matrix, depending on the kind of data used to create the ds-array. Dislib provides an API similar to NumPy to work with ds-arrays, but ds-arrays are stored remotely, allowing to store much more data than regular NumPy arrays. All operations on ds-arrays are internally parallelized with PyCOMPSs. The typical workflow in dislib consists of the following steps: *i*) reading input data into a ds-array; *ii*) creating an estimator object; *iii*) fitting the estimator with the input data; *iv*) getting information from the model’s estimator or applying the model to new data. At each step, the level of parallelism is driven by the number of blocks of the ds-arrays that are operated, which in turn is controlled by the ds-array’s block size, which defines the number of rows and columns of each block.

Choosing the right size of a block-array can be a quite challenging task: small blocks allow for higher parallelism as the computation is divided into more tasks. However, handling a large number of blocks can generate overhead that can negatively impact performance. Thus, the optimal block size will allow the full utilization of the available resources without adding too much overhead. In addition to this, block size also affects the amount of data that tasks load into memory. This means that block size should never be bigger than the amount of available memory per processor. Summing up, the choice of the optimal block size is often difficult but essential for exploiting the full potential of dislib, hence the possibility of effectively applying the proposed methodology.

V. EXPERIMENTAL EVALUATION

This section presents the extensive experimental evaluation we carried out to assess the effectiveness of the proposed methodology using PyCOMPSs/dislib as the execution framework. In particular, we analyzed the impact on execution time of the partitioning suggested by our methodology, performing several experiments on two distinct execution environments, i.e. a cluster node and the MareNostrum 4 supercomputer, in order to evaluate the methodology in a single-node and a multi-node scenario.

For what concerns the evaluation metrics, we used *makespan ratio* to measure the improvement in speed of execution brought by the predicted block size, with respect to other possible partitions. Specifically, given an algorithm *a* to be run in a distributed environment *e*, let t^* and t_{other} be the execution times achieved by using the predicted block size and a different one, respectively. We compute the *makespan*

ratio as follows:

$$makespan\ ratio = \frac{t_{other}}{t^*}$$

In addition, we measured the percentage *makespan reduction*, i.e. the percentage amount of execution time saved by running a given algorithm with the predicted block size, with respect to a different one. Formally:

$$makespan\ reduction = \frac{t_{other} - t^*}{t_{other}}$$


A. Single-node experiments

This first experimental evaluation was carried out on a cluster node equipped with an AMD processor, 64 cores and 256 GB of RAM. The used log contains several executions performed on different datasets using a wide range of machine learning algorithms provided by dislib for classification and clustering, including Support Vector Machine (SVM), Random Forest (RF), Gaussian Mixture Model (GMM) and K-means. In the following sections we describe the results achieved in the single-node scenario, by evaluating the benefits brought by the estimated block size with the use of both real-world and synthetic test datasets.


1) *Real-world datasets*: The effectiveness of our methodology in suggesting a suitable block size value was evaluated on two real-world datasets used for clustering and classification:

- *HEPMASS-1000* [23]: it is a high-energy physics dataset containing signatures of exotic particles, learned from Monte Carlo simulations of the collisions that produce them. The dataset contains 7 million training samples with 27 features that can be separated into two clusters, i.e. particle-producing collisions and background sources.
- *MNIST* [24]: it is a multi-class dataset used for image classification and pattern recognition, containing gray-scale images of handwritten digits, from 0 to 9, labeled with the represented number. In particular, the dataset contains 60 thousand training images in a 28×28 format, which can be represented by vectors of 784 features.

Since both test datasets are characterized by a big number of rows against a relatively small number of columns, the model predicted in both cases a block size that partitions both datasets only horizontally, that is just one block for the columns containing all features. For this reason, the number of blocks generated by creating the distributed arrays is equal to the number of partitions along rows. The results achieved by running K-means and Random Forest on HEPMASS-1000 and MNIST datasets are summarized in table II. Specifically, the time t^* achieved by running the two algorithms using the predicted block size, was compared against the best, worst and average times achieved by using all other possible partitionings, calculated using progressive powers of 2 from 2 to 256, i.e. 4x times the total number of cores available. Moreover, Figure 3 shows the measured execution time by using different gradations of red, where a greater intensity corresponds to a higher duration. In the proposed plots, the time obtained by using the predicted partitioning is marked by a cyan circle, while the best one is marked by a green star.

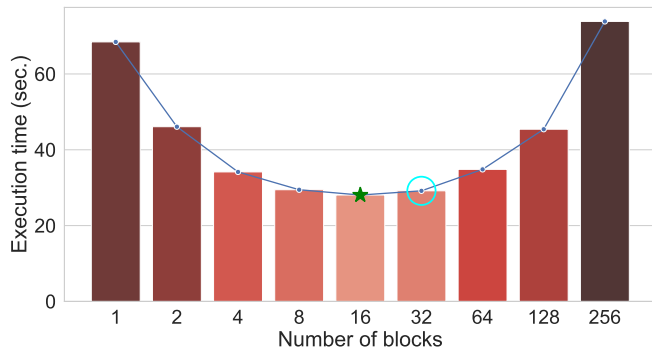

(a) K-means, HEPMASS-1000 dataset.

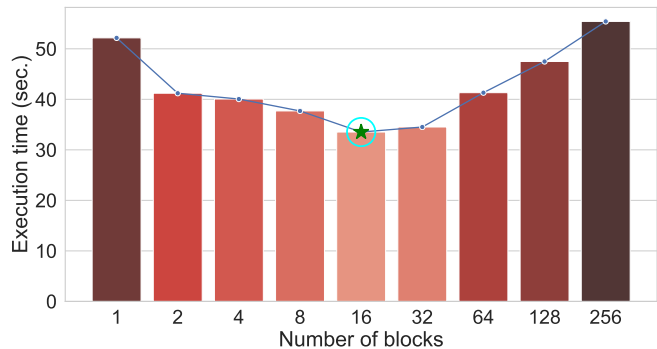

(b) Random Forest, MNIST dataset.

Fig. 3: Execution times achieved by K-means and Random Forest executed on two real-world datasets. The time obtained by using the predicted number of row blocks is marked by the cyan circle, while the best one is marked by the green star.

Algorithm	Dataset name	Dataset Rows	Dataset columns	Metric	Best	Average	Worst
K-means	HEPMASS-1000	7,000,000	27	Makespan ratio	0.96	1.48	2.53
				Makespan reduction	-3.80%	32.6%	60.5%
Random Forest	MNIST	60,000	784	Makespan ratio	1.00	1.27	1.65
				Makespan reduction	0%	21.32%	39.51%

TABLE II: Makespan ratio and percentage makespan reduction measured by running K-means and Random Forest algorithms on the HEPMASS-1000 and MNIST datasets.

By observing Figure 3(a), it can be noticed that the optimal number of blocks that led to the best execution time for the K-means algorithm was 16, while the model suggested partitioning rows in 32 blocks. However, the time measured by using the predicted block size, i.e. t^* , is the second best time, and the difference with the best one is negligible (≈ 1 second). By comparing t^* with the average execution time, the predicted block size led to a 1.48 makespan ratio, with a percentage reduction of makespan equal to 32.6%. The worst execution time was observed in the case in which 256 blocks were used. This is caused by an excessive small size of the blocks, which causes the generation of a too large number of blocks and tasks. In fact, such a degree of parallelism produces too much overhead that results in a degradation of application performance. A similar execution time was measured when just one block was used, i.e. no partitioning is performed. This is the opposite case, in which parallelism is not exploited at all. By comparing t^* with the worst execution time, we measured a makespan ratio of 2.53 and a makespan reduction of 60.5%, which confirms how the block size suggested by the model allows to determine a proper partitioning, which leads to a quite good trade-off between the degree of parallelism and the introduced overhead. The quality of the partitioning suggested by our model is further confirmed by the execution of Random Forest on the MNIST dataset (Figure 3(b)). In this case, the model predicts exactly the best possible partitioning, i.e. 16 blocks along rows. Also in this case, the worst values were measured at the extremes, where the level of parallelism is either zero (1 block) or too high (256 blocks). Furthermore, we

measured a makespan ratio of 1.27 and 1.65 and a makespan improvement of 21.32% and 39.51%, compared to the average and worst execution times, respectively.

2) *Synthetic datasets*: With the aim of further exploring the effectiveness of our methodology, the estimates provided by the model were evaluated against a set of synthetic test datasets, which is useful to observe how the algorithms behave in some specific cases. For this purpose, we generated a series of multiclass test datasets, by allocating one or more normally-distributed clusters of points to each class. Particularly, we used both isotropic and anisotropic Gaussian blobs. In addition, the obtained samples were augmented with random noise and redundant features, generated as a linear combination of the original ones.

Starting from a set of synthetic test datasets of varying shape, generated following the aforementioned process, we measured the performance improvement achievable with the use of our methodology, relative to the execution of K-means and Random Forest algorithms. Specifically, for each test dataset, we compared the time t^* , achieved by using the predicted block size, against the best, worst and average times obtained from all other possible partitionings. The different partitionings for this comparison were calculated using progressive powers of 2 from 2 to 64 for both the number of row and column blocks, which leads to 36 possible configurations. Furthermore, each test execution was repeated 10 times, taking the median value, in order to get a robust measure of execution time, preventing the evaluation process from being biased by noisy measures. Achieved results, in terms of makespan

ratio and percentage makespan reduction, averaged on all test datasets, are summarized in Table III and discussed in the following.

Metric	Best	Average	Worst
Makespan ratio	0.99	1.25	2.11
Makespan reduction (%)	-0.79%	24.71%	55.06%

TABLE III: Average values of makespan ratio and percentage makespan reduction obtained from executing K-means and Random Forest algorithms on the synthetic test datasets.


By comparing t^* with the best time measured by trying all possible partitionings, it can be noticed that the data partitioning suggested by the learning algorithm is almost always the best one, i.e. it guarantees an execution time very close to the shortest obtainable time. In particular, we measured a very little difference compared to the best execution time, with a makespan ratio almost equal to 1, and a negligible increase of execution time less than 0.8%. Regarding the comparison with the average time, we obtained a good performance improvement, with a percentage reduction of makespan equal to 24.71% and a makespan ratio equal to 1.25. These results show how the choice of an unsuitable block size may lead to a degradation of performance, which can be avoided with the aid of the proposed methodology. We further stressed this aspect by comparing t^* with the worst execution time, achieving a remarkable percentage reduction of makespan equal to 55% and a makespan ratio equal to 2.11. Measured values confirm the ability of our methodology in supporting the execution of machine learning algorithms in parallel and distributed environments.

As a last step, to make more detailed and clear the benefits brought by the use of our methodology, Figure 4 and 5 show the results achieved with K-means and Random Forest in three possible cases, in which the number of rows and columns can be equal or very imbalanced. Specifically, a synthetic test dataset for each case was generated as follows:


- *Row-imbalanced*: 500,000 rows, 1000 columns.
- *Column-imbalanced*: 1000 rows, 500,000 columns.
- *Balanced*: 10,000 rows, 10,000 columns.

Again, we compare execution times achieved by using the predicted partitioning and all other possible partitionings, set using progressive powers of 2 from 2 to 64 for both the number of row and column blocks (as explained above).


By observing Figure 4, we can see that, even in the presence of a high imbalance, the algorithm always suggests a block size value very close or equal to the best one, thus allowing an efficient execution of the K-means algorithm. Particularly, the time obtained by using the predicted block size is marked by the cyan circle, while the best one is marked by the green star. Moreover, the heatmap is useful to show how the variation of the block size affects the execution time, depicted in different gradations of red, where a greater intensity corresponds to a higher execution time. We observed that the time t^* obtained by using the predicted block size leads to the second best

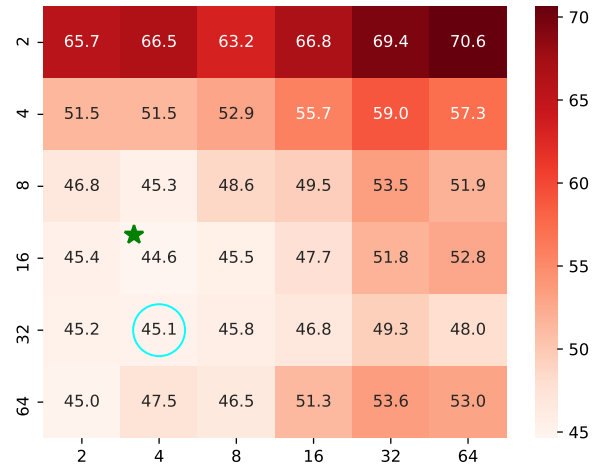

(a) K-means, Row-imbalanced: 500k rows, 1k columns.

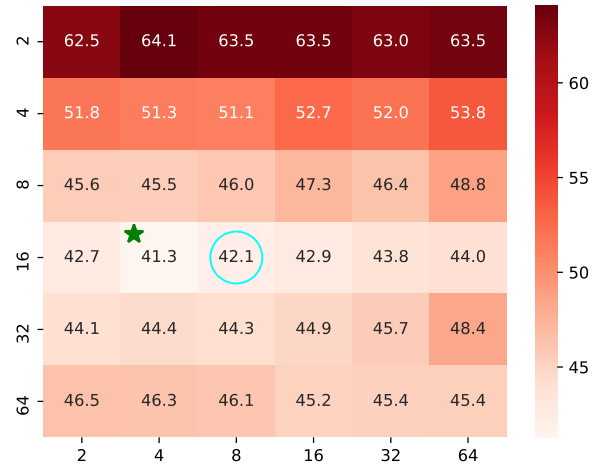


(b) K-means, Column-imbalanced: 1k rows, 500k columns.

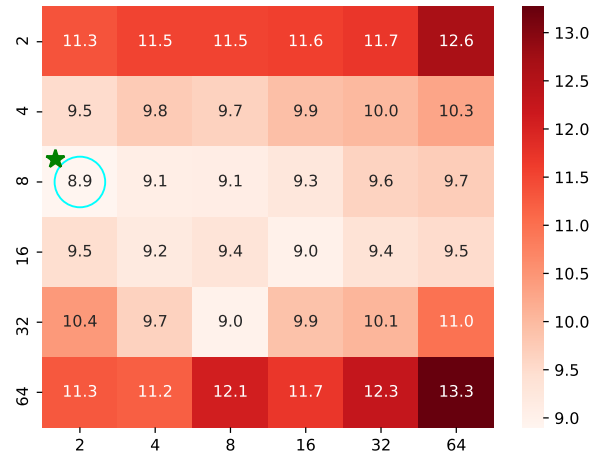


(c) K-means, Balanced: 10k rows, 10k columns.


Fig. 4: Execution times achieved by running K-means on datasets of both balanced and imbalanced shape. The x and y axis show the number of blocks along rows and columns. The time obtained with the predicted block size is marked by the cyan circle, while the best one by the green star.

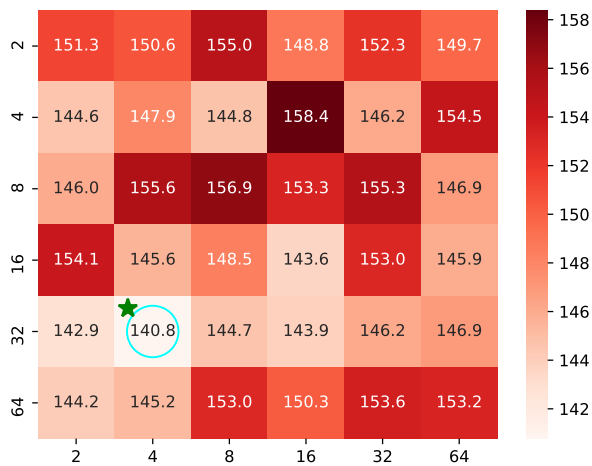

(a) Random Forest, Row-imbalanced: 500k rows, 1k columns.

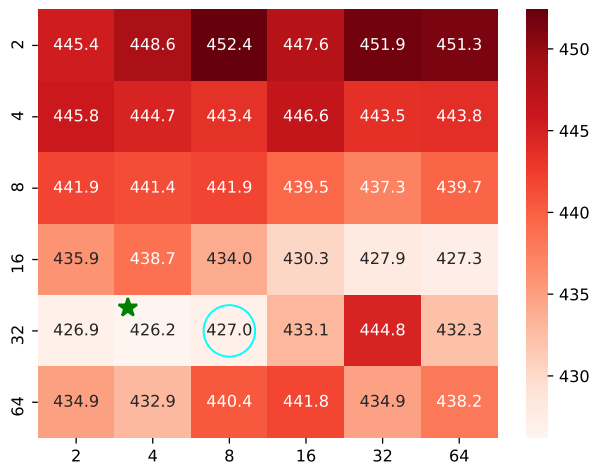

(b) Random Forest, Column-imbalanced: 1k rows, 500k columns.

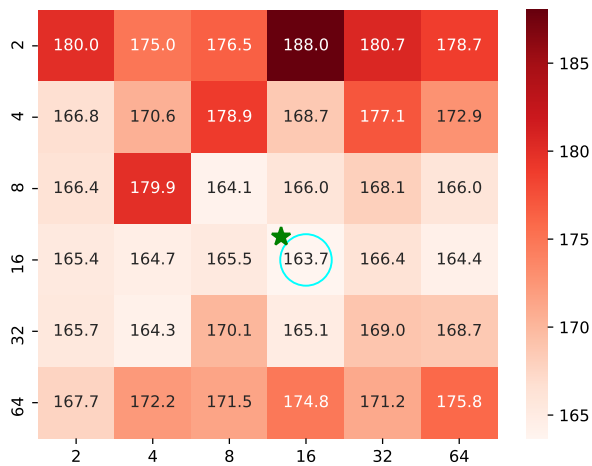

(c) Random Forest, Balanced: 10k rows, 10k columns.

Fig. 5: Execution times achieved by running Random Forest on datasets of both balanced and imbalanced shape. The x and y axis show the number of blocks along rows and columns. The time obtained with the predicted block size is marked by the cyan circle, while the best one by the green star.

time in the first two cases, and to the best time for the last one. The mean percentage difference between t^* and the best time is almost equal to 1%, which shows how the partitioning predicted by the model is a very good estimate of the optimal one. Moreover, by comparing t^* with the average and worst times, we measured an average makespan ratio of 1.17 and 1.53 and an average percentage improvement of makespan equal to 14.27% and 34.44%.

The good results achieved with K-means are confirmed by the experiments performed on Random Forest, shown in Figure 5. In this case, t^* resulted in the best execution time in two cases out of three (the first and the third), and the third best time in the remaining case (the second). In particular, we measured a negligible difference of 0.56% between t^* and the best execution time. Moreover, by comparing t^* with the average and worst times we observed a makespan ratio of 1.03 and 1.10 and a percentage makespan reduction of 3.74% and 9.44%. All these results are summarized in Table IV.

Algorithm	Metric	Best	Average	Worst
K-means	Makespan ratio	0.99	1.17	1.53
	Makespan reduction (%)	-1.03%	14.27%	34.44%
Random Forest	Makespan ratio	0.99	1.03	1.10
	Makespan reduction (%)	-0.56%	3.74%	9.44%

TABLE IV: Average makespan ratio and percentage makespan reduction measured by running K-means and Random Forest on datasets of both balanced and imbalanced shape.

B. Multi-node experiments

We further investigated the effectiveness of our solution in a distributed execution environment. Specifically, we leveraged the MareNostrum 4 supercomputer (MN4) [4], located at the Barcelona Supercomputing Center. Its current peak performance is 11.15 Petaflops and it is composed of 3456 nodes, each of which has two Intel@Xeon Platinum 8160 (24 cores at 2,1 GHz each) and 96 GB of main memory. It has also 100 GB Intel@Omni-Path Full-Fat Tree Interconnection, and 14 PB of shared disk storage managed by the Global Parallel File System [25].

In this experimental evaluation, we focused on the execution of the Principal Component Analysis (PCA) algorithm. It is a dimensionality reduction algorithm, whose aim is to compute a meaningful low-dimensional representation of the input data by projecting each sample onto only the first few principal components. The log used for the extraction of the training data was enriched using several real-world datasets, listed in the following, which belong to different fields, ranging from medicine to particle physics.

- *Diabetes*: medical data, used for predicting whether or not a patient has diabetes, based on diagnostic measurements.
- *Cleveland*: medical data, used for predicting the heart disease risk based on clinical measurements.
- *Banknote*: high resolution images, used for evaluating if a banknote is authentic or forgery.

- *Superconductors* [26]: superconductors data, used for predicting the critical temperature.
- *Accelerometer* [27]: accelerometer data, used for predicting motor failures.
- *Iubq.bck.10.crd*, *Iubq.bck.1.crd*, *Iubq.heavy.1.crd*: particle physics datasets, containing up to 1 million atom trajectories described by a varying number of features and obtained from GROMACS simulations [28].

For the experimental evaluation we used three test datasets containing biomolecular simulation data, specifically information about atom trajectories in a *mdrcd*² format. These datasets are described in Table V.

Dataset name	# atoms	# rows	# columns
Traj_medium	6912	60,000	20,736
Traj_large	19,848	100,000	59,544
Traj_xlarge	31,632	100,000	94,896

TABLE V: Test datasets used to evaluate the benefits brought by the proposed methodology on the execution of the PCA algorithm on the MN4 supercomputer.

For the execution of our experiments, we employed 16 nodes of the MN4 supercomputer, with 96 GB of RAM per node. In addition, the number of used cores per task with the large and extra-large datasets was set to 24 due to the heavy computation and their big memory size, while for the medium dataset we used 8 cores per task.

Unlike the experiments shown in section V-A, we did not consider the large set of all possible partitionings, as the huge size of test datasets could have led to an excessively expensive process, due to time-consuming and resource-intensive computation. In this case, instead, we compared the time achieved by using the predicted partitioning (p_r^* , p_c^*) against the best partitioning that was individuated by domain experts (\hat{p}_r , \hat{p}_c), by following a trial and error approach. The obtained results are shown in Table VI.

Dataset	Predicted partitioning			Manual partitioning		
	p_r^*	p_c^*	Time (s)	\hat{p}_r	\hat{p}_c	Time (s)
Traj_medium	4	16	270	6	21	484
Traj_large	8	40	1123	14	36	1096
Traj_xlarge	8	48	1770	14	48	1825

TABLE VI: Results obtained in MareNostrum 4 using model predictions and domain expert estimates.

By comparing the time achieved by using the block size predicted by the model with that estimated by the domain experts, we achieved quite good results, with an average value of makespan ratio and makespan percentage reduction equal to 1.27 and 14.92%, respectively. In addition, as reported in Table VI, it can be seen that the data partitioning suggested by the model is the best one in two out of three test cases, resulting in

the shortest execution time. Moreover, it is worth noticing that in the remaining case, corresponding to the *Traj_large* dataset, the relative difference between the two execution times is quite small ($\approx 2\%$). The prediction is indeed reasonably good, as it can be calculated quickly without involving any trial and error approach and requiring a quite small amount of resources and domain knowledge.

For the sake of completeness, in Figure 6 we provide the execution times measured by executing the PCA algorithm on the *Traj_medium* dataset with all possible partitionings, computed using progressive powers of 2 from 2 to 64, leading to a maximum number of blocks and tasks equal to 64^2 . The plot shows that the partition predicted by the model is the third best possible. Nevertheless, while not leading to the minimum execution time, the estimate is still an excellent approximation, obtainable in a very efficient way and effectively exploitable to allow the efficient execution of PCA. Finally, we compared the time obtained with the predicted partitioning with the average and worst times shown in Figure 6. Specifically, we measured a makespan ratio equal to 3.54 and 13.59 and a percentage reduction of makespan of 71.75% and 92.64% compared to the average and worst times. All of these results further confirm how crucial it is to choose a suitable partitioning for running data-intensive applications in high-performance distributed environments.

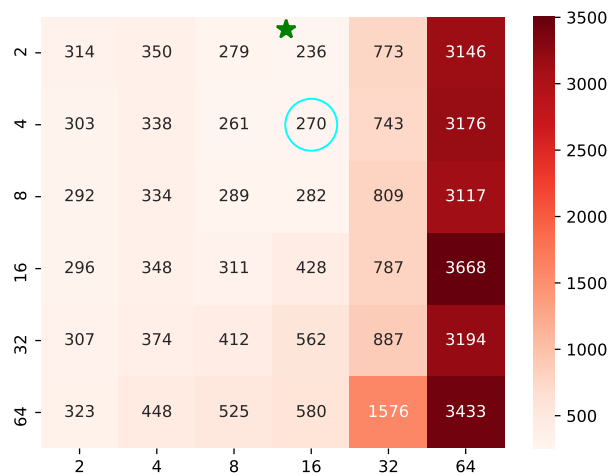


Fig. 6: Execution times achieved in MareNostrum 4 by running PCA on the *Traj_medium* dataset. The x and y axis show the number of blocks along rows and columns. The time obtained with the predicted block size is marked by the cyan circle, while the best one by the green star.

VI. CONCLUSIONS AND FINAL REMARKS

Data-intensive applications are widespread in several domains, such as bioinformatics, high energy physics, and modeling of natural phenomena. In such applications, an effective strategy for data partitioning is crucial to enable their efficient execution in distributed HPC environments. This paper introduced a novel methodology, aimed at optimizing the

²Amber trajectory format, <https://ambermd.org/FileFormats.php>

execution of such applications by determining the best block size to be used for data partitioning. Our methodology was evaluated on the dislib library of PyCOMPSs, considering different execution environments, including the MareNostrum 4 supercomputer, and different real-world datasets. Experimental results show how the proposed machine learning solution can lead to a significant improvement in application performance and a reduction of execution time. In future work we plan to improve our methodology to make it even more generic and usable. In particular, we will extend it to support the choice of other parameters required to configure a distributed environment, such as the number of nodes and the RAM to be assigned to each node. Finally, to further validate the proposed methodology, it can be applied to other frameworks and libraries other than PyCOMPSs and dislib, as it can be exploited in any case data partitioning is essential to improve application performance and scalability.

REFERENCES

- [1] B. Carver, J. Zhang, A. Wang, A. Anwar, P. Wu, and Y. Cheng, "Wukong: A scalable and locality-enhanced framework for serverless parallel computing," in *Proceedings of the 11th ACM Symposium on Cloud Computing*, 2020, pp. 1–15.
- [2] F. Marozzo, F. Rodrigo Duro, J. Garcia Blas, J. Carretero, D. Talia, and P. Trunfio, "A data-aware scheduling strategy for workflow execution in clouds," *Concurrency and Computation: Practice and Experience*, vol. 29, no. 24, 2017.
- [3] S. Giampà, L. Belcastro, F. Marozzo, D. Talia, and P. Trunfio, "A data-aware scheduling strategy for executing large-scale distributed workflows," *IEEE Access*, vol. 9, pp. 47 354–47 364, 2021.
- [4] Barcelona Supercomputing Center (BSC). (2018) MareNostrum IV Technical Information. [Online]. Available: <https://www.bsc.es/marenostrum/marenostrum/technical-information>
- [5] M. S. Mahmud, J. Z. Huang, S. Salloum, T. Z. Emara, and K. Sadat-diyonov, "A survey of data partitioning and sampling methods to support big data analysis," *Big Data Mining and Analytics*, vol. 3, no. 2, pp. 85–101, 2020.
- [6] Apache Hadoop. [Online]. Available: <https://hadoop.apache.org/>
- [7] Apache Spark. [Online]. Available: <https://spark.apache.org/>
- [8] S. Ramírez-Gallego, I. Lastra, D. Martínez-Rego, V. Bolón-Canedo, J. M. Benítez, F. Herrera, and A. Alonso-Betanzos, "Fast-mrmr: Fast minimum redundancy maximum relevance algorithm for high-dimensional big data," *International Journal of Intelligent Systems*, vol. 32, no. 2, pp. 134–152, 2017.
- [9] R.-J. Palma-Mendoza, L. de Marcos, D. Rodriguez, and A. Alonso-Betanzos, "Distributed correlation-based feature selection in spark," *Information Sciences*, vol. 496, pp. 287–299, 2019.
- [10] M. Al-Kateb, P. Sinclair, G. Au, and C. Ballinger, "Hybrid row-column partitioning in teradata®," *Proc. VLDB Endow.*, vol. 9, no. 13, p. 1353–1364, sep 2016.
- [11] G. A. Schreiner, D. Duarte, G. Dal Bianco, and R. d. S. Mello, "A hybrid partitioning strategy for newsq databases: The voltdb case," ser. iiWAS2019. New York, NY, USA: Association for Computing Machinery, 2019, p. 353–360.
- [12] S. Salloum, J. Z. Huang, and Y. He, "Random sample partition: a distributed data model for big data analysis," *IEEE Transactions on Industrial Informatics*, vol. 15, no. 11, pp. 5846–5854, 2019.
- [13] C. Wei, S. Salloum, T. Z. Emara, X. Zhang, J. Z. Huang, and Y. He, "A two-stage data processing algorithm to generate random sample partitions for big data analysis," in *International Conference on Cloud Computing*. Springer, 2018, pp. 347–364.
- [14] M. Bertolucci, E. Carlini, P. Dazzi, A. Lulli, and L. Ricci, "Static and dynamic big data partitioning on apache spark," in *Parallel Computing: On the Road to Exascale*. IOS Press, 2016, pp. 489–498.
- [15] M. Zaharia, M. Chowdhury, T. Das, A. Dave, J. Ma, M. McCauly, M. J. Franklin, S. Shenker, and I. Stoica, "Resilient distributed datasets: A {Fault-Tolerant} abstraction for {In-Memory} cluster computing," in *9th USENIX Symposium on Networked Systems Design and Implementation (NSDI 12)*, 2012, pp. 15–28.
- [16] R. Cantini, F. Marozzo, A. Orsino, D. Talia, and P. Trunfio, "Exploiting machine learning for improving in-memory execution of data-intensive workflows on parallel machines," *Future Internet*, vol. 13, no. 5, 2021.
- [17] O. Sukhoroslov, "Toward efficient execution of data-intensive workflows," *The Journal of Supercomputing*, vol. 77, no. 8, pp. 7989–8012, 2021.
- [18] L. Belcastro, R. Cantini, F. Marozzo, A. Orsino, D. Talia, and P. Trunfio, "Programming big data analysis: Principles and solutions," *Journal of Big Data*, vol. 9, no. 4, 2022.
- [19] F. Marozzo, D. Talia, and P. Trunfio, "Scalable script-based data analysis workflows on clouds," in *Proceedings of the 8th workshop on workflows in support of large-scale science*, 2013, pp. 124–133.
- [20] E. Tejedor, Y. Becerra, G. Alomar, A. Queralt, R. M. Badia, J. Torres, T. Cortes, and J. Labarta, "Pycompss," *International Journal of High Performance Computing Applications*, vol. 31, no. 1, p. 66–82, jan 2017.
- [21] J. Álvarez Cid-Fuentes, S. Solà, P. Álvarez, A. Castro-Ginard, and R. M. Badia, "dislib: Large Scale High Performance Machine Learning in Python," in *Proceedings of the 15th International Conference on eScience*, 2019, pp. 96–105.
- [22] F. Lordan and et al., "Servicess: An interoperable programming framework for the cloud," *Journal of Grid Computing*, vol. 12, no. 1, pp. 67–91, 2014.
- [23] P. Baldi, K. Cranmer, T. Faucett, P. Sadowski, and D. Whiteson, "Parameterized machine learning for high-energy physics," *arXiv preprint arXiv:1601.07913*, 2016.
- [24] Y. LeCun, L. Bottou, Y. Bengio, and P. Haffner, "Gradient-based learning applied to document recognition," *Proceedings of the IEEE*, vol. 86, no. 11, pp. 2278–2324, 1998.
- [25] F. Schmuck and R. Haskin, "{GPFS}: A {Shared-Disk} file system for large computing clusters," in *Conference on File and Storage Technologies (FAST 02)*, 2002.
- [26] K. Hamidieh, "A data-driven statistical model for predicting the critical temperature of a superconductor," *Computational Materials Science*, vol. 154, pp. 346–354, 2018.
- [27] G. S. Sampaio, A. R. de Aguiar Vallim Filho, L. S. da Silva, and L. A. da Silva, "Prediction of motor failure time using an artificial neural network," *Sensors*, vol. 19, no. 19, p. 4342, Oct. 2019.
- [28] M. J. Abraham, T. Murtola, R. Schulz, S. Páll, J. C. Smith, B. Hess, and E. Lindahl, "Gromacs: High performance molecular simulations through multi-level parallelism from laptops to supercomputers," *SoftwareX*, vol. 1–2, pp. 19–25, 2015.