
Parametric control of PageRank centrality rankings: a geometrical approach

Gonzalo Contreras-Aso^{*, #, b} and Regino Criado^{#, b, †} and
Miguel Romance^{#, b, †}

[#]*Departamento de Matemática Aplicada, Ciencia e Ingeniería de los Materiales y Tecnología Electrónica, Universidad Rey Juan Carlos, 28933 Móstoles (Madrid), Spain*

^b*Laboratory of Mathematical Computation on Complex Networks and their Applications, Universidad Rey Juan Carlos, 28933 Móstoles (Madrid), Spain*

[†]*Data, Complex networks and Cybersecurity Research Institute, Universidad Rey Juan Carlos, 28028 Madrid, Spain*

November 24, 2022

Abstract

The PageRank algorithm is a landmark in the development of the Internet as we know it, and its network-theoretic properties are still being studied. Here we present a series of results regarding the parametric controllability of its centralities, and develop a geometric method to crack the problem of assessing the control of its rankings. We apply these methods to the biplex PageRank case, comparing both centrality measures by means of numerical computations on real and synthetic network datasets.

1 Introduction

Almost 25 years have passed since the PageRank algorithm was devised [1]. It brought about two revolutions: on the industry side, it shaped the Internet landscape making Google the giant it is today. On the academic side, it triggered an enormous cascade of studies, interested in understanding its properties, its limitations and its implications [2, 3, 4, 5, 6]. Furthermore, it has been shown to be relevant beyond its original goal of webpage ranking: indeed, it has found applications in very diverse fields such as biology, engineering and even literature (see [7] for an extensive survey).

*Corresponding author: gonzalo.contreras@urjc.es

The academic research poured in the PageRank algorithm coincided with both the development of the interdisciplinary field of Complex Networks and the advent of accessible computing resources. This allowed for both theoretical and numerical results [6, 7, 4, 2] that have many direct applications in economic and social world, since PageRank algorithm is in the core of the most popular web engines. One of these direct implications in marketing and economics is the so called *Search Engine Optimization Problem (SEO)* or *Web Positioning Problem* [8, 9, 10], that tries to find out the strategies that can be performed in a network in order to the maximize PageRank of a specific node (or set of nodes). This theoretical problem has huge real applications with severe economic impact in the global markets. In our nowadays on-line world, for any company not only it is crucial to be present in the WWW, but also to appear highest in the ranking of any web engine; the web-master of a site is thus interested in increasing the PageRank of website by connecting it properly with other webpages, since the highest the ranking of a website the biggest economic revenue the corresponding company gets [11]. This major Search Engine Optimization Problem belongs to a more general class of problems related with centrality measures of networks: the control of a centrality measure. This general problem deals with the ability to modify at our wish the centrality of a specific node (or set of nodes) of a given network by slightly changing the link structure of the network or by modifying the intrinsic parameters of the centrality measure. Note that the Search Engine Optimization problem is related to the control of centrality measures by changing the link structure, while in this paper we will focus on the control by modifying the intrinsic parameters of the centrality measure.

While Search Engine Optimization Problem has attracted broad attention by the scientific community, the control of a centrality measure by modifying its intrinsic parameters has been less considered despite the fact that it also has some potential real applications, since, for example, it gives valuable information for a web engine administrator about how to modify the ranking of a webpage (or a set of webpages) simply by tuning the parameters of the centrality measure that is behind his web searcher. It is well known that most of the web engines work with algorithms that modify their ingredients in order to improve the results [6], so a detailed analysis of the influence and sensibility of each parameter of these centrality measures must be considered. In particular, in the case of PageRank centrality, there are two parameters of this measure to be considered[6, 7]: the *damping factor* $\alpha \in (0, 1)$ and the *personalization vector* $v \in \mathbb{R}^n$. The damping factor has been extensively studied, discussed and interpreted (see e.g. [4]), but the role of personalization vector has always remained understudied [12].

In this article, we attempt to shed some light on the relationship between the centrality vectors resulting from PageRank and the choice of personalization vectors. This is actually intertwined with the subject of centrality control in Complex Networks[13]: probing the space of possible centrality vectors with suitable changes in either the underlying graph or the centrality measure. There are already a number of studies discussing the possibility of increasing a node's own PageRank score[14, 15, 16, 17], as well as some advances regarding PageRank competitors[12] (nodes whose relative ranking position depend on the value of the algorithm's parameters). While these approaches are interesting on their own, they focus on specific nodes and their scores or rankings. In this work we discuss centrality vectors and their rankings as a whole, without reference to individual improvements or detriments.

This paper is structured as follows: In Section 2 we establish some notation and basic graph-theoretical concepts, as well as introduce the terminology that will be used throughout the paper. Section 3 presents the mathematical definition of the PageRank algorithm and then explore some routes towards controlling its resulting centrality, with either structural or parametric changes. Theoretical results connecting PageRank and personalization vectors are proven, and network datasets are then used for numerical comparisons and discussion of the implications. In Section 4 we apply the same techniques to the case of the biplex PageRank [18], an alternative centrality measure based on the PageRank algorithm. We conclude with a discussion and comparison between the results obtained with each of the different approaches.

2 Preliminaries and notation

Let $G = (V, E)$ be a graph (irregardless of directionality or weights), with node set $V = \{1, \dots, n\}$, for some $n \in \mathbb{N}$ and adjacency matrix $A = (a_{ij}) \in M_{n \times n}(\mathbb{R})$ such that

$$a_{ij} = \begin{cases} w_{ij} & \text{if } (i, j) \in E \\ 0 & \text{otherwise,} \end{cases} \quad (\text{II.1})$$

where w_{ij} is the weight corresponding to edge (i, j) , by default $w_{ij} = 1$ if unweighted.

The in-degree (number of incoming links) and out-degree (number of outgoing links) of node $i \in V$ are defined as

$$\text{deg}_{in}(i) = \sum_{j=1}^n a_{ji}, \quad \text{deg}_{out}(i) = \sum_{j=1}^n a_{ij}, \quad (\text{II.2})$$

respectively. For undirected graphs we clearly have $\text{deg}_{in}(i) = \text{deg}_{out}(i)$. Nodes in a graph with no outgoing links, i.e. such that $\text{deg}_{out}(i) \neq 0, i \in V$ are called *dangling* nodes. As will be pointed out later, only networks without dangling nodes will be considered, since similar results can be obtained for the general settings simply by using some standard techniques [12].

By using these definitions, we can introduce the first ingredient of PageRank, the row-normalized adjacency matrix P , which is defined as:

$$P = (p_{ij}) = \left(\frac{a_{ij}}{\text{deg}_{out}(i)} \right) \in M_{n \times n}(\mathbb{R}). \quad (\text{II.3})$$

We will denote vectors as $v = (v_1, \dots, v_n)^T \in \mathbb{R}^n$ and the canonical basis of \mathbb{R}^n as $\{e_1, \dots, e_n\}$, where $e_i = (0, \dots, 1^{(i)}, \dots, 0)^T$. The sum of all the canonical basis vectors will be denoted as $e = e_1 + \dots + e_n = (1, \dots, 1)^T$. Lastly, $I_n \in M_{n \times n}(\mathbb{R})$ is the identity matrix in \mathbb{R}^n and $\langle \cdot, \cdot \rangle$ the standard dot product in \mathbb{R}^n . With this notation, $v \in \mathbb{R}_+^n$ will be a positive vector in the sense that $v \in \mathbb{R}^n$ and $\langle v_i, e_j \rangle > 0$, for all $1 \leq i \leq n$.

3 Standard PageRank

We begin with the usual definition of the PageRank vector[1].

Definition 3.1 (PageRank vector). *Let G be a graph with no dangling nodes and whose row-normalized adjacency matrix is P . Let $v \in \mathbb{R}_+^n$ with $|v|_1 = \langle v, e \rangle = 1$ and $\alpha \in (0, 1)$. Then, the PageRank vector of G with damping factor α and personalization vector v is the only vector $\pi = \pi(G, \alpha, v)$ such that $\pi \in \mathbb{R}_+^n$ with $|\pi|_1 = \langle \pi, e \rangle = 1$ satisfying*

$$\pi^T = \pi^T (\alpha P + (1 - \alpha)ev^T). \quad (\text{III.1})$$

Remark 3.2. *Existence and uniqueness of π is guaranteed by the original Perron Theorem, as $\mathcal{G} = \alpha P + (1 - \alpha)ev^T$ is a positive matrix (see for example [19, 6]).*

Remark 3.3. *Graphs containing dangling nodes can also be considered, in which case we would need to resort to the standard trickery of substituting $P \rightarrow P + du$, where $d \in \mathbb{R}_+^n$ is the distribution of dangling nodes and $u \in \mathbb{R}_+^n$ is the distribution of imposed outgoing links from them (see, for instance [12]). The results shown in this paper are not affected by that change, we will thus omit it for the sake of clarity.*

We are interested in understanding the conditions under which an arbitrary stochastic vector can be set to be the PageRank centrality of a given graph. We can state this more formally:

Problem 3.4 (PageRank centrality control). *Can we modify the graph $G = (V, E)$ or the PageRank measure $\pi(G, \alpha, v)$ such that an arbitrary stochastic vector π_0 is the PageRank vector, i.e. $\pi_0 = \pi(G, \alpha, v)$?*

Changing the structure of the graph in some way (adding/removing edges, changing weights) would be considered as a *structural* change, whereas changing the parameters of the PageRank measure, such as the damping factor or its personalization vector, would be a *parametric* change.

In the context of the Eigenvector centrality it was proven [13] that by a rather mild structural change as changing edge weights, one is able to fully fix the resulting centrality vector at will, so long as the network is directed and strongly connected. In the present case, where we instead deal with the PageRank centrality, things are not that simple, due to the row-normalization of the adjacency matrix: the construction of P normalizes out any weight placed on out-edges coming from nodes with out-degree equal to 1. The simplest way to see this is considering directed rings, as in Figure 1.

We could consider controlling the centrality by means of other types of structural changes, such as adding nodes, rewiring edges, etc. However those are considerably more drastic modifications, and go out of the scope of this paper. Instead, we will now focus on parametric changes, i.e. modifications in the parameters of the centrality measure.

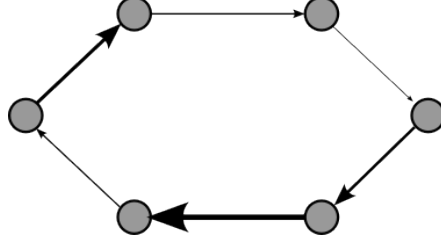


Figure 1: Simple example of a network (the directed cycle C_6) whose PageRank centrality is unaffected by any modification of the edge weights.

3.1 Constraints on the personalization vector

It is clear that suitable adjustments of the damping factor α and the personalization vector v will be needed in order to fix the PageRank centrality of the given network G (see, for example [4, 12]). What we attempt to do is quantifying the balance between the adjustment of both parameters. In other words, we want to understand what ranges of α provide the desired centrality vector for suitable v .

By operating with (III.1) it is easy to obtain the following formula [4]

$$\pi^T (I_n - \alpha P) = (1 - \alpha) v^T. \quad (\text{III.2})$$

Traditionally, this equation can be viewed as an equation for π given α , v and P . In this light, one could express the PageRank vector as the product of v^T and the resolvent of αP , rescaled by $(1 - \alpha)$. However, we can also view it as an equation for v^T given α , π and P :

$$v^T = \frac{1}{1 - \alpha} \pi^T (I_n - \alpha P). \quad (\text{III.3})$$

This equation tells us which personalization vector is required to obtain a desired PageRank vector, for a fixed network and damping factor. This raises a question: can we always find such non-negative personalization vector that gets a prescribed PageRank centrality? This natural question is summarized in the following problem:

Problem 3.5 (Centrality control via personalization vector). *Given $G = (V, E)$, $\alpha \in (0, 1)$ and $\pi_0 \in \mathbb{R}_+^n$ with $|\pi_0|_1 = 1$, does it always exists $v \in \mathbb{R}_+^n$ with $|v|_1 = 1$ such that $\pi(G, \alpha, v) = \pi_0$?*

In other words: can any PageRank vector be set for a given graph and damping factor if we have control over the personalization vector used in the algorithm?

The answer is no, in general, since there is no positive ($\langle v, e_i \rangle > 0, \forall 1 \leq i \leq n$) solution in some cases. Nevertheless, we can study the conditions under which π_0 actually has an associated personalization vector v and the following result give a characterization of the existence of positive personalization vectors that give a prescribed PageRank centrality π_0 in terms of the size of its components.

Theorem 3.6 (Existence of the personalization vector). *Given $G = (V, E)$ and $\pi_0 \in \mathbb{R}_+^n$ with $|\pi_0|_1 = 1$, then there exists $v \in \mathbb{R}_+^n$ with $|v|_1 = 1$ personalization vector such that $\pi(G, \alpha, v) = \pi_0$ if and only if $\langle \pi_0, e_j \rangle > \alpha \pi_0^T P e_j$ for all $1 \leq j \leq n$.*

Proof. First we prove that (III.3) leads to unit-norm personalization vectors, since

$$\begin{aligned} |v|_1 = \langle v, e \rangle &= \frac{1}{1-\alpha} \pi_0^T (I_n - \alpha P) e = \frac{1}{1-\alpha} \pi_0^T (e - \alpha P e) \\ &= \langle \pi_0, e \rangle = |\pi_0|_1 = 1, \end{aligned} \quad (\text{III.4})$$

where we used the row-stochasticity in $P \cdot e = e$. We now require that all of v 's components are positive, so

$$v_j = \langle v, e_j \rangle = \frac{1}{1-\alpha} \pi_0^T (I_n - \alpha P) e_j > 0, \quad (\text{III.5})$$

which, by identifying $\pi_0^T e_j = \langle \pi_0, e_j \rangle$ finalizes the proof. \square

Theorem 3.6 allows us to state that it is not possible to obtain any canonical vector e_i as the PageRank of any network and some analytical interplay between the damping factor and personalization vectors as the following corollaries shows:

Corollary 3.7 (Impossibility of e_i PageRank). *Let $G = (V, E)$ be a graph. There is no choice of personalization vector such that e_i is the resulting PageRank vector, for all i .*

Proof. We prove this by contradiction. Suppose that $\pi_0 = e_i$. Then, by using Theorem 3.6 we find that for every $1 \leq i, j \leq n$

$$\delta_{ij} > \alpha e_i^T P e_j = \alpha P_{ij}, \quad (\text{III.6})$$

where δ_{ij} denotes Kronecker's delta. Note that last expression is always satisfied for $i = j$ since $P_{ii} = 0$ and $\delta_{ii} = 1$, but if $i \neq j$ this is never satisfied for any $\alpha > 0$ since $P_{ij} \geq 0$ and in this case $\delta_{ij} = 0$. \square

Corollary 3.8 (Relation damping and personalization vector). *Given $\pi_0 \in \mathbb{R}_+^n$ with $|\pi_0|_1 = 1$, if $0 < \alpha \leq \min_j \langle \pi_0, e_j \rangle$ then for any $G = (V, E)$ without dangling nodes there exists a personalization vector $v \in \mathbb{R}_+^n$ with $|v|_1 = 1$ such that $\pi(G, \alpha, v) = \pi_0$.*

Proof. Note that $P e_j$ is the j -th column of P , that is

$$P e_j = \left(\frac{a_{1j}}{\deg_{out}(1)}, \frac{a_{2j}}{\deg_{out}(2)}, \dots, \frac{a_{nj}}{\deg_{out}(n)} \right)^T, \quad (\text{III.7})$$

therefore, since $0 \leq a_{ij}/\deg_{out}(i) \leq 1$, then we have that $\pi_0^T P e_j \leq \pi_0^T e = 1$. Now, if we take $\alpha < \min_j \langle \pi_0, e_j \rangle$, then

$$\alpha \pi_0^T P e_j \leq \alpha \leq \langle \pi_0, e_j \rangle \quad \forall 1 \leq j \leq n, \quad (\text{III.8})$$

hence, Theorem 3.6 ensures that there exists a personalization vector $v \in \mathbb{R}_+^n$ with $|v|_1 = 1$ such that $\pi(G, \alpha, v) = \pi_0$, which conclude the proof. \square

3.2 The Ranking control problem

In this section we will analyze the centrality control problem using Corollary 3.8, as seen in the previous section.

Centrality measures typically return a list (vector) of centrality scores: numbers between 0 and 1 specifying the importance of each node in the network with respect to the chosen measure. However, for most applications the actual score of a node is not relevant; instead what matters is its relative position with respect to the rest of the nodes. In other words, the ranking of nodes based on their centrality. We can make this more precise as an equivalence relation [20]: let $\pi_1, \pi_2 \in \mathbb{R}_+^n$ be centrality vectors, then

$$\pi_1 \sim \pi_2 \Leftrightarrow \exists \alpha > 0, \beta \geq (-\min_i v_i) \text{ such that } \pi_1 = \alpha(\pi_2 + \beta e). \quad (\text{III.9})$$

This is due to the fact that neither shifting all scores by the same number or scaling them all at once change the overall ranking. Each equivalence class thus corresponds to a different ranking.

The subject of ranking control has remained fairly unexplored due to its technical complexity (as lifting the constraint of fixing concrete centrality vectors makes the problem harder to tackle), but in the PageRank case Corollary 3.8 provides us with a valuable tool to investigate in this direction by using some techniques from convex geometry.

Consider the following milder version of Problem 3.5, where we are now only interested in rankings rather than concrete PageRank vectors.

Problem 3.9 (Ranking control via personalization vector). *Given $G = (V, E)$, $\alpha \in (0, 1)$ and a permutation σ of the indices $\{1, \dots, n\}$ (i.e. $\sigma(1) \leq \sigma(2) \leq \dots \leq \sigma(n)$, allowing ties), does it always exist $v \in \mathbb{R}_+^n$ with $|v|_1 = 1$ such that $\pi(G, \alpha, v)$ orders the nodes in G according to σ ?*

In order to study this problem we will now change the viewpoint of the discussion to a geometric one: consider the n -simplex defined as

$$\Delta_n = \{x \in \mathbb{R}_+^n; |x|_1 = 1\}. \quad (\text{III.10})$$

This set represents the convex span of vectors $\{e_1, \dots, e_n\}$, and thus is the space of all possible personalization vectors and the space of all possible PageRank vectors of graphs with n nodes. Therefore, we can understand equation (III.2) as the following map on Δ_n :

$$\begin{aligned} \pi(G, \alpha, \cdot) : \Delta_n &\longrightarrow \Delta_n \\ v &\longmapsto \pi(G, \alpha, v) \end{aligned} \quad (\text{III.11})$$

This map is injective (however in general it is not surjective) and linear in v , so $\pi(G, \alpha, \Delta_n)$ is a polytope (i.e. the convex hull of a finite number of points) in $\Delta_n \subset \mathbb{R}^n$. Figure 2 illustrates this geometrical interpretation of $\pi(G, \alpha, \cdot)$ in case $n = 3$.

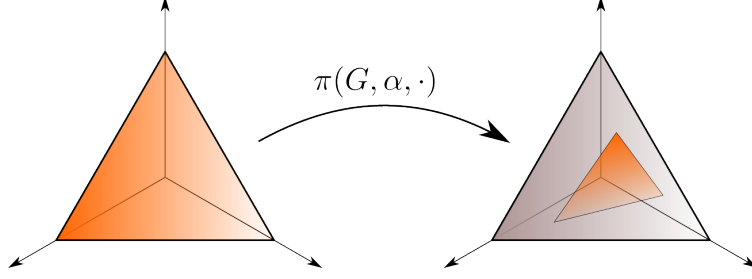


Figure 2: Depiction of the map $\pi(G, \alpha, \cdot)$ for $n = 3$.

The key point in this geometric viewpoint is that we can associate each possible ranking to a portion of the simplex. If we consider the center point (barycenter) of the simplex Δ_n , given by normalization of e , i.e. $\tilde{e} = \frac{1}{n}e = \frac{1}{n}\sum_{i=1}^n e_i$ and we denote $e_0 = \tilde{e}$, then we can define the hyperplanes bisecting the simplex through the center \tilde{e} and any combination of $n - 2$ vertices as

$$\mathcal{H}_n^{i,j} = \left\{ \sum_{k=0, k \neq i, j}^n \lambda_k e_k \mid \lambda_k \in \mathbb{R} \right\} \subseteq \mathbb{R}^n. \quad (\text{III.12})$$

The relevance of this construction is that it provides us with a way to classify the points $\pi \in \Delta_n$ according to their ranking. To see this, consider for instance the hyperplane $\mathcal{H}_4^{1,2}$. It can be identified as the region of ranking space where $c_1 = c_2$, by definition. If we move away from it in the direction of e_2 we will have $c_1 < c_2$, and viceversa.

In general, the $\binom{n}{2}$ planes $\mathcal{H}_n^{i,j}$ uniquely determine the pairwise inequalities between components i, j of the PageRank vector. The original simplex Δ_n is then divided into $n!$ regions (the number of permutations of the components of the PageRank vector), each of them determining a different ranking. A depiction of these regions for the $n = 3$ case can be seen in Figure 3.

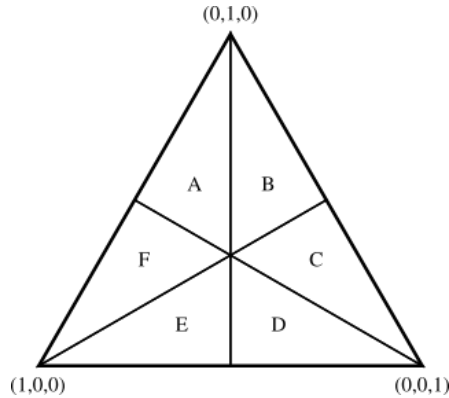


Figure 3: Different ranking regions in the $n = 3$ case. For instance, if ∂A denotes the (topological) boundary of $A \subseteq \Delta_n$ in the containing plane of A , then $\pi = (\pi_1, \pi_2, \pi_3) \in A \setminus \partial A$ corresponds to $\pi_2 > \pi_1 > \pi_3$, while the intersection between triangles would lead to equal scores, e.g. $\pi \in B \cap C$ would correspond to $c_2 = c_3 > c_1$.

Remark 3.10. *Ranking are given by the closeness to each vertex. However, we are not talking about closeness in the standard (ℓ_2 -norm) sense, instead we are referring to close with respect to the ℓ_1 -norm, where equidistant points form a diamond rather than a circle.*

In this light, we can see that there is Ranking control if and only if

$$\tilde{e} = \frac{1}{n}e \in \text{Im}(\pi) \quad \text{and} \quad \tilde{e} = \frac{1}{n}e \notin \partial \text{Im}(\pi). \quad (\text{III.13})$$

The argument here is identical to that of the hyperplanes: $\pi = \tilde{e}$ is the point in ranking space where $c_1 = c_2 = \dots = c_n$. Given that all hyperplanes $\mathcal{H}_n^{i,j}$ pass through \tilde{e} by construction, all ranking regions are $\varepsilon > 0$ away from it. Thus, moving $\varepsilon > 0$ away in any direction will lead to different rankings.

Next, we can give an analytical characterization of the existence of a prescribed ranking of the nodes in terms of the relationship between the damping factor and the column sums of P , which is the analogous of Theorem 3.6 but for the Ranking problem.

Theorem 3.11 (Characterization of ranking control). *Given a network $G = (V, E)$ and $\alpha = (0, 1)$, then it is possible to obtain any ranking of the nodes under the PageRank $\pi(G, \alpha, v)$ for a $v \in \Delta_n$ if and only if*

$$\frac{1}{\alpha} > \max_j \left(\sum_{i=1}^n P_{ij} \right). \quad (\text{III.14})$$

Proof. Using $\pi_0 = \tilde{e}$ in Theorem 3.6 yields

$$\langle \tilde{e}, e_j \rangle = \frac{1}{n} > \alpha \tilde{e}^T P e_j = \frac{1}{n} \alpha \sum_{i=1}^n P_{ij}, \quad (\text{III.15})$$

for all $1 \leq j \leq n$, which already gives us the characterization of the existence of a personalization vector that gives any prescribed ranking of nodes. \square

Remark 3.12. *The above proof assumes that the center does not lie in the border $\text{Im}(\pi)$. If it did, the result still holds for $\tilde{\alpha} = \alpha - \varepsilon$, for any $0 < \varepsilon < \alpha$.*

Note that Theorem 3.11 tells us that, provided we have $\alpha < 1 / \max_j \sum_i P_{ij}$, we can always find any desired ranking with an appropriate choice of personalization vector. It is important to note that this is not a statistical result, in the sense that as long as there is one node targeted by many others with low out-degree, there will be almost no room for ranking control, regardless of the topology of the rest of the network. As we will see later, this is very reminiscent of the scale-free [21] network paradigm: indeed, scale-free networks present these high in-degree nodes pointed to by low out-degree ones.

It is also remarkable to point out the fact that if we denote

$$\alpha_0 = \frac{1}{\max_j \sum_i P_{ij}}, \quad (\text{III.16})$$

then $\alpha_0 \in (0, 1]$ is a measure of the *controllability* of the PageRank in graph G , since the bigger α_0 is the wider range of damping factors allow Ranking control of PageRank in G .

3.3 Real network datasets

Having found an network-specific upper bound for the value of the damping factor α , which would allow the PageRank of the network to be ranking-controllable tinkering with the personalization vector, it is left for us to find out whether it is a hard or soft bound.

The standard value considered for the damping is $\alpha = 0.85$ [6], whose interpretation in terms of Internet hyperlink networks is that of a surfer clicking on hyperlinks ~ 8 times before losing interest and searching for something else; this value corresponds to constraining the maximum of the column sum of P to around 1.17. This is clearly a very strict condition.

In fact, we have computed the maximum of the column sums of P for a variety of networks¹, publicly available from different Internet sources (all fetch from the KONECT network repository [22] and the CASOS network repository [23]). We can extract the maximum value of the damping factor α which would enable us to have ranking control over each network’s PageRank rankings. This is shown in Figure 4.

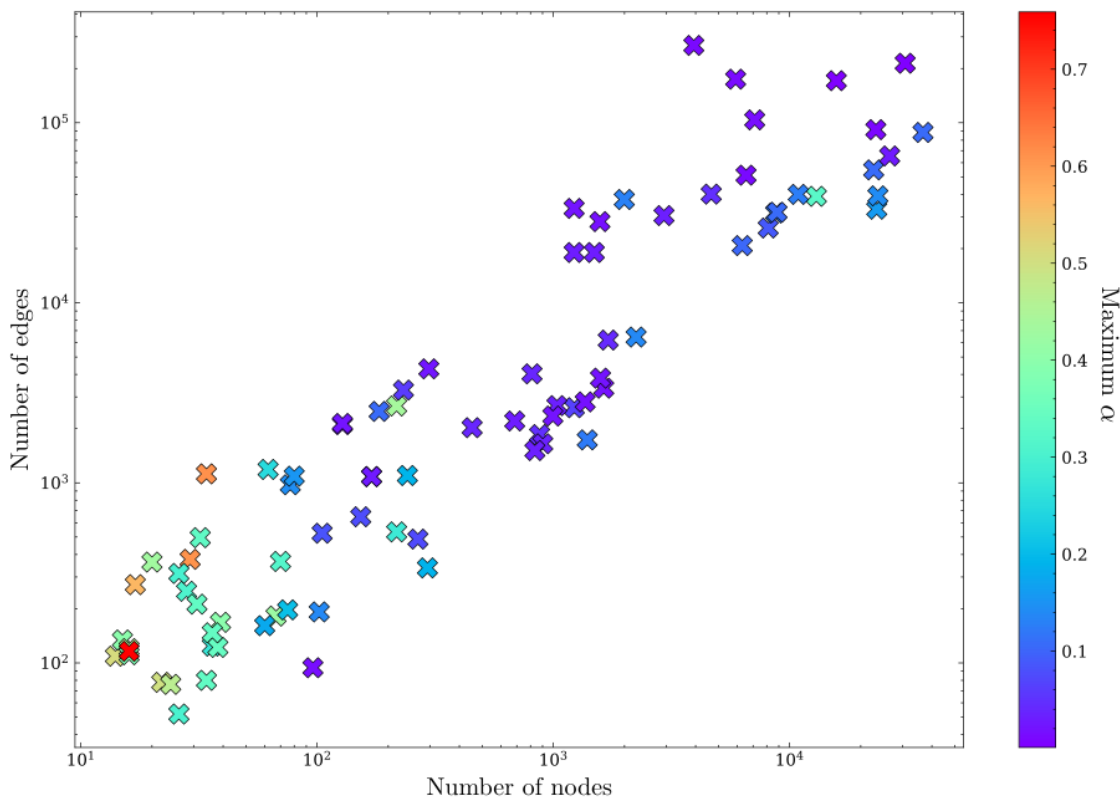


Figure 4: Scatter plot showing the number of edges against the number of nodes for 84 different real networks obtained from the KONECT network repository [22] and the CASOS network repository [23], with datapoints colored based on the maximum value of α providing ranking control.

¹It should be noted that in order to perform this computation we had to deal with the issue of the dangling nodes, which we glossed over at the beginning of this section. We deemed adding a single, random connection from each dangling node to another, non-dangling node as the simplest, least intrusive way to remove this issue.

As expected from the above discussion, the maximum values of the damping factor are generally small compared to the standard $\alpha = 0.85$, regardless of the network size. There are a couple of exceptionally high values, but still lower than such value. We see, on the other hand, that the smaller the network the more controllable it is. This can also be understood from Theorem 3.11: a higher number of nodes means that the maximum column sum of P is likely to be higher (specially due to the number of edges growing also linearly with the number of nodes), hindering controllability.

4 Biplex PageRank

In [18] a novel version of the PageRank vector was put forward by establishing an analogy between the standard PageRank algorithm and a random surfer on a biplex network, which was shown to be useful in order to extend the notion of PageRank centralities to multiplex networks.

Multiplex networks are networks where the interactions between nodes fall into different categories [24]. Hence, they can be represented as different layers, each containing the same nodes but with a particular set of connections. Standard complex network algorithms (such as centrality measures, community algorithms, and others) need to be extended to accounting for these more intricate structures, and the biplex PageRank [18] is one of such extensions.

In the biplex PageRank algorithm, the biplex network considered consists of two layers: one with the actual edge connections between the n nodes, while the other containing a fully connected graph between them [18]. That construction led to the following definition:

Definition 4.1 (Biplex PageRank centrality [18]). *Let G be a graph with no dangling nodes, with row-normalized adjacency matrix P . Let $v \in \mathbb{R}_+^n$ with $|v|_1 = \langle v, e \rangle = 1$ and $\beta \in (0, 1)$. Then, the biplex PageRank vector of G with damping factor β and personalization vector v is the vector*

$$\pi_{\text{BPR}} = \pi_u + \pi_d \in \mathbb{R}_+^n, \quad (\text{IV.1})$$

where $[\pi_u^T \ \pi_d^T] \in \mathbb{R}_+^{2n}$ is the unique normalized and positive eigenvector of

$$M_{\text{BPR}} = \begin{pmatrix} \beta P & (1 - \beta)I_n \\ \beta I_n & (1 - \beta)ev^T \end{pmatrix}. \quad (\text{IV.2})$$

Remark 4.2. *Existence and uniqueness of the Biplex PageRank centrality are granted by the Perron-Frobenius Theorem (see [18])*

Vectors π_u and π_d satisfy the following relations, $\pi_u e = \beta$ and $\pi_d e = 1 - \beta$.

Later in [25] a closed form formula for the Biplex PageRank vector, in resemblance to formula (III.2), was found as

$$\pi_{\text{BPR}}^T = (1 - \beta)^2 v^T (\beta I_n + Y) Z^{-1}, \quad (\text{IV.3})$$

where $Y = I_n - \beta P$, $Z = \gamma I_n - \beta P$ and $\gamma = 1 - \beta(1 - \beta)$. It is straightforward to check that $(\beta I_n + Y)$ is invertible in the $\beta \in (0, 1)$ range, so we also have the formula

$$v^T = \frac{1}{(1 - \beta)^2} \pi_{\text{BPR}}^T Z (\beta I_n + Y)^{-1}. \quad (\text{IV.4})$$

With this, we can state the following theorem that characterizes when a personalization vector exists for a prescribed bplex PageRank centrality.

Theorem 4.3 (Existence of the personalization vector - bplex case). *Given $G = (V, E)$ and $\pi_0 \in \mathbb{R}_+^n$ with $|\pi_0|_1 = 1$, then there exists $v \in \mathbb{R}_+^n$ with $|v|_1 = 1$ personalization vector such that $\pi_{\text{BPR}}(G, \beta, v) = \pi_0$ if and only if $\langle \pi_0, e_j \rangle > \beta \pi_0^T \mathcal{P} e_j$ for all $1 \leq j \leq n$, where $\mathcal{P} = (2 - \beta)(\beta I_n + Y)^{-1}$.*

Proof. First we prove that (IV.4) leads to unit-norm personalization vectors. Note that $P^n e = e$ due to row-stochasticity, therefore if we use the resolvent expansion $(\beta I_n + Y)^{-1} = \frac{1}{\beta+1} \sum_{m=0}^{\infty} (\frac{\beta}{\beta+1} P)^m$ we end up with

$$\begin{aligned} |v|_1 = \langle v, e \rangle &= \frac{1}{(1-\beta)^2} \pi_{\text{BPR}}^T Z(\beta I_n + Y)^{-1} e = \frac{1}{(1-\beta)^2} \pi_{\text{BPR}}^T Z e \frac{1}{\beta+1} \sum_{m=0}^{\infty} r^m \\ &= \frac{1}{(1-\beta)^2} \pi_{\text{BPR}}^T (\beta e - \beta e) = \langle \pi_{\text{BPR}}, e \rangle = 1. \end{aligned}$$

We now require that all components of the required personalization vector are positive,

$$v_j = \langle v, e_j \rangle = \frac{1}{(1-\beta)^2} \pi_{\text{BPR}}^T Z(\beta I_n + Y)^{-1} e_j > 0. \quad (\text{IV.5})$$

It will now be convenient expanding the $Z(\beta I_n + Y)^{-1}$ expression in with the previously mentioned resolvent series, multiplying and re-summing. Doing so we find

$$\begin{aligned} Z(\beta I_n + Y)^{-1} &= \frac{1}{\beta+1} (\gamma I_n - \beta P) \sum_{m=0}^{\infty} \left(\frac{\beta}{\beta+1} \right)^m P^m = \frac{1}{\beta+1} \sum_{m=0}^{\infty} \left[\gamma \left(\frac{\beta}{\beta+1} \right)^m P^m - \beta \left(\frac{\beta}{\beta+1} \right)^m P^{m+1} \right] \\ &= \frac{1}{\beta+1} \left[\gamma I_n - \beta(\beta-2)I_n + \beta(\beta-2) \sum_{m=0}^{\infty} \left(\frac{\beta}{\beta+1} \right)^m P^m \right] = I_n + \beta(\beta-2)(\beta+Y)^{-1}. \end{aligned}$$

Plugging this in the above equation we find the condition

$$[\pi_{\text{BPR}} + \beta(\beta-2)\pi_{\text{BPR}}(\beta I_n + Y)^{-1}] e_j > 0 \quad (\text{IV.6})$$

which, with the identification $\mathcal{P} = (2 - \beta)(\beta I_n + Y)^{-1}$ concludes the proof. \square

Again, by using the geometric approach proposed in Section 3.2 we can interpret the bplex PageRank vector as the linear map between simplices (III.10)

$$\begin{aligned} \pi_{\text{BPR}}(G, \beta, \cdot) : \Delta_n &\longrightarrow \Delta_n \\ v &\longmapsto \pi_{\text{BPR}}(G, \beta, v) \end{aligned} \quad (\text{IV.7})$$

This map is again injective and linear in v , and consequently allows us to employ the same kind of argument for the existence of ranking controllability

$$\tilde{e} = \frac{1}{n} e \in \text{Im}(\pi_{\text{BPR}}), \quad \tilde{e} = \frac{1}{n} e \notin \partial \text{Im}(\pi_{\text{BPR}}). \quad (\text{IV.8})$$

It is straightforward to find an analytic characterization of ranking control in the biplex PageRank case in terms of the relationship between β and the column sums of matrix P , simply by following the same reasoning used in the standard PageRank setting. In fact, following similar arguments that those used in the proof of Theorem 3.11 it can be easily proved the following result:

Theorem 4.4 (Characterization of biplex ranking control). *Given a network $G = (V, E)$ and $\beta = (0, 1)$, then it is possible to obtain any ranking of the nodes under the biplex PageRank $\pi_{\text{BPR}}(G, \beta, v)$ for a $v \in \Delta_n$ if and only if*

$$\frac{1}{\beta} > \max_j \sum_{i=1}^N \mathcal{P}_{ij} \quad (\text{IV.9})$$

By using the definition of \mathcal{P} , the condition that appears in Theorem 4.4 can be rewritten as follows:

$$\frac{1}{\beta} > \max_j \sum_{i=1}^N \mathcal{P}_{ij} = \left(\frac{2-\beta}{1+\beta} \right) \max_j \sum_{i=1}^N \left[\left(I_n - \frac{\beta}{1+\beta} P \right)^{-1} \right]_{ij}, \quad (\text{IV.10})$$

but we cannot expect a more simplified expression of the maximal β in terms of P_{ij} , since matrix \mathcal{P} depends itself on the damping factor, unlike what happened in the standard PageRank case.

4.1 Comparison to the monoplex result

After presenting the analytic result for the Biplex ranking problem (Theorem 4.4), we now turn to numerics in order to develop some understanding for this result. In particular, we are interested in how it compares to the usual PageRank, whether it is *more controllable* or not, in terms of the maximal damping factor that allows full ranking control. A similar comparative analysis was performed in terms of the controllability based on the personalization vector between the (classic) PageRank and the Biplex PageRank by J. Flores et. al [26].

As we have pointed out before, Theorem 3.11 shows that the value α_0 introduced in equation(III.16) is a measure of the controllability of the PageRank in G . Similarly, if we consider β_0 the maximal value that verifies equation (IV.10), then it is also a measure of the controllability of the Biplex PageRank in G , since the bigger β_0 is the wider range of damping factors allow Biplex Ranking control of PageRank in G . A numerical comparison between α_0 and β_0 for the same real network datasets used in the standard PageRank case (all fetch from the KONECT network repository [22] and the CASOS network repository [23]) is presented in Figure 5. Note that, for most cases the maximal value of the damping factor α_0 is smaller than the corresponding maximal β_0 for the Biplex PageRank, so we see that in these cases Biplex PageRank is more controllable than (classic) PageRank, which is consistent with the results obtained in [26] for the controllability related with personalization vectors.

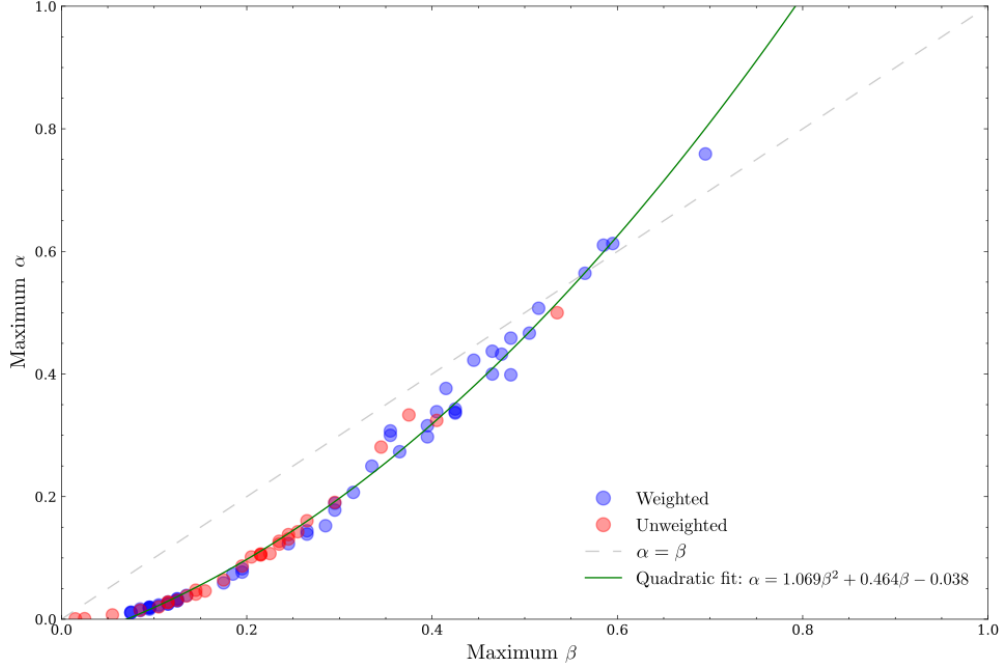


Figure 5: Comparison between maximum α and β saturating their respective bounds in the cases of Standard and Biplax PageRank for 84 different real networks obtained from the KONECT network repository [22] and the CASOS network repository [23]. Red datapoints represents weighted networks and blue represents unweighted ones.

It is also interesting to point out that, although the datasets come from very heterogeneous sources, there is a clear tendency in the data, following a curve which we found to be (via a quadratic polynomial fit) $y = 1.014x^2 + 0.492x - 0.041$. This is perhaps more surprising when we take into account that some of the sampled networks are weighted, yet the quadratic behaviour remains unchanged.

In order to delve deeper in this result, we will consider another batch of network data; this time synthetic networks. We have generated two distinct sets of networks: some random directed networks and some directed scale-free ones. In both cases we generated networks with the number of nodes ranging from 10 to 20,000, with different edge creation probabilities. We again compute their maximum values of α, β and plot one against the other, obtaining Figure 6.

We can clearly see that the polynomial fit is very similar to that of the real networks case, and we could expect them to match even better had we sampled more networks. Apart from that, it is quite noticeable that the distinct nature of the generated networks also separates them in their behavior with respect to both centrality measures. This was already hinted at in the previous section: the presence of high in-degree nodes pointed to by low out-degree ones is very common in scale-free networks, thus their maximum values of α and β are specially low. For random networks all nodes have, on average, the same connectivity, thus they allow for more flexibility in ranking control. Another byproduct of the randomness in the corresponding synthetic networks is the higher spread in α for fixed β compared to that of scale-free ones.

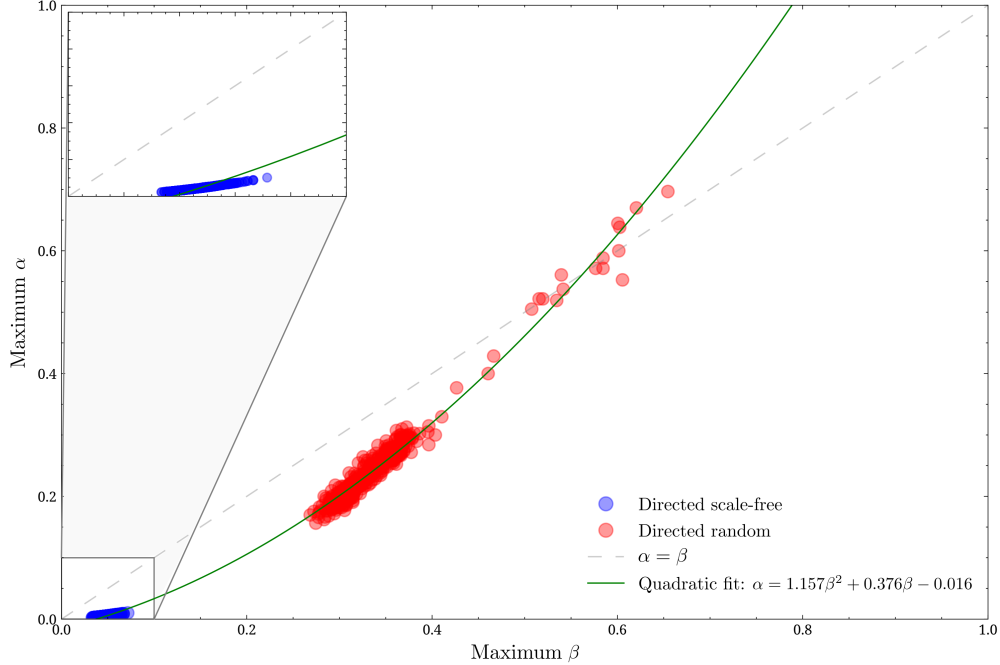


Figure 6: Comparison of maximum α and β saturating their respective bounds in the cases of Standard and Biplax PageRank for synthetic networks. Here red datapoints represent random networks and blue represents scale-free ones.

5 Conclusions

In this paper we have studied the controllability of the PageRank algorithm as a centrality measure in complex networks. We have shown the impossibility of full control by means of weight changes, and we have explored the conditions required to have full control by means of parametric changes involving both the damping factor and the personalization vector. Lifting the requirement of fully fixing the centrality scores, and focusing on the centrality rankings, we have found a milder requirement for it, both in the case of the standard PageRank and the biplx PageRank. Nevertheless, when we apply this condition to either real or synthetic networks, we see that it is a very hard bound. We argue that these results provide yet another piece of evidence regarding the stability of the PageRank algorithm as an indexing tool.

Acknowledgements

This work has been partially supported by projects PGC2018-101625-B-I00 (Spanish Ministry, AEI/FEDER, UE) and M1993 (URJC Grant). G. C-A. is funded by the URJC fellowship PREDOC-21-026-2164.

Data Availability Statement

The data used for the numerical results presented in this work, as well as the code written to analyze and plot them, can be found in the repository

https://github.com/LaComarca-Lab/PageRank_CentralityControl.

References

- [1] L. Page et al. “The PageRank citation ranking: Bringing order to the Web”. In: *Proceedings of the 7th International World Wide Web Conference*. 1998, pp. 161–172.
- [2] Monica Bianchini, Marco Gori, and Franco Scarselli. “Inside PageRank”. In: *ACM Trans. Inter. Tech.* 5 (Feb. 2005), pp. 92–. DOI: [10.1145/1052934.1052938](https://doi.org/10.1145/1052934.1052938).
- [3] Amy Langville and Carl Meyer. “Deeper Inside PageRank”. In: *Internet Mathematics* 1 (Jan. 2004). DOI: [10.1080/15427951.2004.10129091](https://doi.org/10.1080/15427951.2004.10129091).
- [4] Paolo Boldi, Massimo Santini, and Sebastiano Vigna. “PageRank as a Function of the Damping Factor”. In: *Proceedings of the 14th International Conference on World Wide Web*. New York, NY, USA: Association for Computing Machinery, 2005, pp. 557–566. ISBN: 1595930469. DOI: [10.1145/1060745.1060827](https://doi.org/10.1145/1060745.1060827).
- [5] Paolo Boldi, Massimo Santini, and Sebastiano Vigna. “PageRank: Functional dependencies”. In: *ACM Trans. Inf. Syst.* 27 (Jan. 2009).
- [6] Carl D. Langville, Amy N. ; Meyer. *Google’s PageRank and beyond, the science of search engine rankings*. Amy N. Langville and Carl D. Meyer. Princeton Univ. Press, 2006. ISBN: 0-691-12202-4.
- [7] David F. Gleich. “PageRank Beyond the Web”. In: *SIAM Review* 57.3 (2015), pp. 321–363. DOI: [10.1137/140976649](https://doi.org/10.1137/140976649).
- [8] D Chaffey, C Lake, and A Friedlein. “Search engine optimization-best practice guide”. In: *Econsultancy. com Ltd* (2009).
- [9] Jerri L Ledford. *Search engine optimization bible*. Vol. 584. John Wiley & Sons, 2015.
- [10] Monika R Henzinger. “Hyperlink analysis for the web”. In: *IEEE Internet computing* 5.1 (2001), pp. 45–50.
- [11] Patricia R Olsen. “A future in directing online traffic”. In: *The New York Times* (2009), p. 10.
- [12] E. García, F. Pedroche, and M. Romance. “On the localization of the personalized PageRank of complex networks”. In: *Linear Algebra and its Applications* 439.3 (2013). Special Issue in Honor of Harm Bart, pp. 640–652. ISSN: 0024-3795. DOI: <https://doi.org/10.1016/j.laa.2012.10.051>. URL: <https://www.sciencedirect.com/science/article/pii/S0024379512007835>.
- [13] V. Nicosia et al. “Controlling centrality in complex networks”. In: *Scientific Reports* 2, 218 (Jan. 2012), p. 218. DOI: [10.1038/srep00218](https://doi.org/10.1038/srep00218). arXiv: [1109.4521](https://arxiv.org/abs/1109.4521) [physics.soc-ph].

- [14] Konstantin Avrachenkov and Nelly Litvak. “The Effect of New Links on Google Pagerank”. In: *Stochastic Models* 22.2 (2006), pp. 319–331. DOI: [10.1080/15326340600649052](https://doi.org/10.1080/15326340600649052).
- [15] Cristobald de Kerchove, Laure Ninove, and Paul van Dooren. “Maximizing PageRank via outlinks”. In: *Linear Algebra and its Applications* 429.5 (2008). Special Issue devoted to selected papers presented at the 13th Conference of the International Linear Algebra Society, pp. 1254–1276. ISSN: 0024-3795. DOI: <https://doi.org/10.1016/j.laa.2008.01.023>. URL: <https://www.sciencedirect.com/science/article/pii/S0024379508000529>.
- [16] Martin Olsen. “Maximizing PageRank with New Backlinks”. In: *Algorithms and Complexity*. Ed. by Tiziana Calamoneri and Josep Diaz. Berlin, Heidelberg: Springer Berlin Heidelberg, 2010, pp. 37–48. ISBN: 978-3-642-13073-1.
- [17] V. Carchiolo et al. “Long Distance In-Links for Ranking Enhancement”. In: *Intelligent Distributed Computing XII*. Ed. by Javier Del Ser et al. Cham: Springer International Publishing, 2018, pp. 3–10. ISBN: 978-3-319-99626-4.
- [18] Francisco Pedroche, Miguel Romance, and Regino Criado. “A biplex approach to PageRank centrality: From classic to multiplex networks”. In: *Chaos: An Interdisciplinary Journal of Nonlinear Science* 26.6 (2016), p. 065301. DOI: [10.1063/1.4952955](https://doi.org/10.1063/1.4952955). URL: <https://doi.org/10.1063/1.4952955>.
- [19] Carl D. Meyer. *Matrix Analysis and Applied Linear Algebra*. SIAM, 2001. URL: <http://www.matrixanalysis.com/>.
- [20] Francesca Arrigo, Desmond J. Higham, and Vanni Noferini. “Beyond non-backtracking: non-cycling network centrality measures”. In: *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* 476.2235 (2020), p. 20190653.
- [21] Albert-László Barabási and Réka Albert. “Emergence of Scaling in Random Networks”. In: *Science* 286.5439 (Oct. 1999), pp. 509–512. DOI: [10.1126/science.286.5439.509](https://doi.org/10.1126/science.286.5439.509). arXiv: [cond-mat/9910332](https://arxiv.org/abs/cond-mat/9910332) [cond-mat.dis-nn].
- [22] Jérôme Kunegis. “KONECT – The Koblenz Network Collection”. In: *Proc. Int. Conf. on World Wide Web Companion*. 2013, pp. 1343–1350. URL: <http://dl.acm.org/citation.cfm?id=2488173>.
- [23] *CASOS network datasets*.
- [24] S. Boccaletti et al. “The structure and dynamics of multilayer networks”. In: *Physics Reports* 544.1 (2014), pp. 1–122. ISSN: 0370-1573. DOI: <https://doi.org/10.1016/j.physrep.2014.07.001>.
- [25] Francisco Pedroche et al. “Sharp estimates for the personalized Multiplex PageRank”. In: *Journal of Computational and Applied Mathematics* 330 (2018), pp. 1030–1040. ISSN: 0377-0427. DOI: <https://doi.org/10.1016/j.cam.2017.02.013>. URL: <https://www.sciencedirect.com/science/article/pii/S0377042717300717>.

- [26] Julio Flores et al. “Parametric controllability of the personalized PageRank: Classic model vs biplex approach”. In: *Chaos: An Interdisciplinary Journal of Nonlinear Science* 30.2 (2020), p. 023115.