

Toward Efficient Language Model Pretraining and Downstream Adaptation via Self-Evolution: A Case Study on SuperGLUE

Qihuang Zhong^{1,2*} Liang Ding^{2*} Yibing Zhan² Yu Qiao³ Yonggang Wen⁴ Li Shen² Juhua Liu¹
Baosheng Yu⁵, Bo Du¹, Yixin Chen⁶, Xinbo Gao⁷, Chunyan Miao⁴, Xiaoou Tang³ Dacheng Tao²

¹Wuhan University ²JD Explore Academy, JD.com Inc. ³Shanghai AI Lab ⁴Nanyang Technological University

⁵The University of Sydney ⁶Washington University in St Louis ⁷Chongqing University of Posts and Telecommunications

✉ zhongqihuang@whu.edu.cn, dingliang1@jd.com

Abstract

This technical report briefly describes our JDExplore d-team’s **Vega v2** submission on the SuperGLUE leaderboard¹. SuperGLUE is more challenging than the widely used general language understanding evaluation (GLUE) benchmark, containing eight difficult language understanding tasks, including question answering, natural language inference, word sense disambiguation, coreference resolution, and reasoning. **[Method]** Instead of arbitrarily increasing the size of a pretrained language model (PLM), our aim is to 1) fully extract knowledge from the input pretraining data given a certain parameter budget, e.g., 6B, and 2) effectively transfer this knowledge to downstream tasks. To achieve goal 1), we propose self-evolution learning for PLMs to wisely predict the informative tokens that should be masked, and supervise the masked language modeling (MLM) process with rectified smooth labels. For goal 2), we leverage the prompt transfer technique to improve the low-resource tasks by transferring the knowledge from the foundation model and related downstream tasks to the target task. **[Results]** According to our submission record (Oct. 2022), with our optimized pretraining and fine-tuning strategies, our 6B Vega method achieved new state-of-the-art performance on 4/8 tasks, sitting atop the SuperGLUE leaderboard on Oct. 8, 2022, with an average score of 91.3.

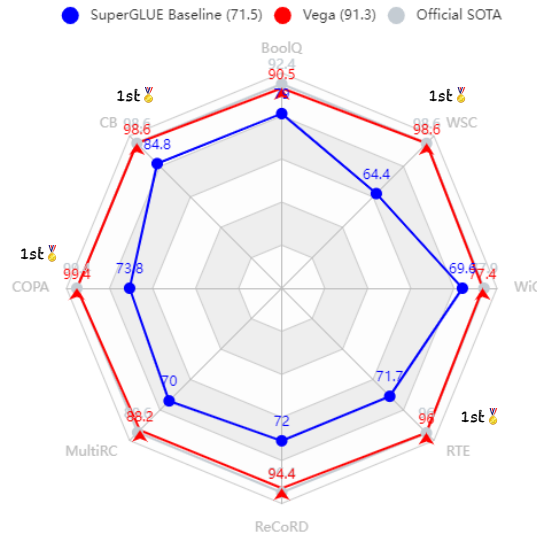


Figure 1: Vega v2 achieves state-of-the-art records on 4 out of 8 tasks among all submissions, producing the best average score of 91.3 and significantly outperforming the competitive official SuperGLUE Baseline (Wang et al., 2019a, BERT++).

* Equal contribution. Work was done when Qihuang was interning at JD Explore Academy.

¹<https://super.gluebenchmark.com/leaderboard/>

1 Introduction

The last several years have witnessed notable progress across many natural language processing (NLP) tasks, led by pretrained language models (PLMs) such as bidirectional encoder representations from transformers (BERT) (Devlin et al., 2019), OpenAI GPT (Radford et al., 2019) and its most renowned evolution GPT3 (Brown et al., 2020). The unifying theme of the above methods is that they conduct self-supervised learning with massive easy-to-acquire unlabelled text corpora during the pretraining stage and effectively fine-tune on a few labeled data in target tasks. Such a “pretraining-fine-tuning” paradigm has been widely adopted by academia and industry, and the main research and development direction involves scaling the sizes of foundation models up to extremely large settings, such as Google’s 540B PaLM (Chowdhery et al., 2022b), to determine the upper capacity bounds of foundation models.

In such a context, the SuperGLUE (Wang et al., 2019a) (a more challenging version of the general language understanding evaluation (GLUE) benchmark (Wang et al., 2018)) has become the most influential and prominent evaluation benchmark for the foundation model community. Most high-performing models on the GLUE/ SuperGLUE leaderboard bring new insights and better practices to properly guide future research and applications.

We recently submitted our 6B **Vega** v2 model to the SuperGLUE leaderboard and, as seen in Figure 1, obtained state-of-the-art records on 4 out of 8 tasks, sitting atop the leaderboard as of Oct. 8, 2022, with an average score of 91.3. Encouragingly, our 6B model with deliberately optimized pretraining and downstream adaptation strategies substantially outperforms 540B PaLM (Chowdhery et al., 2022b), showing the effectiveness and parameter-efficiency of our Vega model. This technical report briefly describes how we build our powerful model under a certain parameter budget, i.e., 6B, from different aspects, including backbone framework (§2.1), the efficient pretraining process (§2.2), and the downstream adaptation approach (§2.3). To fully extract knowledge from the given pretraining data to PLMs, we propose a **self-evolution learning** (in Figure 2) mechanism to wisely predict the informative tokens that should be masked and supervise the mask language modeling process with rectified smooth labels. To effectively transfer the knowledge to different downstream tasks, especially the low-resource tasks, e.g., CB, COPA, and WSC, we design a **knowledge distillation-based prompt transfer** method (Zhong et al., 2022b) (in Figure 3) to achieve better performance with improved robustness.

The remainder of this paper is designed as follows. We introduce the major utilized approaches in Section 2. In Section 3, we review the task descriptions and data statistics and present the experimental settings and major results. Conclusions are described in Section 4.

2 Approaches

In this section, we describe the main techniques in our model, including the backbone framework in §2.1, the efficient pretraining approaches in §2.2, and the downstream adaptation technique in §2.3.

2.1 Backbone Framework

Vanilla transformers (Vaswani et al., 2017) enjoy appealing scalability as large-scale PLM backbones (Devlin et al., 2019; Raffel et al., 2020; Brown et al., 2020; Zan et al., 2022b); for example, T5 and GPT3 flexibly scale their feedforward dimensions and layers up to 65,534 and 96, respectively. We hereby employ a vanilla transformer, i.e., multihead self-attention followed by a fully connected feedforward network, as our major backbone framework. As encoder-only PLMs have an overwhelming advantage over the existing methods on the SuperGLUE leaderboard, we train our large model in an encoder-only fashion to facilitate downstream language understanding tasks. According to our PLM parameter budget – 6 Billion, we empirically set the model as follows: 24 layers, 4096 as the hidden layer size, an FFN of size 16,384, 32 heads, and 128 as the head size. In addition, He et al. (2021) empirically demonstrated the necessity of computing self-attention with disentangled matrices based on their contents and relative positions, namely disentangled attention², which is adopted in Vega v2.

²In our preliminary ablations, we surprisingly found the Enhanced Mask Decoder (He et al., 2021) technique, which is coupled with disentangled attention strategy in DeBRETa, was useless, therefore we did not this strategy in Vega v2.

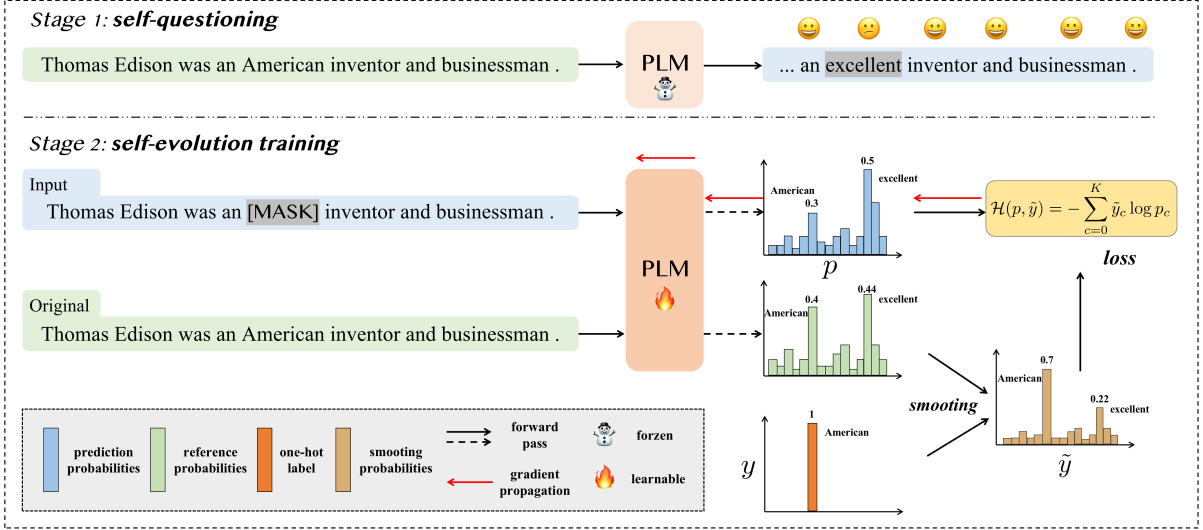


Figure 2: Overview of the proposed **self-evolution learning mechanism** for PLMs.

2.2 Efficient Pretraining

Recall that our aim is not to arbitrarily increase the model scales, but to facilitate storing the informative derived knowledge from the pretraining data in PLMs. To approach this goal, we first revisit the representative self-supervision objective – masked language modeling (Devlin et al., 2019) (MLM), and propose a novel self-evolution learning mechanism to enable our PLM to wisely predict the informative tokens that should be masked, and train the model with smooth self-evolution labels.

Masked Language Modeling MLM is a widely used self-supervision objective when conducting large-scale pretraining on large amounts of text to learn contextual word representations. In practice, MLM randomly selects a subset of tokens from a sentence and replaces them with a special mask token, i.e., [MASK]. However, such a random masking procedure is usually suboptimal, as the masked tokens are sometimes too easy to guess with only local cues or shallow patterns. Hence, some prior works focused on more informative masking strategies, such as span-level masking (Joshi et al., 2020), entity-level masking (Sun et al., 2019), and pointwise mutual information (PMI)-based masking (Sadeq et al., 2022). These efforts achieved better performance than vanilla random masking, which inspires us to explore more approaches for fully extracting knowledge from pretraining data.

Self-Evolution Learning Based on the above motivations, we propose a novel self-evolution learning mechanism for PLMs, as illustrated in Figure 2. Different from the prior works that designed masking strategies to train language models from scratch, our self-evolution learning approach aims to encourage the given “naive” PLMs to find patterns (tokens) that are not learned well but are more informative, and then fix them. Specifically, there are two stages in our self-evolution learning mechanism, as follows.

Stage 1 is *self-questioning*. Given a vanilla PLM (e.g., trained with the random masking objective), we first feed the original training samples into the PLM and make it re-predict the output probabilities for each token. As the PLM has seen these samples and learned from them in the pretraining stage, it can make deterministic and correct predictions for most of the tokens, which we denote as learned tokens. However, for some tokens, such as “American” in the sentence “Thomas Edison was an American inventor and businessman”, the PLM tends to predict this token as “excellent” (the probability of “excellent” is 0.44, while the probability of “American” is 0.4). We attribute this phenomenon to the fact that the PLM does not learn this knowledge-intense pattern but only makes its prediction based on the local cues. We refer to these harder and more informative tokens as neglected tokens. After all training samples are fed into the PLM, we can obtain a set of neglected tokens for each training sample. Note that this procedure is conducted offline and does not update the parameters of the original PLM.

Algorithm 1: Transductive Fine-tuning

Input: Finetuned (FT) Model M , Downstream Seed D **Output:** Transductively FT Model M'

```
1  $t := 0$ 
2 while not convergence do
3   Estimate  $D$  with  $M$  and get  $D^M$ 
4   Tune  $M$  on  $D \cup D^M$  and get  $M'$ , then  $M = M'$ 
5    $t := t + 1$ 
6 end
```

Stage 2 is *self-evolution training*. Given the neglected tokens (obtained in stage 1), we can select them for masking and then encourage the PLM to learn from these informative patterns, thus continuously improving the capability of the PLM. Intuitively, we can make the PLM learn how to predict these tokens, by minimizing the loss between the predicted probabilities and one-hot labels. However, considering the diversity of the neglected token, if we force the PLM to promote one specified ground truth over others, the other reasonable “ground truths” (for a given masking token, there can be more than one reasonable prediction) become false negatives that may plague the training process or cause a performance decrease (Li et al., 2022).

Hence, we propose a novel self-evolution training method to help the PLM learn from the informative tokens, without damaging the diversification ability of the PLM. In practice, we feed the masked sentence and original sentence into the PLM, and obtain the prediction probabilities p and reference probabilities r for the [MASK] token. Then, we merge the r and the one-hot label y as $\tilde{y} = (1 - \alpha) * y + \alpha * r$, where \tilde{y} denotes the smoothing label probabilities and α is a weighting factor that is empirically set as 0.5. Finally, we use the cross-entropy loss function to minimize the difference between p and \tilde{y} . In this way, different from the strong-headed supervision of the one-hot labels y , the PLM can benefit more from the smooth and informative labels \tilde{y} .

2.3 Downstream Adaptation

In addition to the above efficient pretraining methods, we also introduce some useful fine-tuning strategies for effectively adapting our Vega v2 to downstream tasks. Specifically, there are two main problems that hinder the adaptation performance of a model. 1) The first concerns the domain gaps between the training and test sets, which lead to poor performance on target test sets. 2) The second is the use of limited training data, e.g., the CB task, which only consists of 250 training samples, as limited data can hardly update the total parameters of PLMs effectively. Note that in addition to the strategies listed below, we have also designed and implemented other methods from different perspectives to improve the generalization and efficiency of models, e.g. the FSAM optimizer for PLMs (Zhong et al., 2022c), SparseAdapter (He et al., 2022), and continued training with downstream data (Zan et al., 2022a). Although these approaches can help to some extent, they do not provide complementary benefits compared to the listed approaches, so they are not described here.

Transductive Fine-tuning Regarding the domain or linguistic style gap between the training and test sets (the first problem), we adopt a transductive fine-tuning strategy to improve the target domain performance, which is a common practice in machine translation evaluations (Wu et al., 2020; Ding and Tao, 2021) and some domain adaptation applications (Liu et al., 2020). The proposed transductive fine-tuning technique is shown in Algorithm 1. Whether we should conduct transductive fine-tuning depends on the practical downstream performance achieved.

Prompt-Tuning To address the second problem, we replace the vanilla fine-tuning process with a more parameter-efficient method, *prompt-tuning* (Lester et al., 2021), for low-resource tasks. Despite the success of prompts in many NLU tasks (Wang et al., 2022; Zhong et al., 2022a), directly using prompt-tuning might lead to poor results, as this approach is sensitive to the prompt’s parameter initialization

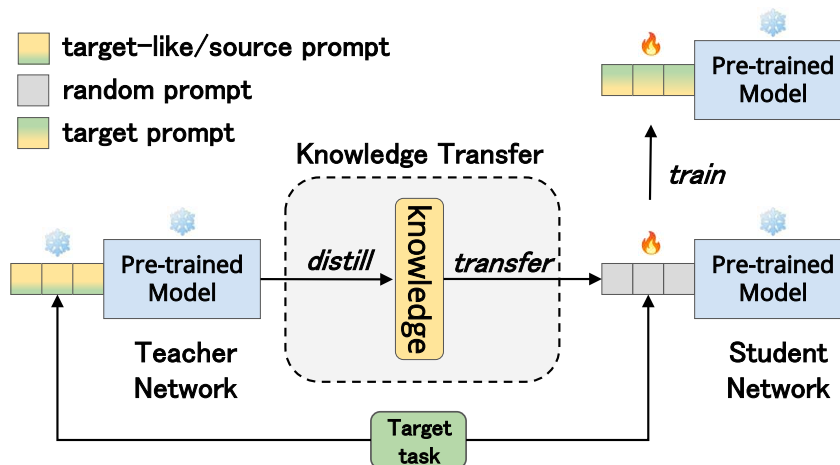


Figure 3: The architecture of our proposed KD-based prompt transfer method.

settings (Zhong et al., 2022b). An intuitive approach, termed as prompt transfer (Vu et al., 2022), is to initialize the prompt on the target task with the trained prompts from similar source tasks. Unfortunately, such a vanilla prompt transfer approach usually achieves suboptimal performance, as (i) the prompt transfer process is highly dependent on the similarity of the source-target pair and (ii) directly tuning a prompt initialized with the source prompt on the target task might lead to forgetting the useful general knowledge learned from the source task.

To this end, we introduce a novel prompt transfer framework (Zhong et al., 2022b) to tackle the above problems. For (i), we propose a new metric to accurately predict prompt transferability. In practice, the metric first maps the source/target tasks into a shared semantic space to obtain their task embeddings based on the source/target soft prompts and then measures the prompt transferability via the similarity of corresponding task embeddings. In our primary experiments, we found that this metric could make appropriately choose which source tasks should be used for a target task. For instance, to perform prompt transfer among the SuperGLUE tasks, WSC is a better source task for the CB task, while COPA benefits more from the RTE task.

Regarding (ii), inspired by the knowledge distillation (KD) paradigm (Hinton et al., 2015; Liu et al., 2021; Rao et al., 2022) that leverages a powerful teacher model to guide the training process of a student model, we propose a KD-based prompt transfer method that leverages the KD technique to transfer the knowledge from the source prompt to the target prompt in a subtle manner, thus effectively alleviating the problem of prior knowledge forgetting. An illustration of our proposed method is shown in Figure 3. More specifically, our KD-based prompt transfer approach first uses the PLM with the source prompt as the teacher network and the PLM with the randomly initialized prompt as the student network. Then, the student network is trained using the supervision signals from both the ground-truth labels in the target task and the soft targets predicted by the teacher network. Note that we only update the parameters of the student prompt, while keeping the other parameters fixed. Furthermore, to adaptively control the knowledge transfer process in our approach, we use the prompt similarity predicted by our metric as the balancing factor between the two supervision signals for each source-target pair.

Adversarial Fine-Tuning In addition to the above transductive FT and prompt-tuning processed for deliberately solving the training-testing domain gap and low downstream resource problem, respectively, we also adopt the advanced adversarial fine-tuning algorithm (Miyato et al., 2019; Jiang et al., 2020) designed for PLMs, i.e., SiFT (He et al., 2021), to improve the training stability of our approach. In practice, we follow He et al. (2021) by applying the perturbations to the normalized word embeddings when tuning our Vega foundation model on downstream tasks, where we first normalize the embedding vectors into stochastic vectors and then apply the perturbations to the normalized embedding vectors.

Table 1: **Results obtained on the SuperGLUE test sets**, which are scored by the SuperGLUE evaluation server. We obtained the results from <https://super.gluebenchmark.com> on October 8, 2022. The best results (except the those of human baselines) are shown in bold.

Model	BoolQ		CB		COPA		MultiRC		ReCoRD		RTE	WiC	WSC	Score
	Acc	F1	Acc	Acc	F1	EM	F1	Acc.	Acc	Acc	Acc			
SuperGLUE Baselines	79.0	84.8	90.4	73.8	70.0	24.1	72.0	71.3	79.0	69.6	64.4	71.5		
SuperGLUE Human Baselines	89.0	95.8	98.9	100.0	81.8	51.9	91.7	91.3	93.6	80.0	100.0	89.8		
PaLM 540B (Chowdhery et al., 2022a)	91.9	94.4	96.0	99.0	88.7	63.6	94.2	93.3	94.1	77.4	95.9	90.4		
ERNIE 3.0 (Sun et al., 2021)	91.0	98.6	99.2	97.4	88.6	63.2	94.7	94.2	92.6	77.4	97.3	90.6		
Turing NLR v5 (Bajaj et al., 2022)	92.0	95.9	97.6	98.2	88.4	63.0	96.4	95.9	94.1	77.1	97.3	90.9		
ST-MoE-32B (Zoph et al., 2022)	92.4	96.9	98.0	99.2	89.6	65.8	95.1	94.4	93.5	77.7	96.6	91.2		
Vega v2 (Ours)	90.5	98.6	99.2	99.4	88.2	62.4	94.4	93.9	96.0	77.4	98.6	91.3		

3 Experiments

3.1 Implementation

For pretraining, we follow many prior works (Liu et al., 2019; He et al., 2021) and use Wikipedia³ (the English Wikipedia dump, 10 GB), BookCorpus (Zhu et al., 2015)⁴ (6 GB), OpenwebText⁵ (38 GB), Stories⁶ (31 GB) and CC-News (Trinh and Le, 2018) (76 GB) as pretraining datasets, and use 40 NVIDIA DGX nodes with 320 A100 GPUs to train our Vega v2 model. It takes 30 days to finish phase-1 (pretraining, i.e., MLM) with 1 M steps. For phase-2, i.e., self-evolution training, we continuously train Vega v2 for 50K steps. During fine-tuning, we only apply our KD-based prompt transfer strategy to the low-resource tasks, e.g., CB, COPA, and WSC. For the other tasks, the vanilla full-parameter model-tuning method with adversarial and transductive fine-tuning is used. We use AdamW (Loshchilov and Hutter, 2018) as the optimizer for both pretraining and fine-tuning.

3.2 Tasks

To validate the effectiveness of Vega v2, we use the SuperGLUE benchmark (Wang et al., 2019b) for model evaluation purposes. As one of the most popular NLU benchmarks, SuperGLUE consists of eight challenging NLU tasks, including question answering (BoolQ, Clark et al. (2019), MultiRC, Khashabi et al. (2018), ReCoRD, Zhang et al. (2018)), natural language inference (CB, de Marneffe et al. (2019), RTE, Dagan et al. (2006; Bar Haim et al. (2006; Giampiccolo et al. (2007; Bentivogli et al. (2009))), word sense disambiguation (WIC, Pilehvar and Camacho-Collados (2019)), coreference resolution (WSC, Levesque et al. (2012)), and reasoning (COPA, Roemmele et al. (2011)). More detailed data statistics and examples for the above tasks can be found in Appendix Tables 3 and 4.

3.3 Main Results

Table 1 reports the test results obtained by our Vega v2 and other cutting-edge models on the SuperGLUE benchmark⁷. Vega v2 significantly surpasses the powerful human baselines in terms of average score (91.3 vs. 89.8) and achieves state-of-the-art performance on four (relatively) low-resource tasks, i.e., CB, COPA, RTE, and WSC. We attribute this success to the novel self-evolution learning mechanism and KD-based prompt transfer method. More specifically, the former enhances Vega v2’s ability to extract informative patterns, while the latter alleviates the problem of overfitting and boosts the model performance on low-resource tasks.

In addition, compared to the other larger PLMs, e.g., PaLM (Chowdhery et al., 2022b) which consists of 540 billion parameters, our 6-billion-parameter Vega v2 can achieve competitive or even better performance on the SuperGLUE benchmark. This inspires us to conclude that scaling PLMs to larger

³<https://dumps.wikimedia.org/enwiki/>

⁴https://github.com/butsugiri/homemade_bookcorpus

⁵<http://Skylion007.github.io>

⁶https://github.com/tensorow/models/tree/master/research/lm_commonsense

⁷We show the detailed ranking results on the SuperGLUE leaderboard in the Appendix. Please refer to Table 2.

model sizes arbitrarily might not be cost-effective, but would encourage the PLMs to fully extract knowledge from the pretraining data when given a certain parameter budget.

4 Conclusion

This paper presents the JD Explore Academy large-scale Vega v2 PLM for the SuperGLUE benchmark. Based on an advanced transformer backbone with disentangled attention and a series of advanced fine-tuning strategies, we propose two novel techniques. The first is a self-evolution learning mechanism that fully exploits the knowledge contained in data for a PLM in two steps: 1) the PLM performs self-questioning to determine hard and informative words, and then 2) supervises the MLM process with rectified smooth labels. The second is a prompt transfer strategy for efficiently adapting downstream tasks (especially low-resource tasks) by leveraging the knowledge acquired from the foundation model and related downstream tasks.

We show that these techniques significantly improve the efficiency of model pretraining and the performance achieved on downstream tasks. The Vega v2 model with 6 billion parameters achieves state-of-the-art records on 4 out of 8 tasks and ranks the first in terms of the macro-average score. Our experience with building Vega v2 demonstrates the necessity of 1) fully improving the parameter efficiency of PLMs, and 2) wisely performing downstream adaptation.

Acknowledgments

The authors wish to thank the leaderboard maintainer of SuperGLUE for their great construction efforts and their prompt responses to our questions. The authors also especially thank Mr. Yukang Zhang (JD Explore Academy), who kindly supports maintaining a stable computing platform.

References

- Payal Bajaj, Chenyan Xiong, Guolin Ke, Xiaodong Liu, Di He, Saurabh Tiwary, Tie-Yan Liu, Paul Bennett, Xia Song, and Jianfeng Gao. 2022. Metro: Efficient denoising pretraining of large scale autoencoding language models with model generated signals. *arXiv preprint arXiv:2204.06644*.
- Roy Bar Haim, Ido Dagan, Bill Dolan, Lisa Ferro, Danilo Giampiccolo, Bernardo Magnini, and Idan Szpektor. 2006. The second PASCAL recognising textual entailment challenge. In *Proceedings of the Second PASCAL Challenges Workshop on Recognising Textual Entailment*.
- Luisa Bentivogli, Ido Dagan, Hoa Trang Dang, Danilo Giampiccolo, and Bernardo Magnini. 2009. The fifth PASCAL recognizing textual entailment challenge. In *Textual Analysis Conference (TAC)*.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. Language models are few-shot learners. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin, editors, *Advances in Neural Information Processing Systems*, volume 33, pages 1877–1901. Curran Associates, Inc.
- Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. 2022a. Palm: Scaling language modeling with pathways. *arXiv preprint arXiv:2204.02311*.
- Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, Parker Schuh, Kensen Shi, Sasha Tsvyashchenko, Joshua Maynez, Abhishek B Rao, Parker Barnes, Yi Tay, Noam M. Shazeer, Vinodkumar Prabhakaran, Emily Reif, Nan Du, Benton C. Hutchinson, Reiner Pope, James Bradbury, Jacob Austin, Michael Isard, Guy Gur-Ari, Pengcheng Yin, Toju Duke, Anselm Levskaya, Sanjay Ghemawat, Sunipa Dev, Henryk Michalewski, Xavier García, Vedant Misra, Kevin Robinson, Liam Fedus, Denny Zhou, Daphne Ippolito, David Luan, Hyeontaek Lim, Barret Zoph, Alexander Spiridonov, Ryan Sepassi, David Dohan, Shivani Agrawal, Mark Omernick, Andrew M. Dai, Thanumalayan Sankaranarayanan Pillai, Marie Pellat, Aitor Lewkowycz, Erica Moreira, Rewon Child, Oleksandr Polozov, Katherine Lee, Zongwei Zhou, Xuezhi Wang, Brennan Saeta, Mark Díaz, Orhan Firat, Michele Catasta, Jason Wei, Kathleen S. Meier-Hellstern, Douglas Eck, Jeff Dean, Slav Petrov, and Noah Fiedel. 2022b. Palm: Scaling language modeling with pathways. *ArXiv*, abs/2204.02311.

- Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. 2019. Boolq: Exploring the surprising difficulty of natural yes/no questions. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 2924–2936.
- Ido Dagan, Oren Glickman, and Bernardo Magnini. 2006. The PASCAL recognising textual entailment challenge. In *Machine Learning Challenges. Evaluating Predictive Uncertainty, Visual Object Classification, and Recognising Textual Entailment*. Springer.
- Marie-Catherine de Marneffe, Mandy Simons, and Judith Tonhauser. 2019. The CommitmentBank: Investigating projection in naturally occurring discourse. To appear in *Proceedings of Sinn und Bedeutung 23*. Data can be found at <https://github.com/mcdm/CommitmentBank/>.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota, June. Association for Computational Linguistics.
- Liang Ding and Dacheng Tao. 2021. The USYD-JD speech translation system for IWSLT2021. In *Proceedings of the 18th International Conference on Spoken Language Translation (IWSLT 2021)*, pages 182–191, Bangkok, Thailand (online), August. Association for Computational Linguistics.
- Danilo Giampiccolo, Bernardo Magnini, Ido Dagan, and Bill Dolan. 2007. The third PASCAL recognizing textual entailment challenge. In *Proceedings of the ACL-PASCAL Workshop on Textual Entailment and Paraphrasing*. Association for Computational Linguistics.
- Pengcheng He, Xiaodong Liu, Jianfeng Gao, and Weizhu Chen. 2021. Deberta: Decoding-enhanced bert with disentangled attention. In *International Conference on Learning Representations*.
- Shwai He, Liang Ding, Daize Dong, Miao Zhang, and Dacheng Tao. 2022. Sparseadapter: An easy approach for improving the parameter-efficiency of adapters. *ArXiv*, abs/2210.04284.
- Geoffrey Hinton, Oriol Vinyals, Jeff Dean, et al. 2015. Distilling the knowledge in a neural network. *arXiv*.
- Haoming Jiang, Pengcheng He, Weizhu Chen, Xiaodong Liu, Jianfeng Gao, and Tuo Zhao. 2020. Smart: Robust and efficient fine-tuning for pre-trained natural language models through principled regularized optimization. *ArXiv*, abs/1911.03437.
- Mandar Joshi, Danqi Chen, Yinhan Liu, Daniel S Weld, Luke Zettlemoyer, and Omer Levy. 2020. Spanbert: Improving pre-training by representing and predicting spans. *Transactions of the Association for Computational Linguistics*, 8:64–77.
- Daniel Khoshdel, Snigdha Chaturvedi, Michael Roth, Shyam Upadhyay, and Dan Roth. 2018. Looking beyond the surface: A challenge set for reading comprehension over multiple sentences. In *Proceedings of the Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (NAACL-HLT)*. Association for Computational Linguistics.
- Brian Lester, Rami Al-Rfou, and Noah Constant. 2021. The power of scale for parameter-efficient prompt tuning. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 3045–3059.
- Hector Levesque, Ernest Davis, and Leora Morgenstern. 2012. The Winograd schema challenge. In *Thirteenth International Conference on the Principles of Knowledge Representation and Reasoning*.
- Shaobo Li, Xiaoguang Li, Lifeng Shang, Chengjie Sun, Bingquan Liu, Zhenzhou Ji, Xin Jiang, and Qun Liu. 2022. Pre-training language models with deterministic factual knowledge. *arXiv preprint arXiv:2210.11165*.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Roberta: A robustly optimized bert pretraining approach. *arXiv*.
- Juhua Liu, Qihuang Zhong, Yuan Yuan, Hai Su, and Bo Du. 2020. Semitext: Scene text detection with semi-supervised learning. *Neurocomputing*, 407:343–353.
- Juhua Liu, Qihuang Zhong, Liang Ding, Hua Jin, Bo Du, and Dacheng Tao. 2021. Unified instance and knowledge alignment pretraining for aspect-based sentiment analysis. *arXiv preprint arXiv:2110.13398*.
- Ilya Loshchilov and Frank Hutter. 2018. Decoupled weight decay regularization. In *International Conference on Learning Representations*.

- Takeru Miyato, Shin ichi Maeda, Masanori Koyama, and Shin Ishii. 2019. Virtual adversarial training: A regularization method for supervised and semi-supervised learning. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 41:1979–1993.
- Mohammad Taher Pilehvar and Jose Camacho-Collados. 2019. WiC: The word-in-context dataset for evaluating context-sensitive meaning representations. In *Proceedings of the Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (NAACL-HLT)*. Association for Computational Linguistics.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. 2019. Language models are unsupervised multitask learners. Technical report, OpenAI.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21(140):1–67.
- Jun Rao, Xv Meng, Liang Ding, Shuhan Qi, and Dacheng Tao. 2022. Parameter-efficient and student-friendly knowledge distillation. *ArXiv*, abs/2205.15308.
- Melissa Roemmele, Cosmin Adrian Bejan, and Andrew S. Gordon. 2011. Choice of plausible alternatives: An evaluation of commonsense causal reasoning. In *2011 AAAI Spring Symposium Series*.
- Nafis Sadeq, Canwen Xu, and Julian McAuley. 2022. Informask: Unsupervised informative masking for language model pretraining. *arXiv preprint arXiv:2210.11771*.
- Yu Sun, Shuohuan Wang, Yukun Li, Shikun Feng, Xuyi Chen, Han Zhang, Xin Tian, Danxiang Zhu, Hao Tian, and Hua Wu. 2019. Ernie: Enhanced representation through knowledge integration. *arXiv preprint arXiv:1904.09223*.
- Yu Sun, Shuohuan Wang, Shikun Feng, Siyu Ding, Chao Pang, Junyuan Shang, Jiayang Liu, Xuyi Chen, Yanbin Zhao, Yuxiang Lu, et al. 2021. Ernie 3.0: Large-scale knowledge enhanced pre-training for language understanding and generation. *arXiv preprint arXiv:2107.02137*.
- Trieu H Trinh and Quoc V Le. 2018. A simple method for commonsense reasoning. *arXiv preprint arXiv:1806.02847*.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *NeurIPS*.
- Tu Vu, Brian Lester, Noah Constant, Rami Al-Rfou, and Daniel Cer. 2022. Spot: Better frozen model adaptation through soft prompt transfer. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5039–5059.
- Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. 2018. GLUE: A multi-task benchmark and analysis platform for natural language understanding. In *Proceedings of the 2018 EMNLP Workshop BlackboxNLP: Analyzing and Interpreting Neural Networks for NLP*, pages 353–355, Brussels, Belgium, November. Association for Computational Linguistics.
- Alex Wang, Yada Pruksachatkun, Nikita Nangia, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. 2019a. Superglue: A stickier benchmark for general-purpose language understanding systems. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc.
- Alex Wang, Yada Pruksachatkun, Nikita Nangia, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. 2019b. Superglue: A stickier benchmark for general-purpose language understanding systems. *Advances in neural information processing systems*, 32.
- Bing Wang, Liang Ding, Qihuang Zhong, Ximing Li, and Dacheng Tao. 2022. A contrastive cross-channel data augmentation framework for aspect-based sentiment analysis. In *COLING*.
- Shuangzhi Wu, Xing Wang, Longyue Wang, Fangxu Liu, Jun Xie, Zhaopeng Tu, Shuming Shi, and Mu Li. 2020. Tencent neural machine translation systems for the WMT20 news translation task. In *WMT*.
- Changtong Zan, Liang Ding, Li Shen, Yu Cao, Weifeng Liu, and Dacheng Tao. 2022a. Bridging cross-lingual gaps during leveraging the multilingual sequence-to-sequence pretraining for text generation. *arXiv preprint*.

- Changtong Zan, Keqin Peng, Liang Ding, Baopu Qiu, Boan Liu, Shwai He, Qingyu Lu, Zheng Zhang, Chuang Liu, Weifeng Liu, Yibing Zhan, and Dacheng Tao. 2022b. Vega-mt: The jd explore academy translation system for wmt22.
- Sheng Zhang, Xiaodong Liu, Jingjing Liu, Jianfeng Gao, Kevin Duh, and Benjamin Van Durme. 2018. ReCoRD: Bridging the gap between human and machine commonsense reading comprehension. *arXiv preprint 1810.12885*.
- Qihuang Zhong, Liang Ding, Juhua Liu, Bo Du, and Dacheng Tao. 2022a. E2s2: Encoding-enhanced sequence-to-sequence pretraining for language understanding and generation. *arXiv preprint arXiv:2205.14912*.
- Qihuang Zhong, Liang Ding, Juhua Liu, Bo Du, and Dacheng Tao. 2022b. Panda: Prompt transfer meets knowledge distillation for efficient model adaptation. *arXiv preprint arXiv:2208.10160*.
- Qihuang Zhong, Liang Ding, Li Shen, Peng Mi, Juhua Liu, Bo Du, and Dacheng Tao. 2022c. Improving sharpness-aware minimization with fisher mask for better generalization on language models. *ArXiv*, abs/2210.05497.
- Yukun Zhu, Ryan Kiros, Rich Zemel, Ruslan Salakhutdinov, Raquel Urtasun, Antonio Torralba, and Sanja Fidler. 2015. Aligning books and movies: Towards story-like visual explanations by watching movies and reading books. In *Proceedings of the IEEE international conference on computer vision*, pages 19–27.
- Barret Zoph, Irwan Bello, Sameer Kumar, Nan Du, Yanping Huang, Jeff Dean, Noam Shazeer, and William Fedus. 2022. St-moe: Designing stable and transferable sparse expert models. *arxiv*.

Table 2: **Results of Top-10 models on SuperGLUE leaderboard** (<https://super.gluebenchmark.com/leaderboard>), on October 8, 2022.

#Rank	Model	BoolQ	CB		COPA	MultiRC		ReCoRD		RTE	WiC	WSC	Score
		Acc	F1	Acc	Acc	F1	EM	F1	Acc.	Acc	Acc	Acc	
1	Vega v2 (Ours)	90.5	98.6	99.2	99.4	88.2	62.4	94.4	93.9	96.0	77.4	98.6	91.3
2	ST-MoE-32B	92.4	96.9	98.0	99.2	89.6	65.8	95.1	94.4	93.5	77.7	96.6	91.2
3	Turing NLR v5	92.0	95.9	97.6	98.2	88.4	63.0	96.4	95.9	94.1	77.1	97.3	90.9
4	ERNIE 3.0	91.0	98.6	99.2	97.4	88.6	63.2	94.7	94.2	92.6	77.4	97.3	90.6
5	PaLM 540B	91.9	94.4	96.0	99.0	88.7	63.6	94.2	93.3	94.1	77.4	95.9	90.4
6	T5+UKG, Single Model	91.4	95.8	97.6	98.0	88.3	63.0	94.2	93.5	93.0	77.9	96.6	90.4
7	DeBERTa/ TuringNLRv4	90.3	95.7	97.6	98.4	88.2	63.7	94.5	94.1	93.2	77.5	95.9	90.3
8	SuperGLUE Human Baselines	89.0	95.8	98.9	100.0	81.8	51.9	91.7	91.3	93.6	80.0	100.0	89.8
9	T5	91.2	93.9	96.8	94.8	88.1	63.3	94.1	93.4	92.5	76.9	93.8	89.3
10	Frozen T5 1.1 + SPoT	91.1	95.8	97.6	95.6	87.9	61.9	93.3	92.4	92.9	75.8	93.8	89.2

Table 3: **Data statistics of different tasks included in SuperGLUE** according to their original paper (Wang et al., 2019a). *WSD* stands for word sense disambiguation, *NLI* is natural language inference, *coref.* is coreference resolution, and *QA* is question answering. For MultiRC, we list the number of total answers for 456/83/166 train/dev/test questions.

Corpus	Train	Dev	Test	Task	Metrics	Text Sources
BoolQ	9427	3270	3245	QA	acc.	Google queries, Wikipedia
CB	250	57	250	NLI	acc./F1	various
COPA	400	100	500	QA	acc.	blogs, photography encyclopedia
MultiRC	5100	953	1800	QA	F1 _a /EM	various
ReCoRD	101k	10k	10k	QA	F1/EM	news (CNN, Daily Mail)
RTE	2500	278	300	NLI	acc.	news, Wikipedia
WiC	6000	638	1400	WSD	acc.	WordNet, VerbNet, Wiktionary
WSC	554	104	146	coref.	acc.	fiction books

Table 4: **Task examples from the valid set in SuperGLUE** (Wang et al., 2019a). **Text** represents part of the example format for each task. Text in *italics* is part of the model input. Underlined text is specially marked in the input. Text in a monospaced font represents the expected model output.

BoolQ	Passage: <i>Barq's – Barq's is an American soft drink. Its brand of root beer is notable for having caffeine. Barq's, created by Edward Barq and bottled since the turn of the 20th century, is owned by the Barq family but bottled by the Coca-Cola Company. It was known as Barq's Famous Olde Tyme Root Beer until 2012.</i> Question: <i>is barq's root beer a pepsi product</i> Answer: No
CB	Text: <i>B: And yet, uh, I we-, I hope to see employer based, you know, helping out. You know, child, uh, care centers at the place of employment and things like that, that will help out. A: Uh-huh. B: What do you think, do you think we are, setting a trend?</i> Hypothesis: <i>they are setting a trend</i> Entailment: Unknown
COPA	Premise: <i>My body cast a shadow over the grass.</i> Question: <i>What's the CAUSE for this?</i> Alternative 1: <i>The sun was rising.</i> Alternative 2: <i>The grass was cut.</i> Correct Alternative: 1
MultiRC	Paragraph: <i>Susan wanted to have a birthday party. She called all of her friends. She has five friends. Her mom said that Susan can invite them all to the party. Her first friend could not go to the party because she was sick. Her second friend was going out of town. Her third friend was not so sure if her parents would let her. The fourth friend said maybe. The fifth friend could go to the party for sure. Susan was a little sad. On the day of the party, all five friends showed up. Each friend had a present for Susan. Susan was happy and sent each friend a thank you card the next week</i> Question: <i>Did Susan's sick friend recover?</i> Candidate answers: <i>Yes, she recovered (T), No (F), Yes (T), No, she didn't recover (F), Yes, she was at Susan's party (T)</i>
ReCoRD	Paragraph: <i>(CNN) Puerto Rico on Sunday overwhelmingly voted for statehood. But Congress, the only body that can approve new states, will ultimately decide whether the status of the US commonwealth changes. Ninety-seven percent of the votes in the nonbinding referendum favored statehood, an increase over the results of a 2012 referendum, official results from the State Electoral Commission show. It was the fifth such vote on statehood. "Today, we the people of Puerto Rico are sending a strong and clear message to the US Congress ... and to the world ... claiming our equal rights as American citizens, Puerto Rico Gov. Ricardo Rossello said in a news release. @highlight Puerto Rico voted Sunday in favor of US statehood</i> Query For one, they can truthfully say, "Don't blame me, I didn't vote for them," when discussing the <code>placeholder</code> presidency Correct Entities: US
RTE	Text: <i>Dana Reeve, the widow of the actor Christopher Reeve, has died of lung cancer at age 44, according to the Christopher Reeve Foundation.</i> Hypothesis: <i>Christopher Reeve had an accident.</i> Entailment: False
WiC	Context 1: <i>Room and board.</i> Context 2: <i>He nailed boards across the windows.</i> Sense match: False
WSC	Text: <i>Mark told Pete many lies about himself, which Pete included in his book. He should have been more truthful.</i> Coreference: False