

A Simple and Efficient Stochastic Algorithm for Decentralized Nonconvex-Strongly-Concave Minimax Optimization

Lesi Chen *

Haishan Ye[†]Luo Luo[‡]

Abstract

This paper studies the stochastic optimization for decentralized nonconvex-strongly-concave minimax problem. We propose a simple and efficient algorithm, called Decentralized Recursive gradient descEnt Ascent Method (**DREAM**), which requires $\mathcal{O}(\kappa^3\epsilon^{-3})$ stochastic first-order oracle (SFO) calls and $\mathcal{O}(\kappa^2\epsilon^{-2}/\sqrt{1-\lambda_2(W)})$ communication rounds to find an ϵ -stationary point, where κ is the condition number and $\lambda_2(W)$ is the second-largest eigenvalue of the gossip matrix W . To the best of our knowledge, **DREAM** is the first algorithm whose SFO and communication complexities simultaneously achieve the optimal dependency on ϵ and $\lambda_2(W)$ for this problem.

1 Introduction

We study the decentralized minimax optimization problem

$$\min_{x \in \mathbb{R}^{d_x}} \max_{y \in \mathcal{Y}} f(x, y) \triangleq \frac{1}{m} \sum_{i=1}^m f_i(x, y), \quad (1)$$

where $f(x, y)$ is μ -strongly-concave in y ; each $f_i(x, y)$ is the local function on the i -th agent and has the following stochastic form

$$f_i(x, y) \triangleq \mathbb{E}[F_i(x, y; \xi_i)]; \quad (2)$$

and $\mathcal{Y} \subseteq \mathbb{R}^{d_y}$ is closed and convex. We suppose the stochastic component $F_i(x, y; \xi_i)$ indexed by random variable ξ_i is L -average smooth and concave in y . The nonconvex-strongly-concave minimax problem (1) plays an important role in the scenario of many machine learning applications, such as adversary training [9, 36], distributional robust optimization [47], AUC maximization [10, 28, 61], reinforcement learning [42], learning with non-decomposable loss [7, 44] and so on. This paper focus on the task of finding an ϵ -stationary point of the primal function, which is defined as

$$P(x) \triangleq \max_{y \in \mathcal{Y}} f(x, y).$$

Recently, nonconvex-strongly-concave minimax optimization has received increasing attentions [5, 7, 9, 10, 13, 14, 25, 28, 33, 34, 36, 42, 44, 54, 61, 62, 63]. In the scenario of single machine, Lin et al. [25] showed stochastic gradient descent ascent (**SGDA**) requires $\mathcal{O}(\kappa^3\epsilon^{-4})$ SFO complexity to find an ϵ -stationary point of $P(x)$, where the condition number $\kappa \triangleq L/\mu$. Luo et al. [33] proposed Stochastic Recursive gradiEnt Descent Ascent (**SREDA**), which uses the variance reduction technique [8, 24, 38, 39, 40] to establish a SFO complexity of $\mathcal{O}(\kappa^3\epsilon^{-3})$. Later, Huang et al. [14], Xu et al. [54] extended the idea of **SREDA** to zeroth-order optimization. Very recently, Zhang et al. [63] incorporated the inexact proximal point iteration [56] and proposed **SAPD+** with an accelerated $\mathcal{O}(\kappa^2\epsilon^{-3})$ rate. It is worth noting that the $\mathcal{O}(\epsilon^{-3})$ dependency on the accuracy matches the lower bound of stochastic nonconvex-strongly-concave minimax optimization under average-smooth assumption [2].

*School of Data Science, Fudan University; lschen19@fudan.edu.cn

[†]School of Management, Xi'an Jiaotong University; hsyee.cs@outlook.com

[‡]School of Data Science, Fudan University; luoluo@fudan.edu.cn

Decentralized optimization is a popular setting for training large-scale machine learning models. It allows all agents collaboratively optimize the global objective and each of them only communicates with its neighbors, which avoids the communication traffic jam on the central node [27]. There are a lot of work focus on decentralized minimization problem [16, 20, 21, 23, 32, 46, 49, 51, 53, 57, 58, 59, 60].

Recently, some optimal algorithms for decentralized minimax optimization under convex-concave setting has been established [3, 17, 31, 35], however, the understanding of nonconvex-strongly-concave setting is still limited [29, 50, 52]. Tsaknakis et al. [50] combined gradient tracking [37, 43] with gradient descent ascent for solving decentralized nonconvex-strongly-concave minimax problem, but their algorithm depends on the access of exact gradient information, which may be quite expensive or even inaccessible in stochastic scenarios. Xian et al. [52] introduced the momentum and variance reduction [6] techniques into decentralized nonconvex-strongly-concave minimax optimization. They proposed Decentralized Minimax Hybrid Stochastic Gradient Descent (DM-HSGD) within $\mathcal{O}((m\kappa^3\epsilon^{-2} + \kappa^3\epsilon^{-3})/(1 - \lambda_2(W))^2)$ complexity for both SFO calls and communication rounds, which is the first one achieves the optimal dependency on ϵ .

In this paper, we propose Decentralized Recursive-gradient dEscent Ascent Method (DREAM) for solving decentralized nonconvex-strongly-concave minimax problem (1). The design of DREAM integrates the ideas of SGDA [25], Probabilistic recursive Gradient Estimator (PAGE) [24, 32], gradient tracking [41, 43] and multi-consensus [27, 57, 58, 59]. We construct a novel Lyapunov function that simultaneously characterizes the decrease of primal function $P(x)$, the approximation error of primal function, the gradient estimation error of $f(x, y)$ and consensus error. We show that DREAM encourages the much larger mini-batch sizes and stepsizes than the ones in DM-HSGD [52]. As a result, we prove DREAM only requires $\mathcal{O}(\kappa^3\epsilon^{-3})$ SFO calls and $\mathcal{O}(\kappa^2\epsilon^{-2}/\sqrt{1 - \lambda_2(W)})$ communication rounds to find an ϵ -stationary point of $P(x)$, which is the best known theoretical guarantee for decentralized stochastic nonconvex-strongly-concave minimax problem. Both of the SFO complexity and the communication complexity of DREAM are independent on m and achieve optimal dependency on ϵ and $\lambda_2(W)$ [2, 30, 48]. We summarize results of proposed DREAM and previous work in Table 1.

We also consider the special case of problem (1) when each random variable ξ_i is finitely sampled from $\xi_{i,1}, \dots, \xi_{i,n}$, that is we can write the local function as

$$f_i(x, y) \triangleq \frac{1}{n} \sum_{j=1}^n F_{ij}(x, y) \quad (3)$$

and the algorithm could access the exact local gradient. We refer to the general form of (2) as online (stochastic) case and refer to the special case (3) as offline (finite-sum) case. For the offline case, DREAM requires $\mathcal{O}(nm + \sqrt{nm}\kappa^2\epsilon^{-2})$ SFO calls and $\mathcal{O}(\kappa^2\epsilon^{-2}/\sqrt{1 - \lambda_2(W)})$ communication rounds to find an ϵ -stationary point of $P(x)$, which is optimal to the dependency on m , n , ϵ and $\lambda_2(W)$ simultaneously [8, 21, 24, 32, 48]. Interested readers may refer to the discussion for the optimality of [21] and [32].

2 Preliminaries

Throughout this paper, we denote $\|\cdot\|$ as the Frobenius norm of a matrix or the ℓ_2 -norm of a vector. We use I to present identity matrix and let $\mathbf{1} = [1, \dots, 1]^\top \in \mathbb{R}^m$. We define aggregate variables for all agents as

$$\mathbf{x} = \begin{bmatrix} \mathbf{x}(1)^\top \\ \vdots \\ \mathbf{x}(m)^\top \end{bmatrix} \in \mathbb{R}^{m \times d_x}, \quad \mathbf{y} = \begin{bmatrix} \mathbf{y}(1)^\top \\ \vdots \\ \mathbf{y}(m)^\top \end{bmatrix} \in \mathbb{R}^{m \times d_y} \quad \text{and} \quad \mathbf{z} = \begin{bmatrix} \mathbf{z}(1)^\top \\ \vdots \\ \mathbf{z}(m)^\top \end{bmatrix} \in \mathbb{R}^{m \times d},$$

where $\mathbf{x}(i) \in \mathbb{R}^{d_x}$ and $\mathbf{y}(i) \in \mathbb{R}^{d_y}$ are local variables on the i -th agent; $\mathbf{z}(i) = [\mathbf{x}(i); \mathbf{y}(i)] \in \mathbb{R}^d$ and $d = d_x + d_y$. We use the lower case with the bar to represent the mean vector, such as

$$\bar{x} = \frac{1}{m} \sum_{i=1}^m x(i), \quad \bar{y} = \frac{1}{m} \sum_{i=1}^m y(i) \quad \text{and} \quad \bar{z} = \frac{1}{m} \sum_{i=1}^m z(i).$$

Table 1: We compare the theoretical results of DREAM and related work for decentralized nonconvex strongly-concave optimization. We remark for * that the analysis of algorithm GT-DA does not explicitly provide coefficients $p, q > 0$ in the complexity [29].

Setting	Algorithm	#SFO	#Communication	Reference
Online	DM-HSGD	$\mathcal{O}\left(\frac{m\kappa^3\epsilon^{-2} + \kappa^3\epsilon^{-3}}{(1 - \lambda_2(W))^2}\right)$	$\mathcal{O}\left(\frac{m\kappa^3\epsilon^{-2} + \kappa^3\epsilon^{-3}}{(1 - \lambda_2(W))^2}\right)$	Xian et al. [52]
	DREAM	$\mathcal{O}(\kappa^3\epsilon^{-3})$	$\mathcal{O}\left(\frac{\kappa^2\epsilon^{-2}}{\sqrt{1 - \lambda_2(W)}}\right)$	Theorem 1
Offline	GT-DA*	$\tilde{\mathcal{O}}\left(\frac{nm\kappa^q\epsilon^{-2}}{(1 - \lambda_2(W))^p}\right)$	$\mathcal{O}\left(\frac{m\kappa^q\epsilon^{-2}}{(1 - \lambda_2(W))^p}\right)$	Tsaknakis et al. [50]
	DREAM	$\mathcal{O}(nm + \sqrt{nm}\kappa^2\epsilon^{-2})$	$\mathcal{O}\left(\frac{\kappa^2\epsilon^{-2}}{\sqrt{1 - \lambda_2(W)}}\right)$	Theorem 1

We also introduce the aggregate gradient as

$$\nabla \mathbf{f}(\mathbf{z}) = \begin{bmatrix} \nabla f_1(\mathbf{x}(1), \mathbf{y}(1))^\top \\ \vdots \\ \nabla f_m(\mathbf{x}(m), \mathbf{y}(m))^\top \end{bmatrix} \in \mathbb{R}^{m \times d}.$$

Additionally, we use the notation $\mathbb{I}[\cdot]$ to represent the indicator function of an event and define $n = +\infty$ for online case.

We assume the stochastic decentralized optimization problem (1) satisfies following assumptions [33, 52, 54].

Assumption 1. We suppose $P(x) \triangleq \max_{y \in \mathcal{Y}} f(x, y)$ is lower bounded. That is, we have

$$P^* = \inf_{x \in \mathbb{R}^{d_x}} P(x) > -\infty.$$

Assumption 2. We suppose the stochastic component functions $F(x, y; \xi_i)$ on each agent is L -average smooth for some $L > 0$. That is, we have

$$\mathbb{E} \|\nabla F_i(x, y; \xi_i) - \nabla F_i(x', y'; \xi_i)\|^2 \leq L^2 (\|x - x'\|^2 + \|y - y'\|^2)$$

for any $(x, y), (x', y') \in \mathbb{R}^{d_x \times d_y}$ and random index ξ_i .

Assumption 3. We suppose each stochastic component function $F(x, y; \xi_i)$ is concave in y . That is, we have

$$F_i(x, y; \xi_i) \leq F_i(x, y'; \xi_i) + \nabla_y F_i(x, y'; \xi_i)^\top (y - y')$$

for any $x \in \mathbb{R}^{d_x}$, $y, y' \in \mathbb{R}^{d_y}$ and random index ξ_i .

Assumption 4. We suppose each local function $f_i(x, y)$ is μ -strongly-concave in y . That is, there exists some constant $\mu > 0$ such that we have

$$f_i(x, y) \leq f_i(x, y') + \nabla_y f_i(x, y')^\top (y - y') - \frac{\mu}{2} \|y - y'\|^2$$

for any $x \in \mathbb{R}^{d_x}$ and $y, y' \in \mathbb{R}^{d_y}$.

Assumption 5. We suppose each stochastic first-order oracle (SFO) $\nabla F_i(x, y; \xi_i)$ is unbiased and has bounded variance, such that

- $\mathbb{E}[\nabla F_i(x, y; \xi_i)] = \nabla f_i(x, y)$,
- $\mathbb{E} \|\nabla f_i(x, y) - \nabla F_i(x, y; \xi_i)\|^2 \leq \sigma^2$

for any $(x, y) \in \mathbb{R}^{d_x} \times \mathbb{R}^{d_y}$ and some $\sigma^2 < +\infty$.

The gossip matrix, also called mixing matrix, tells us how the nodes communicate with neighbors. We assume it satisfies the following assumption.

Assumption 6. We suppose the gossip matrix $W \in \mathbb{R}^{m \times m}$ has the following properties:

- We have W is symmetric with $W_{i,j} \neq 0$ if and only if i and j are connected or $i \neq j$;
- We have $\mathbf{0} \preceq W \preceq I$, $W\mathbf{1} = \mathbf{1}$ and $\text{null}(I - W) = \text{span}(\mathbf{1})$.

Based on the smoothness and strong concavity assumptions, we define the condition number of our problem.

Definition 1. We define $\kappa \triangleq L/\mu$ as the condition number of problem (1), where L and μ are defined in Assumption 2 and 4 respectively.

The following lemma guarantee the primal function $P(\mathbf{x})$ is differentiable and we can define the ϵ -stationary point by its gradient.

Lemma 1 (Lin et al. [25, Lemma 4.3]). Under Assumptions 2 and 4, the primal function $P(x) = \max_{y \in \mathcal{Y}} f(x, y)$ is L_P -smooth with $L_P = (\kappa + 1)L$ and its gradient can be written as $\nabla P(x) = \nabla_x f(x, y^*(x))$, where we define $y^*(x) \triangleq \arg \max_{y \in \mathcal{Y}} f(x, y)$.

Definition 2. We say \hat{x} is an ϵ -stationary point if it holds that $\|\nabla P(\hat{x})\| \leq \epsilon$.

We define the projection and gradient mapping as follows.

Definition 3. We define $\Pi(y) \triangleq \arg \min_{y' \in \mathcal{Y}} \|y' - y\|^2$ for $y \in \mathbb{R}^{d_y}$ and $\mathbf{\Pi}(\mathbf{y}) \triangleq \arg \min_{\mathbf{y}' \in \mathcal{Y}} \|\mathbf{y}' - \mathbf{y}\|^2$ for $\mathbf{y} \in \mathbb{R}^{m \times d_y}$.

Definition 4. We define the gradient mapping of f at (x, y) with respect to y as

$$G_\eta(x, y) = \frac{\Pi(y + \eta \nabla_y f(x, y)) - y}{\eta}$$

with some $0 < \eta \leq 1/L$.

3 Algorithms and Main Results

In this section, we propose a novel stochastic algorithm named Decentralized Recursive gradient dEscent Ascent Method (DREAM) for decentralized nonconvex-strongly-concave minimax problem. We also provide a new framework for analyzing our DREAM. It shows the algorithm can find an ϵ -stationary point of $P(x)$ within at most $\mathcal{O}(\kappa^3 \epsilon^{-3})$ and $\mathcal{O}(n + \sqrt{n} \kappa^2 \epsilon^{-2})$ SFO calls for online setting and offline setting respectively; and both of two settings require at most $\mathcal{O}(\kappa^2 \epsilon^{-2} / \sqrt{1 - \lambda_2(W)})$ communication rounds.

Algorithm 1 DREAM (online)

- 1: **Input:** initial parameter $\bar{\mathbf{z}}_0 \in \mathbb{R}^d$, stepsize $\eta > 0$, ratio $\lambda \in (0, 1]$, probability $p \in (0, 1]$, small mini-batch size b , large mini-batch size b' , initial communication rounds K_0 , small communication rounds K , large communication rounds K' .
 - 2: $\mathbf{z}_{-1} = \mathbf{z}_0 = \mathbf{1}\bar{\mathbf{z}}_0$
 - 3: **parallel for** $i = 1, \dots, m$ **do**
 - 4: $\mathbf{g}_0(i) = \frac{1}{b'} \sum_{\xi_{i,j} \in \mathcal{S}_t(i)} \nabla F_i(\mathbf{z}_0(i); \xi_{i,j})$
where $\mathcal{S}'_0(i) = \{\xi_{i,1}, \dots, \xi_{i,b'}\}$ is established by uniform sampling
 - 5: **end parallel for**
 - 6: $\mathbf{s}_{-1} = \mathbf{s}_0 = \text{FastMix}(\mathbf{g}_0, K_0)$
 - 7: **for** $t = 1, \dots, T - 1$ **do**
 - 8: generate $\zeta_t \sim \text{Bernoulli}(p)$
 - 9: $\mathbf{x}_{t+1} = \text{FastMix}(\mathbf{x}_t - \lambda\eta\mathbf{u}_t, K)$
 - 10: $\mathbf{y}_{t+1} = \text{FastMix}(\mathbf{\Pi}(\mathbf{y}_t + \eta\mathbf{v}_t), K)$
 - 11: **parallel for** $i = 1, \dots, m$ **do**
 - 12:
$$\mathbf{g}_{t+1}(i) = \begin{cases} \frac{1}{b'} \sum_{\xi_{i,j} \in \mathcal{S}'_t(i)} \nabla F_i(\mathbf{z}_{t+1}(i); \xi_{i,j}), & \text{if } \zeta_t = 1; \\ \mathbf{g}_t(i) + \frac{1}{b} \sum_{\xi_{i,j} \in \mathcal{S}_t(i)} (\nabla F_i(\mathbf{z}_{t+1}(i); \xi_{i,j}) - \nabla F_i(\mathbf{z}_t(i); \xi_{i,j})), & \text{if } \zeta_t = 0; \end{cases}$$
where $\mathcal{S}_t(i) = \{\xi_{i,1}, \dots, \xi_{i,b}\}$ and $\mathcal{S}'_t(i) = \{\xi_{i,1}, \dots, \xi_{i,b'}\}$ are established by uniform sampling
 - 13: **end parallel for**
 - 14:
$$\mathbf{s}_t = \begin{cases} \text{FastMix}(\mathbf{s}_{t-1} + \mathbf{g}_t - \mathbf{g}_{t-1}, K'), & \text{if } \zeta_t = 1; \\ \text{FastMix}(\mathbf{s}_{t-1} + \mathbf{g}_t - \mathbf{g}_{t-1}, K), & \text{if } \zeta_t = 0; \end{cases}$$
 - 15: **end for**
- Output:** x_{out} from $\{\mathbf{x}_0(1), \mathbf{x}_0(2), \dots, \mathbf{x}_{T-1}(m)\}$ uniformly at random
-

3.1 Decentralized Recursive Gradient Descent Ascent

For the online setting, we present the detailed procedure of DREAM in Algorithm 1, where $\mathbf{x}_t \in \mathbb{R}^{m \times d_x}$, $\mathbf{y}_t \in \mathbb{R}^{m \times d_y}$, $\mathbf{u}_t \in \mathbb{R}^{m \times d_x}$ and $\mathbf{v}_t \in \mathbb{R}^{m \times d_y}$ are defined by the partitions $\mathbf{z}_t = [\mathbf{x}_t; \mathbf{y}_t] \in \mathbb{R}^{m \times d}$ and $\mathbf{s}_t = [\mathbf{u}_t; \mathbf{v}_t] \in \mathbb{R}^{m \times d}$. The subroutine **FastMix** [27] is shown in Algorithm 3.

DREAM enjoys the following nice characterizations:

- It applies the loopless framework of variance reduction [12, 18, 24] and GDA-type update [25, 26] to avoid the additional inner iterations, which leads to the algorithm be efficient and easy to be implemented.
- It uses the stochastic recursive gradient [8, 19, 24, 38, 40] to establish the gradient estimator (line 12 of Algorithm 1), which leads to the $\mathcal{O}(\epsilon^{-3})$ dependency in the SFO upper bound. Such strategy also encourages the algorithm could use larger mini-batch size and less number of iterations. As a results, the communication complexity of DREAM only depends on $\mathcal{O}(\kappa^2\epsilon^{-2})$, rather than $\mathcal{O}(\kappa^3\epsilon^{-3})$ in DM-HSGD [52].
- It introduces the gradient tracking and multi-consensus steps (Line 14 of Algorithm 1 and Algorithm 3) [27, 41, 43, 57, 58, 59] to reduce the consensus error, which leads to the algorithm be communication efficient. Combining with the variance reduction, the total communication complexity of DREAM has the upper bound of $\mathcal{O}(\kappa^2\epsilon^{-2}/\sqrt{1 - \lambda_2(W)})$, which is significantly better than $\mathcal{O}(\kappa^3\epsilon^{-3}/(1 - \lambda_2(W))^2)$

Algorithm 2 DREAM (offline)

- 1: **Input:** initial parameter $\bar{\mathbf{z}}_0 \in \mathbb{R}^d$, stepsize $\eta > 0$, ratio $\lambda \in (0, 1]$, probability $p \in (0, 1]$, mini-batch size b , initial communication rounds K_0 , small communication rounds K , large communication rounds K' .
 - 2: $\mathbf{z}_{-1} = \mathbf{z}_0 = \mathbf{1}\bar{\mathbf{z}}_0$
 - 3: **parallel for** $i = 1, \dots, m$ **do**
 - 4: $\mathbf{g}_0(i) = \frac{1}{n} \sum_{j=1}^n \nabla F_{ij}(\mathbf{z}_0(i))$
 - 5: **end parallel for**
 - 6: $\mathbf{s}_{-1} = \mathbf{s}_0 = \text{FastMix}(\mathbf{g}_0, K_0)$
 - 7: **for** $t = 1, \dots, T - 1$ **do**
 - 8: generate $\zeta_t \sim \text{Bernoulli}(p)$
 - 9: $\mathbf{x}_{t+1} = \text{FastMix}(\mathbf{x}_t - \lambda\eta\mathbf{u}_t, K)$
 - 10: $\mathbf{y}_{t+1} = \text{FastMix}(\Pi(\mathbf{y}_t + \eta\mathbf{v}_t), K)$
 - 11: **parallel for** $i = 1, \dots, m$ **do**
 - 12:
$$\mathbf{g}_{t+1}(i) = \begin{cases} \frac{1}{n} \sum_{j=1}^n \nabla F_{ij}(\mathbf{z}_{t+1}(i)), & \text{if } \zeta_t = 1; \\ \mathbf{g}_t(i) + \frac{1}{b} \sum_{\xi_{i,j} \in \mathcal{S}_t(i)} (\nabla F_i(\mathbf{z}_{t+1}(i); \xi_{i,j}) - \nabla F_i(\mathbf{z}_t(i); \xi_{i,j})), & \text{if } \zeta_t = 0; \end{cases}$$
 - where $\mathcal{S}_t(i) = \{\xi_{i,1}, \dots, \xi_{i,b}\}$ is established by uniform sampling
 - 13: **end parallel for**
 - 14: $\mathbf{s}_t = \begin{cases} \text{FastMix}(\mathbf{s}_{t-1} + \mathbf{g}_t - \mathbf{g}_{t-1}, K'), & \text{if } \zeta_t = 1; \\ \text{FastMix}(\mathbf{s}_{t-1} + \mathbf{g}_t - \mathbf{g}_{t-1}, K), & \text{if } \zeta_t = 0; \end{cases}$
 - 15: **end for**
 - 16: **Output:** x_{out} from $\{\mathbf{x}_0(1), \mathbf{x}_0(2), \dots, \mathbf{x}_{T-1}(m)\}$ uniformly at random
-

of DM-HSGD. The gradient tracking and multi-consensus also lead to the SFO complexity of DREAM does not depend on the spectrum of W .

The Bernoulli random variable $\zeta_t \sim \text{Bernoulli}(p)$ in Line 8 of Algorithm 1 makes the iteration stochastically switches between two modes: One mode iterates with small mini-batch size b of stochastic gradient and small communication rounds K with probability p . Another iterates with large mini-batch size b' of stochastic gradient and large communication rounds K' with probability $1 - p$. We set $p = \Omega(b/b')$ and $b = \mathcal{O}(\sqrt{b'/m})$ to guarantee the expected SFO complexity on per-agent depends on the small mini-batch size $\mathcal{O}(b)$ at each round. The iteration scheme with probabilistic gradient estimator has been well studied in convex/nonconvex minimization problem and convex-concave minimax problem [1, 12, 15, 17, 24, 32, 58]. In this work, we first introduce this idea to nonconvex-strongly-concave minimax optimization. Since the roles of two variables in our problem are quite different, DREAM additionally includes the scaling parameter λ to set different stepsizes for \mathbf{x} and \mathbf{y} , which leads to the algorithm be efficient while the convergence analysis also be more difficult than existing probabilistic gradient methods.

For the offline setting, it is possible to access the exact local gradient. Hence, we only needs to modify Algorithm 1 by replacing the steps of constructing the local gradient estimator with large mini-batch size b' by computing the exact local gradient $\nabla f_i(x, y)$. For completeness, we present the details of DREAM for offline setting in Algorithm 2.

Algorithm 3 FastMix($\mathbf{a}^{(0)}, K$)

- 1: **Initialize:** $\mathbf{a}^{(-1)} = \mathbf{a}^{(0)}$
 - 2: $\eta_a = \frac{1 - \sqrt{1 - \lambda_2^2(W)}}{1 + \sqrt{1 - \lambda_2^2(W)}}$.
 - 3: **for** $k = 0, 1, \dots, K$ **do**
 - 4: $\mathbf{a}^{(k+1)} = (1 + \eta_a)W\mathbf{a}^{(k)} - \eta_a\mathbf{a}^{(k-1)}$
 - 5: **end for**
 - 6: **Output:** $\mathbf{a}^{(K)}$.
-

3.2 The Complexity Analysis

The complexity analysis of DREAM is based on the following quantities:

- The first one is the optimization error

$$\Psi_t = P(\bar{x}_t) - P^* + \alpha(P(\bar{x}_t) - f(\bar{x}_t, \bar{y}_t)), \quad (4)$$

where $\alpha \in (0, 1]$. We expect Ψ_t decrease by some one that is proportional to $\|\nabla P(\bar{x}_t)\|^2$ at the t -th round. Then lower bounded condition (Assumption 1) implies we can find a nearly stationary point. Compare with the analysis of nonconvex optimization [8, 21, 24, 32], the algorithm cannot access the (stochastic) first-order oracle of $P(x)$ directly. Hence, we regard $\nabla_x f(\bar{x}_t, \bar{y}_t)$ as an estimator of $\nabla P(\bar{x}_t)$ and introduce the additional term $P(\bar{x}_t) - f(\bar{x}_t, \bar{y}_t)$ to quantify the sub-optimality of the maximum problem $\max_{y \in \mathcal{Y}} f(\bar{x}_t, y)$.

- The second one is the consensus error

$$C_t = \|\mathbf{z}_t - \mathbf{1}\bar{z}_t\|^2 + \eta^2\|\mathbf{s}_t - \mathbf{1}\bar{s}_t\|^2,$$

which can be bounded by the properties of gradient tracking and multi-consensus steps. Then we can show that all of the local variables could be close to their mean sufficiently expectation and the output x_{out} must be a desired nearly stationary point.

- The last two ones are related to the error of gradient estimator, including the local estimation error

$$V_t = \frac{1}{m}\|\mathbf{g}_t - \nabla \mathbf{f}(\mathbf{z}_t)\|^2,$$

as well as the global estimation error

$$U_t = \left\| \frac{1}{m} \sum_{i=1}^m (\mathbf{g}_t(i) - \nabla f_i(\mathbf{z}_t(i))) \right\|^2,$$

which can be bounded by the analysis of probabilistic gradient methods [24, 32]. Note that we always have $V_t \geq U_t$, while both of these terms are necessary to our complexity analysis. We provide the detailed discussion for the roles of V_t and U_t after Lemma 4 and 5.

We construct the Lyapunov function

$$\Phi_t = \Psi_t + \frac{1}{m\eta}C_t + \frac{\eta}{mp}V_t + \frac{\eta}{p}U_t. \quad (5)$$

We can show that both C_t , U_t and V_t are sufficient small during the iterations, which allows us to analyze DREAM by analogizing gradient descent ascent on the mean variables \bar{x}_t and \bar{y}_t with some small noise.

Remark 1. Our Lyapunov function Φ_t characterizes the sub-optimality of the maximum problem $\max_{y \in \mathcal{Y}} f(\bar{x}_t, y)$ by $P(\bar{x}_t) - f(\bar{x}_t, \bar{y}_t)$, which is easy to be analyzed for stochastic variance reduced algorithm in decentralized setting. In contrast, Xian et al. [52] measure the sub-optimality by $\|\bar{y}_t - y^*(\bar{x}_t)\|^2$, which leads to their analysis be more complicated than ours.

Our analysis starts from the following descent lemma.

Lemma 2. For Algorithm 1 (or Algorithm 2), we set the parameters $\eta \leq 1/(4L)$ and

$$\lambda = \frac{\alpha}{(1+\alpha)128\kappa^2}, \quad (6)$$

then it holds that

$$\mathbb{E}[\Psi_{t+1}] \leq \Psi_t - \frac{\lambda\eta}{2} \|\nabla P(\bar{x}_t)\|^2 - \frac{1}{8\lambda\eta} \mathbb{E}\|\bar{x}_{t+1} - \bar{x}_t\|^2 - \frac{\alpha}{16\eta} \mathbb{E}\|\bar{z}_{t+1} - \bar{z}_t\|^2 + 6\alpha\eta U_t + \frac{3\alpha}{m\eta} C_t.$$

for any $\alpha > 0$.

If the global estimation error U_t and the consensus error C_t are both sufficiently small, the above lemma indicates that the optimization error decreases by $(\lambda\eta/2)\|\nabla P(\bar{x}_t)\|^2$ in expectation and the remaining proof can follow the inexact gradient descent on the primal function $P(x)$.

Following the notation of DREAM (Algorithm 1 and 2), we define the discount factors of consensus error arose from FastMix (Algorithm 3) as:

$$\begin{cases} \rho_0 = (1 - \sqrt{1 - \lambda_2(W)})^{K_0}, \\ \rho' = (1 - \sqrt{1 - \lambda_2(W)})^{K'}, \\ \rho = (1 - \sqrt{1 - \lambda_2(W)})^K. \end{cases} \quad (7)$$

Remark 2. We set $K' \geq K$ in the implementation of DREAM, which means $\rho' \leq \rho$. We determine the communication rounds in gradient tracking steps (Line 14 in Algorithm 1 and 2) by the Bernoulli random variable ζ_t , which makes it requires large communication rounds K' with small probability p and small communication rounds K with large probability $1-p$. As a result, the expected communication complexity in each iteration depends on $K = \mathcal{O}(1/\sqrt{1 - \lambda_2(W)})$.

We have the following lemma for consensus error.

Lemma 3. For Algorithm 1 (or Algorithm 2), we set parameters satisfying $\rho^2 \leq 1/24$, then it holds that

$$\mathbb{E}[C_{t+1}] \leq 12\rho^2 C_t + 6\rho'^2 \eta^2 m V_t + 2\rho^2 m \mathbb{E}\|\bar{z}_{t+1} - \bar{z}_t\|^2 + \frac{6\rho'^2 m \eta^2 \sigma^2}{b'} \mathbb{I}[b' < n].$$

Remark 3. For convenience, we define $n = +\infty$ in online setting (Algorithm 1) and $b' = n$ in offline setting (Algorithm 2) and , which leads to

$$\mathbb{I}[b' < n] = \begin{cases} 1, & \text{for online case,} \\ 0, & \text{for offline case.} \end{cases}$$

This notation results we can present the analysis for two cases in one unified framework.

Lemma 2 and 3 mean the decrease of the optimization error Ψ_t and consensus error C_t requires the reasonable upper bounds of gradient estimation error V_t and U_t , which can be characterized by the following recursions.

Lemma 4. For Algorithm 1 (or Algorithm 2), we have

$$\mathbb{E}[V_{t+1}] \leq (1-p)V_t + \frac{4(1-p)L^2}{mb} C_t + \frac{p\sigma^2}{b'} \mathbb{I}[b' < n] + \frac{3(1-p)L^2}{b} \mathbb{E}\|\bar{z}_{t+1} - \bar{z}_t\|^2.$$

Lemma 5. For Algorithm 1 (or Algorithm 2), we have

$$\mathbb{E}[U_{t+1}] \leq (1-p)U_t + \frac{4(1-p)L^2}{m^2 b} C_t + \frac{p\sigma^2}{mb'} \mathbb{I}[b' < n] + \frac{3(1-p)L^2}{mb} \mathbb{E}\|\bar{z}_{t+1} - \bar{z}_t\|^2.$$

Both of the quantities U_t and V_t are necessary and play the different roles in our complexity analysis.

- We use the quantity U_t rather than the quantity V_t to upper bound the optimization error Ψ_t in Lemma 2. This is because of the fact $U_t \leq V_t$, which leads to the total SFO complexity of DREAM does not depend on the agents number m in online setting.
- We use the quantity V_t to upper bound the consensus error C_t in Lemma 3. Note that it cannot be replaced by U_t , since we desire each local variable be close to the mean.

In the construction (5) for our Lyapunov function Φ_t , the term of V_t has an additional coefficient $1/m$, which is motivated by the inequality $V_t \leq mU_t$. In a very recent work [32], the similar technique is also be used to establish the optimal SFO algorithm for decentralized nonconvex finite-sum minimization problem.

Putting Lemma 2, 3, 4 together, we achieve the main result for DREAM as follows.

Theorem 1 (main result). *For Algorithm 1 (or Algorithm 2), we set parameters*

$$\begin{aligned} \eta &= \frac{1}{48L}, \quad b = \left\lceil \sqrt{\frac{b'}{m}} \right\rceil, \quad p = \frac{b}{b+b'} \\ T &= \left\lceil \frac{16\Psi_0}{\lambda\eta\epsilon^2} + \frac{2}{p} \right\rceil, \quad K_0 = \left\lceil \frac{\log(16/(\lambda m\epsilon^2))}{\sqrt{1-\lambda_2(W)}} \right\rceil, \\ K &= \left\lceil \frac{5}{\sqrt{1-\lambda_2(W)}} \right\rceil, \quad K' = \left\lceil \frac{5 \log m}{\sqrt{1-\lambda_2(W)}} \right\rceil, \end{aligned} \tag{8}$$

where we take $\lambda = \Theta(\kappa^{-2})$ according to (6), $\alpha = 1/8$ for optimization error (4) and

$$b' = \begin{cases} \lceil 32\sigma^2/(\lambda m\epsilon^2) \rceil, & \text{for online case,} \\ n, & \text{for offline case.} \end{cases} \tag{9}$$

Then the output satisfies $\mathbb{E}\|P(x_{\text{out}})\| \leq \epsilon$ within the overall SFO complexity

$$\begin{cases} \mathcal{O}(\sigma^2\epsilon^{-2} + \kappa^3 L\sigma\epsilon^{-3}), & \text{for online case;} \\ \mathcal{O}(nm + \sqrt{nm}\kappa^2 L\epsilon^{-2}), & \text{for offline case;} \end{cases}$$

and communication complexity $\mathcal{O}(\kappa^2 L\epsilon^{-2}/\sqrt{1-\lambda_2(W)})$ for both cases.

4 Discussion and Related Work

The results of Theorem 1 mean DREAM achieves the optimal SFO complexity and optimal communication complexity in terms of ϵ , L , m , n , σ and $\lambda_2(W)$, since they match the lower bounds of finding an ϵ -stationary point in decentralized nonconvex stochastic optimization [2, 8, 24, 30, 32, 49], which is a special case our nonconvex-strongly-concave minimax problem. We provide the detailed discussion for optimality in Appendix H.

The optimality in terms of condition number κ is still an open problem even for stochastic nonconvex-strongly-concave minimax in non-distributed setting [11, 22, 62]. Recently, Zhang et al. [63] proposed SAPD+ with the best known SFO complexity of $\mathcal{O}(\kappa^2\epsilon^{-3})$ for single machine scenario. However, SAPD+ consists of triple loops, which leads to it is inconvenient to implement and the extension to decentralized setting is also complicated.

5 Experiment

We conduct numerical experiments on the model of robust logistic regression [33, 52, 55]. It considers training the binary classifier $x \in \mathbb{R}^d$ on dataset $\{(a_k, b_k)\}_{k=1}^{mn}$, where $a_k \in \mathbb{R}^d$ and $b_k \in \{1, -1\}$ are the feature of the

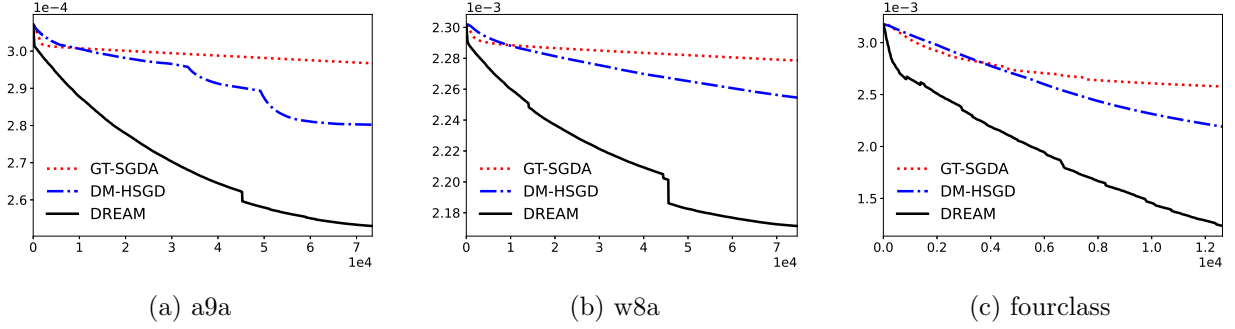


Figure 1: Comparison on the number of SFO calls against $P(\bar{x}) \triangleq \max_{y \in \Delta_N} f(\bar{x}, y)$.

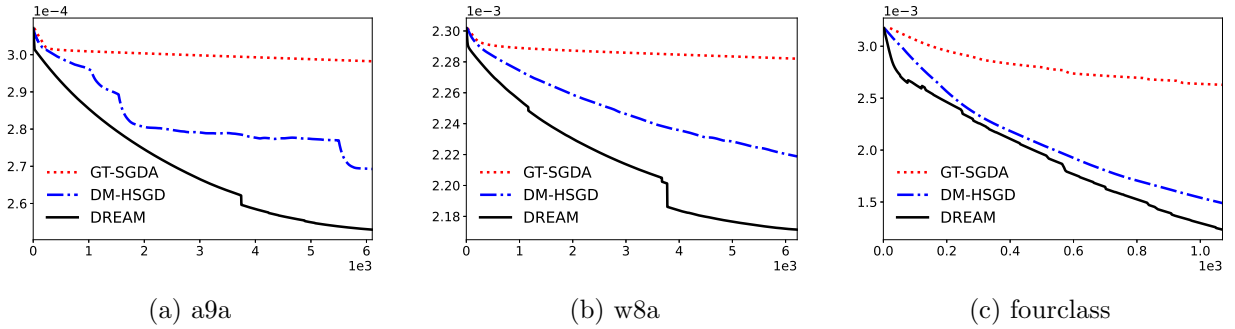


Figure 2: Comparison on the number of communication rounds against $P(\bar{x}) \triangleq \max_{y \in \Delta_N} f(\bar{x}, y)$.

k -th sample and its corresponding label. The total $N = mn$ samples are equally distributed on m agents. The decentralized minimax formulation for this problem is

$$\min_{x \in \mathbb{R}^d} \max_{y \in \Delta_N} f(x, y) \triangleq \frac{1}{m} \sum_{i=1}^m f_i(x)$$

with local functions

$$f_i(x) \triangleq \frac{1}{n} \sum_{j=1}^n (y_{ij} l_{ij}(x) - V(y) + g(x)),$$

where $\Delta_N = \{y \in \mathbb{R}^N : 0 \leq y_k \leq 1, \sum_{i=1}^N y_i = 1\}$, $l_{ij}(x) = \log(1 + \exp(b_{ij} a_{ij}^\top x))$, $V(y) = \frac{1}{2N^2} \|Ny - \mathbf{1}\|^2$, $g(x) = \theta \sum_{k=1}^d \alpha x_k^2 / (1 + \alpha x_k^2)$, $\theta = 10^{-5}$ and $\alpha = 10$. We set gossip matrix with m nodes as the γ -lazy random walk matrix on a ring graph [52, 58] and let $\gamma = 0.999$ that leads to low consensus rate since $\lambda_2(W) = \gamma + (1 - \gamma) \cos(2\pi(m - 1)/m)$.

We compare the performance of our proposed method **DREAM** with **DM-HSGD** [52] and **GT-SGDA**¹ on LIB-SVM [4] datasets ‘‘a9a’’, ‘‘w8a’’ and ‘‘fourclass’’. All of the algorithms are implemented by MPI by following the code provided by Xian et al. [52].² We run the experiments on an 8-core Intel i5-1135G7 2.40 GHz processor by setting $m = 8$ and $n = N/8$. For **DREAM**, we set $b' = b^2$, $p = b/(b + b')$ and tune K_0, K', K from $\{2, 5, 10\}$. For **GT-SGDA**, we let the number of inner loops be 20 by following setting of Lin et al. [25]. For **DM-HSGD**, we set $\beta_x = \beta_y = 0.01$ by following Xian et al. [52]. For each algorithm, we grid search η, λ and b from $\{1, 0.1, 0.01\}$, $\{0.1, 0.01, 0.001\}$ and $\{1, 10, 100\}$ respectively. We present the empirical results for the comparisons on computation complexity and communication complexity in Figure 1 and 2. It is shown that the proposed **DREAM** performs apparently better than baselines.

¹GT-SGDA is the stochastic variant of GT-DA Tsaknakis et al. [50] and we present its details in Appendix G.

²<https://github.com/Trashzzz/DM-HSGD>

6 Conclusion and Future Work

In this paper, we have propose a simple and efficient algorithm **DREAM** for decentralized stochastic nonconvex-strongly-concave minimax optimization. The theoretical analysis showed **DREAM** achieves best-known SFO complexity and communication complexity. The numerical performance of our algorithm is also better than state-of-the-art methods. A future direction is to design the practical decentralized stochastic algorithm with better dependency on condition number. It is also interesting to consider time-varying networks [45] and decentralized minimax optimization with nonconvex-non-strongly-concave objective function.

References

- [1] Ahmet Alacaoglu and Yura Malitsky. Stochastic variance reduction for variational inequality methods. In *COLT*, 2022.
- [2] Yossi Arjevani, Yair Carmon, John C. Duchi, Dylan J. Foster, Nathan Srebro, and Blake Woodworth. Lower bounds for non-convex stochastic optimization. *Mathematical Programming*, pages 1–50, 2022.
- [3] Aleksandr Beznosikov, Valentin Samokhin, and Alexander Gasnikov. Distributed saddle-point problems: Lower bounds, optimal and robust algorithms. *arXiv preprint arXiv:2010.13112*, 2020.
- [4] Chih-Chung Chang and Chih-Jen Lin. LIBSVM: A library for support vector machines. *ACM transactions on intelligent systems and technology*, 2(3):1–27, 2011. URL <https://www.csie.ntu.edu.tw/~cjlin/libsvm/>.
- [5] Ziyi Chen, Qunwei Li, and Yi Zhou. Finding local minimax points via (stochastic) cubic-regularized GDA: Global convergence and complexity. *arXiv preprint arXiv:2110.07098*, 2021.
- [6] Ashok Cutkosky and Francesco Orabona. Momentum-based variance reduction in non-convex SGD. *NeurIPS*, 32, 2019.
- [7] Yanbo Fan, Siwei Lyu, Yiming Ying, and Baogang Hu. Learning with average top- k loss. *NeurIPS*, 2017.
- [8] Cong Fang, Chris Junchi Li, Zhouchen Lin, and Tong Zhang. SPIDER: Near-optimal non-convex optimization via stochastic path-integrated differential estimator. In *NeurIPS*, 2018.
- [9] Farzan Farnia and Asuman Ozdaglar. Train simultaneously, generalize better: Stability of gradient-based minimax learners. In *ICML*, 2021.
- [10] Zhishuai Guo, Zhuoning Yuan, Yan Yan, and Tianbao Yang. Fast objective & duality gap convergence for nonconvex-strongly-concave min-max problems. *arXiv preprint arXiv:2006.06889*, 2020.
- [11] Yuze Han, Guangzeng Xie, and Zhihua Zhang. Lower complexity bounds of finite-sum optimization problems: The results and construction. *arXiv preprint arXiv:2103.08280*, 2021.
- [12] Thomas Hofmann, Aurelien Lucchi, Simon Lacoste-Julien, and Brian McWilliams. Variance reduced stochastic gradient descent with neighbors. In *NIPS*, 2015.
- [13] Feihu Huang, Xidong Wu, and Heng Huang. Efficient mirror descent ascent methods for nonsmooth minimax problems. *NeurIPS*, 2021.
- [14] Feihu Huang, Shangqian Gao, Jian Pei, and Heng Huang. Accelerated zeroth-order and first-order momentum methods from mini to minimax optimization. *Journal of Machine Learning Research*, 23: 36–1, 2022.
- [15] Dmitry Kovalev, Samuel Horváth, and Peter Richtárik. Don’t jump through hoops and remove those loops: SVRG and Katyusha are better without the outer loop. In *ALT*, 2020.

- [16] Dmitry Kovalev, Adil Salim, and Peter Richtárik. Optimal and practical algorithms for smooth and strongly convex decentralized optimization. *NeurIPS*, 2020.
- [17] Dmitry Kovalev, Aleksandr Beznosikov, Abdurakhmon Sadiev, Michael Persianov, Peter Richtárik, and Alexander Gasnikov. Optimal algorithms for decentralized stochastic variational inequalities. In *NeurIPS*, 2022.
- [18] Lihua Lei, Cheng Ju, Jianbo Chen, and Michael I. Jordan. Non-convex finite-sum optimization via SCSSG methods. In *NIPS*, 2017.
- [19] Bingcong Li, Meng Ma, and Georgios B. Giannakis. On the convergence of SARAH and beyond. In *AISTAS*, 2020.
- [20] Boyue Li, Shicong Cen, Yuxin Chen, and Yuejie Chi. Communication-efficient distributed optimization in networks with gradient tracking and variance reduction. *Journal of Machine Learning Research*, 21: 1–51, 2020.
- [21] Boyue Li, Zhize Li, and Yuejie Chi. DESTRESS: Computation-optimal and communication-efficient decentralized nonconvex finite-sum optimization. *SIAM Journal on Mathematics of Data Science*, 4(3): 1031–1051, 2022.
- [22] Haochuan Li, Yi Tian, Jingzhao Zhang, and Ali Jadbabaie. Complexity lower bounds for nonconvex-strongly-concave min-max optimization. In *NeurIPS*, 2021.
- [23] Huan Li, Zhouchen Lin, and Yongchun Fang. Variance reduced extra and diging and their optimal acceleration for strongly convex decentralized optimization. *Journal of Machine Learning Research*, 23: 1–41, 2022.
- [24] Zhize Li, Hongyan Bao, Xiangliang Zhang, and Peter Richtárik. PAGE: A simple and optimal probabilistic gradient estimator for nonconvex optimization. In *ICML*, 2021.
- [25] Tianyi Lin, Chi Jin, and Michael Jordan. On gradient descent ascent for nonconvex-concave minimax problems. In *ICML*, 2020.
- [26] Tianyi Lin, Chi Jin, and Michael I. Jordan. A nonasymptotic analysis of gradient descent ascent for nonconvex-concave minimax problems. *SSRN*, 2022.
- [27] Ji Liu and A. Stephen Morse. Accelerated linear iterations for distributed averaging. *Annual Reviews in Control*, 35(2):160–165, 2011.
- [28] Mingrui Liu, Zhuoning Yuan, Yiming Ying, and Tianbao Yang. Stochastic AUC maximization with deep neural networks. *arXiv preprint arXiv:1908.10831*, 2019.
- [29] Mingrui Liu, Wei Zhang, Youssef Mroueh, Xiaodong Cui, Jarret Ross, Tianbao Yang, and Payel Das. A decentralized parallel algorithm for training generative adversarial nets. In *NeurIPS*, 2020.
- [30] Yucheng Lu and Christopher De Sa. Optimal complexity in decentralized training. In *ICML*, 2021.
- [31] Luo Luo and Haishan Ye. Decentralized stochastic variance reduced extragradient method. *arXiv preprint arXiv:2202.00509*, 2022.
- [32] Luo Luo and Haishan Ye. An optimal stochastic algorithm for decentralized nonconvex finite-sum optimization. *arXiv preprint arXiv:2210.13931*, 2022.
- [33] Luo Luo, Haishan Ye, Zhichao Huang, and Tong Zhang. Stochastic recursive gradient descent ascent for stochastic nonconvex-strongly-concave minimax problems. In *NeurIPS*, 2020.
- [34] Luo Luo, Li Yujun, and Cheng Chen. Finding second-order stationary points in nonconvex-strongly-concave minimax optimization. In *NeurIPS*, 2022.

- [35] Dmitriy Meteleev, Alexander Rogozin, Alexander Gasnikov, and Dmitry Kovalev. Decentralized saddle-point problems with different constants of strong convexity and strong concavity. *arXiv preprint arXiv:2206.00090*, 2022.
- [36] Vaishnavh Nagarajan and J. Zico Kolter. Gradient descent GAN optimization is locally stable. *NIPS*, 2017.
- [37] Angelia Nedic, Alex Olshevsky, and Wei Shi. Achieving geometric convergence for distributed optimization over time-varying graphs. *SIAM Journal on Optimization*, 27(4):2597–2633, 2017.
- [38] Lam M. Nguyen, Jie Liu, Katya Scheinberg, and Martin Takáč. SARAH: A novel method for machine learning problems using stochastic recursive gradient. In *ICML*, 2017.
- [39] Lam M. Nguyen, Katya Scheinberg, and Martin Takáč. Inexact SARAH algorithm for stochastic optimization. *arXiv preprint:1811.10105*, 2018.
- [40] Nhan H. Pham, Lam M. Nguyen, Dzung T. Phan, and Quoc Tran-Dinh. ProxSARAH: An efficient algorithmic framework for stochastic composite nonconvex optimization. *Journal of Machine Learning Research*, 21(110):1–48, 2020.
- [41] Shi Pu and Angelia Nedić. Distributed stochastic gradient tracking methods. *Mathematical Programming*, 187(1):409–457, 2021.
- [42] Shuang Qiu, Zhuoran Yang, Xiaohan Wei, Jieping Ye, and Zhaoran Wang. Single-timescale stochastic nonconvex-concave optimization for smooth nonlinear td learning. *arXiv preprint arXiv:2008.10103*, 2020.
- [43] Guannan Qu and Na Li. Accelerated distributed Nesterov gradient descent. *IEEE Transactions on Automatic Control*, 65(6):2566–2581, 2019.
- [44] Hassan Rafique, Mingrui Liu, Qihang Lin, and Tianbao Yang. Weakly-convex-concave min-max optimization: provable algorithms and applications in machine learning. *Optimization Methods and Software*, pages 1–35, 2021.
- [45] Alexander Rogozin, Alexander Gasnikov, Aleksander Beznosikov, and Dmitry Kovalev. Decentralized optimization over time-varying graphs: a survey. *arXiv preprint arXiv:2210.09719*, 2022.
- [46] Wei Shi, Qing Ling, Gang Wu, and Wotao Yin. EXTRA: An exact first-order algorithm for decentralized consensus optimization. *SIAM Journal on Optimization*, 25(2):944–966, 2015.
- [47] Aman Sinha, Hongseok Namkoong, and John C. Duchi. Certifying some distributional robustness with principled adversarial training. In *ICLR*, 2018.
- [48] Haoran Sun and Mingyi Hong. Distributed non-convex first-order optimization and information processing: Lower complexity bounds and rate optimal algorithms. *IEEE Transactions on Signal processing*, 67(22):5912–5928, 2019.
- [49] Haoran Sun, Songtao Lu, and Mingyi Hong. Improving the sample and communication complexity for decentralized non-convex optimization: Joint gradient estimation and tracking. In *ICML*, 2020.
- [50] Ioannis Tsaknakis, Mingyi Hong, and Sijia Liu. Decentralized min-max optimization: Formulations, algorithms and applications in network poisoning attack. In *ICASSP*, 2020.
- [51] César A Uribe, Soomin Lee, Alexander Gasnikov, and Angelia Nedić. A dual approach for optimal algorithms in distributed optimization over networks. In *ITA*. IEEE, 2020.
- [52] Wenhan Xian, Feihu Huang, Yanfu Zhang, and Heng Huang. A faster decentralized algorithm for nonconvex minimax problems. In *NeurIPS*, 2021.
- [53] Ran Xin, Usman A. Khan, and Soumya Kar. Fast decentralized nonconvex finite-sum optimization with recursive variance reduction. *SIAM Journal on Optimization*, 32(1):1–28, 2022.

- [54] Tengyu Xu, Zhe Wang, Yingbin Liang, and H. Vincent Poor. Gradient free minimax optimization: Variance reduction and faster convergence. *arXiv preprint arXiv:2006.09361*, 2020.
- [55] Yan Yan, Yi Xu, Qihang Lin, Lijun Zhang, and Tianbao Yang. Stochastic primal-dual algorithms with faster convergence than $O(1/\sqrt{T})$ for problems without bilinear structure. *arXiv preprint arXiv:1904.10112*, 2019.
- [56] Yan Yan, Yi Xu, Qihang Lin, Wei Liu, and Tianbao Yang. Optimal epoch stochastic gradient descent ascent methods for min-max optimization. In *NeurIPS*, 2020.
- [57] Haishan Ye, Luo Luo, Ziang Zhou, and Tong Zhang. Multi-consensus decentralized accelerated gradient descent. *arXiv preprint arXiv:2005.00797*, 2020.
- [58] Haishan Ye, Wei Xiong, and Tong Zhang. PMGT-VR: A decentralized proximal-gradient algorithmic framework with variance reduction. *arXiv preprint arXiv:2012.15010*, 2020.
- [59] Haishan Ye, Ziang Zhou, Luo Luo, and Tong Zhang. Decentralized accelerated proximal gradient descent. In *NeurIPS*, 2020.
- [60] Kun Yuan, Qing Ling, and Wotao Yin. On the convergence of decentralized gradient descent. *SIAM Journal on Optimization*, 26(3):1835–1854, 2016.
- [61] Zhuoning Yuan, Zhishuai Guo, Yi Xu, Yiming Ying, and Tianbao Yang. Federated deep AUC maximization for heterogeneous data with a constant communication complexity. *arXiv preprint arXiv:2102.04635*, 2021.
- [62] Siqi Zhang, Junchi Yang, Cristóbal Guzmán, Negar Kiyavash, and Niao He. The complexity of nonconvex-strongly-concave minimax optimization. In *UAI*, 2021.
- [63] Xuan Zhang, Necdet Serhat Aybat, and Mert Gurbuzbalaban. SAPD+: An accelerated stochastic method for nonconvex-concave minimax problems. In *NeurIPS*, 2022.

A Some Useful Lemmas

We first provide some useful lemmas.

Lemma 6 (Liu and Morse [27, Lemma 2]). *Under Assumption 6, Algorithm 3 holds that $\frac{1}{m}\mathbf{1}^\top \mathbf{a}^{(K)} = \bar{a}^{(0)}$ and*

$$\|\mathbf{a}^{(K)} - \mathbf{1}\bar{a}^{(0)}\| \leq \left(1 - \sqrt{1 - \lambda_2(W)}\right)^K \|\mathbf{a}^{(0)} - \mathbf{1}\bar{a}^{(0)}\|,$$

where $\bar{a}^{(0)} = \frac{1}{m}\mathbf{1}^\top \mathbf{a}^{(0)}$ and $\|\cdot\|$ is the Frobenius norm.

Lemma 7. *For any $a_1, \dots, a_m \in \mathbb{R}^d$, we have*

$$\left\| \frac{1}{m} \sum_{i=1}^m a_i \right\|^2 \leq \frac{1}{m} \sum_{i=1}^m \|a_i\|^2.$$

Lemma 8 (Ye et al. [57, Lemma 3]). *For any matrix $\mathbf{z} \in \mathbb{R}^{m \times d}$, we have $\|\mathbf{z} - \mathbf{1}\bar{z}\| \leq \|\mathbf{z}\|$ where $\bar{z} = \frac{1}{m}\mathbf{1}^\top \mathbf{z}$.*

Lemma 9. *Under Assumption 2, we have $\|\nabla \mathbf{f}(\mathbf{z}) - \nabla \mathbf{f}(\mathbf{z}')\| \leq L \|\mathbf{z} - \mathbf{z}'\|$ for any $\mathbf{z}, \mathbf{z}' \in \mathbb{R}^{m \times d}$.*

Lemma 10. *For Algorithm 1, we have $\bar{s}_t = \frac{1}{m}\mathbf{1}^\top \mathbf{g}_t = \bar{g}_t$.*

Proof. We prove this lemma by induction. For $t = 0$, we have

$$\bar{\mathbf{s}}_0 = \frac{1}{m} \mathbf{1}^\top \mathbf{s}_0 = \frac{1}{m} \mathbf{1}^\top \mathbf{g}_0.$$

Suppose the statement holds for $t \leq k$. Then for $t = k + 1$, Lemma 6 and induction base means

$$\begin{aligned} & \bar{\mathbf{s}}_{k+1} \\ &= \bar{\mathbf{s}}_k + \bar{\mathbf{g}}_{k+1} - \bar{\mathbf{g}}_k \\ &= \frac{1}{m} \mathbf{1}^\top \mathbf{g}(\mathbf{x}_k) + \bar{\mathbf{g}}_{k+1} - \frac{1}{m} \mathbf{1}^\top \mathbf{g}(\mathbf{x}_k) \\ &= \bar{\mathbf{g}}_{k+1} \\ &= \frac{1}{m} \mathbf{1}^\top \mathbf{g}_{k+1}. \end{aligned}$$

□

Lemma 11. *Under Assumption 2, for Algorithm 1, it holds that*

$$\|\bar{\mathbf{s}}_t - \nabla f(\bar{\mathbf{z}}_t)\|^2 \leq 2 \left\| \frac{1}{m} \sum_{i=1}^m (\mathbf{g}_t(i) - \nabla f_i(\mathbf{z}_t(i))) \right\|^2 + \frac{2L^2}{m} \|\mathbf{z}_t - \mathbf{1}\bar{\mathbf{z}}_t\|^2.$$

Proof. Using Young's inequality and Assumption 2, we have

$$\begin{aligned} & \|\bar{\mathbf{s}}_t - \nabla f(\bar{\mathbf{z}}_t)\|^2 \\ &= \left\| \frac{1}{m} \sum_{i=1}^m (\mathbf{g}_t(i) - \nabla f_i(\bar{\mathbf{z}}_t)) \right\|^2 \\ &\leq 2 \left\| \frac{1}{m} \sum_{i=1}^m (\mathbf{g}_t(i) - \nabla f_i(\mathbf{z}_t(i))) \right\|^2 + 2 \left\| \frac{1}{m} \sum_{i=1}^m (\nabla f_i(\mathbf{z}_t(i)) - \nabla f_i(\bar{\mathbf{z}}_t)) \right\|^2 \\ &\leq 2 \left\| \frac{1}{m} \sum_{i=1}^m (\mathbf{g}_t(i) - \nabla f_i(\mathbf{z}_t(i))) \right\|^2 + \frac{2}{m} \sum_{i=1}^m \|\nabla f_i(\mathbf{z}_t(i)) - \nabla f_i(\bar{\mathbf{z}}_t)\|^2 \\ &\leq 2 \left\| \frac{1}{m} \sum_{i=1}^m (\mathbf{g}_t(i) - \nabla f_i(\mathbf{z}_t(i))) \right\|^2 + \frac{2L^2}{m} \|\mathbf{z}_t - \mathbf{1}\bar{\mathbf{z}}_t\|^2. \end{aligned}$$

□

Lemma 12. *When $f(x, y)$ is L -smooth and μ -strongly-concave in y , it holds that*

$$\|\nabla P(x) - \nabla_x f(x, y)\| \leq 2\kappa \|G_\eta(x, y)\|,$$

where $G_\eta(x, y)$ denotes the gradient mapping

$$G_\eta(x, y) = \frac{\Pi(y + \eta \nabla_y f(x, y)) - y}{\eta}$$

with any $\eta \leq 1/L$.

Proof. Using the Danskin's theorem, i.e. $\nabla P(x) = \nabla_x f(x, y^*(x))$ as well as the L -smoothness, we have

$$\|\nabla P(x) - \nabla_x f(x, y)\| \leq L \|y^*(x) - y\|. \quad (10)$$

The Corollary 1 of Luo et al. [33, Appendix A] tells us

$$\mu \|y - y^*(x)\| \leq 2 \|G_\eta(x, y)\|. \quad (11)$$

We prove this lemma by combing inequalities (10) and (11). □

B The Proof of Lemma 2

Proof. Denote $\mathbf{y}'_{t+1} = \Pi(\mathbf{y}_t + \eta\mathbf{v}_t)$, then the update rules of

$$\begin{cases} \mathbf{x}_{t+1} = \text{FastMix}(\mathbf{x}_t - \lambda\eta\mathbf{u}_t, K) \\ \mathbf{y}_{t+1} = \text{FastMix}(\Pi(\mathbf{y}_t + \eta\mathbf{v}_t), K) \end{cases}$$

and Lemma 6 means

$$\bar{\mathbf{x}}_{t+1} = \bar{\mathbf{x}}_t - \lambda\eta\bar{\mathbf{u}}_t \quad \text{and} \quad \bar{\mathbf{y}}_{t+1} = \bar{\mathbf{y}}'_{t+1} = \bar{\Pi}(\mathbf{y}_t + \eta\mathbf{v}_t). \quad (12)$$

In the view of inexact gradient descent on $P(x)$, it yields

$$\begin{aligned} & \mathbb{E}[P(\bar{\mathbf{x}}_{t+1})] \\ & \leq \mathbb{E} \left[P(\bar{\mathbf{x}}_t) + \nabla P(\bar{\mathbf{x}}_t)^\top (\bar{\mathbf{x}}_{t+1} - \bar{\mathbf{x}}_t) + \frac{L_P}{2} \|\bar{\mathbf{x}}_{t+1} - \bar{\mathbf{x}}_t\|^2 \right] \\ & = \mathbb{E} \left[P(\bar{\mathbf{x}}_t) - \lambda\eta \nabla P(\bar{\mathbf{x}}_t)^\top \bar{\mathbf{u}}_t + \frac{L_P \lambda^2 \eta^2}{2} \|\bar{\mathbf{u}}_t\|^2 \right] \\ & = \mathbb{E} \left[P(\bar{\mathbf{x}}_t) - \frac{\lambda\eta}{2} \|\nabla P(\bar{\mathbf{x}}_t)\|^2 - \left(\frac{\lambda\eta}{2} - \frac{L_P \lambda^2 \eta^2}{2} \right) \|\bar{\mathbf{u}}_t\|^2 + \frac{\lambda\eta}{2} \|\nabla P(\bar{\mathbf{x}}_t) - \bar{\mathbf{u}}_t\|^2 \right] \\ & \leq \mathbb{E} \left[P(\bar{\mathbf{x}}_t) - \frac{\lambda\eta}{2} \|\nabla P(\bar{\mathbf{x}}_t)\|^2 - \left(\frac{\lambda\eta}{2} - \frac{L_P \lambda^2 \eta^2}{2} \right) \|\bar{\mathbf{u}}_t\|^2 \right] \\ & \quad + \mathbb{E} \left[\frac{\lambda\eta}{m} \sum_{i=1}^m \|\nabla P(\bar{\mathbf{x}}_t) - \nabla_x f(\bar{\mathbf{x}}_t, \mathbf{y}_t(i))\|^2 + \frac{\lambda\eta}{m} \sum_{i=1}^m \|\bar{\mathbf{u}}_t - \nabla_x f(\bar{\mathbf{x}}_t, \mathbf{y}_t(i))\|^2 \right] \\ & \leq \mathbb{E} \left[P(\bar{\mathbf{x}}_t) - \frac{\lambda\eta}{2} \|\nabla P(\bar{\mathbf{x}}_t)\|^2 - \left(\frac{\lambda\eta}{2} - \frac{L_P \lambda^2 \eta^2}{2} \right) \|\bar{\mathbf{u}}_t\|^2 \right] \\ & \quad + \mathbb{E} \left[\frac{4\kappa^2 \lambda \eta}{m} \sum_{i=1}^m \|G_\eta(\bar{\mathbf{x}}_t, \mathbf{y}_t(i))\|^2 + \frac{\lambda\eta}{m} \sum_{i=1}^m \|\bar{\mathbf{u}}_t - \nabla_x f(\bar{\mathbf{x}}_t, \mathbf{y}_t(i))\|^2 \right] \\ & \leq \mathbb{E} \left[P(\bar{\mathbf{x}}_t) - \frac{\lambda\eta}{2} \|\nabla P(\bar{\mathbf{x}}_t)\|^2 - \left(\frac{\lambda\eta}{2} - \frac{L_P \lambda^2 \eta^2}{2} \right) \|\bar{\mathbf{u}}_t\|^2 \right] \\ & \quad + \mathbb{E} \left[\frac{8\kappa^2 \lambda \eta}{m} \sum_{i=1}^m \|\mathbf{v}'_t(i)\|^2 + \frac{8\kappa^2 \lambda \eta}{m} \sum_{i=1}^m \|\mathbf{v}_t(i) - \nabla_y f(\bar{\mathbf{x}}_t, \mathbf{y}_t(i))\|^2 + \frac{\lambda\eta}{m} \sum_{i=1}^m \|\bar{\mathbf{u}}_t - \nabla_x f(\bar{\mathbf{x}}_t, \mathbf{y}_t(i))\|^2 \right], \end{aligned} \quad (13)$$

where $\mathbf{v}'_t(i) = (\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i))/\eta$. Above, the first inequality follows from the smoothness of $P(x)$ by Lemma 1; the second one is due to the Young's inequality; the third inequality holds according to Lemma 12; in the last one we use the Young's inequality along with

$$\begin{aligned} & \|\mathbf{v}'_t(i) - G_\eta(\bar{\mathbf{x}}_t, \mathbf{y}_t(i))\| \\ & = \frac{1}{\eta} \|\Pi(\mathbf{y}_t + \eta\mathbf{v}_t(i)) - \Pi(\mathbf{y}_t + \eta\nabla_y f(\bar{\mathbf{x}}_t, \mathbf{y}_t(i)))\| \\ & \leq \|\mathbf{v}_t(i) - \nabla_y f(\bar{\mathbf{x}}_t, \mathbf{y}_t(i))\|. \end{aligned}$$

Recall that $\mathbf{y}'_{t+1} = \Pi(\mathbf{y}_t + \eta\mathbf{v}_t)$ and the property of projection, we have

$$(\mathbf{y}_t(i) + \eta\mathbf{v}_t(i) - \mathbf{y}'_{t+1}(i))^\top (\mathbf{y} - \mathbf{y}'_{t+1}(i)) \leq 0$$

for any $\mathbf{y} \in \mathcal{Y}$. Taking $\mathbf{y} = \bar{\mathbf{y}}_t$ in above inequality, we get

$$\begin{aligned} & \mathbf{v}_t(i)^\top (\bar{\mathbf{y}}_t - \mathbf{y}'_{t+1}(i)) \\ & \leq \frac{1}{\eta} (\bar{\mathbf{y}}_t - \mathbf{y}'_{t+1}(i))^\top (\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)) \\ & = \frac{1}{2\eta} \|\bar{\mathbf{y}}_t - \mathbf{y}_t(i)\|^2 - \frac{1}{2\eta} \|\bar{\mathbf{y}}_t - \mathbf{y}'_{t+1}(i)\|^2 - \frac{1}{2\eta} \|\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)\|^2. \end{aligned} \quad (14)$$

In the view of inexact gradient descent ascent on $f(x, y)$, it yields

$$\begin{aligned}
& \mathbb{E}[-f(\bar{x}_{t+1}, \mathbf{y}'_{t+1}(i))] \\
& \leq \mathbb{E} \left[-f(\bar{x}_{t+1}, \mathbf{y}_t(i)) - \nabla_y f(\bar{x}_{t+1}, \mathbf{y}_t(i))^\top (\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)) + \frac{L}{2} \|\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)\|^2 \right] \\
& \leq \mathbb{E} \left[-f(\bar{x}_t, \mathbf{y}_t(i)) - \nabla_x f(\bar{x}_t, \mathbf{y}_t(i))^\top (\bar{x}_{t+1} - \bar{x}_t) + \frac{L}{2} \|\bar{x}_{t+1} - \bar{x}_t\|^2 \right] \\
& \quad + \mathbb{E} \left[-\nabla_y f(\bar{x}_{t+1}, \mathbf{y}_t(i))^\top (\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)) + \frac{L}{2} \|\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)\|^2 \right] \\
& \leq \mathbb{E} \left[-f(\bar{x}_t, \bar{y}_t) + \nabla_y f(\bar{x}_t, \mathbf{y}_t(i))^\top (\bar{y}_t - \mathbf{y}_t(i)) - \nabla_x f(\bar{x}_t, \mathbf{y}_t(i))^\top (\bar{x}_{t+1} - \bar{x}_t) + \frac{L}{2} \|\bar{x}_{t+1} - \bar{x}_t\|^2 \right] \\
& \quad + \mathbb{E} \left[-\nabla_y f(\bar{x}_{t+1}, \mathbf{y}_t(i))^\top (\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)) + \frac{L}{2} \|\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)\|^2 \right] \\
& = \mathbb{E} \left[-f(\bar{x}_t, \bar{y}_t) + \nabla_y f(\bar{x}_t, \mathbf{y}_t(i))^\top (\bar{y}_t - \mathbf{y}'_{t+1}(i)) - \nabla_x f(\bar{x}_t, \mathbf{y}_t(i))^\top (\bar{x}_{t+1} - \bar{x}_t) + \frac{L}{2} \|\bar{x}_{t+1} - \bar{x}_t\|^2 \right] \\
& \quad + \mathbb{E} \left[(\nabla_y f(\bar{x}_t, \mathbf{y}_t(i)) - \nabla_y f(\bar{x}_{t+1}, \mathbf{y}_t(i)))^\top (\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)) + \frac{L}{2} \|\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)\|^2 \right] \\
& = \mathbb{E} \left[-f(\bar{x}_t, \bar{y}_t) + \mathbf{v}_t(i)^\top (\bar{y}_t - \mathbf{y}'_{t+1}(i)) - \nabla_x f(\bar{x}_t, \mathbf{y}_t(i))^\top (\bar{x}_{t+1} - \bar{x}_t) + \frac{L}{2} \|\bar{x}_{t+1} - \bar{x}_t\|^2 \right] \\
& \quad + \mathbb{E} \left[(\nabla_y f(\bar{x}_t, \mathbf{y}_t(i)) - \nabla_y f(\bar{x}_{t+1}, \mathbf{y}_t(i)))^\top (\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)) + \frac{L}{2} \|\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)\|^2 \right] \\
& \quad + \mathbb{E} [(\nabla_y f(\bar{x}_t, \mathbf{y}_t(i)) - \mathbf{v}_t(i))^\top (\bar{y}_t - \mathbf{y}'_{t+1}(i))] \\
& \leq \mathbb{E} \left[-f(\bar{x}_t, \bar{y}_t) - \frac{1}{2\eta} \|\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)\|^2 - \nabla_x f(\bar{x}_t, \mathbf{y}_t(i))^\top (\bar{x}_{t+1} - \bar{x}_t) + \frac{L}{2} \|\bar{x}_{t+1} - \bar{x}_t\|^2 \right] \\
& \quad + \mathbb{E} \left[(\nabla_y f(\bar{x}_t, \mathbf{y}_t(i)) - \nabla_y f(\bar{x}_{t+1}, \mathbf{y}_t(i)))^\top (\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)) + \frac{L}{2} \|\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)\|^2 \right] \\
& \quad + \mathbb{E} \left[\frac{\eta}{2} \|\nabla_y f(\bar{x}_t, \mathbf{y}_t(i)) - \mathbf{v}_t(i)\|^2 + \frac{1}{2\eta} \|\bar{y}_t - \mathbf{y}_t(i)\|^2 \right] \\
& \leq \mathbb{E} \left[-f(\bar{x}_t, \bar{y}_t) - \left(\frac{\eta}{4} - \frac{\eta^2 L}{2} \right) \|\mathbf{v}'_t(i)\|^2 + \left(\frac{\lambda^2 \eta^2 L}{2} + \lambda^2 \eta^3 L^2 + \frac{3\lambda^2 \eta}{2} \right) \|\bar{u}_t\|^2 \right] \\
& \quad + \mathbb{E} \left[\frac{\eta}{2} \|\nabla_x f(\bar{x}_t, \mathbf{y}_t(i)) - \bar{u}_t\|^2 + \frac{\eta}{2} \|\nabla_y f(\bar{x}_t, \mathbf{y}_t(i)) - \mathbf{v}_t(i)\|^2 + \frac{1}{2\eta} \|\bar{y}_t - \mathbf{y}_t(i)\|^2 \right],
\end{aligned}$$

where $\mathbf{v}'_t(i) = (\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i))/\eta$. Above, the equations rely on rearranging the terms; the first two inequalities are based on the L -smoothness of the objective $f(x, y)$. The third one follows from the concavity of in the direction of y ; the second last inequality is a use of (14) and the Young's inequality; the last inequality follows from the Young's inequality and the L -smoothness that leads to

$$\begin{aligned}
& (\nabla_y f(\bar{x}_t, \mathbf{y}_t(i)) - \nabla_y f(\bar{x}_{t+1}, \mathbf{y}_t(i)))^\top (\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)) \\
& \leq \frac{1}{4\eta} \|\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)\|^2 + \eta \|\nabla_y f(\bar{x}_{t+1}, \mathbf{y}_t(i)) - \nabla_y f(\bar{x}_t, \mathbf{y}_t(i))\| \\
& \leq \frac{1}{4\eta} \|\mathbf{y}'_{t+1}(i) - \mathbf{y}_t(i)\|^2 + \eta L^2 \|\bar{x}_{t+1} - \bar{x}_t\|^2 \\
& = \frac{\eta}{4} \|\mathbf{v}'_t(i)\|^2 + \lambda^2 \eta^3 L^2 \|\bar{u}_t\|^2.
\end{aligned}$$

Using the concavity of $f(x, y)$ in variable y as well as the Jensen's inequality, we have

$$\begin{aligned} \mathbb{E}[-f(\bar{x}_{t+1}, \bar{y}'_{t+1})] &\leq \mathbb{E} \left[-f(\bar{x}_t, \bar{y}_t) - \left(\frac{\eta}{4} - \frac{\eta^2 L}{2} \right) \frac{1}{m} \sum_{i=1}^m \|\mathbf{v}'_t(i)\|^2 + \left(\frac{\lambda^2 \eta^2 L}{2} + \lambda^2 \eta^3 L^2 + \frac{3\lambda^2 \eta}{2} \right) \|\bar{u}_t\|^2 \right] \\ &\quad + \frac{1}{m} \sum_{i=1}^m \mathbb{E} \left[\frac{\eta}{2} \|\nabla_x f(\bar{x}_t, \mathbf{y}_t(i)) - \bar{u}_t\|^2 + \frac{\eta}{2} \|\nabla_y f(\bar{x}_t, \mathbf{y}_t(i)) - \mathbf{v}_t(i)\|^2 + \frac{1}{2\eta} \|\bar{y}_t - \mathbf{y}_t(i)\|^2 \right]. \end{aligned} \quad (15)$$

Recall $\bar{y}'_{t+1} = \bar{y}_{t+1}$ by Lemma 6 and the definition of P_t . Adding (13) multiplying $(1 + \alpha)$ times along with (15) multiplying α times, we get

$$\begin{aligned} \mathbb{E}[P_{t+1}] &\leq P_t + (1 + \alpha) \mathbb{E} \left[-\frac{\lambda\eta}{2} \|\nabla P(\bar{x}_t)\|^2 - \left(\frac{\lambda\eta}{2} - \frac{L_P \lambda^2 \eta^2}{2} \right) \|\bar{u}_t\|^2 \right] \\ &\quad + (1 + \alpha) \mathbb{E} \left[\frac{8\kappa^2 \lambda \eta}{m} \sum_{i=1}^m \|\mathbf{v}'_t(i)\|^2 + \frac{8\kappa^2 \lambda \eta}{m} \sum_{i=1}^m \|\mathbf{v}_t(i) - \nabla_y f(\bar{x}_t, \mathbf{y}_t(i))\|^2 + \frac{\lambda\eta}{m} \sum_{i=1}^m \|\bar{u}_t - \nabla_x f(\bar{x}_t, \mathbf{y}_t(i))\|^2 \right] \\ &\quad + \alpha \left[-\left(\frac{\eta}{4} - \frac{\eta^2 L}{2} \right) \frac{1}{m} \sum_{i=1}^m \|\mathbf{v}'_t(i)\|^2 + \left(\frac{\lambda^2 \eta^2 L}{2} + \lambda^2 \eta^3 L^2 + \frac{3\lambda^2 \eta}{2} \right) \|\bar{u}_t\|^2 \right] \\ &\quad + \frac{\alpha}{m} \sum_{i=1}^m \mathbb{E} \left[\frac{\eta}{2} \|\nabla_x f(\bar{x}_t, \mathbf{y}_t(i)) - \bar{u}_t\|^2 + \frac{\eta}{2} \|\nabla_y f(\bar{x}_t, \mathbf{y}_t(i)) - \mathbf{v}_t(i)\|^2 + \frac{1}{2\eta} \|\bar{y}_t - \mathbf{y}_t(i)\|^2 \right] \end{aligned}$$

Rearranging above result leads to

$$\begin{aligned} \mathbb{E}[\Psi_{t+1}] &\leq \mathbb{E} \left[\Psi_t - \frac{(1 + \alpha)\lambda\eta}{2} \|\nabla P(\bar{x}_t)\|^2 \right] \\ &\quad - \left((1 + \alpha) \left(\frac{\lambda\eta}{2} - \frac{L_P \lambda^2 \eta^2}{2} \right) - \alpha \left(\frac{L\lambda^2 \eta^2}{2} + \lambda^2 \eta^3 L + \frac{3\lambda^2 \eta}{2} \right) \right) \mathbb{E}[\|\bar{u}_t\|^2] \\ &\quad - \left(\alpha \left(\frac{\eta}{4} - \frac{L\eta^2}{2} \right) - (1 + \alpha)8\kappa^2 \lambda \eta \right) \frac{1}{m} \sum_{i=1}^m \mathbb{E}[\|\mathbf{v}'_t(i)\|^2] \\ &\quad + \left((1 + \alpha)\lambda + \frac{\alpha}{2} \right) \frac{\eta}{m} \sum_{i=1}^m \mathbb{E}[\|\bar{u}_t - \nabla_x f(\bar{x}_t, \mathbf{y}_t(i))\|^2] \\ &\quad + \left((1 + \alpha)8\kappa^2 \lambda + \frac{\alpha}{2} \right) \frac{\eta}{m} \sum_{i=1}^m \mathbb{E}[\|\mathbf{v}_t(i) - \nabla_y f(\bar{x}_t, \mathbf{y}_t(i))\|^2] \\ &\quad + \frac{\alpha}{2\eta m} \sum_{i=1}^m \mathbb{E}[\|\bar{y}_t - \mathbf{y}_t(i)\|^2]. \end{aligned}$$

Since $\alpha \in (0, 1]$, taking $\eta \leq 1/(4L)$ and the definition of λ in (6) mean

$$\left(\alpha \left(\frac{\eta}{4} - \frac{L\eta^2}{2} \right) - (1 + \alpha)8\kappa^2 \lambda \eta \right) \geq \frac{\alpha\eta}{16}.$$

as well as

$$(1 + \alpha) \left(\frac{\lambda\eta}{2} - \frac{L_P \lambda^2 \eta^2}{2} \right) - \alpha \left(\frac{L\lambda^2 \eta^2}{2} + \lambda^2 \eta^3 L + \frac{3\lambda^2 \eta}{2} \right) \geq \frac{\lambda\eta}{4}.$$

Also, note that $\alpha \in (0, 1]$ and our choice of λ , we have

$$(1 + \alpha)8\kappa^2 \lambda + \frac{\alpha}{2} \leq \alpha, \quad (1 + \alpha)8\kappa^2 \lambda + \frac{\alpha}{2} \leq \alpha.$$

Therefore, we obtain the optimization bound as

$$\begin{aligned} \mathbb{E}[\Psi_{t+1}] &\leq \mathbb{E} \left[\Psi_t - \frac{\lambda\eta}{2} \|\nabla P(\bar{x}_t)\|^2 - \frac{\lambda\eta}{4} \|\bar{u}_t\|^2 - \frac{\alpha\eta}{16m} \sum_{i=1}^m \|\mathbf{v}'_t(i)\|^2 \right] \\ &\quad + \mathbb{E} \left[\frac{\alpha\eta}{m} \sum_{i=1}^m \|\bar{u}_t - \nabla_x f(\bar{x}_t, \mathbf{y}_t(i))\|^2 + \frac{\alpha\eta}{m} \sum_{i=1}^m \|\mathbf{v}_t(i) - \nabla_y f(\bar{x}_t, \mathbf{y}_t(i))\|^2 + \frac{\alpha}{2\eta m} \sum_{i=1}^m \|\bar{y}_t - \mathbf{y}_t(i)\|^2 \right]. \end{aligned} \quad (16)$$

Note that it holds that

$$\sum_{i=1}^m \|\mathbf{v}_t(i) - \nabla_y f(\bar{x}_t, \mathbf{y}_t(i))\|^2 \leq 3m \|\bar{v}_t - \nabla_y f(\bar{x}_t, \bar{y}_t)\|^2 + 3\|\mathbf{v}_t - \mathbf{1}\bar{v}_t\|^2 + 3L^2 \|\mathbf{y}_t - \mathbf{1}\bar{y}_t\|^2$$

and

$$\sum_{i=1}^m \|\bar{u}_t - \nabla_x f(\bar{x}_t, \mathbf{y}_t(i))\|^2 \leq 2m \|\bar{u}_t - \nabla_x f(\bar{x}_t, \bar{y}_t)\|^2 + 2L^2 \|\mathbf{y}_t - \mathbf{1}\bar{y}_t\|^2,$$

where we use the L -smoothness and Young's inequality. Then we combine Lemma 11 to get

$$\begin{aligned} & \frac{\alpha\eta}{m} \sum_{i=1}^m \|\bar{u}_t - \nabla_x f(\bar{x}_t, \mathbf{y}_t(i))\|^2 + \frac{\alpha\eta}{m} \sum_{i=1}^m \|\mathbf{v}_t(i) - \nabla_y f(\bar{x}_t, \mathbf{y}_t(i))\|^2 \\ & \leq \frac{6\alpha\eta L^2}{m} \|\mathbf{y}_t - \mathbf{1}\bar{y}_t\|^2 + \frac{3\alpha\eta}{m} \|\bar{s}_t - \nabla f(\bar{x}_t, \bar{y}_t)\|^2 + \frac{3\alpha\eta}{m} \|\mathbf{v}_t - \mathbf{1}\bar{v}_t\|^2 \\ & \leq \frac{\alpha}{2\eta m} \|\mathbf{y}_t - \mathbf{1}\bar{y}_t\|^2 + 3\alpha\eta \|\bar{s}_t - \nabla f(\bar{x}_t, \bar{y}_t)\|^2 + \frac{3\alpha\eta}{m} \|\mathbf{v}_t - \mathbf{1}\bar{v}_t\|^2, \end{aligned} \quad (17)$$

where we use $\eta \leq 1/(4L)$. Plugging (17) into (16) and then use the inequality

$$\frac{1}{m} \sum_{i=1}^m \|\mathbf{v}'_t(i)\|^2 \geq \|\bar{v}'_t\|^2.$$

Hence, we have

$$\begin{aligned} \mathbb{E}[\Psi_{t+1}] & \leq \mathbb{E} \left[\Psi_t - \frac{\lambda\eta}{2} \|\nabla P(\bar{x}_t)\|^2 - \frac{\lambda\eta}{4} \|\bar{u}_t\|^2 - \frac{\alpha\eta}{16} \|\bar{v}'_t\|^2 \right] \\ & \quad + \mathbb{E} \left[3\alpha\eta \|\bar{s}_t - \nabla_x f(\bar{x}_t, \bar{y}_t)\|^2 + \frac{3\alpha\eta}{m} \|\mathbf{v}_t - \mathbf{1}\bar{v}_t\|^2 + \frac{\alpha}{\eta m} \|\mathbf{y}_t - \bar{y}_t\|^2 \right]. \end{aligned}$$

Combining with Lemma 11 and using $\|\mathbf{y}_t - \mathbf{1}\bar{y}_t\| \leq \|\mathbf{z}_t - \mathbf{1}\bar{z}_t\|$ and $\eta \leq 1/(4L)$, we obtain

$$\begin{aligned} \mathbb{E}[\Psi_{t+1}] & \leq \mathbb{E} \left[\Psi_t - \frac{\lambda\eta}{2} \|\nabla P(\bar{x}_t)\|^2 - \frac{\lambda\eta}{4} \|\bar{u}_t\|^2 - \frac{\alpha\eta}{16} \|\bar{v}'_t\|^2 \right] \\ & \quad + \mathbb{E} \left[\frac{3\alpha\eta}{m} \|\mathbf{v}_t - \mathbf{1}\bar{v}_t\|^2 + 6\alpha\eta \left\| \frac{1}{m} \sum_{i=1}^m (\mathbf{g}_t(i) - \nabla f_i(\mathbf{z}_t(i))) \right\|^2 + \frac{2\alpha}{\eta m} \|\mathbf{z}_t - \bar{z}_t\|^2 \right]. \end{aligned}$$

Note that

$$\bar{u}_t = \frac{\bar{x}_t - \bar{x}_{t+1}}{\lambda\eta}, \quad \bar{v}'_t = \frac{\bar{y}_{t+1} - \bar{y}_t}{\eta} \quad \text{and} \quad \frac{1}{8\lambda\eta} \geq \frac{\alpha}{16\eta},$$

then we have

$$\begin{aligned} \mathbb{E}[\Psi_{t+1}] & \leq \mathbb{E} \left[\Psi_t - \frac{\lambda\eta}{2} \|\nabla P(\bar{x}_t)\|^2 - \frac{1}{8\lambda\eta} \|\bar{x}_{t+1} - \bar{x}_t\|^2 - \frac{\alpha}{16\eta} \|\bar{z}_{t+1} - \bar{z}_t\|^2 \right] \\ & \quad + \mathbb{E} \left[\frac{3\alpha\eta}{m} \|\mathbf{v}_t - \mathbf{1}\bar{v}_t\|^2 + 6\alpha\eta \left\| \frac{1}{m} \sum_{i=1}^m (\mathbf{g}_t(i) - \nabla f_i(\mathbf{z}_t(i))) \right\|^2 + \frac{2\alpha}{\eta m} \|\mathbf{z}_t - \mathbf{1}\bar{z}_t\|^2 \right], \end{aligned}$$

Recalling the definition of C_t, U_t , we obtain the result of Lemma 2. \square

C The Proof of Lemma 3

Proof. The relation of (12) means

$$\begin{aligned}
& \|\mathbf{x}_{t+1} - \mathbf{1}\bar{x}_{t+1}\| \\
&= \left\| \text{FastMix}(\mathbf{x}_t - \eta\mathbf{u}_t, K) - \frac{1}{m}\mathbf{1}\mathbf{1}^\top \text{FastMix}(\mathbf{x}_t - \eta\mathbf{u}_t, K) \right\| \\
&\leq \rho \left\| (\mathbf{x}_t - \lambda\eta\mathbf{u}_t) - \frac{1}{m}\mathbf{1}\mathbf{1}^\top (\mathbf{x}_t - \eta\mathbf{u}_t) \right\| \\
&= \rho \|\mathbf{x}_t - \lambda\eta\mathbf{u}_t - \mathbf{1}(\bar{x}_t - \eta\bar{u}_t)\| \\
&\leq \rho (\|\mathbf{x}_t - \mathbf{1}\bar{x}_t\| + \lambda\eta \|\mathbf{u}_t - \mathbf{1}\bar{u}_t\|),
\end{aligned}$$

where the first inequality is based on Lemma 6 and the last step is due to triangle inequality. Similarly, we define the notation $\bar{\Pi}(\cdot) = \frac{1}{m}\mathbf{1}\mathbf{1}^\top(\cdot)$ for convenience. Then for variable y , we can verify that

$$\begin{aligned}
& \|\mathbf{y}_{t+1} - \mathbf{1}\bar{y}_{t+1}\| \\
&= \left\| \text{FastMix}(\Pi(\mathbf{y}_t + \eta\mathbf{v}_t, K)) - \frac{1}{m}\mathbf{1}\mathbf{1}^\top \text{FastMix}(\Pi(\mathbf{y}_t + \eta\mathbf{v}_t, K)) \right\| \\
&\leq \rho \left\| \Pi(\mathbf{y}_t + \eta\mathbf{v}_t) - \frac{1}{m}\mathbf{1}\mathbf{1}^\top \Pi(\mathbf{y}_t + \eta\mathbf{v}_t) \right\| \\
&\leq \rho \|\Pi(\mathbf{y}_t + \eta\mathbf{v}_t) - \Pi(\mathbf{1}\bar{y}_t + \eta\mathbf{1}\bar{v}_t)\| + \rho \|\Pi(\mathbf{1}\bar{y}_t + \eta\mathbf{1}\bar{v}_t) - \mathbf{1}\bar{\Pi}(\mathbf{y}_t + \eta\mathbf{v}_t)\| \\
&\leq 2\rho \|\mathbf{y}_t + \eta\mathbf{v}_t - \mathbf{1}(\bar{y}_t + \eta\bar{v}_t)\| \\
&\leq 2\rho (\|\mathbf{y}_t - \mathbf{1}\bar{y}_t\| + \eta \|\mathbf{v}_t - \mathbf{1}\bar{v}_t\|),
\end{aligned}$$

where in the third inequality we use the non-expansiveness of projection and Lemma 11 in [59], i.e.

$$\|\mathbf{1}\bar{\Pi}(\mathbf{x}) - \Pi(\mathbf{1}\bar{x})\| \leq \|\mathbf{x} - \mathbf{1}\bar{x}\|.$$

Consequently, we use Young's inequality together with $\lambda \in (0, 1]$ to obtain

$$\begin{aligned}
& \|\mathbf{z}_{t+1} - \mathbf{1}\bar{z}_{t+1}\|^2 \\
&= \|\mathbf{x}_{t+1} - \mathbf{1}\bar{x}_{t+1}\|^2 + \|\mathbf{y}_{t+1} - \mathbf{1}\bar{y}_{t+1}\|^2 \\
&\leq 8\rho^2 \|\mathbf{y}_t - \mathbf{1}\bar{y}_t\|^2 + 8\rho^2\eta^2 \|\mathbf{v}_t - \mathbf{1}\bar{v}_t\|^2 + 2\rho^2 \|\mathbf{x}_t - \mathbf{1}\bar{x}_t\|^2 + 2\rho^2\eta^2 \|\mathbf{y}_t - \mathbf{1}\bar{y}_t\|^2 \\
&\leq 8\rho^2 \|\mathbf{z}_t - \mathbf{1}\bar{z}_t\|^2 + 8\rho^2\eta^2 \|\mathbf{s}_t - \mathbf{1}\bar{s}_t\|^2.
\end{aligned} \tag{18}$$

Furthermore, if $24\rho^2 \leq 1$, we have

$$\begin{aligned}
& \|\mathbf{z}_{t+1} - \mathbf{z}_t\|^2 \\
&\leq 3\|\mathbf{z}_{t+1} - \mathbf{1}\bar{z}_{t+1}\|^2 + 3\|\mathbf{z}_t - \mathbf{1}\bar{z}_t\|^2 + 3\|\mathbf{1}\bar{z}_t - \mathbf{1}\bar{z}_{t+1}\|^2 \\
&\leq (24\rho^2 + 3)\|\mathbf{z}_t - \mathbf{1}\bar{z}_t\|^2 + 24\rho^2\eta^2 \|\mathbf{s}_t - \mathbf{1}\bar{s}_t\|^2 + 3\|\mathbf{1}\bar{z}_t - \mathbf{1}\bar{z}_{t+1}\|^2 \\
&\leq 4\|\mathbf{z}_t - \mathbf{1}\bar{z}_t\|^2 + \eta^2 \|\mathbf{s}_t - \mathbf{1}\bar{s}_t\|^2 + 3m\|\bar{z}_t - \bar{z}_{t+1}\|^2.
\end{aligned} \tag{19}$$

We let $\rho_t = \rho'$ for $\zeta_t = 1$ and $\rho_t = \rho$ otherwise. The update of $\mathbf{g}_{t+1}(i)$ means

$$\begin{aligned}
& \mathbb{E}[\rho_t^2 \|\mathbf{g}_{t+1}(i) - \mathbf{g}_t(i)\|^2] \\
&= \rho'^2 p \mathbb{E} \left\| \frac{1}{b'} \sum_{\xi_{i,j} \in \mathcal{S}'_t(i)} \nabla F_i(\mathbf{z}_{t+1}(i); \xi_{i,j}) - \mathbf{g}_t(i) \right\|^2 + \frac{\rho^2(1-p)}{b} \mathbb{E} \|\nabla F_i(\mathbf{z}_{t+1}(i); \xi_{i,j}) - \nabla F_i(\mathbf{z}_t(i); \xi_{i,j})\|^2 \\
&\leq 3\rho'^2 p \mathbb{E} \left\| \frac{1}{b'} \sum_{\xi_{i,j} \in \mathcal{S}'_t(i)} \nabla F_i(\mathbf{z}_{t+1}(i); \xi_{i,j}) - \nabla f_i(\mathbf{z}_{t+1}(i)) \right\|^2 + 3\rho'^2 p \mathbb{E} \|\nabla f_i(\mathbf{z}_{t+1}(i)) - \nabla f_i(\mathbf{z}_t(i))\|^2
\end{aligned}$$

$$\begin{aligned}
& + 3\rho'^2 p \mathbb{E} \|\nabla f_i(\mathbf{z}_t(i)) - \mathbf{g}_t(i)\|^2 + \frac{\rho^2(1-p)L^2}{b} \mathbb{E} \|\mathbf{z}_{t+1}(i) - \mathbf{z}_t(i)\|^2 \\
\leq & \frac{3\rho'^2 p \sigma^2}{b'} \mathbb{I}[b' < n] + 3\rho'^2 p L^2 \mathbb{E} \|\mathbf{z}_{t+1}(i) - \mathbf{z}_t(i)\|^2 \\
& + 3\rho'^2 p \mathbb{E} \|\nabla f_i(\mathbf{z}_t(i)) - \mathbf{g}_t(i)\|^2 + \frac{\rho^2(1-p)L^2}{b} \mathbb{E} \|\mathbf{z}_{t+1}(i) - \mathbf{z}_t(i)\|^2 \\
\leq & \frac{3\rho'^2 p \sigma^2}{b'} \mathbb{I}[b' < n] + 3\rho'^2 p \mathbb{E} \|\nabla f_i(\mathbf{z}_t(i)) - \mathbf{g}_t(i)\|^2 + \left(\frac{1-p}{b} + 3p\right) \rho^2 L^2 \mathbb{E} \|\mathbf{z}_{t+1}(i) - \mathbf{z}_t(i)\|^2,
\end{aligned}$$

where the first inequality is based on the update rule and Assumption 5; the second inequality is based on triangle inequality and the last inequality is due to Assumption 2. Summing over above result over $i = 1, \dots, m$, obtain

$$\mathbb{E}[\rho_t^2 \|\mathbf{g}_{t+1} - \mathbf{g}_t\|^2] \leq \frac{3\rho'^2 m p \sigma^2}{b'} \mathbb{I}[b' < n] + 3\rho'^2 p \mathbb{E} \|\nabla \mathbf{f}(\mathbf{z}_t) - \mathbf{g}_t\|^2 + \left(\frac{1-p}{b} + 3p\right) \rho^2 L^2 \mathbb{E} \|\mathbf{z}_{t+1} - \mathbf{z}_t\|^2.$$

Using $b \geq 1, p \in (0, 1]$ and (19), we have

$$\begin{aligned}
\mathbb{E}[\rho_t^2 \|\mathbf{g}_{t+1} - \mathbf{g}_t\|^2] & \leq \frac{3\rho'^2 m \sigma^2}{b'} \mathbb{I}[b' < n] + 3\rho'^2 \mathbb{E}[\|\nabla \mathbf{f}(\mathbf{z}_t) - \mathbf{g}_t\|^2] + 4\rho^2 L^2 \mathbb{E}[\|\mathbf{z}_{t+1} - \mathbf{z}_t\|^2] \\
& \leq \frac{3\rho'^2 m \sigma^2}{b'} \mathbb{I}[b' < n] + 3\rho'^2 \mathbb{E}[\|\nabla \mathbf{f}(\mathbf{z}_t) - \mathbf{g}_t\|^2] \\
& \quad + 16\rho^2 L^2 \mathbb{E}[\|\mathbf{z}_t - \mathbf{1}\bar{z}_t\|^2] + 4\rho^2 L^2 \eta^2 \mathbb{E}[\|\mathbf{s}_t - \mathbf{1}\bar{s}_t\|^2] + 12\rho^2 m L^2 \mathbb{E}[\|\bar{z}_{t+1} - \bar{z}_t\|^2],
\end{aligned} \tag{20}$$

Using Lemma 6, we have

$$\begin{aligned}
& \|\mathbf{s}_{t+1} - \mathbf{1}\bar{s}_{t+1}\| \\
= & \left\| \text{FastMix}(\mathbf{s}_t + \mathbf{g}_{t+1} - \mathbf{g}_t, K) - \frac{1}{m} \mathbf{1}\mathbf{1}^\top \text{FastMix}(\mathbf{s}_t + \mathbf{g}_{t+1} - \mathbf{g}_t, K) \right\| \\
\leq & \rho_t \left\| \mathbf{s}_t + \mathbf{g}_{t+1} - \mathbf{g}_t - \frac{1}{m} \mathbf{1}\mathbf{1}^\top (\mathbf{s}_t + \mathbf{g}_{t+1} - \mathbf{g}_t) \right\| \\
\leq & \rho_t \|\mathbf{s}_t - \mathbf{1}\bar{s}_t\| + \rho_t \left\| \mathbf{g}_{t+1} - \mathbf{g}_t - \frac{1}{m} \mathbf{1}\mathbf{1}^\top (\mathbf{g}_{t+1} - \mathbf{g}_t) \right\| \\
\leq & \rho_t \|\mathbf{s}_t - \mathbf{1}\bar{s}_t\| + \rho_t \|\mathbf{g}_{t+1} - \mathbf{g}_t\|,
\end{aligned} \tag{21}$$

where the second inequality is based on triangle inequality and the last step uses Lemma 8. Combining the results of (20) and (21) and using $\eta \leq 1/(4L)$ and $6\rho^2 \leq 1$, we have

$$\begin{aligned}
& \eta^2 \mathbb{E} \|\mathbf{s}_{t+1} - \mathbf{1}\bar{s}_{t+1}\|^2 \\
\leq & 2\rho^2 \eta^2 \|\mathbf{s}_t - \mathbf{1}\bar{s}_t\|^2 + 2\eta^2 \mathbb{E}[\rho_t^2 \|\mathbf{g}_{t+1} - \mathbf{g}_t\|^2] \\
\leq & 4\rho^2 \eta^2 \mathbb{E}[\|\mathbf{s}_t - \mathbf{1}\bar{s}_t\|^2] + 4\rho^2 \mathbb{E}[\|\mathbf{z}_t - \mathbf{1}\bar{z}_t\|^2] \\
& + 6\rho'^2 \eta^2 \mathbb{E}[\|\nabla \mathbf{f}(\mathbf{z}_t) - \mathbf{g}_t\|^2] + 2\rho^2 m \mathbb{E}[\|\bar{z}_{t+1} - \bar{z}_t\|^2] + \frac{6\rho'^2 m \eta^2 \sigma^2}{b'} \mathbb{I}[b' < n].
\end{aligned} \tag{22}$$

Combining (22) and (18), we obtain

$$\begin{aligned}
& \mathbb{E}[\|\mathbf{z}_{t+1} - \mathbf{1}\bar{z}_{t+1}\|^2 + \eta^2 \|\mathbf{s}_{t+1} - \mathbf{1}\bar{s}_{t+1}\|^2] \\
\leq & 12\rho^2 \mathbb{E}[\|\mathbf{z}_t - \mathbf{1}\bar{z}_t\|^2 + \eta^2 \|\mathbf{s}_t - \mathbf{1}\bar{s}_t\|^2] \\
& + 6\rho'^2 \eta^2 \mathbb{E}[\|\nabla \mathbf{f}(\mathbf{z}_t) - \mathbf{g}_t\|^2] + 2\rho^2 m \mathbb{E}[\|\bar{z}_{t+1} - \bar{z}_t\|^2] + \frac{6\rho'^2 m \eta^2 \sigma^2}{b'} \mathbb{I}[b' < n],
\end{aligned}$$

which is the result we what to show. \square

D The Proof of Lemma 4

Proof. The update of $\mathbf{g}_{t+1}(i)$ means

$$\begin{aligned}
& \mathbb{E} \|\mathbf{g}_{t+1}(i) - \nabla f_i(\mathbf{z}_{t+1}(i))\|^2 \\
&= p \mathbb{E} \left\| \frac{1}{b'} \sum_{\xi_{i,j} \in \mathcal{S}'_t(i)} \nabla F_i(\mathbf{z}_{t+1}(i); \xi_{i,j}) - \nabla f_i(\mathbf{z}_{t+1}(i)) \right\|^2 \\
&\quad + (1-p) \mathbb{E} \left\| \mathbf{g}_t(i) + \frac{1}{b} \sum_{\xi_{i,j} \in \mathcal{S}_t(i)} (\nabla F_i(\mathbf{z}_{t+1}(i); \xi_{i,j}) - \nabla F_i(\mathbf{z}_t(i); \xi_{i,j})) - \nabla f_i(\mathbf{z}_{t+1}(i)) \right\|^2 \\
&\leq \frac{p\sigma^2}{b'} \mathbb{I}[b' < n] \\
&\quad + (1-p) \mathbb{E} \left\| \mathbf{g}_t(i) - \nabla f_i(\mathbf{z}_t(i)) + \frac{1}{b} \sum_{\xi_{i,j} \in \mathcal{S}_t(i)} (\nabla F_i(\mathbf{z}_{t+1}(i); \xi_{i,j}) - \nabla F_i(\mathbf{z}_t(i); \xi_{i,j}) - \nabla f_i(\mathbf{z}_{t+1}(i)) + \nabla f_i(\mathbf{z}_t(i))) \right\|^2 \\
&= \frac{p\sigma^2}{b'} \mathbb{I}[b' < n] + (1-p) \mathbb{E} \|\mathbf{g}_t(i) - \nabla f_i(\mathbf{z}_t(i))\|^2 \\
&\quad + (1-p) \mathbb{E} \left\| \frac{1}{b} \sum_{\xi_{i,j} \in \mathcal{S}_t(i)} (\nabla F_i(\mathbf{z}_{t+1}(i); \xi_{i,j}) - \nabla F_i(\mathbf{z}_t(i); \xi_{i,j}) - \nabla f_i(\mathbf{z}_{t+1}(i)) + \nabla f_i(\mathbf{z}_t(i))) \right\|^2 \\
&\leq \frac{p\sigma^2}{b'} \mathbb{I}[b' < n] + (1-p) \mathbb{E} \|\mathbf{g}_t(i) - \nabla f_i(\mathbf{z}_t(i))\|^2 + \frac{1-p}{b} \mathbb{E} \|\nabla F_i(\mathbf{z}_{t+1}(i); \xi_{i,j}) - \nabla F_i(\mathbf{z}_t(i); \xi_{i,j})\|^2 \\
&\leq \frac{p\sigma^2}{b'} \mathbb{I}[b' < n] + (1-p) \mathbb{E} \|\mathbf{g}_t(i) - \nabla f_i(\mathbf{z}_t(i))\|^2 + \frac{(1-p)L^2}{b} \mathbb{E} \|\mathbf{z}_{t+1}(i) - \mathbf{z}_t(i)\|^2
\end{aligned}$$

where the first inequality is based on Assumption 5; the second inequality use the property of variance; the last inequality is based on Assumption 2; the second equality uses the property of Martingale according to Proposition 1 in [8]. Taking the average over $i = 1, \dots, m$ for above result and using (19), we obtain

$$\begin{aligned}
& \mathbb{E} \|\mathbf{g}_{t+1} - \nabla \mathbf{f}(\mathbf{z}_{t+1})\|^2 \\
&\leq \frac{mp\sigma^2}{b'} \mathbb{I}[b' < n] + (1-p) \mathbb{E} \|\mathbf{g}_t - \nabla \mathbf{f}(\mathbf{z}_t)\|^2 + \frac{(1-p)L^2}{b} \mathbb{E} \|\mathbf{z}_{t+1} - \mathbf{z}_t\|^2 \\
&\leq \frac{mp\sigma^2}{b'} \mathbb{I}[b' < n] + (1-p) \mathbb{E} \|\mathbf{g}_t - \nabla \mathbf{f}(\mathbf{z}_t)\|^2 \\
&\quad + \frac{(1-p)L^2}{b} \mathbb{E} [4\|\mathbf{z}_t - \mathbf{1}\bar{z}_t\|^2 + \eta^2 \|\mathbf{s}_t - \mathbf{1}\bar{s}_t\|^2 + 3m\|\bar{z}_{t+1} - \bar{z}_t\|^2],
\end{aligned} \tag{23}$$

which is the variance bound as claimed by the definition of V_t □

E The Proof of Lemma 5

We omit the detailed proof since it is almost similar to the proof of Lemma 4. Readers can also refer to Lemma 8 in [32]. Compared with Lemma 4, the quantities in Lemma 5 can be scaled with an additional factor of $1/m$ by using $\mathbb{E} \|\sum_{i=1}^m a_i\|^2 = \sum_{i=1}^m \mathbb{E} \|a_i\|^2$ when each a_i is independent vector with zero mean.

F The Proof of Theorem 1

Proof. Combing Lemma 2, 3, 4 and 5 together, we obtain

$$\begin{aligned}
\mathbb{E}[\Phi_{t+1}] &\leq \mathbb{E} \left[\Phi_t - \frac{\lambda\eta}{2} \|\nabla P(\bar{x}_t)\|^2 - \frac{1}{8\lambda\eta} \|\bar{x}_{t+1} - \bar{x}_t\|^2 - \frac{\alpha}{16\eta} \|\bar{z}_{t+1} - \bar{z}_t\|^2 + 6\alpha\eta U_t + \frac{3\alpha}{m\eta} C_t \right] \\
&\quad + \frac{\eta}{mp} \mathbb{E} \left[-pV_t + \frac{4(1-p)L^2}{mb} C_t + \frac{3(1-p)L^2}{b} \|\bar{z}_{t+1} - \bar{z}_t\|^2 + \frac{p\sigma^2}{b'} \mathbb{I}[b' < n] \right]
\end{aligned}$$

$$\begin{aligned}
& + \frac{\eta}{p} \mathbb{E} \left[-pU_t + \frac{4(1-p)L^2}{m^2b} C_t + \frac{3(1-p)L^2}{mb} \|\bar{z}_{t+1} - \bar{z}_t\|^2 + \frac{p\sigma^2}{mb'} \mathbb{I}[b' < n] \right] \\
& + \frac{1}{\eta m} \mathbb{E} \left[-(1-12\rho^2)C_t + 6m\rho'^2\eta^2V_t + 2\rho^2m\mathbb{E}[\|\bar{z}_{t+1} - \bar{z}_t\|^2] + \frac{6\rho'^2m\eta^2\sigma^2}{b'} \mathbb{I}[b' < n] \right] \\
= & \Phi_t + \mathbb{E} \left[-\frac{\lambda\eta}{2} \|\nabla P(\bar{x}_t)\|^2 - \frac{1}{8\lambda\eta} \|\bar{x}_{t+1} - \bar{x}_t\|^2 - \left(\frac{\alpha}{16\eta} - \frac{2\rho^2}{\eta} - \frac{6\eta(1-p)L^2}{mbp} \right) \|\bar{z}_{t+1} - \bar{z}_t\|^2 \right] \\
& - (1-6\alpha)\eta U_t - \frac{(1-6m\rho'^2)\eta}{m} V_t - \left(\frac{1-12\rho^2-3\alpha}{\eta m} - \frac{8(1-p)L^2}{m^2bp} \right) C_t + \left(6\rho'^2 + \frac{2}{m} \right) \frac{\eta\sigma^2}{b'} \mathbb{I}[b' < n].
\end{aligned}$$

Plugging in our setting of parameters in (8), it can be seen that

$$\mathbb{E}[\Phi_{t+1}] \leq \Phi_t - \frac{\lambda\eta}{2} \mathbb{E}[\|\nabla P(\bar{x}_t)\|^2] - \frac{4\alpha}{\eta m} C_t + \frac{3\eta\sigma^2}{mb'} \mathbb{I}[b' < n].$$

Telescoping for $t = 0, 1, \dots, T-1$, we obtain

$$\frac{1}{T} \sum_{t=0}^{T-1} \mathbb{E}[\|\nabla P(\bar{x}_t)\|^2] \leq \frac{2}{\lambda\eta T} \Phi_0 - \frac{8\alpha}{\lambda\eta^2 m T} \sum_{t=0}^{T-1} C_t + \frac{6\sigma^2}{\lambda m b'} \mathbb{I}[b' < n]. \quad (24)$$

Note that achieving \bar{x}_t is not simple, so the output x_{out} is sampled from $\{\mathbf{x}_t(i)\}$ where $t = 0, \dots, T-1$ and $i = 1, \dots, m$. We also has the following bound:

$$\begin{aligned}
\mathbb{E} \|\nabla P(x_{\text{out}})\|^2 &= \frac{1}{mT} \sum_{i=1}^m \sum_{t=0}^{T-1} \|\nabla P(\mathbf{x}_t(i))\|^2 \\
&\leq \frac{2}{mT} \sum_{i=1}^m \sum_{t=0}^{T-1} \left(\|\nabla P(\bar{x}_t)\|^2 + \|\nabla P(\mathbf{x}_t(i)) - \nabla P(\bar{x}_t)\|^2 \right) \\
&\leq \frac{2}{mT} \sum_{i=1}^m \sum_{t=0}^{T-1} \left(\|\nabla P(\bar{x}_t)\|^2 + L^2 \|\mathbf{x}_t(i) - \bar{x}_t\|^2 \right) \\
&= \frac{2}{T} \sum_{t=0}^{T-1} \|\nabla P(\bar{x}_t)\|^2 + \frac{2L^2}{mT} \sum_{t=0}^{T-1} \|\mathbf{x}_t - \mathbf{1}\bar{x}_t\|^2 \\
&\leq \frac{2}{T} \sum_{t=0}^{T-1} \|\nabla P(\bar{x}_t)\|^2 + \frac{2L^2}{mT} \sum_{t=0}^{T-1} C_t,
\end{aligned}$$

where the first step use Young's inequality; the second inequality is due to Assumption 2. Now we plug in (24) to get the following bound as

$$\mathbb{E} \|\nabla P(x_{\text{out}})\|^2 \leq \frac{4}{\lambda\eta T} \Phi_0 - \left(\frac{16\alpha}{\lambda\eta^2} - 2L^2 \right) \frac{1}{mT} \sum_{t=0}^{T-1} C_t + \frac{12\sigma^2}{\lambda m b'} \mathbb{I}[b' < n].$$

Recall the choice of λ in (6); $\eta \leq 1/(4L)$ and $pT \geq 2$. Hence, we have

$$\begin{aligned}
\mathbb{E} \|\nabla P(x_{\text{out}})\|^2 &\leq \frac{4}{\lambda\eta T} \Phi_0 + \frac{12\sigma^2}{\lambda m b'} \mathbb{I}[b' < n] \\
&= \frac{4}{\lambda\eta T} \left(\Psi_0 + \frac{\eta}{mp} V_0 + \frac{\eta}{p} U_0 + \frac{\eta}{m} C_0 \right) + \frac{12\sigma^2}{\lambda m b'} \mathbb{I}[b' < n] \\
&= \frac{4}{\lambda\eta T} \left(\Psi_0 + \frac{2\eta\sigma^2}{mb'p} \mathbb{I}[b' < n] + \frac{\eta}{m} \|\mathbf{s}_0 - \mathbf{1}\bar{s}_0\|^2 \right) + \frac{12\sigma^2}{\lambda m b'} \mathbb{I}[b' < n] \\
&\leq \frac{4}{\lambda\eta T} \left(\Psi_0 + \frac{2\eta\sigma^2}{mb'p} \mathbb{I}[b' < n] + \frac{\eta\rho_0^2}{m} \|\mathbf{g}_0 - \mathbf{1}\bar{g}_0\|^2 \right) + \frac{12\sigma^2}{\lambda m b'} \mathbb{I}[b' < n] \\
&\leq \frac{8}{\lambda\eta T} \Psi_0 + \frac{16\sigma^2}{\lambda m b'} \mathbb{I}[b' < n] + \frac{4\rho_0^2 \|\mathbf{g}_0 - \mathbf{1}\bar{g}_0\|^2}{\lambda m}.
\end{aligned}$$

Algorithm 4 DM-HSGD

```
1: Input: initial parameter  $\bar{z}_0 \in \mathbb{R}^d$ , stepsize  $\eta > 0$ , ratio  $\lambda \in (0, 1]$ , mini-batch size  $b$ , momentum parameter  $\beta \in (0, 1]$ 
2:  $\mathbf{z}_{-1} = \mathbf{z}_0 = \mathbf{1}\bar{z}_0$ ,  $\mathbf{s}_{-1} = \mathbf{s}_0 = \mathbf{0}$ ,  $\mathbf{g}_{-1} = \mathbf{g}_0 = \mathbf{0}$ 
3: for  $t = 0, \dots, T - 1$  do
4:   parallel for  $i = 1, \dots, m$  do
5:     draw mini-batch  $\mathcal{B}_i$  with size  $b$ 
6:      $\mathbf{g}_t(i) = \nabla F_i(\mathbf{z}_t(i); \mathcal{B}_i) + (1 - \beta)(\mathbf{g}_t(i) - \nabla F_i(\mathbf{z}_{t-1}(i); \mathcal{B}_i))$ 
7:   end parallel for
8:    $\mathbf{s}_t = (\mathbf{s}_{t-1} + \mathbf{g}_t - \mathbf{g}_{t-1}) \cdot W$ 
9:    $\mathbf{x}_{t+1} = (\mathbf{x}_t - \lambda\eta\mathbf{u}_t, K) \cdot W$ 
10:   $\mathbf{y}_{t+1} = (\mathcal{P}(\mathbf{y}_t + \eta\mathbf{v}_t)) \cdot W$ 
11: end for
```

Therefore the parameters in (8) and (9) guarantee that $\mathbb{E}\|\nabla P(x_{\text{out}})\|^2 \leq \epsilon^2$. By Jensen's inequality, it further implies that the output is a nearly stationary point satisfying $\mathbb{E}\|\nabla P(x_{\text{out}})\| \leq \epsilon$.

Recall our choice of λ in (6), we know that $1/\lambda = \Theta(\kappa^2)$. Then the total SFO complexity for all agents in expectation is

$$mb' + mT(b'p + b(1 - p)) = mb' + \frac{2mTbb'}{b + b'} \leq mb' + 2mTb.$$

Plug in the choice of b, b' yields the SFO complexity as claimed. Next, recalling the definition of ρ, ρ_0 in (7), we know the total number of communication rounds is

$$K_0 + T(pK' + (1 - p)K) = \mathcal{O}\left(\frac{\kappa^2 L \epsilon^{-2}}{\sqrt{1 - \lambda_2(W)}}\right).$$

□

G Other Details of Experiment

We present the details for baselines algorithms DM-HSGD [52] and GT-SGD [50] in Algorithm 4 and 5 respectively.

H Further Discussions on Optimality

We the optimality for DREAM in terms of $\epsilon, L, m, \sigma, \lambda_2(W)$ for online case and $\epsilon, L, m, n, \lambda_2(W)$ for offline case can be verified by the lower bounds of finding ϵ -stationary points for stochastic nonconvex optimization problem. We only need to consider the stochastic component of the $F_i(x, y; \xi_i) = H_i(x; \xi_i) - \|y\|^2$, where H_i is average-smooth and possibly nonconvex. Then our minimax problem is reduced to the decentralized nonconvex optimization problem with objective function $\frac{1}{m} \sum_{i=1}^m h_i(x)$ with local function $h_i(x) = \mathbb{E}[H_i(x; \xi_i)]$, which means we can directly use the existing results of nonconvex optimization to check the optimality of DREAM.

- The communication complexity of $\mathcal{O}(L\epsilon^{-2}/\sqrt{1 - \lambda_2(W)})$ for both offline and online case matches the lower bound of nonconvex decentralized optimization shown by Corollary 1 of Lu and De Sa [30].
- The SFO complexity of $\mathcal{O}(\sigma^2\epsilon^{-2} + \sigma\epsilon^{-3})$ for online case matches the lower bound in Theorem 3 of Arjevani et al. [2] for non-distributed scenario. It also can be applied to our decentralized setting by

Algorithm 5 GT-SGDA

```
1: Input: initial parameter  $\bar{z}_0 \in \mathbb{R}^d$ , stepsize  $\eta > 0$ , ratio  $\lambda \in (0, 1]$ , mini-batch size  $b$ , number of inner
   loops  $M$ 
2:  $\mathbf{z}_{-1} = \mathbf{z}_0 = \mathbf{1}\bar{z}_0$ ,  $\mathbf{s}_{-1} = \mathbf{s}_0 = \mathbf{0}$ ,  $\mathbf{g}_{-1} = \mathbf{g}_0 = \mathbf{0}$ 
3: for  $t = 0, \dots, T - 1$  do
4:   parallel for  $i = 1, \dots, m$  do
5:     draw mini-batch  $\mathcal{B}_i$  with size  $b$  and calculate  $\mathbf{g}_t(i) = \nabla_x F_i(\mathbf{x}_t(i), \mathbf{y}_t(i); \mathcal{B}_i)$ 
6:   end parallel for
7:    $\mathbf{s}_t = (\mathbf{s}_{t-1} + \mathbf{g}_t - \mathbf{g}_{t-1}) \cdot W$ 
8:    $\mathbf{x}_{t+1} = (\mathbf{x}_t - \lambda \eta \mathbf{s}_t) \cdot W$ 
9:    $\mathbf{y}_t^{(0)} = \mathbf{y}_t$ 
10:  for  $j = 0, \dots, M - 1$ 
11:    parallel for  $i = 1, \dots, m$  do
12:      draw mini-batch  $\mathcal{B}_i$  with size  $b$  and calculate  $\mathbf{v}_t(i) = \nabla_y F_i(\mathbf{x}_t(i), \mathbf{y}_t^{(j)}(i); \mathcal{B}_i)$ 
13:    end parallel for
14:     $\mathbf{y}_t^{(j+1)} = \mathcal{P}(\mathbf{y}_t^{(j)} + \eta \mathbf{v}_t) \cdot W$ 
15:  end for
16:   $\mathbf{y}_{t+1} = \mathbf{y}_t^{(M)}$ 
17: end for
```

considering a fully connected network and each node optimizes the same worse-case function of Arjevani et al. [2]. This idea of achieving the lower bound for decentralized algorithms from the single machine case by constructing fully connected network follows Lu and De Sa [30].

- The SFO complexity of $\mathcal{O}(nm + \sqrt{nm}\epsilon^{-2})$ for offline case matches the lower bound in Theorem 2 of Li et al. [24] with mn stochastic component in total. The readers can refer to Section 5 of Luo and Ye [32] for more discussions.