

# LEAD: Liberal Feature-based Distillation for Dense Retrieval

Hao Sun<sup>1\*</sup>, Xiao Liu<sup>2†</sup>, Yeyun Gong<sup>2</sup>, Anlei Dong<sup>3</sup>, Jian Jiao<sup>3</sup>, Jingwen Lu<sup>3</sup>, Yan Zhang<sup>1</sup>, Daxin Jiang<sup>3</sup>, Linjun Yang<sup>3</sup>, Rangan Majumder<sup>3</sup>, Nan Duan<sup>2</sup>

<sup>1</sup> Peking University, <sup>2</sup> Microsoft Research Asia, <sup>3</sup> Microsoft  
 sunhao@stu.pku.edu.cn, zhyzhy001@pku.edu.cn,  
 {xiaoliu2, yegong, nanduan}@microsoft.com

## Abstract

Knowledge distillation is often used to transfer knowledge from a strong teacher model to a relatively weak student model. Traditional knowledge distillation methods include response-based methods and feature-based methods. Response-based methods are used the most widely but suffer from lower upper limit of model performance, while feature-based methods have constraints on the vocabularies and tokenizers. In this paper, we propose a tokenizer-free method liberal feature-based distillation (LEAD). LEAD aligns the distribution between teacher model and student model, which is effective, extendable, portable and has no requirements on vocabularies, tokenizer, or model architecture. Extensive experiments show the effectiveness of LEAD on several widely-used benchmarks, including MS MARCO Passage, TREC Passage 19, TREC Passage 20, MS MARCO Document, TREC Document 19 and TREC Document 20.

## 1 Introduction

Recently, with the advent of large pre-trained language models (Devlin et al., 2018; Brown et al., 2020; Smith et al., 2022), dense retrieval (Karpukhin et al., 2020; Xiong et al., 2021; Zhou et al., 2022) has become a popular topic for information retrieval, which aims to identify relevant contents from a large collection of passages. Despite the great success of dense retrieval on benchmarks like MS MACRO (Nguyen et al., 2016), the inference efficiency is still left as a problem. Therefore, small and efficient models are welcomed in the practical scenarios of dense retrieval.

Considering the trade-off between efficiency and effectiveness, researchers resort to knowledge distillation (KD) (Hinton et al., 2015; Sanh et al., 2019; Jiao et al., 2019), which aims to transfer

knowledge from a strong and large teacher model to a small yet efficient student model. Popular distillation methods involve response-based methods and feature-based methods. Response-based methods (Hinton et al., 2015; Kim et al., 2018; Mirzadeh et al., 2020) train the student model to predict the output of the teacher model, which is simple yet effective in different tasks. However, compared with feature-based methods, response-based methods ignore the intermediate signals of teachers, which are proven to be important in deep and thin neural network (Romero et al., 2015) and lead to lower upper limits than feature-based methods.

Feature-based methods mainly use the representations or attention maps of the intermediate layers as features, directly matching the features of the teacher and the student (Romero et al., 2015; Zagoruyko and Komodakis, 2016, 2017; Passalis and Tefas, 2018; Xu et al., 2020; Li et al., 2021a; Haidar et al., 2022). However, these methods suffer from two major weaknesses: (1) In our preliminary study, feature-based methods do not work in dense retrieval, whose performances are even lower than response-based methods. (2) Matching the features requires the teacher and the student to share the same tokenizer-vocabulary set or internal output size, which would somehow constrain the flexibility choices of the teacher model.

To fill the gap, we propose a liberal feature-based distillation method (LEAD) for dense retrieval. Specifically, we use the internal [CLS] embedding vectors to calculate the similarity distribution of the passages as features in the mini-batch. Then, we align the features between the teacher and the student, to accomplish the feature matching without tokenizer of architecture constraints. We also randomly select layers from the model to participate in the feature matching, adaptively assigning weights to the selected layers based on their informativeness. Besides, we jointly train the teacher model and student model to let them

\*This work was done during internship at MSRA.

†Xiao Liu is the corresponding author.

learn from each other. The reason why we call our method **liberal** comes from two folds: (1) LEAD supports various teacher architectures like dual encoder, ColBERT, cross encoder, and so on, only assuming that the teacher has a layer number no less than the student. (2) LEAD uses the label distributions to calculate distillation loss, which is free of the constraints on vocabularies, tokenizers, or model architectures.

To evaluate the effectiveness of LEAD, we conduct experiments on several public benchmarks, such as MS MARCO (Nguyen et al., 2016) and TREC Deep Learning Track (Craswell et al., 2020, 2021), where LEAD achieves better performances than traditional response-based and feature-based methods. Furthermore, we also find that LEAD has two main advantages: (1) LEAD is extendable to the broad sense “layers”, which include Transformers layers and linear layers that can be appended after the models depending on the downstream tasks. (2) LEAD is portable for the existing popular distillation pipeline for dense retrieval (Zeng et al., 2022; Lin et al., 2022), which means it not only achieves superior performance but can also achieve further improvements with other effective pipelines.

## 2 Related Work

### 2.1 Dense Retrieval

Dense retrieval methods (Zhan et al., 2021; Lin et al., 2021, 2022; Lu et al., 2022b) have the potential of identifying semantically relevant but text-independent query-passage pairs. The query and passage representations in dense retrieval models are usually obtained using dual encoders (Karpukhin et al., 2020). ColBERT (Khattab and Zaharia, 2020) pushes performance higher by introducing the late interaction while requiring higher computation and storage costs. In spite of the model structure, recent work also focuses on utilizing training strategies to obtain better results, ranging from data-centric studies (Ren et al., 2021; Sciavolino et al., 2021) and negative sampling (Gao and Callan, 2021; Xiong et al., 2021; Zhou et al., 2022) to distillation (Hofstätter et al., 2020; Zeng et al., 2022; Lu et al., 2022a).

Our work is in line with the distillation methods, where LEAD can be a better alternative to the widely-used response-based methods.

### 2.2 Knowledge Distillation

Knowledge distillation (Hinton et al., 2015) aims to transfer knowledge from an effective teacher model to an efficient student model, which can be divided into two categories: response-based methods and feature-based methods. The main idea of response-based methods (Lin et al., 2022; Zeng et al., 2022) is to let student model mimic the final predictions of the teacher model (Gou et al., 2021), which is simple yet effective in different tasks. However, these methods fail to take into account the intermediate signals of the teacher model, which turns out to be very important in very deep neural networks (Romero et al., 2014).

Feature-based methods are thought to be the extension of response-based methods and are especially useful in thinner and deeper networks (Gou et al., 2021), which focus on aligning the internal representations or attention scores. Romero et al. (2015); Xu et al. (2020); Wang et al. (2020); Sun et al. (2019); Haidar et al. (2022) directly match the internal representations of the teacher and the student, which is not suitable for cross encoders. Besides, Zagoruyko and Komodakis (2016); Passban et al. (2021); Huang and Wang (2017); Li et al. (2021b) directly enclose the attention maps of the teacher and the student, which are constrained on used vocabularies and tokenizers.

Unlike distillation work on multiple teachers (Lu et al., 2022a; Lin et al., 2022), LEAD focuses on single teacher, taking advantage from both response-based and feature-based methods, enclosing the label distributions of intermediate layers, thus leaving no constraints on the vocabularies, tokenizers, or model architectures.

## 3 Method

We first introduce the task description of dense retrieval and then offer a unified view of retrieval models. Based on the unified view, we elaborate the liberal feature-based distillation method.

### 3.1 Task Description

The target of dense retrieval is to retrieve passages based on learned distributed representations of queries and passages. Formally, given a query set  $\mathbb{Q} = \{q_1, q_2, \dots, q_n\}$  containing  $n$  queries and a passage set  $\mathbb{P} = \{p_1, p_2, \dots, p_m\}$  containing  $m$  passages, dense retrieval aims to find the most relevant passages in corpus  $\mathbb{P}$  for each query  $q_i$ .

### 3.2 Unified View of Retrieval Models

In the research line of dense retrieval, there are several popular models consisting of stacked neural networks, such as dual encoder (Karpukhin et al., 2020), ColBERT (Khattab and Zaharia, 2020), and cross encoder (Qu et al., 2021). Although these models have diverse architectures, they shall have common characteristics. Therefore, we offer a unified view of these models in this section.

Consider dividing the above-mentioned models into two parallel aligned modules,  $E_1$  and  $E_2$ , which are two piles of neural layers (including Transformers and linear layers) with the same layer numbers. Given a model with  $N$  layers, let's use  $E_1^i$  and  $E_2^i$  ( $1 \leq i \leq N$ ) to denote the encoding of the first  $i$  layers of  $E_1$  and  $E_2$ , respectively. The two major differences between those models are (1) the instantiations of  $E_1$  and  $E_2$  and (2) the similarity calculation function  $f(\cdot)$ . To better elaborate the unified view, we show the following examples.

**Dual Encoder (DE)** (Karpukhin et al., 2020) is the most widely used dense retrieval architecture, which encodes queries and passages into dense vectors separately, calculating the relevance score through the inner product. For DE,  $E_1$  is the query encoder and the  $E_2$  is the passage encoder. Both of them are Transformer encoders. The similarity calculation function  $f_{DE}(\cdot)$  is defined as:

$$f_{DE}(\mathbf{q}, \mathbf{p}) = E_Q(\mathbf{q})^T \cdot E_P(\mathbf{p}) \quad (1)$$

**ColBERT (CB)** (Khattab and Zaharia, 2020) can be viewed as a more expressive dual-encoder, which delays the interaction between query and passage after encoding. The instantiation of  $E_1$  and  $E_2$  is the same as DE. But the similarity calculation function  $f_{CB}(\cdot)$  is defined as:

$$f_{CB}(\mathbf{q}, \mathbf{p}) = \sum_{1 \leq x \leq X} \max_{1 \leq y \leq Y} E_Q(\mathbf{q})_x \cdot E_P(\mathbf{p})_y \quad (2)$$

where  $X$  and  $Y$  denote the length of the query and passage token sequence, respectively. Please note that, following Hofstätter et al. (2020), we remove the punctuation filter and the last linear layer of the encoders to focus on distillation.

**Cross Encoder (CE)** (Qu et al., 2021) has strong abilities to capture the fine-grained relationships between queries and passages within the Transformer encoding. Much different from DE and CB, for CE,  $E_1$  is the query-passage pair encoder  $E_{CE}$  and  $E_2$  is the projection layer  $w$  after the Transformer encoder, which is used in a shared

manner. The similarity calculation function  $f_{CE}(\cdot)$  is defined as:

$$f_{CE}(\mathbf{q}, \mathbf{p}) = w^T \cdot E_{CE}([\mathbf{q}; \mathbf{p}]) \quad (3)$$

where  $[\cdot; \cdot]$  is the concatenation operation.

### 3.3 Distilling with Liberal Layer Feature

Previous response-based distillation methods (Qu et al., 2021; Lin et al., 2020a; Luan et al., 2021) mainly distill knowledge from the output logits of the entire teacher model to the student model. However, considering that different model layers try to capture the relationships between queries and passages at different granularity, we believe distilling knowledge from intermediate layers may be good for the student model. Thus, based on the unified view, we propose a liberal feature-based distillation method (LEAD) based on layer-wise alignment, which is shown in Figure 1.

**Layer Feature Definition.** In general, the backbone of our model is a pile of Transformer encoders, which abstracts the input information from low-level structure to high-level semantics. For each layer, we calculate the score distribution of the input query-passage pairs in a minibatch, which is defined as the **layer feature**:

$$\mathbf{t}_i = \underset{\mathbf{p} \in \mathbb{P}^+ + \mathbb{P}^-}{\forall} \frac{\exp(f(\mathbf{q}, \mathbf{p}))}{\sum_{\mathbf{p}' \in \mathbb{P}^+ + \mathbb{P}^-} \exp(f(\mathbf{q}, \mathbf{p}'))} \quad (4)$$

$$\mathbf{s}_i = \underset{\mathbf{p} \in \mathbb{P}^+ + \mathbb{P}^-}{\forall} \frac{\exp(g(\mathbf{q}, \mathbf{p}))}{\sum_{\mathbf{p}' \in \mathbb{P}^+ + \mathbb{P}^-} \exp(g(\mathbf{q}, \mathbf{p}'))} \quad (5)$$

where  $\mathbb{P}^+$  and  $\mathbb{P}^-$  is the relevant and negative passage pool of  $\mathbf{q}$ , respectively;  $f(\cdot)$ ,  $g(\cdot)$  is the similarity score function of the student model and teacher model, respectively;  $i$  denotes the  $i$ -th layer.

**Layer Selection.** In each layer-wise alignment, we need to find a teacher layer for each student layer. Without loss of the generality, we randomly select  $K$  layers ( $N \geq M \geq K$ ) from teacher model  $A = \{a_1, a_2, \dots, a_K\}$  and  $K$  layers from student model  $B = \{b_1, b_2, \dots, b_K\}$ , respectively, keeping their original partial orders. Then, we distill knowledge from the  $i$ -th selected teacher layer  $a_i$  to the  $i$ -th selected student layer  $b_i$  by forcing the layer features  $\mathbf{t}_{a_i}$  and  $\mathbf{s}_{b_i}$  to be close:

$$\mathcal{L}_{\text{lyr}}^i = D_{\text{KL}}(\mathbf{t}_{a_i}/\tau, \mathbf{s}_{b_i}/\tau) \quad (6)$$

where  $\tau$  is the temperature.

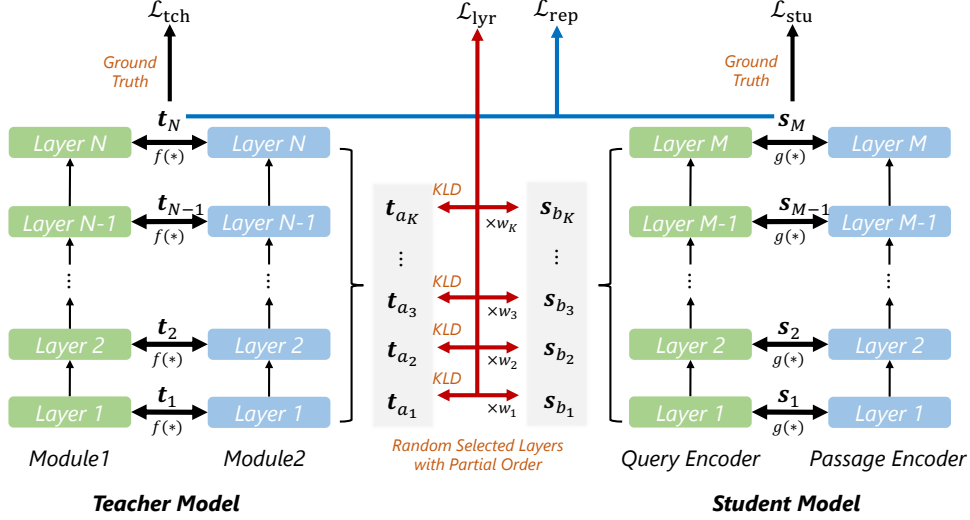


Figure 1: The unified framework of LEAD, which supports various teacher architectures. Assume the teacher and student model has  $N$  and  $M$  layers ( $N \geq M$ ), respectively. The *Module1* and *Module2* correspond to the  $E_1$  and  $E_2$  of the teacher model, respectively.  $t_i$  and  $s_i$  is the similarity distribution of the passages in the current batch, which is calculated with the  $i$ -th layer for the teacher and student model using  $f(*)$  and  $g(*)$ , respectively.  $a_1, a_2, \dots, a_K$  is the current random selection of teacher layers for layer-wise distillation.  $b_1, b_2, \dots, b_K$  is the current random selection of student layers for layer-wise distillation. The selected layers preserve the original partial order  $1 \leq a_1 < a_2 < \dots < a_K \leq N$  and  $1 \leq b_1 < b_2 < \dots < b_K \leq M$ .

**Layer Re-weighting.** Although different teacher layers contain different information, some layers may contain noisy information which may be harmful to the model performance. Thus, we propose a layer re-weighting technique by assigning different weights to involved teacher layers. The weights are calculated based on the teacher layer features and the ground truth label distribution:

$$w_i = \frac{\exp(-D_{\text{KL}}(\mathbf{y}, \mathbf{t}_{a_i})/\tau)}{\sum_{j=1}^K \exp(-D_{\text{KL}}(\mathbf{y}, \mathbf{t}_{a_j})/\tau)} \quad (7)$$

where  $\mathbf{y}$  is the ground truth one-hot label.

At last, the layer distillation loss is the weighted sum of the loss items of all the selected layers.

$$\mathcal{L}_{\text{lyr}} = \sum_{i=1}^K w_i \times \mathcal{L}_{\text{lyr}}^i \quad (8)$$

### 3.4 Joint Training of Teacher and Student

Previous distillation methods for dense retrieval (Hofstätter et al., 2020; Lin et al., 2020b, 2022; Zeng et al., 2022) usually tune the student with a fixed teacher, while the supervision signals come from the differences in the output label distributions. We think that the pre-learned teacher models that are converged on the training data could further benefit from distillation. Therefore, we jointly train the teacher model and the student model, allowing them to learn from each other.

First, we adopt the bi-directional response-based loss as:

$$\mathcal{L}_{\text{rep}} = D_{\text{KL}}(\mathbf{t}_N/\tau, \mathbf{s}_M/\tau) + D_{\text{KL}}(\mathbf{s}_M/\tau, \mathbf{t}_N/\tau) \quad (9)$$

Second, we calculate the hard loss items by the output distributions and ground truth as:

$$\mathcal{L}_{\text{tch}} = - \sum_{\mathbf{p}^+ \in \mathbb{P}^+} \log \frac{\exp(f(\mathbf{q}, \mathbf{p}^+))}{\sum_{\mathbf{p} \in \mathbb{P}^+ + \mathbb{P}^-} \exp(f(\mathbf{q}, \mathbf{p}))} \quad (10)$$

$$\mathcal{L}_{\text{stu}} = - \sum_{\mathbf{p}^+ \in \mathbb{P}^+} \log \frac{\exp(g(\mathbf{q}, \mathbf{p}^+))}{\sum_{\mathbf{p} \in \mathbb{P}^+ + \mathbb{P}^-} \exp(g(\mathbf{q}, \mathbf{p}))} \quad (11)$$

As last, the total loss is the combination of the layer distillation loss, the response-based loss and the hard loss:

$$\mathcal{L}_{\text{total}} = \mathcal{L}_{\text{lyr}} + \mathcal{L}_{\text{rep}} + \mathcal{L}_{\text{tch}} + \mathcal{L}_{\text{stu}} \quad (12)$$

### 3.5 Discussion

**Extendibility.** Since LEAD is based on the unified view of retrieval models presented in §3.2, in which the models are abstracted as piles of neural layers, we think LEAD is extendable to different types of layers. For example, LEAD also supports variants of DE and CB models, such as appending linear layers to the naive output of DE and CB, reducing the output dimensionalities, which supports building a smaller vector-based index for passages.

**Portability.** LEAD is a good alternative to the traditional response-based distillation method, which can also be applied in the state-of-the-art distillation pipelines for dense retrieval, such as curriculum learning (Zeng et al., 2022) and learning with multiple teachers (Lin et al., 2022).

## 4 Experiments

### 4.1 Experimental Setting

**Datasets.** Experiments are conducted on several popular retrieval datasets: MS MACRO Passage Ranking (MS-PAS) (Nguyen et al., 2016), TREC 2019 DL Track (TREC-PAS-19 and TREC-DOC-19) (Craswell et al., 2020), MS MARCO Document Ranking (MS-DOC) (Nguyen et al., 2016) and TREC 2020 DL Track (TREC-PAS-20 and TREC-DOC-20) (Craswell et al., 2021). The statistics are shown in Appendix B.

**Metrics.** Following previous works (Zhan et al., 2021; Lin et al., 2022), for MS-PAS, we report **MRR@10**, **MAP@1k** and **R@1k** on the dev set. For TREC-PAS-19 and TREC-PAS-20, we report **nDCG@10** and **MAP@1k**. For MS-DOC, we report **MRR@10** and **R@100** on the dev set. For TREC-DOC-19 and TREC-DOC-20, we report **nDCG@10** and **R@100**.

### 4.2 Baselines

To verify the effectiveness of our methods, we compare LEAD with three groups of methods.

The first group contains sparse retrieval methods and popular dense retrieval methods without distillation, including **BM25** (Yang et al., 2017), **DeepCT** (Dai and Callan, 2019), **docT5query** (Nogueira et al., 2019), **ANCE** (Xiong et al., 2021), **ME-BERT** (Luan et al., 2021) and **ADORE** (Zhan et al., 2021).

The second group consists of recent dense retrieval methods enhanced with distillation, including **Margin-MSE** (Hofstätter et al., 2020), **TCT-ColBERT** (Lin et al., 2020a) and **RocketQA v1** (Qu et al., 2021).

The third group contains different knowledge distillation strategies like response-based method (**RD**) (Qu et al., 2021) and feature-based method (**FD**) (Li et al., 2021a). Furthermore, we use **12-layer DE**, **12-layer CB** and **12-layer CE** as the teacher model and conduct knowledge distillation with a 6-layer DE student.

### 4.3 Implementation Details

**Model Initialization.** We use LUYU/CO-CONDENSER-MARCO from huggingface<sup>1</sup> to initialize the 12-layer teacher models and DISTILBERT-BASE-UNCASED for the 6-layer dual encoder student model.

**Training Process.** First, we use random or BM25 negatives to train a 12-layer DE and retrieve top-100 hard negatives. Then, we train the teacher model and student model with the mined hard negatives as warming up. Finally, we load the trained checkpoints for the teacher model and student model, conducting the knowledge distillation. The experiments are conducted on 8 NVIDIA V100 GPUs. Detailed hyper-parameters for reproducing our experiments are listed in Appendix A.

**Metric Calculation.** For DEs, we follow the previous work (Xiong et al., 2021; Qu et al., 2021) and compute the metrics using the IndexFlatIP of faiss<sup>2</sup>. While for CB and CE teacher models, we follow Hofstätter et al. (2020); Lin et al. (2020b, 2022) and rerank the top-1000 results and the top-100 results retrieved by the 12-layer DE teacher model for MS-PAS and MS-DOC, respectively.

### 4.4 Main Results

**Comparing with existing methods.** We compare LEAD with other state-of-the-art text retrieval methods on MS-PAS, TREC-PAS-19, MS-DOC and TREC-DOC-19. We use “LEAD” to denote using 12-layer CB as teacher model. The results are shown in Table 1 and Table 2.

From the result, we can find that: (1) LEAD achieves the best performance on almost all the metrics on both MS-PAS and MS-DOC. (2) Among the baselines, knowledge distillation methods include: TCT-ColBERT (Lin et al., 2020a) which uses CB as teacher model, RocketQA v1 (Qu et al., 2021) which uses CE as teacher model, and Margin-MSE (Hofstätter et al., 2020) which uses the ensemble of multi CE as teachers. The best setting of LEAD which uses CB as teacher model performs better than all of them.

**Comparing with different KD strategies.** To further compare with other knowledge distillation methods in a fair setting, we conduct experiments using different kinds of teacher models, such as DE,

<sup>1</sup><https://huggingface.co/>

<sup>2</sup><https://faiss.ai/>

Method	#Params	MS-PAS			TREC-PAS-19	
		MRR@10	MAP@1k	R@1k	nDCG@10	MAP@1k
BM25 (Yang et al., 2017)	-	18.7	19.6	85.7	49.7	29.0
DeepCT (Dai and Callan, 2019)	-	24.3	25.0	91.0	55.0	34.1
docT5query (Nogueira et al., 2019)	-	27.2	28.1	94.7	64.2	40.3
ANCE (Xiong et al., 2021)	12-layer (110M)	33.0	33.6	95.9	64.8	37.1
ME-BERT (Luan et al., 2021)	12-layer (110M)	33.8	-	-	-	-
ADORE (Zhan et al., 2021)	12-layer (110M)	34.7	35.2	-	68.3	41.9
TCT-ColBERT (Lin et al., 2020a)	12-layer (110M)	33.5	34.2	96.4	67.0	39.1
RocketQA v1 (Qu et al., 2021)	12-layer (110M)	37.0	-	<b>97.9</b>	-	-
Margin-MSE (Hofstätter et al., 2020)	6-layer (66M)	32.3	33.1	95.7	69.9	40.5
LEAD	6-layer (66M)	<b>37.8</b>	<b>38.3</b>	97.4	<b>70.4</b>	<b>43.0</b>

Table 1: The main results against baselines on MS-PAS and TREC-PAS-19. “#Params” represents the number of trainable parameters in a specific model.

Method	#Params	MS-DOC		TREC-DOC-19	
		MRR@10	R@100	nDCG@10	R@100
BM25 (Yang et al., 2017)	12-layer (110M)	27.9	80.7	51.9	<b>39.5</b>
DeepCT (Dai and Callan, 2019)	12-layer (110M)	-	-	54.9	-
ANCE (Xiong et al., 2021)	12-layer (110M)	37.7	89.4	61.0	27.3
STAR (Zhan et al., 2021)	12-layer (110M)	39.0	<b>91.3</b>	60.5	31.3
LEAD	6-layer (66M)	<b>40.0</b>	88.6	<b>64.2</b>	29.1

Table 2: The main results on MS-DOC and TREC-DOC-19. “#Params” represents the number of trainable parameters in a specific model.

CB and CE. The results on MS-PAS, TREC-PAS-19, TREC-PAS-20, MS-DOC, TREC-DOC-19 and TREC-DOC-20 are illustrated in Table 3.

As we can see from the table, it is obvious that we can get the following conclusions: (1) Compared to the original 6-layer DE student, LEAD can further achieve improvements with various teacher models, especially for MRR@10, MAP and nDCG@10.

(2) When training with the same teacher model, generally speaking, RD is better than FD in all the comparisons, indicating that FD is not easy to work on distillation for dense retrieval. Furthermore, LEAD outperforms other KD strategies, such as FD and RD, on all the datasets and metrics, showing the effectiveness of our method.

(3) Among the explored teacher models, 12-layer CB is the best for boosting a 6-layer DE student when using LEAD. We guess the reason may be two folds. First, CB and DE share a similar architecture while the late interaction brings CB better performances, which further leads to better distillation results. Second, although the CE teacher outperforms the CB teacher, training with CB in RD and LEAD can benefit from the cross-batch negatives (Qu et al., 2021), which is limited in CE. Therefore, we use 12-layer CB as the teacher model for LEAD in the rest experiments.

#### 4.5 Effect on Layer Selection

We explore the effects of two major factors in the layer selection of LEAD.

**Study on Layer Number  $K$ .** We tune the distillation layer number  $K$  in the range of  $\{1, 2, 3, 4, 5, 6\}$  on MS-PAS and MS-DOC, and observe the trends of student performances, which is shown in Table 4. We can observe that the model performance gradually improves with the increase of  $K$ . However, the model performance reaches the peak at  $K = 5$  on MS-PAS and  $K = 6$  on MS-DOC, respectively. This is because, with more distillation layers, the student model can absorb more knowledge from the teacher model, which benefits model performance, but eventually the best layer number highly depends on the dataset characteristic. Therefore, we use  $K = 5$  for MS-PAS and  $K = 6$  for MS-DOC in later experiments.

**Study on Selection Strategies.** In LEAD, we randomly select intermediate layers from teacher model and student model for knowledge distillation. We further investigate the performance of different layer selection strategies including Random, Last and Skip in Sun et al. (2019); Haidar et al. (2022). Random refers to randomly selecting intermediate layers for knowledge distillation. Last refers to distilling information from the last layers. And Skip refers to distilling information across every  $k$  layers. More precisely, on MS-PAS, the layer

Setting	Method	MS-PAS			TREC-PAS-19		TREC-PAS-20	
		MRR@10	MAP@1k	R@1k	nDCG@10	MAP@1k	nDCG@10	MAP@1k
6DE	Student	32.62	33.30	96.45	64.76	41.35	64.38	39.47
12DE -> 6DE	Teacher	36.45	37.04	98.31	67.93	45.18	67.54	44.28
	FD	33.50	34.10	95.69	63.97	38.93	63.75	38.21
	RD	35.36	35.99	96.99	69.04	42.05	66.31	40.85
	LEAD	36.26	36.85	96.51	68.91	42.11	66.26	41.49
12CB -> 6DE	Teacher	39.46	40.02	98.31	72.03	48.24	72.82	51.52
	FD	33.92	34.56	96.12	63.69	38.93	65.54	39.71
	RD	36.02	36.62	97.18	67.88	42.57	67.06	42.19
	LEAD	<b>37.80</b>	<b>38.32</b>	<b>97.42</b>	<b>70.44</b>	<b>43.01</b>	<b>68.92</b>	<b>44.09</b>
12CE -> 6DE	Teacher	40.54	41.10	98.31	72.58	49.78	72.96	51.00
	FD	34.18	34.81	95.52	65.85	40.78	65.43	40.00
	RD	35.74	36.31	96.55	67.98	40.34	64.68	39.89
	LEAD	36.73	37.23	96.13	69.12	41.05	66.63	40.12

Setting	Method	MS-Doc			TREC-Doc-19		TREC-Doc-20	
		MRR@10	MAP@100	R@100	nDCG@10	R@100	nDCG@10	R@100
6DE	Student	36.39	37.36	86.33	61.44	27.71	56.66	46.26
12DE -> 6DE	Teacher	39.88	40.79	90.31	62.36	30.73	61.51	52.75
	FD	35.84	36.78	84.38	59.93	26.33	55.51	43.39
	RD	38.79	39.74	88.00	63.02	28.31	57.00	42.87
	LEAD	39.68	40.61	88.00	63.76	27.57	60.15	45.92
12CB -> 6DE	Teacher	41.58	42.44	90.31	65.69	30.73	62.04	52.75
	FD	36.01	36.95	84.94	59.12	26.20	56.92	43.08
	RD	38.45	39.37	87.98	62.11	27.88	59.09	45.70
	LEAD	<b>40.00</b>	<b>40.93</b>	<b>88.63</b>	<b>64.21</b>	<b>29.13</b>	<b>60.05</b>	<b>46.20</b>
12CE -> 6DE	Teacher	41.68	42.55	90.31	61.36	30.73	58.73	52.75
	FD	36.42	37.32	84.25	59.26	25.92	53.82	39.66
	RD	36.78	37.59	81.29	59.12	26.24	54.00	37.47
	LEAD	37.35	38.24	84.77	60.25	28.69	54.82	39.93

Table 3: The main results against different types of teacher models using different distillation methods on MS-PAS, TREC-PAS-19, TREC-PAS-20, MS-DOC, TREC-DOC-19 and TREC-DOC-20. “FD” refers to feature-based method and “RD” refers to response-based method. For simplicity, we use “ $n$ DE”, “ $n$ CB” and “ $n$ CE” to denote the  $n$ -layer teacher model. We also use “A -> B” to denote the distillation process of using A and B as the teacher and student model, respectively.

Setting	MS-PAS		MS-Doc	
	MRR@10	MAP@1k	MRR@10	MAP@100
$K = 1$	37.04	37.62	39.46	40.37
$K = 2$	37.53	38.05	39.73	40.65
$K = 3$	37.59	38.06	39.63	40.57
$K = 4$	37.66	38.17	39.90	40.80
$K = 5$	<b>37.80</b>	<b>38.32</b>	39.98	40.88
$K = 6$	37.68	38.13	<b>40.00</b>	<b>40.93</b>

Table 4: The results of different layer number  $K$  on MS-PAS and MS-DOC

choice for student model is  $\{2, 3, 4, 5, 6\}$ . We set  $k = 2$  and the layer choice for teacher model is  $\{8, 9, 10, 11, 12\}$  in Last and  $\{1, 3, 5, 7, 9\}$  in Skip. It is worth mentioning that the layer selection choice keeps dynamically changing during training in Random while remaining fixed in Last and Skip. The result of the selection strategies on MS-PAS is shown in Table 5.

From the result, we can find that our layer selection strategy Random is better than Last and Skip. Presumably, it might be due to the fact that Last and Skip only distill information from part of

Method	MRR@10	MAP@1k	R@1k
Random	<b>37.80</b>	<b>38.32</b>	<b>97.42</b>
Last	37.05	37.61	97.08
Skip	37.18	37.73	97.05

Table 5: The result of different layer selection strategies on MS-PAS. “Random” means randomly choosing intermediate layers. “Last” means choosing the last  $K$  layers of the teacher and the student. “Skip” means choosing layers every  $k$  layers.

intermediate layers, which may lose information from unchosen layers. However, by distilling information from dynamically changing intermediate layers, Random captures more diverse distributions of richer semantics from low-level to high-level.

#### 4.6 Ablation Study

To show the effectiveness of each component, we conduct an ablation study on LEAD. Since the layer selection has been discussed in §4.5, we focus on the joint training and the layer re-weighting, whose results are shown in Table 6.

First, to completely forbid the joint training, we

Method	MRR@10	MAP@1k	R@1k
LEAD	<b>37.80</b>	<b>38.32</b>	<b>97.42</b>
– w/o Joint Training	37.24	37.79	97.12
– w/o Layer Re-weighting	36.46	37.06	97.08
RD	36.02	36.62	97.18

Table 6: Results of the ablation study on MS-PAS.

Method	MRR@10	MAP@1k
RD	36.02	36.62
RD + linear	34.53	35.10
FD	33.92	34.56
FD + linear	33.20	33.84
LEAD	37.80	38.32
LEAD + linear	36.09	36.67

Table 7: Extendibility Study on MS-PAS. For each of the setting with linear layer, we directly add linear layer after student model and teacher model, and distill knowledge from teacher model to student model.

directly remove the teacher’s hard loss item  $\mathcal{L}_{\text{tch}}$  and  $D_{\text{KL}}(s_M/\tau, t_N/\tau)$  in  $\mathcal{L}_{\text{rep}}$  from the total loss, freezing the teacher model during training. It is clear that after removing the joint training from LEAD, the student’s performances on nearly all the metrics decreased. The reason may be that the information of the teacher model and the student model can complement each other.

Second, we replace the weight  $w_i$  with a constant  $1/K$  in equation (12) to show the effects of the layer re-weighting. As we can see, removing the layer re-weighting causes a larger performance drop in MS-PAS compared with the joint training, but still outperforms response-based methods. We think the reason may be that by assigning higher weights to more informative layers, the noises from uninformative layers can be largely reduced.

#### 4.7 Further Study

**Extendibility.** To verify the extendibility of LEAD, we append a linear layer  $768 \rightarrow 768$  after the student model and teacher model, and observe the performance of RD, FD and LEAD on MS-PAS, which is shown in Table 7.

We can find that after appending the linear layer, the performance of all distillation methods drops. However, our method LEAD+linear still achieves the best performance, which demonstrates the extendibility of our method.

**Portability.** To verify the portability of LEAD, we follow PROD (Lin et al., 2022) and choose three teacher models for continual distillation, which include DE, CB and CE. PROD\* refers to using RD in the distillation process, while PROD\*+LEAD

Method	Step	Description	MRR@10	MAP@1k
Teacher	T1	12DE	36.45	37.04
	T2	12CB	39.46	40.02
	T3	12CE	40.54	41.10
Student	S0	6DE	32.62	33.30
PROD*	S1	12DE -> 6DE	35.36	36.00
	S2	12CB -> 6DE	35.92	36.58
	S3	12CE -> 6DE	36.30	36.92
PROD* + LEAD	S1	12DE -> 6DE	36.26	36.85
	S2	12CB -> 6DE	37.64	38.18
	S3	12CE -> 6DE	37.82	38.34

Table 8: Portability Study on MS-PAS. PROD\* refers to use RD in the distillation process while PROD\*+LEAD refers to use LEAD in the distillation process.

Setting	Method	MS-PAS		MS-Doc	
		MRR@10	MAP@1k	MRR@10	MAP@100
12DE	Before	36.45	37.04	39.88	40.79
	After	37.66	38.21	40.97	41.85
12CB	Before	39.46	40.02	41.58	42.44
	After	40.49	41.00	41.94	42.79
12CE	Before	40.54	41.10	41.68	42.55
	After	41.35	41.87	43.12	43.93

Table 9: The results of teacher model before LEAD and after LEAD on MS-PAS and MS-DOC. “Before” and “After” means the teacher models before and after training with LEAD, respectively.

refers to using LEAD in the distillation process. The results on MS-PAS are shown in Table 8.

From the result, we can find that: (1) The performance of student model gradually improves in each step for both PROD\* and PROD\*+LEAD. However, the performance gain of PROD\*+LEAD in each step is better than that of PROD\*, which leads to better performance of the final student model. The reason may be that compared with RD, LEAD can fully utilize the information from the intermediate layers of the teacher model. (2) Compared with LEAD which solely uses CB as teacher model, the result of PROD\*+LEAD after continual distillation gets little improvement. This may be due to the fact that the multi-teachers used in the continual distillation share similar abilities. Overall, the experiment results prove the feasibility of plugging LEAD into the existing distillation paradigm and further improving the model performance.

**Joint training benefits teacher model.** We propose to jointly train the teacher and student with the intuition that they can complement each other. To verify it, we evaluate the performance of the teacher model before and after LEAD on MS-PAS and MS-DOC, which is shown in Table 9.

We can find that the performance of teacher model can be greatly improved after LEAD on



both datasets, which verifies that teacher model can learn from student model. Besides, as shown in Table 6, when we remove joint training from LEAD, the model performance degrades severely. However, the performance of LEAD without joint training is still better than that of RD and FD.

## 5 Conclusion

In this paper, we propose a novel knowledge distillation method LEAD for dense retrieval. To be specific, LEAD aligns the distribution of the student model and teacher model and pays more attention to the most informative layers using the layer re-weighting technique. LEAD is extendable to more linear layers and is easy to plug into the existing distillation pipelines. Extensive experiments on six widely-used benchmarks show that LEAD can significantly improve the performance of the student model after distillation compared with response-based methods and feature-based methods. We further carried out some hyper-parameter analysis and ablation experiments to prove the effectiveness of LEAD, which also inspires future research direction on the distillation of dense retrievers.

## References

- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901.
- Nick Craswell, Bhaskar Mitra, Emine Yilmaz, and Daniel Campos. 2021. [Overview of the TREC 2020 deep learning track](#). *CoRR*, abs/2102.07662.
- Nick Craswell, Bhaskar Mitra, Emine Yilmaz, Daniel Campos, and Ellen M. Voorhees. 2020. [Overview of the TREC 2019 deep learning track](#). *CoRR*, abs/2003.07820.
- Zhuyun Dai and Jamie Callan. 2019. Deeper text understanding for IR with contextual neural language modeling. In *SIGIR*, pages 985–988.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.
- Luyu Gao and Jamie Callan. 2021. Is your language model ready for dense representation fine-tuning. *arXiv preprint arXiv:2104.08253*.
- Jianping Gou, Baosheng Yu, Stephen J Maybank, and Dacheng Tao. 2021. Knowledge distillation: A survey. *International Journal of Computer Vision*, 129(6):1789–1819.
- Md. Akmal Haidar, Nithin Anchuri, Mehdi Rezagholizadeh, Abbas Ghaddar, Philippe Langlais, and Pascal Poupart. 2022. [RAIL-KD: random intermediate layer mapping for knowledge distillation](#). In *Findings of the Association for Computational Linguistics: NAACL 2022*, pages 1389–1400. Association for Computational Linguistics.
- Geoffrey E. Hinton, Oriol Vinyals, and Jeffrey Dean. 2015. Distilling the knowledge in a neural network. *CoRR*, abs/1503.02531.
- Sebastian Hofstätter, Sophia Althammer, Michael Schröder, Mete Sertkan, and Allan Hanbury. 2020. [Improving efficient neural ranking models with cross-architecture knowledge distillation](#). *CoRR*, abs/2010.02666.
- Zehao Huang and Naiyan Wang. 2017. Like what you like: Knowledge distill via neuron selectivity transfer. *arXiv preprint arXiv:1707.01219*.
- Xiaoqi Jiao, Yichun Yin, Lifeng Shang, Xin Jiang, Xiao Chen, Linlin Li, Fang Wang, and Qun Liu. 2019. Tinybert: Distilling bert for natural language understanding. *arXiv preprint arXiv:1909.10351*.
- Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick S. H. Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. 2020. [Dense passage retrieval for open-domain question answering](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing*, pages 6769–6781.
- Omar Khattab and Matei Zaharia. 2020. [Colbert: Efficient and effective passage search via contextualized late interaction over BERT](#). In *Proceedings of the 43rd International ACM SIGIR conference on research and development in Information Retrieval*, pages 39–48.
- Jangho Kim, SeongUk Park, and Nojun Kwak. 2018. Paraphrasing complex network: Network compression via factor transfer. *Advances in neural information processing systems*, 31.
- Dan Li, Yang Yang, Hongyin Tang, Jingang Wang, Tong Xu, Wei Wu, and Enhong Chen. 2021a. [VIRT: improving representation-based models for text matching through virtual interaction](#). *CoRR*, abs/2112.04195.
- Dan Li, Yang Yang, Hongyin Tang, Jingang Wang, Tong Xu, Wei Wu, and Enhong Chen. 2021b. [Virt: Improving representation-based models for text matching through virtual interaction](#). *arXiv preprint arXiv:2112.04195*.
- Sheng-Chieh Lin, Jheng-Hong Yang, and Jimmy Lin. 2020a. [Distilling dense representations for ranking using tightly-coupled teachers](#). *CoRR*, abs/2010.11386.

- Sheng-Chieh Lin, Jheng-Hong Yang, and Jimmy Lin. 2020b. Distilling dense representations for ranking using tightly-coupled teachers. *arXiv preprint arXiv:2010.11386*.
- Sheng-Chieh Lin, Jheng-Hong Yang, and Jimmy Lin. 2021. In-batch negatives for knowledge distillation with tightly-coupled teachers for dense retrieval. In *Proceedings of the 6th Workshop on Representation Learning for NLP (RepL4NLP-2021)*, pages 163–173.
- Zhenghao Lin, Yeyun Gong, Xiao Liu, Hang Zhang, Chen Lin, Anlei Dong, Jian Jiao, Jingwen Lu, Daxin Jiang, Rangan Majumder, et al. 2022. Prod: Progressive distillation for dense retrieval. *arXiv preprint arXiv:2209.13335*.
- Yuxiang Lu, Yiding Liu, Jiayang Liu, Yunsheng Shi, Zhengjie Huang, Shikun Feng, Yu Sun, Hao Tian, Hua Wu, Shuaiqiang Wang, Dawei Yin, and Haifeng Wang. 2022a. [Ernie-search: Bridging cross-encoder with dual-encoder via self on-the-fly distillation for dense passage retrieval](#). *CoRR*, abs/2205.09153.
- Yuxiang Lu, Yiding Liu, Jiayang Liu, Yunsheng Shi, Zhengjie Huang, Shikun Feng, Yu Sun, Hao Tian, Hua Wu, Shuaiqiang Wang, Dawei Yin, et al. 2022b. Ernie-search: Bridging cross-encoder with dual-encoder via self on-the-fly distillation for dense passage retrieval. *arXiv preprint arXiv:2205.09153*.
- Yi Luan, Jacob Eisenstein, Kristina Toutanova, and Michael Collins. 2021. Sparse, dense, and attentional representations for text retrieval. *Transactions of the Association for Computational Linguistics*, 9:329–345.
- Seyed Iman Mirzadeh, Mehrdad Farajtabar, Ang Li, Nir Levine, Akihiro Matsukawa, and Hassan Ghasemzadeh. 2020. Improved knowledge distillation via teacher assistant. In *Proceedings of the AAAI conference on artificial intelligence*, volume 34, pages 5191–5198.
- Tri Nguyen, Mir Rosenberg, Xia Song, Jianfeng Gao, Saurabh Tiwary, Rangan Majumder, and Li Deng. 2016. [MS MARCO: A human generated machine reading comprehension dataset](#). In *Proceedings of the Workshop on Cognitive Computation: Integrating neural and symbolic approaches 2016*, volume 1773 of *CEUR Workshop Proceedings*.
- Rodrigo Frassetto Nogueira, Wei Yang, Jimmy Lin, and Kyunghyun Cho. 2019. Document expansion by query prediction. *CoRR*, abs/1904.08375.
- Nikolaos Passalis and Anastasios Tefas. 2018. Learning deep representations with probabilistic knowledge transfer. In *Proceedings of the European Conference on Computer Vision (ECCV)*, pages 268–284.
- Peyman Passban, Yimeng Wu, Mehdi Rezagholizadeh, and Qun Liu. 2021. Alp-kd: Attention-based layer projection for knowledge distillation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 13657–13665.
- Yingqi Qu, Yuchen Ding, Jing Liu, Kai Liu, Ruiyang Ren, Wayne Xin Zhao, Daxiang Dong, Hua Wu, and Haifeng Wang. 2021. Rocketqa: An optimized training approach to dense passage retrieval for open-domain question answering. In *NAACL-HLT*, pages 5835–5847.
- Ruiyang Ren, Shangwen Lv, Yingqi Qu, Jing Liu, Wayne Xin Zhao, Qiaoqiao She, Hua Wu, Haifeng Wang, and Ji-Rong Wen. 2021. [PAIR: leveraging passage-centric similarity relation for improving dense passage retrieval](#). In *Findings of the Association for Computational Linguistics: ACL/IJCNLP 2021*, volume ACL/IJCNLP 2021 of *Findings of ACL*, pages 2173–2183.
- Adriana Romero, Nicolas Ballas, Samira Ebrahimi Kahou, Antoine Chassang, Carlo Gatta, and Yoshua Bengio. 2014. Fitnets: Hints for thin deep nets. *arXiv preprint arXiv:1412.6550*.
- Adriana Romero, Nicolas Ballas, Samira Ebrahimi Kahou, Antoine Chassang, Carlo Gatta, and Yoshua Bengio. 2015. Fitnets: Hints for thin deep nets. In *ICLR (Poster)*.
- Victor Sanh, Lysandre Debut, Julien Chaumond, and Thomas Wolf. 2019. Distilbert, a distilled version of bert: smaller, faster, cheaper and lighter. *arXiv preprint arXiv:1910.01108*.
- Christopher Scialolino, Zexuan Zhong, Jinhyuk Lee, and Danqi Chen. 2021. Simple entity-centric questions challenge dense retrievers. *arXiv preprint arXiv:2109.08535*.
- Shaden Smith, Mostofa Patwary, Brandon Norick, Patrick LeGresley, Samyam Rajbhandari, Jared Casper, Zhun Liu, Shrimai Prabhumoye, George Zerveas, Vijay Korthikanti, et al. 2022. Using deepspeed and megatron to train megatron-turing nlg 530b, a large-scale generative language model. *arXiv preprint arXiv:2201.11990*.
- Siqi Sun, Yu Cheng, Zhe Gan, and Jingjing Liu. 2019. Patient knowledge distillation for bert model compression. *arXiv preprint arXiv:1908.09355*.
- Xiaobo Wang, Tianyu Fu, Shengcai Liao, Shuo Wang, Zhen Lei, and Tao Mei. 2020. Exclusivity-consistency regularized knowledge distillation for face recognition. In *European Conference on Computer Vision*, pages 325–342. Springer.
- Lee Xiong, Chenyan Xiong, Ye Li, Kwok-Fung Tang, Jialin Liu, Paul N. Bennett, Junaid Ahmed, and Arnold Overwijk. 2021. [Approximate nearest neighbor negative contrastive learning for dense text retrieval](#). In *Proceedings of the 9th International Conference on Learning Representations*.

Kunran Xu, Lai Rui, Yishi Li, and Lin Gu. 2020. Feature normalized knowledge distillation for image classification. In *European Conference on Computer Vision*, pages 664–680. Springer.

Peilin Yang, Hui Fang, and Jimmy Lin. 2017. Anserini: Enabling the use of lucene for information retrieval research. In *SIGIR*, pages 1253–1256.

Sergey Zagoruyko and Nikos Komodakis. 2016. Paying more attention to attention: Improving the performance of convolutional neural networks via attention transfer. *arXiv preprint arXiv:1612.03928*.

Sergey Zagoruyko and Nikos Komodakis. 2017. Paying more attention to attention: Improving the performance of convolutional neural networks via attention transfer. In *ICLR (Poster)*.

Hansi Zeng, Hamed Zamani, and Vishwa Vinay. 2022. Curriculum learning for dense retrieval distillation. In *SIGIR*, pages 1979–1983.

Jingtao Zhan, Jiaxin Mao, Yiqun Liu, Jiafeng Guo, Min Zhang, and Shaoping Ma. 2021. [Optimizing dense retrieval model training with hard negatives](#). In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 1503–1512.

Kun Zhou, Yeyun Gong, Xiao Liu, Wayne Xin Zhao, Yelong Shen, Anlei Dong, Jingwen Lu, Rangan Majumder, Ji-Rong Wen, Nan Duan, and Weizhu Chen. 2022. [Simans: Simple ambiguous negatives sampling for dense text retrieval](#). *CoRR*, abs/2210.11773.

Setting	Parameter	MS-PAS	MS-DOC
Global	Max query length	32	32
	Max passage length	144	480
	Temperature	1	1
	Warmup proportion	0.1	0.1
Dual Encoder	Learning rate	5e-5	5e-5
	Batch size	80	48
	Training step	50000	50000
	Negative size	16	16
	Optimizer	AdamW	AdamW
ColBERT	Learning rate	5e-5	5e-5
	Batch size	80	48
	Training step	50000	50000
	Negative size	16	16
	Optimizer	AdamW	AdamW
Cross Encoder	Learning rate	5e-5	5e-5
	Batch size	16	8
	Training step	50000	50000
	Negative size	15	15
	Optimizer	AdamW	AdamW

Table 10: Hyper-parameters for LEAD.

Dataset	Train	Dev	Test	#Doc
MS-PAS	502,939	6,980	-	8,841,823
TREC-PAS-19/20	-	-	200	8,841,823
MS-DOC	367,013	5,193	-	3,213,835
TREC-DOC-19/20	-	-	200	3,213,835

Table 11: Statistics of the text retrieval datasets.

## A Hyper-parameters

The detailed hyper-parameters are shown in Table 10.

## B Dataset Statistics

The statistics are shown in Table 11.