

# Counterfactual (Non-)identifiability of Learned SCMs

**Arash Nasr-Esfahany**  
*Massachusetts Institute of Technology*

ARASHNE@MIT.EDU

**Emre Kıcıman**  
*Microsoft Research*

EMREK@MICROSOFT.COM

## Abstract

Recent advances in probabilistic generative modeling have motivated learning Structural Causal Models (SCM) from observational datasets using deep conditional generative models, also known as *Deep Structural Causal Model (DSCM)*. If successful, DSCMs can be utilized for causal estimation tasks, e.g., for answering counterfactual queries (Pawlowski et al. (2020)). In this work, we warn practitioners about non-identifiability of counterfactual inference from observational data, even in the absence of unobserved confounding and assuming known causal structure. We prove counterfactual identifiability of monotonic generation mechanisms with single dimensional exogenous variables. For general generation mechanisms with multi-dimensional exogenous variables, we provide an impossibility result for counterfactual identifiability, motivating the need for parametric assumptions. As a practical approach, we propose a method for estimating worst-case errors of learned DSCMs' counterfactual predictions. The size of this error can be an essential metric for deciding whether or not DSCMs are a viable approach for counterfactual inference in a specific problem setting. In evaluation, our method confirms negligible counterfactual errors for an identifiable Structural Causal Model (SCM) from prior work, and also provides informative error bounds on counterfactual errors for a non-identifiable synthetic SCM.

**Keywords:** Counterfactual Inference, Identifiability, Conditional Generative Models, Deep Structural Causal Models

## 1. Introduction

Counterfactuals queries about hypothetical worlds reside in the third rung of the ladder of causation (Pearl and Mackenzie (2018)). They investigate alternative imaginary outcomes had some precondition been different while everything else stayed the same. Such retrospective “what-if” questions are critical for policy analyses (Agarwal et al. (2020)), root-cause analyses (Budhathoki et al. (2022)), credit assignment (Mesnard et al. (2021)), harm measurement (Richens et al. (2022)), legal analyses (Lagnado et al. (2013)), fairness (Kusner et al. (2017)), explainability (Galhotra et al. (2021)), and trace-driven simulation (Alomar et al. (2022)), across a variety of domains from epidemiology and medicine (Richens et al. (2020)) to economics, computer systems (Gan et al. (2021)), and advertising (Li (2021)). For example, in a medical scenario, we might ask whether a specific patient would have healed if they had not taken a drug; in policy analyses, we might ask whether societal measures would have been higher if government had enacted different economic policies; and in business scenarios, we might ask whether customers would have bought more products if a company had used a different marketing strategy.

The main challenge in counterfactual inference from *observational data* is that both the generation mechanisms and latent world properties are unknown. If we knew the generation mechanisms, counterfactual inference would have been straightforward (Pearl (2009)). Motivated by

the developments in probabilistic generative modeling, a recent line of work (Dash et al. (2022); Khemakhem et al. (2021); Pawlowski et al. (2020); Sanchez and Tsafaris (2022)) suggests learning structured generative models (DSCMs) by fitting the observed data distributions. This naturally raises the following question: Given the fact that identification is an essential part of every causal estimation (Sharma et al. (2021); Bareinboim et al. (2022)), to what extent can we trust counterfactual estimates generated by DSCMs?

In this work, we investigate counterfactual identifiability of DSCMs from observational data. We prove counterfactual identifiability for monotonic generation mechanism with single dimensional exogenous variables (Section 5.2). For generation mechanisms with multi-dimensional exogenous variables, we prove an impossibility result by proposing a general counter-example for counterfactual identifiability (Section 5.3) which underscores the need for parametric assumptions. Going through the counterfactual identification process for each set of assumptions is a cumbersome process. Also, precise counterfactual identifiability may be too strong. Sufficiently small errors in counterfactual estimates could be enough for practitioners. Hence, in Section 6, we propose a computational method to measure the counterfactual ambiguity of learned generation mechanisms.

We evaluate our method with an identifiable SCM adopted from prior work, and also with a non-identifiable synthetic SCM. In the identifiable case, our method confirms counterfactual identifiability by showing negligible error bounds for counterfactual estimates. In the non-identifiable case, our method provides informative error bounds for counterfactual estimates, which can be used by practitioners as an important metric for deciding whether or not using DSCMs is a viable option in their specific problem of interest with their specific set of assumptions.

## 2. Background

**Notation:** We use capital letters for referring to random variables (e.g.,  $V$ ), lowercase letters for referring to realizations of random variables (e.g.,  $v$ ), boldface font for referring to a set of random variables (e.g.,  $\mathbf{V} = \{V_1, \dots, V_n\}$ ), and  $\stackrel{d}{=}$  for referring to distributional equivalence.

### 2.1. Structural Causal Model (SCM)

An SCM is our causal model of the world. It explains how nature assigns values to a set of variables of interest. It allows us to deal rigorously with causal queries by pinning down the causal story behind the generation of our data.

Formally, an SCM  $\mathcal{M}$  consists of two sets of variables  $\mathbf{U} = \{U_1, \dots, U_n\}$  and  $\mathbf{V} = \{V_1, \dots, V_n\}$ . Variables in  $\mathbf{U}$  are called *exogenous variables* as they are external to  $\mathcal{M}$ , and we do not model their generation. Variables in  $\mathbf{V}$  are called *endogenous variables* as they are internal to  $\mathcal{M}$ , and we do model their generation.  $\mathcal{M}$  also includes a set of functions  $\mathbf{f} = \{f_1, \dots, f_n\}$  that describe generation of each endogenous variable based on the values of other variables in the model, i.e.,  $\forall i : X_i := f_i(U_i, \mathbf{PA}_i)$  where  $\mathbf{PA}_i \subseteq \mathbf{V} \setminus V_i$  is the subset of  $\mathbf{V}$  that are parents of  $V_i$  in the causal Directed Acyclic Graph (DAG). Throughout this paper, we assume absence of any unobserved confounders, or a Markovian SCM. This means that exogenous variables are statistically independent and their distribution factorizes, i.e.,  $\forall \mathbf{u} : p_{\mathbf{U}}(\mathbf{u}) = \prod_{i=1}^n p_{U_i}(u_i)$ . The collection of generation functions  $\mathbf{f}$  and the prior distribution over  $\mathbf{U}$  entails a joint distribution over  $p^{\mathcal{M}}(\mathbf{V}, \mathbf{U})$ .

## 2.2. Interventions and the Do-operator

In SCM  $\mathcal{M}$ , let  $\mathbf{X}$  be a subset of endogenous variables, and  $\mathbf{x}$  be their realizations. The submodel  $\mathcal{M}_{\mathbf{x}}$  is the SCM with the same exogenous and endogenous variables, and prior distribution over  $\mathbf{U}$  as  $\mathcal{M}$ . However, its set of generation functions change to

$$\mathbf{f}_{\mathbf{x}} = \{f_i | V_i \notin \mathbf{X}\} \cup \{f'_j(U_j, \mathbf{PA}_j) := x_j | V_j \in \mathbf{X}\}.$$

The do-operation  $\text{do}(\mathbf{X} := \mathbf{x}')$  represents applying the *atomic intervention* that changes the SCM from  $\mathcal{M}$  to  $\mathcal{M}_{\mathbf{x}'}$ . Atomic interventions and the corresponding do-operations can be generalized to other interventions (e.g., functional, soft, etc.) (Pearl (2009); Correa and Bareinboim (2020a,b); Jaber et al. (2020)).

## 2.3. Counterfactuals

Unlike interventional queries that operate at the population level, providing aggregate statistics about the effect of interventions (i.e., exogenous variables  $\mathbf{U}$  are sampled from the prior exogenous distribution  $p_{\mathbf{U}}(\cdot)$ ), counterfactual queries operate at the unit level. Given the evidence  $\mathbf{x}$ , where  $\mathbf{x}$  is a realization of a subset of endogenous variables  $\mathbf{V}$ , *what would  $\mathbf{V}$  have been had we done the intervention  $\text{do}(\mathbf{X} := \mathbf{x}')$ ?* This is an example of a counterfactual query which we formally represent as  $p_{\mathbf{V}}^{\mathcal{M}_{\mathbf{x}'}}(\cdot | \mathbf{x})$  or in short,  $p_{\mathbf{V}_{\mathbf{x}'}}(\cdot | \mathbf{x})$ .

Pearl (2009) provides an algorithmic procedure for answering counterfactual queries, given the underlying SCM  $\mathcal{M}$ :

1. **Abduction:** predict the distribution of exogenous variables given the observed evidence, i.e., infer the posterior  $p_{\mathbf{U}}(\cdot | \mathbf{x})$ .
2. **Action:** Perform the desired intervention  $\text{do}(\mathbf{X} := \mathbf{x}')$ , and also change the distribution of exogenous variables to the inferred posterior in the abduction step ( $p_{\mathbf{U}}(\cdot | \mathbf{x})$ ). In other words, change change the SCM  $\mathcal{M}$  to  $\mathcal{M}_{\mathbf{x}' | \mathbf{x}}$ .
3. **Prediction:** Estimate the counterfactual distribution of interest  $p_{\mathbf{V}_{\mathbf{x}'}}(\cdot | \mathbf{x})$  using the modified SCM  $\mathcal{M}_{\mathbf{x}' | \mathbf{x}}$  and its entailed distribution, calculate the counterfactual query of interest.

For a more extensive overview of the causal literature, see Pearl (2009); Peters et al. (2017); Glymour et al. (2016)

## 2.4. Deep Structural Causal Model (DSCM)

The three-step procedure described in Section 2.3 assumes a known SCM, including known generation functions  $\mathbf{f}$ . However, this knowledge is commonly unavailable in real-world problems. To overcome this challenge, Pawlowski et al. (2020) propose a DSCM methodology for learning the generation functions (and also their corresponding inference mechanisms) from the observed data  $p_{\mathbf{V}}(\cdot)$ . We refer to the set of learned generation mechanisms as  $\hat{\mathbf{f}} = \{\hat{f}_1, \dots, \hat{f}_n\}$ .

DSCMs use deep conditional generative models for modeling the generation mechanism of each of the endogenous variables, i.e.,  $f_i, i \in \{1, \dots, n\}$ . Deep conditional generative models start from samples of a tractable probability distribution, e.g., standard Gaussian, and warp this tractable distribution (given the conditions) to resemble the empirical conditional distribution observed in the

data. They suggest three different categories of generative modeling for learning the generation functions: “*invertible, explicit*” which uses Normalizing Flows (NF) (Papamakarios et al. (2021); Kobyzev et al. (2019)), “*amortized, explicit*” which uses Variational Auto-encoders (VAE) (Kingma and Welling (2014)), and “*amortized, implicit* (Mohamed and Lakshminarayanan (2016))” that uses Generative Adversarial Networks (GAN) (Goodfellow et al. (2020); Arjovsky et al. (2017); Dumoulin et al. (2016)). They argue that learning generation functions and their corresponding inference mechanisms (a tractable procedure for estimating  $p_{U_i|PA_i, V_i}(\cdot|pa_i, y_i)$  which is necessary for the abduction step) enables tractable counterfactual inference from observational data, without any analysis of counterfactual identifiability. For more details, see Pawlowski et al. (2020).

As learning the generation function of  $V_i$  does not have any effect on learning the generation function of  $V_j$  for  $i \neq j$ , we focus on learning the generation function of a single node  $V_i$  henceforth. For ease of notation, we drop the subscript  $i$ , refer to the node for which we are learning the generation mechanism as  $Y$ , its causal parents as  $\mathbf{T}$ , its corresponding exogenous variables as  $U$ , its generation mechanism given its parents as  $f(\cdot, \mathbf{T})$ , and the learned conditional generation mechanism parameterized by  $\theta$  as  $\hat{f}_\theta(\cdot, \mathbf{T})$ .

### 3. Related Work

Recently, there has been a surge of interest in using deep learning for answering counterfactual queries. Pawlowski et al. (2020) develop a framework for learning DSCMs from observational datasets, and using them for answering both interventional and counterfactual queries. Geffner et al. (2022) uses Normalizing Flow (NF)s (Durkan et al. (2019); Rezende and Mohamed (2015); Kingma et al. (2016); Huang et al. (2018)) and variational inference (Blei et al. (2017); Jordan et al. (1999); Zhang et al. (2018)) for causal discovery (Squires and Uhler (2022)) and learning the non-linear additive noise SCM (Peters et al. (2010); Hoyer et al. (2008); Peters et al. (2014)) that can further be utilised for answering causal queries including counterfactuals. The idea of using NFs for leaning the SCM and counterfactual inference was also proposed in Khemakhem et al. (2021). Counterfactual image generation has also been explored using Generative Adversarial Network (GAN)s (Dumoulin et al. (2016)) and Denoising Diffusion Models (Song and Ermon (2019); Ho et al. (2020)) in Dash et al. (2022) and Sanchez and Tsaftaris (2022), respectively. Alomar et al. (2022) learns generation mechanisms from interventional data, and does counterfactual inference for trace-driven simulation assuming low-rank generation mechanisms. Lu et al. (2020) uses conditional GANs (Jaiswal et al. (2018)) to learn the step-wise generation mechanism for generating counterfactual experience for sample efficient reinforcement learning (Sutton and Barto (2018)), assuming monotonicity of generation mechanisms.

Shpitser and Pearl (2008, 2012); Correa et al. (2021) perform non-parametric counterfactual identification using combination of observational and experimental data. They do not take into account parametric and functional form assumptions, as we do in this work. Also, our definition of counterfactual identifiability (Theorem 1) differs as it implies identifiability of every counterfactual query. Vlontzos et al. (2022); Oberst and Sontag (2019); Lorberbom et al. (2021) analyze counterfactual identifiability of discrete SCMs. Zhang et al. (2022) provides bounds on counterfactual estimates for SCMs with discrete endogenous variables by mapping it to polynomial programming (Lasserre (2001); Parrilo (2003)) and estimating the answer with Monte Carlo algorithms. Xia et al. (2021); Witty et al. (2021) propose computational methods for identification of

interventional queries, while our proposed method (Section 6) estimates counterfactual ambiguity of DSCMs.

#### 4. Motivation

In this section, we use a simple example to demonstrate how DSCMs can fail in counterfactual inference. Consider the following simple generation mechanism for  $Y$  given its single dimensional binary parent  $T$ :

$$T \sim \text{Bernoulli}(0.5), U \sim \text{Unif}(0, 1), Y^1 = \begin{cases} U, & T = 1 \\ U - 1, & T = 0 \end{cases} \quad (1)$$

Suppose we have access to a sufficiently large dataset of observed variables  $(t, y)$  generated according to Equation (1). Furthermore, suppose we are interested in answering a counterfactual query, for instance, *What would have happened to  $Y$  had we done  $t' = 1$ , given that  $Y$  was  $y$  when  $T$  was  $t = 0$  (evidence)?*

As described in Section 2.4, prior work suggests using conditional generative models for learning the conditional distribution of  $P_{Y|T}(\cdot|t)$  for different values of  $t$ . The learned conditional distribution parameterized by a neural network can then be interpreted as the data generation mechanism, or DSCM, and further utilized for counterfactual inference.

In our simple, motivating example, many generation mechanisms exist that match the observational conditional distribution  $p_{Y|T}(\cdot|t)$ . For instance, consider the following alternative data generation mechanism:

$$T \sim \text{Bernoulli}(0.5), U \sim \text{Unif}(0, 1), Y^2 = \begin{cases} U, & T = 1 \\ -U, & T = 0 \end{cases} \quad (2)$$

Note that data generated according to Equation (1) and Equation (2) have the same distribution, i.e.,

$$\forall y, t : p_{Y^1|T}(y|t) = p_{Y^2|T}(y|t)$$

This means that both SCMs are potentially valid DSCMs, as fitting the observational distribution is the objective function for learning DSCMs.

However, they give different answers to counterfactual queries. Recall the counterfactual query of interest in this example: *What would have happened to  $Y$  had we done  $t' = 1$ , given that  $Y$  was  $y$  when  $T$  was  $t = 0$  (evidence)?* We use Equations (1) and (2) to answer this query:

$$p_{Y_{t'}^1}(\cdot|t, y) = \delta(1 + y), p_{Y_{t'}^2}(\cdot|t, y) = \delta(-y)$$

By demonstration, this example underscores the risks of naïvely using DSCMs for counterfactual inference without an identification analysis.

#### 5. Counterfactual Identifiability

As demonstrated by the motivational example in Section 4, using DSCMs without any identification analysis could result in inaccurate counterfactual estimates. In this section, we formally define counterfactual identifiability with DSCMs. Additionally, we prove counterfactual identifiability

for bijective SCMs that satisfy a set of assumptions. Finally, for SCMs with multi-dimensional exogenous variables, we provide an impossibility result by proposing a general method for creating counterexamples, i.e., creating alternative SCMs that fit the observational data distribution equally well, while giving different answers to counterfactual queries.

Similar to Pawlowski et al. (2020), we assume knowledge of the exact causal structure, i.e., causal DAG, and the absence of any unobserved confounding. We focus on learning a single conditional generative model (and a corresponding inference mechanism) for the generation of the endogenous node  $Y$ , given its parents  $\mathbf{T}$  in the causal graph ( $\mathbf{T} \rightarrow Y$ ) since conditional generative models learned for generation of different endogenous nodes do not affect training of each other.

As explained in Section 2.4, the learned conditional generative model for this specific node of the causal DAG maps exogenous variable  $U$  sampled from a tractable distribution to samples of the observed conditional distribution  $p_{Y|\mathbf{T}}(\cdot|\mathbf{T})$ , conditioned on the value of its causal parents  $\mathbf{t}$ .

**Definition 1** (*Counterfactual identifiability with DSCMs*): Using DSCMs for learning generation mechanisms leads to identifiable counterfactual estimates if all DSCM pairs that fit the observational conditional distribution result in equivalent counterfactual estimates for any counterfactual query of interest. In other words,

$$\begin{aligned} \forall \mathbf{t} : f_{\theta_1}(\cdot, \mathbf{t}) \stackrel{d}{=} p_{Y|\mathbf{T}}(\cdot|\mathbf{t}), f_{\theta_2}(\cdot, \mathbf{t}) \stackrel{d}{=} p_{Y|\mathbf{T}}(\cdot|\mathbf{t}) \\ \rightarrow \forall \mathbf{t}, \mathbf{t}' : p_{Y_{\mathbf{t}'}}(\cdot|\mathbf{t}, y; \theta_1) \stackrel{d}{=} p_{Y_{\mathbf{t}'}}(\cdot|\mathbf{t}, y; \theta_2) \end{aligned}$$

Intuitively, this definition means that fitting the observational conditional distribution is a good proxy for estimating counterfactuals if all DSCMs that fit the observational conditional distribution lead to the same set of counterfactual estimates.

### 5.1. Bijective Generation Mechanisms

**Definition 2** (*Bijective Generation Mechanism*): Generation mechanism of  $Y$  from its parents  $\mathbf{T}$  and the corresponding exogenous variable  $U$  is bijective if the mapping from  $U$  to  $Y$  is a bijection for each realization of parents.

In bijective generation mechanisms, both the generation and inference mechanisms are deterministic functions, and no information is lost in generation. In this family, we have an equivalent definition of counterfactual identifiability with DSCMs:

**Definition 3** (*Counterfactual identifiability of bijective SCMs*): Using DSCMs for learning bijective generation mechanisms leads to identifiable counterfactual estimates if all DSCM pairs that fit the observational conditional distribution, recover the same exogenous variable up to a nonlinear invertible indeterminacy  $g(\cdot)$ . Note that  $g(\cdot)$  does not depend on parents  $\mathbf{T}$ .

**Theorem 4** Definition 3 and Definition 1 are equivalent for bijective generation mechanisms.

**Proof** Let the ground truth data generation mechanism of  $Y$  based on its parents  $\mathbf{T}$  be  $f$ , i.e.,  $Y = f(U, \mathbf{T})$ . First, we show how Definition 3 implies Definition 1 for bijective mechanisms. If the learned DSCM recovers the latent variable upto some nonlinear invertible indeterminacy ( $\hat{U} = g(U)$ ), it means that the learned generation mechanism  $\hat{f}$  is equal to the combination of the

ground truth generation mechanism  $f$  and the inverse of  $g$ , i.e.,  $\forall \hat{u}, \mathbf{t} : \hat{f}(\hat{u}, \mathbf{t}) = f(g^{-1}(\hat{u}), \mathbf{t})$ . This means that in the abduction step, the learned model recovers  $g(U)$ , but in the prediction step with the modified submodel, it first applies the inverse of  $g$  to the recovered exogenous variable, and then the ground truth generation mechanism  $f$ . Thus, all counterfactual predictions are equal to those of the ground truth generation mechanism  $f$ , which implies Definition 1.

Next, we prove that Definition 1 implies Definition 3 by contradiction. Without loss of generality, suppose that parent is binary and can only take values  $\mathbf{t}_1$  and  $\mathbf{t}_2$ . Also, assume that the learned model recovers  $\hat{U}$ , where  $\hat{U} = g_1(U)$  when the evidence is  $\mathbf{t}_1$  and  $\hat{U} = g_2(U)$  when evidence is  $\mathbf{t}_2$ . This means that the learned generation mechanism is

$$\hat{f}(\hat{U}, \mathbf{T}) = \begin{cases} f(g_1^{-1}(\hat{U}), \mathbf{T}), & \mathbf{T} = \mathbf{t}_1 \\ f(g_2^{-1}(\hat{U}), \mathbf{T}), & \mathbf{T} = \mathbf{t}_2 \end{cases}$$

Now consider the following counterfactual query: What would have been the counterfactual value  $y'$  of  $Y$  had we done  $\mathbf{t}_1$  given the fact that it was  $y$  with  $\mathbf{t}_2$ ? This model will return  $f(g_1^{-1}(g_2(U)), \mathbf{t}_1)$  in response, which can cover a range of different values for arbitrary chosen pairs of  $g_1(\cdot)$  and  $g_2(\cdot)$ . This concludes the proof by contradiction.  $\blacksquare$

## 5.2. Counterfactual Identifiability in Single Dimensional Bijective Generation Mechanisms

**Theorem 5** *The bijective generation mechanism of  $Y$  from its parents  $\mathbf{T}$  is counterfactually identifiable if  $Y$  is a 1-dimensional random variable with a differentiable and strictly increasing Cumulative Distribution Function (CDF), and also the ground truth generation mechanism ( $f(\cdot, \mathbf{t})$ ) is differentiable and strictly increasing (decreasing) for all values of  $\mathbf{t}$ .*

**Proof** Let  $U_1 = f_{\theta_1}^{-1}(Y, \mathbf{T})$  and  $U_2 = f_{\theta_2}^{-1}(Y, \mathbf{T})$ . Let  $k_1(\cdot) = p_{U_1}(U_1 \leq \cdot)$  and  $k_2(\cdot) = p_{U_2}(U_2 \leq \cdot)$  be the CDFs of  $U_1$  and  $U_2$ , respectively. We use CDFs for transforming  $U_1$  and  $U_2$  to  $Unif(0, 1)$ . Let  $Z_1 = k_1(U_1)$  and  $Z_2 = k_2(U_2)$ . Due to Probability Integral transform we have  $Z_1, Z_2 \sim Unif(0, 1)$ . Furthermore  $Z_2 = s(Z_1, \mathbf{T})$  where  $s(\cdot, \mathbf{T}) = k_2(\cdot) \circ f_{\theta_2}^{-1}(\cdot, \mathbf{T}) \circ f_{\theta_1}(\cdot, \mathbf{T}) \circ k_1^{-1}(\cdot)$ . Because  $k_2(\cdot)$ ,  $f_{\theta_2}^{-1}(\cdot, \mathbf{T})$ ,  $f_{\theta_1}(\cdot, \mathbf{T})$ , and  $k_1^{-1}(\cdot)$  are all differentiable and strictly increasing,  $s(\cdot, \mathbf{T})$  is strictly increasing and differentiable for all realizations of  $\mathbf{T}$ . Using the change of variable formula, we have  $\forall z_1, \mathbf{t} : p_{Z_1|\mathbf{T}}(z_1|\mathbf{t}) = p_{Z_2|\mathbf{T}}(s(z_1, \mathbf{t})|\mathbf{t}) \cdot \left| \frac{\partial s(z_1, \mathbf{t})}{\partial z_1} \right|$ . Since  $U_1$  and  $\mathbf{T}$  are statistically independent (no unobserved confounding assumption), and because  $Z_1$  is a deterministic function of  $U_1$ , we conclude independence of  $Z_1$  and  $\mathbf{T}$ . By similar argument,  $Z_2$  and  $\mathbf{T}$  are also statistically independent. Thus  $\forall z_1, \mathbf{t} : p_{Z_1}(z_1) = p_{Z_2}(s(z_1, \mathbf{t})) \cdot \left| \frac{\partial s(z_1, \mathbf{t})}{\partial z_1} \right| \rightarrow \forall z_1, \mathbf{t} : \frac{\partial s(z_1, \mathbf{t})}{\partial z_1} = 1 \rightarrow \forall \mathbf{t} : z_2 = z_1 + H(\mathbf{t})$ , where  $H(\cdot)$  is an arbitrary function.  $Z_1, Z_2 \sim Unif(0, 1)$  and are statistically independent of  $\mathbf{T}$ , so taking expectation of both sides with respect to the joint distribution of  $(Z_1, Z_2)$  results in  $\forall \mathbf{t} : H(\mathbf{t}) = 0$  and hence  $Z_1 = Z_2$ . Now we transform  $Z_1$  and  $Z_2$  back to  $U_1$  and  $U_2$  using the inverse CDFs:  $k_1(U_1) = k_2(U_2)$ . As  $k_1(\cdot)$  is strictly increasing, it is invertible and  $U_1 = k_1^{-1}(k_2(U_2))$ . This concludes the proof with the nonlinear invertible indeterminacy  $g(\cdot)$  being  $k_1^{-1}(\cdot) \circ k_2(\cdot)$ .  $\blacksquare$

Note that Theorem 5 was first proposed by Lu et al. (2020), with a different proof. Also note that counterfactual identifiability of nonlinear additive noise SCMs (Geffner et al. (2022); Peters et al. (2017)), where  $Y = f(\mathbf{T}) + U$ , is implied by Theorem 5.

### 5.3. Counterfactual Non-identifiability of Generation Mechanisms with Multi-dimensional Exogenous Variables, An Impossibility Result

Here, we provide an impossibility result, in the form of a general counterexample, for counterfactual identifiability of general generation mechanisms with multi-dimensional exogenous variables, from observational data.

Suppose that we want to learn the generation mechanism for the generation of variable  $Y$  in the causal DAG from its direct causal parents  $\mathbf{T}$  and corresponding exogenous variable  $U$ , where  $U$  is multi-dimensional. As described in Section 2.4, similar to prior work, we use conditional generative models to learn this generation mechanism from observational data. Without loss of generality, suppose  $U$  is two dimensional, i.e.,  $U = (U^1, U^2)$ . Conditional generative models considered here, e.g., GAN, NF, Variational Auto-Encoder (VAE), etc., sample a latent variable from a tractable distribution, and map it to the observed conditional distribution. A common choice for the distribution of latent variables is the standard isotropic Gaussian distribution where each dimension of the latent variable is sampled independently from a standard normal distribution. Even if a different distribution is used for the latent variables, we can still transform this distribution to a standard isotropic Gaussian, and think of the conditional generative transform as the combination of the distribution transform and the original generative transform. Therefore, without loss of generality, we assume the latent variables are distributed according to a standard isotropic Gaussian.

Let  $f$  be the ground truth generation mechanism, where  $Y = f(U, \mathbf{T})$  and  $U$  is sampled from a two-dimensional standard isotropic Gaussian distribution. We will use  $f$  to construct a different generation mechanism  $f'$  which fits the observed distribution equally well but provides different counterfactual estimates.

Let us split the domain of  $\mathbf{T}$  into sub-domains  $A$  and  $B$ . For  $\mathbf{T}$  in  $A$ , we define  $f'$  to be the same as the ground truth generation mechanism  $f$ . However, for  $\mathbf{T}$  in  $B$ , we define  $f'$  as first applying an arbitrary rotation to  $U$ , and then applying the ground truth generation mechanism  $f$ , i.e.,

$$f'(U, \mathbf{T}) = \begin{cases} f(U, \mathbf{T}), & \forall \mathbf{T} \in A \\ f(R(U), \mathbf{T}), & \forall \mathbf{T} \in B \end{cases}$$

where  $R(\cdot)$  is an arbitrary rotation.

Since the standard isotropic Gaussian distribution is invariant to rotations,  $f$  and  $f'$  produce exactly the same conditional distributions, and are valid solutions for the DSCM's optimization problem. However, for counterfactual queries with evidence in  $A$  and intervention in  $B$  (or the other way around), they generate different counterfactual estimates unless  $f$  is rotation invariant. If  $f$  is rotation invariant, it can in fact be parameterized by a single dimension, and two-dimensional  $U$  is redundant. Note that this result holds even if the joint distribution of parents and exogenous variables in training is the same as the joint distribution of counterfactual parents and exogenous variables in counterfactual queries, and we assume access to infinite amount of observational data. Also note that this result is not limited to bijective generation mechanisms (section 5.1), as we do not assume existence of a deterministic inference mechanism in this section's discussion.

This impossibility result has similarities to, and is partially inspired by the non-identifiability results in unsupervised representation learning (Locatello et al. (2019)) and non-linear Independent Component Analysis (ICA) (Hyvärinen and Pajunen (1999)), and underscores the need for parametric assumptions about the functional form of generation mechanisms with multi-dimensional



exogenous variables for making them counterfactually identifiable. In the next section, we present a methodology for estimating errors of counterfactual estimates given a particular set of assumptions.

## 6. A practical approach

As we saw in Sections 4 and 5.3, even in presence of an infinite amount of data and assuming perfect optimization, learning from observational datasets may result in faulty DSCMs for the task of counterfactual inference. In Section 5.2, we characterized a small set of bijective generation mechanisms for which we have counterfactual identifiability with guarantees. In Section 5.3, we proved an impossibility result for the counterfactual identifiability of general generation mechanisms with multi dimensional exogenous variables. However, adding more inductive biases in terms of parametric assumptions about the true SCM may result in counterfactual identifiability.

Proving counterfactual identifiability for each set of assumptions is a cumbersome process. Also, exact counterfactual identifiability is often too strong, e.g., in cases where low counterfactual error is tolerable by practitioners. To overcome these challenges, we propose a computational analysis of counterfactual identifiability with DSCMs. Given a set of parametric and functional form assumptions, our method can calculate different error metrics for counterfactual estimates.

### 6.1. Method

#### 6.1.1. THE FIRST STEP

As explained in Section 2 and similar to Pawlowski et al. (2020), for each variable  $Y$  in the causal DAG, we train a conditional generative model and a conditional inference mechanism with conditions being its causal parents  $\mathbf{T}$ . In this step, we can add all the inductive biases in the architecture of the conditional generative model, e.g., monotonicity (Zhang and Zhang (1999); Lang (2005); Behrmann et al. (2019)), specific functional forms and parametric assumptions, smoothness (Miyato et al. (2018); Gulrajani et al. (2017); Arjovsky et al. (2017)), etc. The loss function for training the conditional generative model depends on the type of generative model, e.g., Evidence Lower Bound (ELBO) for VAEs, discrimination loss for GANs, log-likelihood for NFs, etc. We call this loss function  $L_{\text{generation}}$ . Intuitively, these models and objective functions learn the conditional distribution of  $Y$  given each realization of its parents  $\mathbf{t}$ , i.e.,  $p_{Y|\mathbf{T}}(\cdot|\mathbf{T})$ .

$$\theta_1 = \arg \min_{\theta} (L_{\text{generation}}(\theta))$$

The model resulting from this step is a typical instance that a DSCM training would produce.

#### 6.1.2. THE SECOND STEP

For each endogenous variable in the causal DAG, we train a second conditional generative model and inference mechanism, like the previous step, but with a different loss function. This time, we attempt to fit the observational conditional distribution  $p_{Y|\mathbf{T}}(\cdot|\mathbf{T})$  as well as the first model, but also to maximize disagreement with the counterfactual estimates of the first model. We can measure this disagreement in terms of any error metric that we care about, e.g., KL-divergence.

$$L_{\text{disagreement}} = -E_{\mathbf{T}_1, \mathbf{T}_2, Y_1 \sim \mathcal{S}} \left[ D(p(Y_{\mathbf{T}_2}|\mathbf{T}_1, Y_1; \theta_1), p(Y_{\mathbf{T}_2}|\mathbf{T}_1, Y_1; \theta_2)) \right]$$

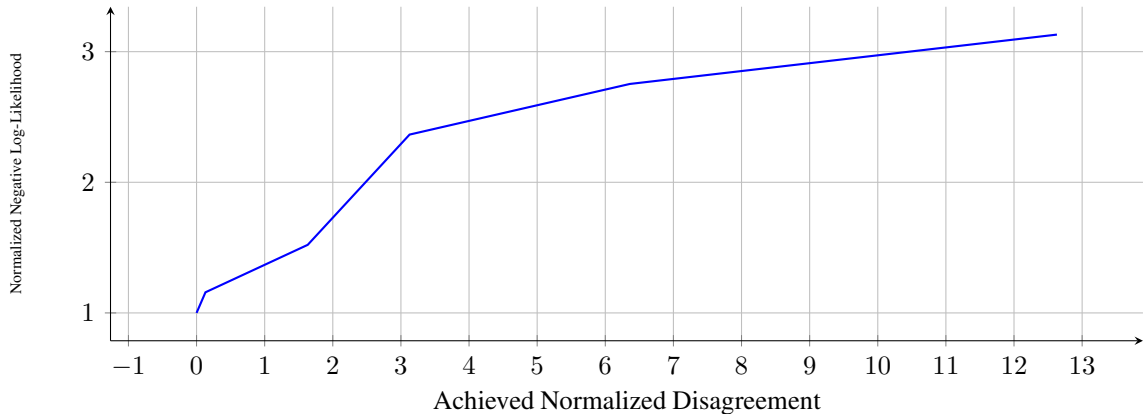


Figure 1: Normalized negative log-likelihood increases consistently with the increase in the achieved normalized disagreement.

$\mathbb{S}$  can be any desired distribution. In our experiments, we choose the intervention and evidence independently from the empirical distribution of observations.

The second model, when trained to convergence, will be an example of a worst-case possible ground truth SCM in terms of counterfactual accuracy metric (disagreement loss) for the first model, which respects all the parametric assumptions.

$$\begin{aligned} \theta_2 &= \arg \min_{\theta} (L_{\text{disagreement}}(\theta)) & (3) \\ \text{subject to } & L_{\text{generation}}(\theta) = L_{\text{generation}}(\theta_1) \end{aligned}$$

If the worst-case counterfactual error obtained in step two is negligible enough for the practitioner, they can move on with their modeling with the trained DSCM. On the other hand, if the counterfactual estimation error is not sufficiently small, it signals the need for more inductive biases, parametric assumptions, etc. for this endogenous variable.

To make Equation (3) amenable to gradient based optimization, we use the Lagrange multiplier to construct  $L_{\text{second}}$ :

$$L_{\text{second}}(\theta) = L_{\text{disagreement}}(\theta) + \lambda L_{\text{generation}}(\theta) \quad (4)$$

Note that we removed  $\lambda L_{\text{generation}}(\theta_1)$  as it is a constant which does not depend on  $\theta$ .

## 7. Evaluation

In this section, we evaluate the practical method presented in Section 6 in an identifiable case directly adopted from Pawlowski et al. (2020), and a non-identifiable case that we create ourselves.

### 7.1. An Identifiable Case

In this part, we use “case study 1” in Pawlowski et al. (2020) as a counterfactually identifiable example to evaluate the practical method presented in Section 6. In this example, intensity ( $Y$ ) and

thickness ( $T$ ) are generated according to the following SCM:

$$\begin{aligned} T &= 0.5 + U_T, & U_T &\sim \Gamma(10, 5) \\ Y &= f(U_Y, T) = 191 \cdot \sigma(0.5 \cdot U_Y + 2 \cdot T - 5) + 64, & U_Y &\sim \mathcal{N}(0, 1) \end{aligned} \quad (5)$$

where  $\sigma(\cdot)$  is the logistic sigmoid.

We focus on learning the generation mechanism for intensity ( $Y$ ). Equation (5) is a bijective single dimensional generation mechanism that satisfies all assumptions of Theorem 5 and is therefore counterfactually identifiable. It was shown in Pawlowski et al. (2020) that using a conditional NF can learn this generation mechanism, and estimate counterfactuals with high accuracy. For the first step of our method, we exactly follow the methodology and setup of Pawlowski et al. (2020): We assume that we know the bijective functional form of the generation mechanism, i.e., the mapping from  $U_Y$  to  $Y$  is a combination of a conditional affine transform, sigmoid transform, and finally a normalization transform. Only the parameters of the conditional affine transform depend on the value of  $T$ . We use a learnable linear transformation to learn the location and scale of this conditional affine transform based on values of  $T$ . It is worth emphasizing that  $L_{\text{generation}}$  is equal to negative log-likelihood of the samples when using a NF.

For the second step, we use the same setup for learning the NF, but we change the loss function to Equation (4). For the disagreement loss, we use the Mean Squared Error (MSE) of the estimated counterfactuals compared with the counterfactuals estimated by the first model. We normalize this MSE with the MSE of predicted counterfactuals from the first model compared with the evidence in the counterfactual query, when the intervention and evidence are both selected randomly from the observed thicknesses.

We found Equation (4) to be an unstable loss function as  $L_{\text{disagreement}}$  can grow unbounded. As a result, we optimize the following loss function while sweeping the range of “*disagreement threshold*” as a hyper-parameter:

$$L_{\text{second}}^* = L_{\text{generation}} + (L_{\text{disagreement}} - \text{disagreement threshold})^2 \quad (6)$$

As we see in Figure 1, the negative log-likelihood achieved by the second NF starts increasing immediately as we encourage disagreement. This means that in this case, no NF exists that achieves the same log-likelihood as the first NF, but gives different counterfactual estimates. In other words, the practical method confirms counterfactual identifiability of DSCM using optimization, without going through identifiability proofs.

## 7.2. A Non-identifiable Case

To evaluate our method in non-identifiable case, we modify Equation (5) to create a new SCM. We change  $U_Y$  to a two-dimensional random variable where each dimension is sampled independently from  $Unif(-\sqrt{3}, \sqrt{3})$ , and  $Y$  to a two-dimensional random variable. To set the generation mechanism of the two-dimensional  $Y$ , we randomly initialize a fully connected neural network  $f_{\theta^*}$  that takes as input  $(U_Y, T)$  and gives as output the two-dimensional corresponding value of  $Y$ . We finetune its weights in a way that the MSE of counterfactual estimates compared with the evidence,  $E_{T, T', U_Y \sim Unif(-\sqrt{3}, \sqrt{3})} [(f_{\theta^*}(U_Y, T) - f_{\theta^*}(U_Y, T'))^2]$ , is close to 1 (to normalize the disagreement loss in the second step). We also train a separate deterministic inference network  $(f_{\theta^*}^{-1}(\cdot, T))$ . This enforces  $f_{\theta^*}$  to be a bijection.

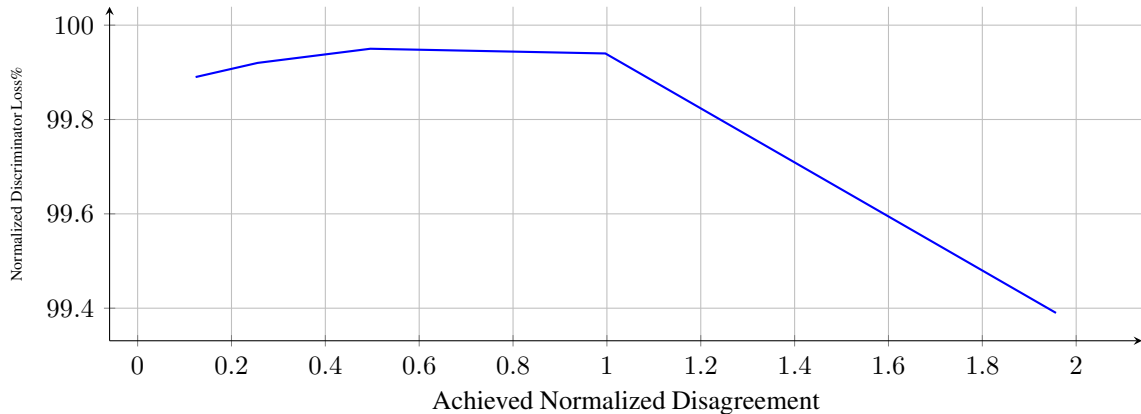


Figure 2: Normalized discriminator loss is high until a certain achieved normalized disagreement (around 1), which is the counterfactual estimation worst-case error.

Now we apply our method to this SCM. For the first step, we train a conditional GAN to fit the conditional distribution  $p_{Y|T}(\cdot|T)$  generated by  $f_{\theta^*}$ . We assume that by prior knowledge, we know that the generation mechanism of  $Y$  is a bijection. To inject this inductive bias into the training process of the conditional GAN, we train a separate deterministic inference mechanism along with the conditional GAN. Note that  $L_{\text{generation}}$  is equal to the negative discrimination loss in this case.

For the second step of the method which trains a second conditional GAN that disagrees with the first one in counterfactual estimations. We define the disagreement loss as the MSE of counterfactual predictions of the first and the second model. We find Equation (4) to be an unstable loss function as  $L_{\text{disagreement}}$  can grow unbounded. Therefore, similar to what we did in Section 7.1, we use Equation (6) as the loss function with a few different thresholds.

Figure 2 shows the discriminator loss (normalized by its theoretical upper bound), which is an indicator of how well DSCM captures the conditional distribution  $p_{Y|T}(\cdot|T)$ , vs the achieved normalized disagreement. As you can see from the trend, distribution quality keeps being high until a certain point (around normalized threshold of 1) where it starts to fall. This means that this SCM is not counterfactually identifiable, as we expected from Section 5.3. Additionally, this trend also demonstrates that the average (over evidence and counterfactual parents) worst case (over ground truth SCMs) normalized counterfactual error is  $\sim 1$ .

Practitioners can decide whether this counterfactual error is sufficiently small for their use case. If yes, they can use the DSCM for counterfactual inference. If not, they should add more inductive biases such as functional forms, parametric assumptions, etc. until the counterfactual error meets their criterion.

## 8. Concluding Remarks

A recent line of work (Dash et al. (2022); Khemakhem et al. (2021); Pawlowski et al. (2020); Sanchez and Tsafaris (2022)) suggests use of conditional generative models for learning DSCMs, which can further be utilized for the task of counterfactual inference. In this work, we demonstrated how this approach can fail in the absence of counterfactual identifiability. We characterized the set of bijective single

dimensional generation mechanism as counterfactually identifiable, and also proved an impossibility result for counterfactual identifiability of general generation mechanisms with multi-dimensional exogenous variables. Furthermore, we proposed a practical algorithm that can help a practitioner decide whether or not they want to use deep models in their specific setting with their set of assumptions, by giving informative bounds on counterfactual estimate errors of DSCMs. We evaluated this method in an identifiable and a non-identifiable setting.

## References

- Anish Agarwal, Devavrat Shah, and Dennis Shen. Synthetic interventions. *arXiv preprint arXiv:2006.07691*, 2020.
- Abdullah Alomar, Pouya Hamadani, Arash Nasr-Esfahany, Anish Agarwal, Mohammad Alizadeh, and Devavrat Shah. Causalsim: A causal inference framework for unbiased trace-driven simulation. 2022.
- Martin Arjovsky, Soumith Chintala, and Léon Bottou. Wasserstein generative adversarial networks. In Doina Precup and Yee Whye Teh, editors, *Proceedings of the 34th International Conference on Machine Learning*, volume 70 of *Proceedings of Machine Learning Research*, pages 214–223. PMLR, 06–11 Aug 2017. URL <https://proceedings.mlr.press/v70/arjovsky17a.html>.
- Elias Bareinboim, Juan D. Correa, Duligur Ibeling, and Thomas Icard. *On Pearl’s Hierarchy and the Foundations of Causal Inference*, page 507–556. Association for Computing Machinery, New York, NY, USA, 1 edition, 2022. ISBN 9781450395861. URL <https://doi.org/10.1145/3501714.3501743>.
- Jens Behrmann, David Kristjanson Duvenaud, and Jörn-Henrik Jacobsen. Invertible residual networks. In *ICML*, 2019.
- David M Blei, Alp Kucukelbir, and Jon D McAuliffe. Variational inference: A review for statisticians. *Journal of the American statistical Association*, 112(518):859–877, 2017.
- Kailash Budhathoki, Lenon Minorics, Patrick Bloebaum, and Dominik Janzing. Causal structure-based root cause analysis of outliers. In *International Conference on Machine Learning*, pages 2357–2369. PMLR, 2022.
- Juan Correa and Elias Bareinboim. A calculus for stochastic interventions: Causal effect identification and surrogate experiments. In *Proceedings of the AAAI conference on artificial intelligence*, volume 34, pages 10093–10100, 2020a.
- Juan Correa and Elias Bareinboim. General transportability of soft interventions: Completeness results. *Advances in Neural Information Processing Systems*, 33:10902–10912, 2020b.
- Juan Correa, Sanghack Lee, and Elias Bareinboim. Nested counterfactual identification from arbitrary surrogate experiments. *Advances in Neural Information Processing Systems*, 34:6856–6867, 2021.
- Saloni Dash, Vineeth N. Balasubramanian, and Amit Sharma. Evaluating and mitigating bias in image classifiers: A causal perspective using counterfactuals. *2022 IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 3879–3888, 2022.
- Vincent Dumoulin, Ishmael Belghazi, Ben Poole, Olivier Mastropietro, Alex Lamb, Martin Arjovsky, and Aaron Courville. Adversarially learned inference. *arXiv preprint arXiv:1606.00704*, 2016.

- Conor Durkan, Artur Bekasov, Iain Murray, and George Papamakarios. Neural spline flows. *Advances in neural information processing systems*, 32, 2019.
- Sainyam Galhotra, Romila Pradhan, and Babak Salimi. Explaining black-box algorithms using probabilistic contrastive counterfactuals. In *Proceedings of the 2021 International Conference on Management of Data*, pages 577–590, 2021.
- Yu Gan, Mingyu Liang, Sundar Dev, David Lo, and Christina Delimitrou. Sage: Practical and scalable ml-driven performance debugging in microservices. In *Proceedings of the 26th ACM International Conference on Architectural Support for Programming Languages and Operating Systems, ASPLOS '21*, page 135–151, New York, NY, USA, 2021. Association for Computing Machinery. ISBN 9781450383172. doi: 10.1145/3445814.3446700. URL <https://doi.org/10.1145/3445814.3446700>.
- Tomas Geffner, Javier Antorán, Adam Foster, Wenbo Gong, Chao Ma, Emre Kıcıman, Ajay Sharma, A. Lamb, Martin Kukla, Nick Pawłowski, Miltiadis Allamanis, and Cheng Zhang. Deep end-to-end causal inference. *ArXiv*, abs/2202.02195, 2022.
- Madelyn Glymour, Judea Pearl, and Nicholas P Jewell. *Causal inference in statistics: A primer*. John Wiley & Sons, 2016.
- Ian Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. Generative adversarial networks. *Communications of the ACM*, 63(11):139–144, 2020.
- Ishaan Gulrajani, Faruk Ahmed, Martin Arjovsky, Vincent Dumoulin, and Aaron C Courville. Improved training of wasserstein gans. *Advances in neural information processing systems*, 30, 2017.
- Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *Advances in Neural Information Processing Systems*, 33:6840–6851, 2020.
- Patrik Hoyer, Dominik Janzing, Joris M Mooij, Jonas Peters, and Bernhard Schölkopf. Nonlinear causal discovery with additive noise models. *Advances in neural information processing systems*, 21, 2008.
- Chin-Wei Huang, David Krueger, Alexandre Lacoste, and Aaron Courville. Neural autoregressive flows. In *International Conference on Machine Learning*, pages 2078–2087. PMLR, 2018.
- Aapo Hyvärinen and Petteri Pajunen. Nonlinear independent component analysis: Existence and uniqueness results. *Neural networks*, 12(3):429–439, 1999.
- Amin Jaber, Murat Kocaoglu, Karthikeyan Shanmugam, and Elias Bareinboim. Causal discovery from soft interventions with unknown targets: Characterization and learning. *Advances in neural information processing systems*, 33:9551–9561, 2020.
- Ayush Jaiswal, Wael AbdAlmageed, Yue Wu, and Premkumar Natarajan. Bidirectional conditional generative adversarial networks. In *Asian Conference on Computer Vision*, pages 216–232. Springer, 2018.

- Michael I Jordan, Zoubin Ghahramani, Tommi S Jaakkola, and Lawrence K Saul. An introduction to variational methods for graphical models. *Machine learning*, 37(2):183–233, 1999.
- Ilyes Khemakhem, Ricardo Pio Monti, Robert Leech, and Aapo Hyvärinen. Causal autoregressive flows. *ArXiv*, abs/2011.02268, 2021.
- Diederik P. Kingma and Max Welling. Auto-encoding variational bayes. In Yoshua Bengio and Yann LeCun, editors, *2nd International Conference on Learning Representations, ICLR 2014, Banff, AB, Canada, April 14-16, 2014, Conference Track Proceedings*, 2014. URL <http://arxiv.org/abs/1312.6114>.
- Durk P Kingma, Tim Salimans, Rafal Jozefowicz, Xi Chen, Ilya Sutskever, and Max Welling. Improved variational inference with inverse autoregressive flow. *Advances in neural information processing systems*, 29, 2016.
- Ivan Kobyzev, Simon Prince, and Marcus A. Brubaker. Normalizing flows: Introduction and ideas. *ArXiv*, abs/1908.09257, 2019.
- Matt J Kusner, Joshua Loftus, Chris Russell, and Ricardo Silva. Counterfactual fairness. *Advances in neural information processing systems*, 30, 2017.
- David A Lagnado, Tobias Gerstenberg, and Ro’i Zultan. Causal responsibility and counterfactuals. *Cognitive science*, 37(6):1036–1073, 2013.
- Bernhard Lang. Monotonic multi-layer perceptron networks as universal approximators. In *International conference on artificial neural networks*, pages 31–37. Springer, 2005.
- Jean B Lasserre. Global optimization with polynomials and the problem of moments. *SIAM Journal on optimization*, 11(3):796–817, 2001.
- Ang Li. *Unit selection based on counterfactual logic*. University of California, Los Angeles, 2021.
- Francesco Locatello, Stefan Bauer, Mario Lucic, Gunnar Raetsch, Sylvain Gelly, Bernhard Schölkopf, and Olivier Bachem. Challenging common assumptions in the unsupervised learning of disentangled representations. In *international conference on machine learning*, pages 4114–4124. PMLR, 2019.
- Guy Lorberbom, Daniel D Johnson, Chris J Maddison, Daniel Tarlow, and Tamir Hazan. Learning generalized gumbel-max causal mechanisms. *Advances in Neural Information Processing Systems*, 34:26792–26803, 2021.
- Chaochao Lu, Biwei Huang, Ke Wang, José Miguel Hernández-Lobato, Kun Zhang, and Bernhard Schölkopf. Sample-efficient reinforcement learning via counterfactual-based data augmentation. *arXiv preprint arXiv:2012.09092*, 2020.
- Thomas Mesnard, Theophane Weber, Fabio Viola, Shantanu Thakoor, Alaa Saade, Anna Harutyunyan, Will Dabney, Thomas S Stepleton, Nicolas Heess, Arthur Guez, et al. Counterfactual credit assignment in model-free reinforcement learning. In *International Conference on Machine Learning*, pages 7654–7664. PMLR, 2021.



- Takeru Miyato, Toshiki Kataoka, Masanori Koyama, and Yuichi Yoshida. Spectral normalization for generative adversarial networks. In *International Conference on Learning Representations*, 2018.
- Shakir Mohamed and Balaji Lakshminarayanan. Learning in implicit generative models. *ArXiv*, abs/1610.03483, 2016.
- Michael Oberst and David Sontag. Counterfactual off-policy evaluation with gumbel-max structural causal models. In *International Conference on Machine Learning*, pages 4881–4890. PMLR, 2019.
- George Papamakarios, Eric T. Nalisnick, Danilo Jimenez Rezende, Shakir Mohamed, and Balaji Lakshminarayanan. Normalizing flows for probabilistic modeling and inference. *J. Mach. Learn. Res.*, 22:57:1–57:64, 2021.
- Pablo A Parrilo. Semidefinite programming relaxations for semialgebraic problems. *Mathematical programming*, 96(2):293–320, 2003.
- Nick Pawlowski, Daniel Coelho de Castro, and Ben Glocker. Deep structural causal models for tractable counterfactual inference. *Advances in Neural Information Processing Systems*, 33:857–869, 2020.
- Judea Pearl. *Causality*. Cambridge university press, 2009.
- Judea Pearl and Dana Mackenzie. *The book of why: the new science of cause and effect*. Basic books, 2018.
- Jonas Peters, Dominik Janzing, and Bernhard Schölkopf. Identifying cause and effect on discrete data using additive noise models. In *Proceedings of the thirteenth international conference on artificial intelligence and statistics*, pages 597–604. JMLR Workshop and Conference Proceedings, 2010.
- Jonas Peters, Joris M Mooij, Dominik Janzing, and Bernhard Schölkopf. Causal discovery with continuous additive noise models. 2014.
- Jonas Peters, Dominik Janzing, and Bernhard Schölkopf. *Elements of causal inference: foundations and learning algorithms*. 2017.
- Danilo Rezende and Shakir Mohamed. Variational inference with normalizing flows. In *International conference on machine learning*, pages 1530–1538. PMLR, 2015.
- Jonathan G Richens, Ciarán M Lee, and Saurabh Johri. Improving the accuracy of medical diagnosis with causal machine learning. *Nature communications*, 11(1):1–9, 2020.
- Jonathan G. Richens, Rory Beard, and Daniel H. Thompson. Counterfactual harm. 2022.
- Pedro Sanchez and Sotirios A. Tsafaris. Diffusion causal models for counterfactual estimation. In *CLeaR*, 2022.
- Amit Sharma, Vasilis Syrgkanis, Cheng Zhang, and Emre Kıcıman. Dowhy: Addressing challenges in expressing and validating causal assumptions. *arXiv preprint arXiv:2108.13518*, 2021.

- Ilya Shpitser and Judea Pearl. Complete identification methods for the causal hierarchy. *Journal of Machine Learning Research*, 9:1941–1979, 2008.
- Ilya Shpitser and Judea Pearl. What counterfactuals can be tested. *arXiv preprint arXiv:1206.5294*, 2012.
- Yang Song and Stefano Ermon. Generative modeling by estimating gradients of the data distribution. *Advances in Neural Information Processing Systems*, 32, 2019.
- Chandler Squires and Caroline Uhler. Causal structure learning: a combinatorial perspective. *arXiv preprint arXiv:2206.01152*, 2022.
- Richard S Sutton and Andrew G Barto. *Reinforcement learning: An introduction*. MIT press, 2018.
- Athanasios Vlontzos, Bernhard Kainz, and Ciarán Lee. Estimating categorical counterfactuals via deep twin networks. 2022.
- Sam Witty, David Jensen, and Vikash Mansinghka. A simulation-based test of identifiability for bayesian causal inference. *arXiv preprint arXiv:2102.11761*, 2021.
- Kevin Xia, Kai-Zhan Lee, Yoshua Bengio, and Elias Bareinboim. The causal-neural connection: Expressiveness, learnability, and inference. *Advances in Neural Information Processing Systems*, 34:10823–10836, 2021.
- Cheng Zhang, Judith Bütepage, Hedvig Kjellström, and Stephan Mandt. Advances in variational inference. *IEEE transactions on pattern analysis and machine intelligence*, 41(8):2008–2026, 2018.
- Hong Zhang and Zhen Zhang. Feedforward networks with monotone constraints. In *IJCNN'99. International Joint Conference on Neural Networks. Proceedings (Cat. No.99CH36339)*, volume 3, pages 1820–1823 vol.3, 1999. doi: 10.1109/IJCNN.1999.832655.
- Junzhe Zhang, Jin Tian, and Elias Bareinboim. Partial counterfactual identification from observational and experimental data. In *International Conference on Machine Learning*, pages 26548–26558. PMLR, 2022.