

MINERVA: A File-Based Ransomware Detector

Dorjan Hitaj¹, Giulio Pagnotta¹, Fabio De Gaspari¹, Lorenzo De Carli², and Luigi V. Mancini¹

¹ Sapienza University of Rome, Rome, Italy
{hitaj.d, pagnotta, degaspari, mancini}@di.uniroma1.it,
² University of Calgary, Alberta, Canada
lorenzo.decarli@ucalgary.ca

Abstract. Ransomware is a rapidly evolving type of malware designed to encrypt user files on a device, making them inaccessible in order to exact a ransom. Ransomware attacks resulted in billions of dollars in damages in recent years and are expected to cause hundreds of billions more in the next decade. With current state-of-the-art process-based detectors being heavily susceptible to evasion attacks, no comprehensive solution to this problem is available today.

This paper presents Minerva, a new approach to ransomware detection. Unlike current methods focused on identifying ransomware based on process-level behavioral modeling, Minerva detects ransomware by building behavioral profiles of files based on all the operations they receive in a time window. Minerva addresses some of the critical challenges associated with process-based approaches, specifically their vulnerability to complex evasion attacks. Our evaluation of Minerva demonstrates its effectiveness in detecting ransomware attacks, including those that are able to bypass existing defenses. Our results show that Minerva identifies ransomware activity with an average accuracy of 99.45% and an average recall of 99.66%, with 99.97% of ransomware detected within 1 second.

Keywords: ransomware detection · machine learning

1 Introduction

Despite intense recent research [25], ransomware remains a significant problem. In ransomware attacks, a malicious actor infiltrates the network of a victim organization (e.g., an enterprise [11] or a city government [4]) and installs specialized malware—ransomware—which encrypts sensitive organization data. A ransom is then requested in order to provide decryption. Ransomware attacks can create significant monetary damage to the victims and cause disruption to critical systems, as recently seen in the Colonial Pipeline attack [1, 2, 23].

Detection of ransomware on user machines and servers is an important last line of defense. Should ransomware manage to penetrate network defense, a number of detection algorithms can be used to identify ransomware activity at the process level, terminate the unwanted processes, and restore encrypted files to their original content. Most existing approaches [6, 12, 18, 21] generate and

analyze process-level features to distinguish ransomware processes performing file encryption from other benign processes executing on the machine. They effectively build behavioral profiles of benign and ransomware applications and compare all processes in a system against these profiles to classify them. This approach is reasonable: ransomware operations involve intense disk I/O and encryption, typically resulting in entirely different behavioral profiles than benign applications. However, recent work [8] demonstrated a series of adversarial attacks that can readily bypass both academic and commercial process-based behavioral detectors. These evasive ransomware attacks entail distributing the ransomware workload across several cooperating processes, each emulating, feature-wise, the behavior of a benign process. Effectively, the behavioral profile of each ransomware process is indistinguishable from that of benign processes, but their coordinated action still results in the expected ransomware behavior. This evasive ransomware approach exploits inherent weaknesses of process-level features and, as such, cannot be identified at the process level. This finding leaves a significant gap in state-of-the-art ransomware detection defenses: to the best of our knowledge, no defense exists against this evasive ransomware approach.

This paper introduces **Minerva**, a novel defense against ransomware. Unlike prior work focused on detecting ransomware based on process-level behavioral modeling, Minerva flips the defender’s perspective to consider file-level features instead. Our insight is that while ransomware can mimic benign processes with little performance penalty by sharing the load between multiple processes, it must inevitably encrypt the user’s files to achieve its goal. Minerva relies on a novel approach, *file-based behavioral profiles*, to detect traditional and evasive ransomware. In a nutshell, for each file, Minerva builds a behavioral profile based on the operations the file receives in a time window and classifies the profile as either benign or malicious for that window. Ransomware processes are identified based on whether they interacted with the file in a time window where the file behavioral profile was classified as malicious.

A critical aspect of any ML-based detector is its resilience to adaptive attacks. It is trivial to design a detector that works flawlessly against known ransomware, only to fail when the attacker slightly adjusts the malware to evade detection. We designed Minerva with the explicit goal of building a resilient detector to adaptive attacks by selecting features that cannot easily be circumvented. As we discuss in later sections and demonstrate in our experiments, evading some of Minerva’s features requires ransomware to increase others inevitably. Overall, the choice of features makes it difficult for ransomware to achieve file encryption without triggering detection.

This paper makes the following contributions:

1. We propose Minerva, a ransomware detector based on the novel concept of file-based behavioral profiles. Minerva overcomes critical limitations of existing process-based detection techniques.
2. We perform a comprehensive analysis of the features generated by ransomware activity, identifying a robust set of features intrinsically related to core ransomware operations.

3. We evaluate our approach against traditional ransomware and state-of-the-art evasive ransomware techniques. Minerva detects ransomware activity with an average accuracy of 99.45% and an average recall of 99.66% within 1 second of the malicious activity.
4. We analyze the resilience of Minerva to *adaptive, unseen ransomware attacks*: ransomware specifically designed to evade Minerva’s features and that is not included in the training set. Our experiments show that Minerva is resilient to this type of attack and generalizes well to unseen ransomware behaviors.

2 Background

2.1 ML-based Ransomware Detection

Many ransomware detection approaches are based on the insight that ransomware processes behave very differently from benign processes. Such approaches commonly consist of three main components. A monitoring component monitors the dynamic behavior of running processes, which is used to compute a set of *features* based on program execution. Feature computation typically considers a sequence of recent process system calls, whose characteristics are aggregated over a window of operations. Typical features used for this purpose are frequency and characteristics of file read/write operations, changes to file types (such as file type and file content entropy), and others. All these features are computed per process and then fed to a classifier, which uses them to label processes as benign or ransomware.

Several techniques proposed in recent years follow the approach above: UNVEIL [19] and Redemption [18] generate a suspicious activity score based on characteristics of file write operations, entropy changes, and others. Crypto-Drop [32] generates a reputation score computed similarly. ShieldFS [6] uses relative frequencies of various disk operations, such as read, write, folder listings, and others, as features fed to a random forest process classifier. A similar approach is also used by RWGuard [21]. While detection techniques used in commercial detectors are not disclosed, [7] shows that Malwarebytes’s [3] ransomware detector is vulnerable to evasion attacks designed against process-based detectors and thus likely to leverage similar techniques.

2.2 Evasive Ransomware: Cerberus

Since many ransomware detectors follow a similar process-based approach, a relevant research question is whether they exhibit similar vulnerabilities. Recently, in [8], the authors proposed a novel family of evasion attacks against process-based ransomware detectors. Specifically, the authors suggested three attacks: *process splitting*, *functional splitting*, and *mimicry attack*. All these attacks aim to keep representative features’ values below the detection threshold using different mechanisms, but the core idea is to split the ransomware operations over multiple independent processes.

In a *process splitting* attack, the ransomware workload is distributed across many processes. However, this approach is quite simplistic and impractical, requiring the creation of a large number of processes. The more powerful *functional splitting* attack generates a smaller number of processes, each performing few types of operations (such as performing only file reads or file writes). While this attack is practical, it can be mitigated with adversarial training [8]. Finally, the *mimicry attack* works by splitting ransomware into multiple processes, each mimicking the behavioral profile of benign applications from the point of view of disk operations. Mimicry attacks are fundamentally hard to detect as they are designed to resemble, feature-wise, precisely the behavior of a benign process.

3 Threat Model

We position ourselves in a threat model similar to those considered by prior work in the domain [6, 12, 18, 21]: the adversary is a ransomware that has infected a target machine with the goal of encrypting users files and ask for a ransom to recover the data. Specifically, we consider different types of ransomware attacks according to their capabilities and behaviors:

- **Traditional Ransomware Attack**, corresponding to the typical ransomware families found in the wild.
- **Evasive Ransomware Attack**, corresponding to complex ransomware that attempts to mimic the behavior of benign processes, such as Cerberus [7].
- **Adaptive Ransomware Attack**, corresponding to a sophisticated evasive attack aimed at lowering the expression of Minerva’s file-based features in an attempt to evade detection.

Trusted Components. In our threat model we assume Minerva’s components to be trusted, meaning that the ransomware processes can not tamper with their functionality. In particular, it is assumed that the Disk Activity Monitor module, the File-Based Behavioral Detector module, and the File Recovery module can work correctly and independently of any ransomware infecting the system. These assumptions are in line with prior work in the field [6, 12, 18, 21]. The details of each module are described in Section 4.1.

4 Minerva: A File-Based Ransomware Detector

We present Minerva, a novel file-based behavioral ransomware detector that can defend against traditional and evasive ransomware. The key insight behind Minerva is that while individual ransomware processes can modulate their behavior to appear benign [7, 8], they must inevitably encrypt a large portion of user files to achieve their goal. It is, therefore, possible to monitor the behavioral profiles of the files themselves and detect any deviation from expected behaviors. Regardless of the stealthiness of individual ransomware processes, their coordinated actions will result in the expected malicious behavioral profile from the point of view of

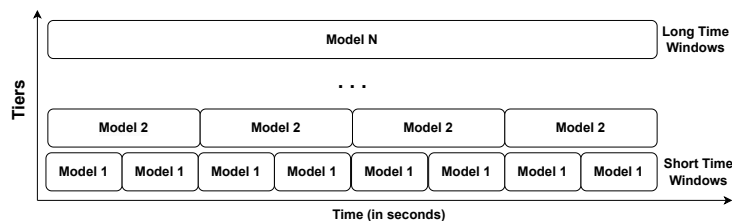


Fig. 1: Minerva’s multi-tier architecture. Each tier implements an individual Random Forest classifier trained on an increasingly longer time window of operations.

the encrypted file. Minerva achieves this by building file-based behavioral profiles for each user file in the system, based on the I/O operations they receive in a given time window. The remainder of this section presents the overall architecture of Minerva in Section 4.1, the analysis of the features we selected in Section 4.2, and a discussion on the resilience of Minerva to adaptive attacks in Section 4.3.

4.1 Minerva Architecture

From a high-level architectural view, Minerva is comprised of three separate modules: (1) *Disk Activity Monitor*, (2) *File-Based Behavioral Detector*, and (3) *File Recovery Module*. Together, these modules form a sequential pipeline that provides resilient ransomware detection capabilities and file recovery support.

Disk Activity Monitor. The Disk Activity Monitor module is a shim that provides system-wide, real-time information on all file system operations performed. We implemented the module as a driver that uses the I/O Request Packet data structure provided by Windows systems to transparently log filesystem operations system-wide, similarly to [6]. Each filesystem-related system call performed by a process can result in many lower-level operations. The Disk Activity Monitor captures and filters all these low-level operations before processing them into feature vectors that are fed to the File-based Behavioral Detector module. To minimize overhead, we logically divide files into critical and non-critical: critical files are all user files that are high-priority targets for ransomware. In contrast, non-critical files are system and configuration files that can easily be recovered after an attack. The Disk Activity Monitor filters out any operation performed on non-critical files and computes per-file feature vectors for all other files.

File-Based Behavioral Detector. The File-based Behavioral Detector module consists of an ensemble of machine learning classifiers trained to detect ransomware activity based on the behavioral profile of files. For each critical file in the system, we compute several features using the operations that the file receives in a predefined time window (for a discussion on the features, see

Section 4.2). These features define the files’ behavioral profile for that time window, which the Detector uses to decide whether the file has been subject to malicious activity in the window. To be resilient to changes in ransomware behavior, such as adaptive attacks aimed at slowing ransomware activity to span multiple windows, Minerva uses a multi-tier architecture similar to [6]. Each tier implements a separate Random Forest classifier trained on feature vectors computed over increasingly long time windows: low-tier classifiers use feature vectors computed over short time windows (e.g., 1 sec), while high-tier classifiers use features calculated over longer windows (e.g., 96 sec). At the end of each window, Minerva queries the classifiers of all tiers that are lower or equal to the current time interval to detect malicious behavioral profiles. For instance, at time interval 6 sec, Minerva queries classifiers from tier 1 (1 sec) up to tier 3 (6 sec). If any of the classifiers reports a malicious behavioral profile for their time window, all the processes that were active on the specific file in that particular window are reported as ransomware processes. This procedure is carried out for each active critical file, meaning critical files that are receiving read or write operations. The tiered architecture of Minerva is depicted in Figure 1.

File Recovery Module. The File Recovery module temporarily stores file operations performed in a time window in a protected area, shielding user files from potential malicious modifications. Conceptually, this module works in a similar fashion to operating systems file buffers: write operations are stored in a temporary buffer before being flushed to the file on disk when appropriate. In Minerva, flushing happens when the behavioral detector classifies the operations as benign in the current time window. Depending on the maximum considered time window and the average detection time, the File Recovery module can be implemented in two ways: (1) page cache-based file recovery or (2) shadow copy-based file recovery. Previous work shows that if ransomware is detected quickly, the File Recovery module can be implemented with essentially zero overhead through the operating system’s page cache. In [12], the authors implement a similar file protection mechanism that delays the operating system’s page cache flushing for suspicious processes to prevent ransomware operations on disk. The authors show that as long as the time required to detect ransomware is low enough, the delay on cache flushing has minimal impact on the system performance ($< 2\%$). In [6], the authors implement a shadow copy-based file recovery system that shadows a file whenever the original one is altered. Write operations are then buffered on the shadow copy until the process that issued them is cleared as benign. Only then the shadow copy is flushed to disk. This approach is more computationally intensive than exploiting the page cache, requiring the system to explicitly create a copy of active files and duplicate write operations. However, this approach allows withholding synchronization of the shadow copy for hours [6].

While our current implementation does not include file recovery, we stress that on average Minerva detects ransomware in $1.002sec$, with 99.97% of the ransomware activity being detected in one second or less. These detection times

align with the page cache delay time used in [12], which means that this approach can be implemented in our system with similarly low overhead.

4.2 Feature Analysis

Minerva uses seven distinctive file-level features that effectively describe the behavioral profile of files. We carefully selected these features after analyzing a dataset of benign and ransomware processes to validate the initial intuition behind them. As our experimental evaluation shows, it is highly challenging for ransomware to modulate its behavior in a way that results in the successful evasion of these features. This is because ransomware is forced to increase the prominence of some features to reduce other ones.

Read - Write Data Mismatch. The type of data read and written to a file is an important indicator of whether the file is seeing benign or malicious activity. Typically, benign processes do not alter the type of file they interact with; the type of data read from the file and written to it is consistent [18]. A file where one type of data is consistently read, but a different type of data is written exhibits highly suspicious behavior. In this regard, the type of data read from the file in a time window can be compared to the data written back to look for potential mismatches. For a ransomware detector, we are only concerned with one type of read - write mismatch: reading non-encrypted data and writing encrypted data. If a file consistently receives read operations for non-encrypted data and write operations containing encrypted data, then ransomware activity is highly likely. Minerva uses two different features to detect read - write data mismatch: the *type of data read* from a file and the *type of data written* to a file in a time window.

In the general case, there is no reliable information on the type of specific files in the system. Magic bytes and extensions can be unreliable [8], and parsing large portions of each file that is read to estimate its type would introduce significant overhead in the system. To maintain an acceptable overhead, we must infer the type of data in a read/write operation by looking only at a small chunk of the operation data itself. Given that we are only concerned with “non-encrypted” and “encrypted” types, we can reduce the problem to a binary classification task between these two classes. Traditionally in the literature, the most widely used approximation to distinguish “non-encrypted” and “encrypted” data relies on the concept of data entropy [6, 18, 21]. However, recent works show that entropy is an unreliable distinguisher between these data types [9]. Consequently, we propose to use EnCoD [9], a deep neural network classifier trained to distinguish encrypted from non-encrypted data, to classify read and written data as either encrypted or non-encrypted.

Unfortunately, as we discuss in Section 5.1, for privacy reasons, the dataset used by related works [6, 8] only includes the average entropy of read and write operations, which is not sufficient to compute the type of read data and type of written data using the EnCoD classifier. Since we also use this same dataset to provide consistent and directly comparable results, our implementation of

Minerva uses the *average entropy of read operations* and the *average entropy of write operations* as a proxy for the two EnCoD features. We stress that using average entropy is a worst-case scenario for Minerva, as it is considerably less reliable than EnCoD classification and adversarial attacks can be crafted to evade this feature [8]. Our experimental evaluation shows that despite this limitation, Minerva is resilient to adaptive attacks designed to evade average entropy (see Section 6.3).

File Write Ratio. Typically, benign processes write (or overwrite) small chunks of files over time, but rarely do they rewrite a file entirely. From the point of view of the behavioral profile of files, this implies that in a time window that is short enough, the number of distinct bytes written by all processes acting on the file should be considerably smaller than the file size. Conversely, to successfully exact a ransom, ransomware needs to entirely overwrite as many files as possible as quickly as possible. From the point of view of the behavioral profile of files, this means that in a time window where ransomware is present, most or all of the file is rewritten or overwritten. This behavioral asymmetry also holds for evasive ransomware that splits write operations over multiple processes [8]. From the point of view of process behavior, each evasive ransomware process only writes a small portion of the file, similar to benign processes. However, from the point of view of the file behavioral profile, the whole file (or, at the very least, a large portion of it) is overwritten.

The percentage of a file written in a time window (*Write Ratio*, from here on) is, therefore, a defining, robust feature that helps characterize operations performed by both traditional and evasive ransomware.

File Read Ratio. While it is unlikely for a benign process to overwrite a file entirely, it can happen rather often that a benign process reads a file completely. This is common for many types of user files, such as text documents, spreadsheets, and many others. Indeed, ransomware and benign processes have similar behavior from the point of view of the percentage of a file read, so it would appear to be a comparatively weak feature to use for classification. While this is true in isolation, its importance becomes clear when coupled with the percentage of a file written. Indeed, the main techniques used by evasive ransomware to reduce feature expression are load splitting and function splitting: an individual ransomware process is divided into multiple processes, and both the number of operations, as well as their type (i.e., read, write), is split between the processes. Splitting functionality between processes means that, in some cases, evasive ransomware processes perform only read operations on files and share the data with multiple writer processes through some stealth communication channel [8]. The writer processes will encrypt the data and overwrite the file at some later time.

From the point of view of the behavioral profile of files, this implies that in some time windows there might be write operations of encrypted data over a portion of the file, with no corresponding read operation in the same time

window. The percentage of a file read in a time window (*Read Ratio*, from here on) is a fundamental feature to capture this unique behavior.

Number of Processes Reading or Writing the File. Generally, in a time window with no ransomware activity, user files are accessed by a few processes, typically only one. This behavior holds for traditional ransomware as well, where one process reads and writes a file entirely. To mimic the behavior of benign processes, however, evasive ransomware processes have strict limits on the number of operations they are allowed to perform and the size of the operations [8]. Multiple distinct processes are spawned to read and write the file in close succession to satisfy these constraints while fully encrypting user files. The number of processes performing read or write operations on a file in a time window is, consequently, a fundamental feature for the detection of evasive ransomware.

Number of Operations on the File. The number of read and write operations performed on the file in a time window provides essential context to weigh the importance of the other features. Some traditional ransomware attempt to avoid detection by performing many small write operations on the files rather than a few large, high-entropy operations. Similarly, to better mimic the behavior of benign processes, evasive ransomware is restricted in the maximum average size of read and write operations performed. From the perspective of the file behavioral profile, these restrictions typically result in a more significant number of operations in a time window with malicious activity compared to one with benign activity. Furthermore, the number of operations on the file also supplements the number of processes feature, adding another important dimension for the classifier to consider.

4.3 Adaptive Attack Resilience

Every application of machine learning to adversarial contexts must consider an attacker that *adapts* their attack to evade the specific detector faced. This section discusses the types of adaptive attacks that can be designed against Minerva and why our detector is resilient to them.

Evading the Read - Write Data Mismatch. As discussed in Section. 4.2, Minerva uses two features, average read entropy and average write entropy, to detect read - write mismatch. Typically, non-encrypted data has lower entropy than encrypted data, therefore using average entropy is a sufficient approximation. However, an attacker can easily manipulate the average entropy of operations, as demonstrated by the authors in [7]. Since the average entropy is computed over all the operations in a time window, an adaptive ransomware attack against Minerva only needs to add some low-entropy operations among the other high-entropy ones to evade this feature. These low-entropy operations can be performed by

a single process for traditional ransomware or split over multiple processes for evasive ransomware.

As we show in Section 6.3, Minerva is resilient to this class of adaptive attacks by design. Indeed, arbitrary manipulation of the average entropy requires performing additional operations on the file in the same time window. These additional operations have the desired effect of altering the average entropy, but also the side effect of increasing the number of operations performed in a window. Moreover, since each evasive ransomware process mimics the behavior of benign processes, they have strict constraints on how many read and write operations they can perform [7]. Consequently, for evasive ransomware introducing additional operations also means spawning new children and increasing the number of processes accessing the file in a time window. Consequently, evading the read-write mismatch feature forces the adaptive ransomware to increase the expression of other features, which allows Minerva to resist these attacks.

Evading File Read and Write Ratios Features. The two features file read and file write ratios describe respectively the percentage of the file that is read and written in a time window. The only way an adaptive ransomware could alter these features is by slowing down its encryption activity so that only a small percentage of the file is read/written in a time window. This is problematic for ransomware, as its goal is to encrypt as many files as possible as quickly as possible before it is eventually detected. If the ransomware were to slow down the encryption process too much, it would become ineffective [18, 19]. Moreover, the tiered architecture of Minerva is designed to detect this family of adaptive attacks: ransomware may slightly slow down its activity, causing some read/write operations to occur in successive windows for the lower-tier classifiers. However, the higher-tier classifiers of Minerva will still detect the malicious activity even if the ransomware slows down its operations in reading and writing files entirely.

Evading Number of Processes Reading or Writing the File Feature. The number of processes feature is mainly addressed in detecting evasive ransomware which uses multiple, independent processes to encrypt files. In order to evade these features, an adaptive ransomware would have to decrease the number of processes that operate on a file in a time window. Effectively, this means that an evasive ransomware would have to use only a few processes to encrypt a file to evade this feature completely. This is antithetical to the design of evasive ransomware, as decreasing the number of processes makes evasive ransomware more similar to traditional ransomware. As shown in our experimental evaluation, Minerva is easily able to detect this type of ransomware.

Evading Number of Operations Feature. The number of operations feature is mainly aimed at detecting evasive ransomware that mimics the behavior of benign processes. To accurately mimic benign behavior, evasive ransomware constrains the size of read and write operations of its processes. The end result is

that, typically, evasive ransomware needs to perform several read/write operations to encrypt a file fully. In order to decrease the number of operations performed in a time window, evasive ransomware would have to increase the size of reads/writes, differentiating its behavioral profile from that of benign processes and becoming susceptible to detection by process-based behavioral detectors [7].

5 Experimental Setup

5.1 Dataset

Dataset of Process Operations. The File-Based Behavioral Detector module of Minerva is trained on features calculated from two different dataset: the ShieldFS dataset for benign and traditional ransomware [6], and the Cerberus dataset for evasive ransomware [7].

- **ShieldFS dataset:** the ShieldFS dataset contains 2.46 billion process operations, divided into 1.76 billion operations from benign process activity and 664 million from ransomware process activity. The benign operations are generated by installing a low-level I/O file-system sniffer on real-world machines in use by 11 volunteers. The ransomware operations come from running 383 ransomware samples on a Windows virtual machine and collecting the logs for each ransomware sample.
- **Cerberus dataset:** the Cerberus dataset consists of 4.2 million operations generated by running evasive ransomware on a Windows virtual machine. This dataset encompasses the functional-split and the Mimicry evasive ransomware approaches presented in [7].

Extracted Features Dataset From the two above-mentioned dataset, we compute four separate feature dataset: benign feature dataset, traditional ransomware feature dataset, evasive ransomware feature dataset, and adaptive ransomware feature dataset. Table 1 reports the total number of features in each dataset, for each time window used in Minerva.

Minerva models are only trained on benign, traditional, and evasive feature dataset. We stress that the adaptive ransomware features dataset **is never used in the training process**. It is only used in the testing phase, to assess the resilience of Minerva to adaptive attacks and its ability to generalize to unseen ransomware.

5.2 Behavioral Detector Implementation Details

As detailed in Section 4.1, Minerva uses a multi-tier architecture, with one classifier per tier. Each classifier uses features computed over a fixed time window, the length of which is defined by the tier of the classifier. For our implementation, we chose the following time windows [1, 3, 6, 12, 24, 48, 96] seconds. For each of these seven tiers, we use a Random Forest classifier composed of 100 trees.

Table 1: Extracted features dataset.

Time window	Train	Test			
		Benign	Traditional	Evasive	Adaptive
1sec	9,871K	917K	3,078K	9K	47k
3sec	8,342K	708K	2,748K	9K	47k
6sec	7,800K	608K	2,655K	9K	47k
12sec	7,366K	499K	2,603K	9K	47k
24sec	7,064K	410K	2,575K	9K	47k
48sec	6,910K	367K	2,561K	9K	47k
96sec	6,806K	334K	2,552K	9K	47k

6 Evaluation

This section thoroughly evaluates the performance of Minerva against *traditional*, *evasive*, and *adaptive* ransomware attacks. The results are reported in Table 2. Before we discuss our results, we introduce the necessary notation.

- TN - True Negative Rate: ratio between the *benign* features correctly classified as *benign* over the total number of *benign* features in the test set.
- TP_T - True Positive Rate of *Traditional* Ransomware: ratio between the *traditional* ransomware features correctly classified as ransomware over the total number of *traditional* ransomware features in the test set.
- TP_E - True Positive Rate of *Evasive* Ransomware: ratio between the *evasive* ransomware features correctly classified as ransomware over the total number of *evasive* ransomware features in the test set.
- TP_A - True Positive Rate of *Adaptive* Ransomware: ratio between the *adaptive* ransomware features correctly classified as ransomware over the total number of *adaptive* ransomware features in the test set.
- *Accuracy*: The accuracy value reported in Table 2 corresponds to the ratio between all correctly classified samples over the total number of samples in the test set.
- *Recall*: The recall value reported in Table 2 corresponds to the ratio between all correctly classified ransomware samples, over the total number of ransomware samples in the test set.

6.1 Traditional ransomware attack evaluation

Table 2 reports the performance of Minerva on the traditional ransomware test set. The true positive rate (TP_T) value for all of the considered time windows is above 99%. This means that each of the Minerva classifiers is able to accurately pinpoint traditional ransomware activity with less than 1% of false negatives. This result is in line with the performance of previous works on traditional ransomware detection [6, 19, 21]. Figure 2a shows the confusion matrix for the 1-second window

Table 2: Performance analysis of Minerva against traditional, evasive and adaptive ransomware attacks.

Time window	Benign Traditional Evasive Adaptive				Overall	
	TN	TP_T	TP_E	TP_A	Accuracy	Recall
1sec	98.2%	99.6%	99.8%	99.9%	99.4%	99.6%
3sec	97.7%	99.8%	99.8%	99.9%	99.2%	99.5%
6sec	98.2%	99.6%	99.8%	99.9%	99.2%	99.6%
12sec	98.3%	99.0%	99.7%	99.9%	99.4%	99.6%
24sec	98.6%	99.8%	99.7%	99.9%	99.6%	99.8%
48sec	98.8%	99.8%	99.7%	99.9%	99.7%	99.8%
96sec	98.7%	99.8%	99.7%	99.9%	99.7%	99.9%

classifier. As we can see, the Tier 1 model generalizes and performs exceptionally well with only 0.35% false negatives. This is an important result in the case of ransomware detection, as false negatives (missed ransomware) are much more dangerous than false positives in this context.

6.2 Evasive ransomware attack evaluation

Table 2 reports the performance of Minerva classifiers on the evasive ransomware test set. The evasive ransomware test data are collected using the Cerberus ransomware, which was shown to completely evade all prior process-based ransomware detection techniques [8]. As we can see from the table, the true positive rate against evasive ransomware (TP_E) is above 99% for all time windows. This confirms our hypothesis that Minerva’s file-based behavioral profiling is resilient to this type of evasive malware, contrary to prior works. Figure 2b shows the confusion matrix of the tier 1 Minerva classifier (1-second window). As we can see, the ML model generalizes and performs extremely well, with only 0.17% false negatives. We believe this to be an impressive result as no prior behavioral classifier could detect this evasive ransomware.

6.3 Adaptive ransomware attack evaluation

We assess the ability of Minerva to generalize and its resilience to adaptive evasion attacks by testing it against unseen ransomware designed to evade its features. This adaptive ransomware is a modified version of the evasive ransomware [8], improved to modulate one or more of the features used by Minerva to avoid detection, as discussed in Section 4.3. As shown in Table 2 and in Figure 2c, Minerva classifiers are able to detect over 99% of the adaptive ransomware activity correctly. These results confirm our hypothesis that to evade some of Minerva’s features, ransomware must necessarily increase others, inevitably leading to detection.

Finally, the last two columns of Table 2 report the accuracy and recall of Minerva for each tier of the architecture. These values are calculated considering

all ransomware types (traditional, evasive, and adaptive) as one class. We note the extremely high level of accuracy of each tier but, more importantly, we highlight the near-perfect recall. These results show that Minerva can accurately pinpoint ransomware activity with extremely low false negatives. We stress that this is fundamental for ransomware detection because false negatives (missed ransomware) are much more dangerous than false positives in this setting.

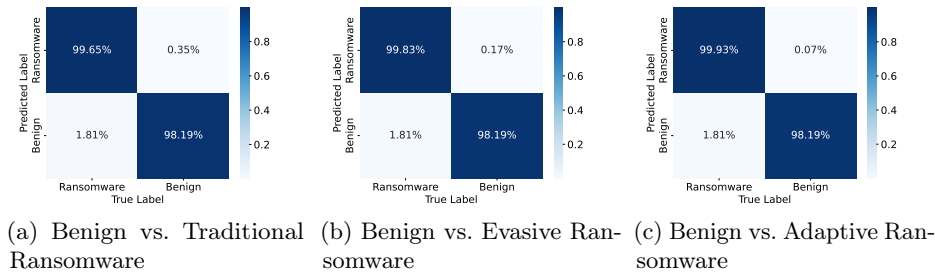


Fig. 2: Confusion matrices on 1 second window comparing the performance of Minerva on each ransomware type considered (traditional, evasive, adaptive).

6.4 Feature Importance

Mean Decrease in Impurity (MDI) is a method used in decision tree-based ML algorithms to evaluate the importance of each feature [5]. MDI calculates each feature’s impurity (e.g., Gini impurity) and averages the impurity decrease across all the feature splits. The feature with the highest average decrease in impurity is considered the most important feature.

Figure 3 shows the MDI feature importance across the first six tiers of the File-Based Behavioral Classifier. It is interesting to note how different time windows impact the model’s decision and how some features are directly or inversely proportional to the window size. Figure 3a shows that in the shortest time window (1 sec), the most important feature is the number of operations performed on the file. This behavior confirms our initial intuition: traditional ransomware typically encrypts files as fast as possible, while evasive ransomware processes are constrained in the maximum size of operations [8]. Finally, adaptive ransomware introduces artificial low-entropy operations to decrease the average entropy feature. All these behaviors result in a high number of read/write operations.

For larger time windows (see Figure 3f), the number of operations decreases in importance in favor of feature based on the number of processes performing read or write operations on a file. We empirically found that, over longer time windows, more than one benign processes access the same file. On the other hand, ransomware typically accesses files either with a single process (for traditional

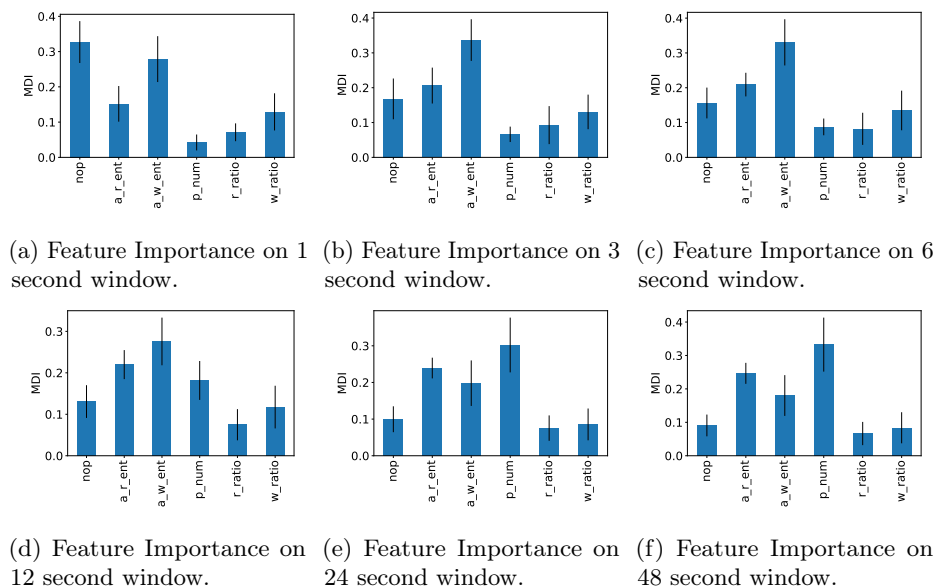


Fig. 3: Feature importance of the Random Forest classifiers on different time windows using the Mean Decrease in Impurity (MDI)

ransomware) or multiple times with numerous processes (for evasive and adaptive ransomware). Thus, this behavior becomes a discriminating factor between benign and malicious activity on the file.

Lastly, we note how the average entropy of operations, which is used as a proxy for the mismatch between read and written data type (see Section 4.2), is a strong predictor of malicious activity regardless of the window size. This is expected, as regardless of how large the time window is, the type of data read from a file should never be different from what is written to it if the system is not under attack.

7 Related Work

7.1 Malware Analysis and Detection

Process-based behavioral ransomware detection [6, 8, 18, 19, 21, 32] attempts to identify running ransomware processes by analyzing features derived from their execution. These approaches are discussed in detail in Section 2.1. Beyond ransomware, many dynamic malware detection techniques have been proposed based on analyzing system calls and other dynamic characteristics [36].

Several approaches focus on using high entropy as a proxy to detect ransomware encryption activity. These approaches use various techniques, including χ^2 -test [26] and the Kullback-Liebler divergence [20]. As we discussed earlier,

in isolation, entropy is a weak distinguisher of ransomware activity and can be easily evaded [9].

Another line of work utilizes decoy files [13, 22, 24]. A decoy file is a dummy file, typically hidden from the user and created for ransomware detection. As no application is expected to use a decoy file, accesses to it are a strong signal of ransomware activity. More in general, many approaches exist that perform static analysis to identify ransomware [28, 37], and malware [33]. All these works are orthogonal to our proposal and can be used together with Minerva to improve resilience.

7.2 Evasion of Malware Defenses

In [8], the authors describe a family of evasion attacks against existing ransomware detectors. These attacks are discussed in Section 2.2. A high-level discussion of similar approaches to evasion was also addressed by Genç et al. [14]. MalWASH [17], D-TIME [27], and ROPE [10] are generic malware obfuscators that also leverage the distribution of malware workload across processes, similarly to [8]. Rather than distributing malware workload, other approaches attempt to perturb the sequence of system calls generated by ransomware [16, 29]. As Minerva uses file-based behavioral profiles to detect malicious activity, it is resilient to these evasion attacks by design, regardless of the approach used to distribute malware behavior between processes.

Evasion techniques deployed in the wild commonly target detectors based on static features, which are relatively easy to evade. Examples of such evasion techniques include the use of obfuscation [31] and packers [35], and memory-only malware [34]. Many academic approaches exploit various adversarial ML techniques to guide mutation to various static features [15, 30]. The detection technique discussed in this paper is based on dynamic behavior and, therefore, robust to static obfuscation.

8 Conclusions

This paper presented Minerva, a novel approach to ransomware detection and mitigation. Unlike current methods focused on identifying ransomware based on process-level behavioral modeling, Minerva detects ransomware by building behavioral profiles of files based on all the operations they receive in a time window. Switching from process-based to file-based behavioral modeling allows Minerva to address some of the critical challenges associated with process-based approaches, specifically their vulnerability to complex evasion attacks. Through a thorough evaluation, we showed that Minerva is highly effective against all types of ransomware attacks exhibiting an average accuracy of 99.45% and an average recall of 99.66%, with 99.97% of ransomware detected within 1 second. We believe that ransomware is one of the major threats of the past decade, and it will remain so for years to come. Our results provide a significant step forward in designing robust defenses against this evergrowing threat.

References

1. Global ransomware damage costs predicted to exceed 265 billion by 2031. <https://cybersecurityventures.com/global-ransomware-damage-costs-predicted-to-reach-250-billion-usd-by-2031/>, accessed: 2022-12-12
2. Global ransomware damage costs predicted to exceed 265 billion by 2031. <https://www.coveware.com/blog/ransomware-attack-vectors-shift-as-new-software-vulnerability-exploits-abound>, accessed: 2022-12-12
3. Malwarebytes anti-ransomware for business. <https://www.malwarebytes.com/business/solutions/ransomware/> (2019)
4. Blinder, A., Perlroth, N.: A Cyberattack Hobbles Atlanta, and Security Experts Shudder. *The New York Times* (Mar 2018)
5. Breiman, L., Friedman, J.H., Olshen, R.A., J., S.C.: Classification and regression trees. Chapman and Hall/CRC (1984)
6. Continella, A., Guagnelli, A., Zingaro, G., De Pasquale, G., Barengi, A., Zanero, S., Maggi, F.: Shieldfs: a self-healing, ransomware-aware filesystem. In: Proceedings of the 32nd annual conference on computer security applications. pp. 336–347 (2016)
7. De Gaspari, F., Hitaj, D., Pagnotta, G., Carli, L.D., Mancini, L.V.: The naked sun: Malicious cooperation between benign-looking processes. In: International Conference on Applied Cryptography and Network Security. pp. 254–274. Springer (2020)
8. De Gaspari, F., Hitaj, D., Pagnotta, G., De Carli, L., Mancini, L.V.: Evading behavioral classifiers: A comprehensive analysis on evading ransomware detection techniques. *Neural Computing and Applications* **34**(14), 12077–12096 (Jul 2022)
9. De Gaspari, F., Hitaj, D., Pagnotta, G., De Carli, L., Mancini, L.V.: Reliable detection of compressed and encrypted data. *Neural Computing and Applications* **34**(22), 20379–20393 (Nov 2022)
10. D’Elia, D.C., Invidia, L., Querzoni, L.: Rope: Covert Multi-process Malware Execution with Return-Oriented Programming. In: *Computer Security – ESORICS 2021*, vol. 12972, pp. 197–217. Springer International Publishing, Cham (2021)
11. Derek Kortepeter: Shipping giant COSCO brutalized by ransomware attack. <http://techgenix.com/cosco-ransomware-attack/> (Aug 2018)
12. Elkhail, A.A., Lachtar, N., Ibdah, D., Aslam, R., Khan, H., Bacha, A., Malik, H.: Safeguarding data against ransomware attacks. *IEEE Transactions on Dependable and Secure Computing* **20**(1), 1–16 (2023)
13. Genç, Z.A., Lenzini, G., Sgandurra, D.: On deception-based protection against cryptographic ransomware. In: International conference on detection of intrusions and malware, and vulnerability assessment. pp. 219–239. Springer (2019)
14. Genç, Z.A., Lenzini, G., Ryan, P.Y.A.: Next Generation Cryptographic Ransomware. In: *Secure IT Systems*, vol. 11252, pp. 385–401. Springer International Publishing, Cham (2018)
15. Grosse, K., Papernot, N., Manoharan, P., Backes, M., McDaniel, P.: Adversarial examples for malware detection. In: European symposium on research in computer security. pp. 62–79. Springer (2017)
16. Hu, W., Tan, Y.: Black-box attacks against rnn based malware detection algorithms (2018)
17. Ispoglou, K.K., Payer, M.: {malWASH}: Washing malware to evade dynamic analysis. In: 10th USENIX Workshop on Offensive Technologies (WOOT 16) (2016)

18. Kharraz, A., Kirda, E.: Redemption: Real-time protection against ransomware at end-hosts. In: RAID (2017)
19. Kirda, E.: Unveil: A large-scale, automated approach to detecting ransomware (keynote). In: SANER (2017)
20. Mbol, F., Robert, J.M., Sadighian, A.: An Efficient Approach to Detect Torrent-Locker Ransomware in Computer Systems. In: Foresti, S., Persiano, G. (eds.) Cryptology and Network Security, vol. 10052, pp. 532–541. Springer International Publishing, Cham (2016)
21. Mehnaz, S., Mudgerikar, A., Bertino, E.: Rwgard: A real-time detection system against cryptographic ransomware. In: International Symposium on Research in Attacks, Intrusions, and Defenses. pp. 114–136. Springer (2018)
22. Moore, C.: Detecting Ransomware with Honeypot Techniques. In: CCC (2016)
23. Morgan, S.: 2019 official annual cybercrime report (2019)
24. Moussaileb, R., Bouget, B., Palisse, A., Le Bouder, H., Cuppens, N., Lanet, J.L.: Ransomware’s early mitigation mechanisms. In: Proceedings of the 13th International Conference on Availability, Reliability and Security. pp. 1–10 (2018)
25. Moussaileb, R., Cuppens, N., Lanet, J.L., Bouder, H.L.: A survey on windows-based ransomware taxonomy and detection mechanisms. ACM Comput. Surv. **54**(6) (2021)
26. Palisse, A., Durand, A., Le Bouder, H., Le Guernic, C., Lanet, J.L.: Data Aware Defense (DaD): Towards a Generic and Practical Ransomware Countermeasure. In: Lipmaa, H., Mitrokotsa, A., Matulevičius, R. (eds.) Secure IT Systems, vol. 10674, pp. 192–208. Springer International Publishing, Cham (2017)
27. Pavithran, J., Patnaik, M., Rebeiro, C.: {D-TIME}: Distributed threadless independent malware execution for runtime obfuscation. In: 13th USENIX Workshop on Offensive Technologies (WOOT 19) (2019)
28. Rezaei, T., Manavi, F., Hamzeh, A.: A PE header-based method for malware detection using clustering and deep embedding techniques. Journal of Information Security and Applications **60**, 102876 (Aug 2021)
29. Rosenberg, I., Shabtai, A., Elovici, Y., Rokach, L.: Query-Efficient GAN Based Black-Box Attack Against Sequence Based Machine and Deep Learning Classifiers. arXiv:1804.08778 [cs] (Apr 2018), <http://arxiv.org/abs/1804.08778>
30. Rosenberg, I., Shabtai, A., Rokach, L., Elovici, Y.: Generic black-box end-to-end attack against state of the art api call based malware classifiers. In: International Symposium on Research in Attacks, Intrusions, and Defenses. pp. 490–510. Springer (2018)
31. Saidi, H., Porras, P., Yegneswaran, V.: Experiences in malware binary deobfuscation. Virus Bulletin (2010)
32. Scaife, N., Carter, H., Traynor, P., Butler, K.R.B.: CryptoLock (and Drop It): Stopping Ransomware Attacks on User Data. In: ICDCS (2016)
33. Shalaginov, A., Banin, S., Dehghantanha, A., Franke, K.: Machine Learning Aided Static Malware Analysis: A Survey and Tutorial. In: Dehghantanha, A., Conti, M., Dargahi, T. (eds.) Cyber Threat Intelligence, pp. 7–45. Advances in Information Security, Springer International Publishing, Cham (2018)
34. Sudhakar, Kumar, S.: An emerging threat Fileless malware: A survey and research challenges. Cybersecurity **3**(1), 1 (Jan 2020)
35. Ugarte-Pedrero, X., Balzarotti, D., Santos, I., Bringas, P.G.: SoK: Deep Packer Inspection: A Longitudinal Study of the Complexity of Run-Time Packers. In: IEEE S&P (2015)
36. Ye, Y., Li, T., Adjero, D., Iyengar, S.S.: A Survey on Malware Detection Using Data Mining Techniques. ACM Computing Surveys **50**(3), 41:1–41:40 (Jun 2017)

37. Zhu, J., Jang-Jaccard, J., Singh, A., Welch, I., Al-Sahaf, H., Camtepe, S.: A few-shot meta-learning based siamese neural network using entropy features for ransomware classification. *Computers & Security* **117**, 102691 (Jun 2022)