

Maximum Optimality Margin: A Unified Approach for Contextual Linear Programming and Inverse Linear Programming

Chunlin Sun*, Shang Liu*, Xiaocheng Li

Institute for Computational and Mathematical Engineering, Stanford University, chunlin@stanford.edu
Imperial College Business School, Imperial College London, (s.liu21, xiaocheng.li)@imperial.ac.uk

Abstract

In this paper, we study the predict-then-optimize problem where the output of a machine learning prediction task is used as the input of some downstream optimization problem, say, the objective coefficient vector of a linear program. The problem is also known as predictive analytics or contextual linear programming. The existing approaches largely suffer from either (i) optimization intractability (a non-convex objective function)/statistical inefficiency (a suboptimal generalization bound) or (ii) requiring strong condition(s) such as no constraint or loss calibration. We develop a new approach to the problem called *maximum optimality margin* which designs the machine learning loss function by the optimality condition of the downstream optimization. The max-margin formulation enjoys both computational efficiency and good theoretical properties for the learning procedure. More importantly, our new approach only needs the observations of the optimal solution in the training data rather than the objective function, which makes it a new and natural approach to the inverse linear programming problem under both contextual and context-free settings; we also analyze the proposed method under both offline and online settings, and demonstrate its performance using numerical experiments.

1 Introduction

The predict-then-optimize problem considers a learning problem under a decision making context where the output of a machine learning model serves as the input of a downstream optimization problem (e.g. a linear program). The ultimate goal of the learner is to prescribe a decision/solution for the downstream optimization problem using directly the input (variables) of the machine learning model but without full observation of the input of the optimization problem. A similar problem formulation was also studied as prescriptive analytics (Bertsimas and Kallus, 2020) and contextual linear programming (Hu et al., 2022). While Elmachtoub and Grigas (2022) justify the importance of leveraging the optimization problem structure when building the machine learning model and the existing efforts on exploiting the optimization structure have been largely inadequate. In this paper, we delve deeper into the structural properties of the optimization problem and propose a new approach called maximum optimality margin which builds a max-margin learning model based on the optimality condition of the downstream optimization problem. More importantly, our approach only needs the observations of the optimal solution in the training data rather than the objective function, thus it draws an interesting connection to the inverse optimization problem. The connection gives a new shared perspective on both the predict-then-optimize problem and the inverse optimization problem, and our analysis reveals a scale inconsistency issue that arises practically and theoretically for many existing methods.

* Equal contribution.

Now we present the problem formulation and provide an overview of the existing techniques and related literature. Consider a linear program (LP) that takes the following standard form

$$\begin{aligned} \text{LP}(c, A, b) &:= \min c^\top x, \\ \text{s.t. } Ax &= b, x \geq 0. \end{aligned} \tag{1}$$

where $c \in \mathbb{R}^n$, $A \in \mathbb{R}^{m \times n}$, and $b \in \mathbb{R}^m$ are the inputs of the LP. In addition, there is an available feature vector $z \in \mathbb{R}^d$ that encodes the useful covariates (side information) associated with the LP.

Predict-then-optimize/Contextual linear programming

The problem of predict-the-optimize or contextual LP is stated as follows. A set of training data

$$\mathcal{D}_{\text{ML}}(T) := \{(c_t, A_t, b_t, z_t)\}_{t=1}^T$$

consists of i.i.d. samples from an unknown distribution \mathcal{P} , where $c_t \in \mathbb{R}^n$, $A_t \in \mathbb{R}^{m \times n}$, $b_t \in \mathbb{R}^m$, and $z_t \in \mathbb{R}^d$. Throughout the paper, we assume the constraints have a fixed dimensionality for notational simplicity, while all the results can be easily extended to the case of variable dimensionality. The goal of a conventional machine learning (ML) model is to identify a function $g(\cdot; \Theta) : \mathbb{R}^d \rightarrow \mathbb{R}^n$ that best predicts the objective coefficient vector c_t using the covariates z_t . However, the predict-then-optimize problem has a slightly different pipeline for the testing phase. It aims to map from the observation of the context and the knowledge of the constraints to a decision (from data to decision):

$$(A_{\text{new}}, b_{\text{new}}, z_{\text{new}}) \rightarrow x_{\text{new}}$$

without the observation of c_{new} , where the tuple $(c_{\text{new}}, A_{\text{new}}, b_{\text{new}}, z_{\text{new}})$ is a new test sample from \mathcal{P} . That is, for this new test sample, the decision maker knows the constraints $(A_{\text{new}}, b_{\text{new}})$, and the aim is to predict the unknown objective c_{new} from z_{new} and prescribe the decision variable x_{new} .

There are commonly three performance measures for the problem (as noted by [Chen and Kılınç-Karzan \(2020\)](#))

- Prediction loss: $l_{\text{pre}}(\hat{\Theta}) = \mathbb{E} \left[\|c_{\text{new}} - \hat{c}_{\text{new}}\|_2^2 \right]$
- Estimate loss: $l_{\text{est}}(\hat{\Theta}) = \mathbb{E} \left[c_{\text{new}}^\top x_{\text{new}} - \hat{c}_{\text{new}}^\top x_{\text{new}}^* \right]$
- Suboptimality loss: $l_{\text{sub}}(\hat{\Theta}) = \mathbb{E} \left[\hat{c}_{\text{new}}^\top x_{\text{new}}^* - \hat{c}_{\text{new}}^\top \hat{x}_{\text{new}} \right]$

where $\hat{c}_{\text{new}} = g(z_{\text{new}}; \hat{\Theta})$ is the predicted output of the ML model. Here \hat{x}_{new} and x_{new}^* are the optimal solutions of $\text{LP}(\hat{c}_{\text{new}}, A_{\text{new}}, b_{\text{new}})$ and $\text{LP}(c_{\text{new}}, A_{\text{new}}, b_{\text{new}})$, respectively. The expectations are taken with respect to this new sample (following the distribution \mathcal{P}).

The prediction loss is aligned with the standard ML problems, where the L_2 loss can also be replaced by other proper metrics. The estimate loss captures the quality of the recommended decision x_{new} under the true (unobserved) c_{new} and it is a more natural loss given the interests in the downstream optimization task. The suboptimality loss measures how well the predicted \hat{c}_{new} explains the realized optimal solution x_{new}^* . It is more commonly adopted in the inverse linear programming literature ([Mohajerin Esfahani et al., 2018](#); [Bärmann et al., 2018](#); [Chen and Kılınç-Karzan, 2020](#)).

Inverse linear programming

Our proposed approach to the predict-then-optimize problem also solves a seemingly unrelated problem – inverse linear programming. In the language of predict-then-optimize, the problem of inverse linear

programming considers a set of training data

$$\mathcal{D}_{\text{inv}}(T) := \{(x_t^*, A_t, b_t, z_t)\}_{t=1}^T.$$

Similarly as the previous case, the tuples (c_t, A_t, b_t, z_t) 's are generated from an unknown distribution \mathcal{P} . Differently, for inverse linear programming, the optimal solution x_t^* instead of the objective coefficient vectors c_t is given in the training data. While the classic setting of inverse linear programming does not consider the context, i.e., $z_t \equiv 1$ for all t , several recent works (Mohajerin Esfahani et al., 2018; Besbes et al., 2021) study the contextual case. The goal of the inverse linear programming is similar as that of the predict-then-optimize problem, to learn a function $g(\cdot; \Theta)$ that maps from the context z_t to the objective c_t . We emphasize that the observation of x_t^* gives much less information than that of c_t which makes the inverse problem more challenging than the predict-then-optimize problem.

In the following, we briefly review the representative existing approaches to tackle the two problems.

Predicting the objective.

The first class of approaches treats the predict-then-optimize problem as a two-step procedure. The learner first learns a function $g(\cdot; \hat{\Theta}) : z \rightarrow c$ from the training data, and then prescribes the final output x_{new} by the optimal solution of $\text{LP}(g(z_{\text{new}}; \hat{\Theta}), A_{\text{new}}, b_{\text{new}})$. There are mainly two existing routes for how the parameter $\hat{\Theta}$ should be estimated from the training data. The first route is to ignore the constraint (A_t, b_t) (in the training data) and treat the training problem as a pure ML problem (Ho-Nguyen and Kılınç-Karzan, 2022). The issue of this route is that there can be a misalignment between the ML loss $l_{\text{pre}}(\cdot)$ and the downstream optimization loss $l_{\text{est}}(\cdot)$ or $l_{\text{sub}}(\cdot)$. Empirically, it causes sample inefficiency if one is interested in $l_{\text{est}}(\cdot)$ (noted by Elmachtoub and Grigas (2022) and also observed in our numerical experiments). Theoretically, to establish a performance guarantee for the optimization loss, it requires a calibration condition which can be hard to satisfy/verify (Ho-Nguyen and Kılınç-Karzan, 2022). The second route is to employ the optimization loss $l_{\text{est}}(\cdot)$ for the estimation of $\hat{\Theta}$ (Elmachtoub and Grigas, 2022; Elmachtoub et al., 2020). However, the loss function is generally non-convex in the parameter Θ . A convex surrogate loss called SPO+ is proposed, but the sample complexity yielded under the surrogate loss can be of a suboptimal rate (El Balghiti et al., 2019). In the literature of inverse LP, the (convex) suboptimality loss $l_{\text{sub}}(\cdot)$ is often used instead of $l_{\text{est}}(\cdot)$.

Our proposed approach falls in this category of first predicting the objective and then solving the LP. Different from all the existing works, we derive a new formulation based on the optimality condition of the optimization problem that features for both statistical and computational efficiency.

Predicting the optimal solution.

The second class of approaches treats the predict-then-optimize problem as a one-step procedure, and aims to learn an end-to-end function that maps from the context z_t directly to the optimal solution x_t^* (Bertsimas and Kallus, 2020; Hu et al., 2022). This end-to-end treatment works well in the unconstrained setting. But for the constrained setting, the optimal solution of an LP generally stays at the corner of the feasible simplex, and the end-to-end mapping can hardly predict such a corner solution. In the domain of inverse linear programming, a recent work (Tan et al., 2020) also proposes a loss function minimizing the gap between the predicted optimal solution and the observed optimal solution. The idea is more aligned with the early formulation of inverse optimization (Zhang and Liu, 1996; Ahuja and Orlin, 2001). However, the formulation in (Tan et al., 2020) is more of a conceptual framework that is hardly computationally tractable.

Consistency/Feasibility check.

For the inverse linear programming problem, a common approach in literature (Zhang and Liu, 1996; Ahuja and Orlin, 2001; Boyd and Vandenberghe, 2004; Bertsimas et al., 2015; Bärmann et al., 2018; Besbes et al., 2021) is to transform the knowledge of the optimal solution x_t^* equivalently to constraints on the objective vector $c_t \in \mathcal{C}_t$ for some polyhedron \mathcal{C}_t (through the optimality condition), and then utilize these \mathcal{C}_t to make inference about the objective vector. There can be two issues with this approach. First, many existing results study the context-free case and require a non-empty intersection of the polyhedrons, i.e., $\bigcap_{t=1}^T \mathcal{C}_t \neq \emptyset$. This requirement may fail in a noisy or contextual setting. Second, from a methodology perspective, it is difficult to relate the structure of \mathcal{C}_t with the covariates z_t . To this end, our paper complements the results of the existing literature by providing a new approach for the inverse linear programming problem for both context-free and contextual setting and with less assumption.

2 LP Optimality Structure and Main Algorithm

Now we first present some preliminaries on linear programming and then describe our main algorithm. Let $x^* = (x_1, \dots, x_n)^\top$ be the optimal solution of the LP(c, A, b). The optimal basis \mathcal{B}^* and its complement \mathcal{N}^* of an LP are defined as follows

$$\mathcal{B}^* := \{i : x_i^* > 0\}, \quad \mathcal{N}^* := \{i : x_i^* = 0\}.$$

For a set $\mathcal{B} \subset [n]$, we use $A_{\mathcal{B}}$ to denote the submatrix of A with column indices corresponding to \mathcal{B} and $c_{\mathcal{B}}$ to denote the subvector with corresponding dimensions. We make the following assumptions on the LP's nondegeneracy.

Assumption 1 (Nondegeneracy). *All the linear programs in this paper are nondegenerate, i.e., satisfying the following two conditions:*

- (a) *The LP is feasible and has a unique optimal solution.*
- (b) *All the submatrices $A_{\mathcal{B}}$ are invertible for $|\mathcal{B}| = m$. The optimal basis satisfies $|\mathcal{B}^*| = m$.*

The assumption is standard in the literature of LP. It is a mild one in that any LP can satisfy the assumption under an arbitrarily small perturbation (Megiddo and Chandrasekaran, 1989). We also note that our focus on the standard-form LP (1) is without loss of generality because all the LPs can be written in the standard form and the results in this paper can be easily adapted to an LP of other forms.

The following lemma describes the optimality condition for a linear program in terms of its input.

Lemma 1 (Luenberger et al. (1984)). *Let $\mathcal{B} \subset [n]$ be a feasible basis of LP(c, A, b), i.e., $A_{\mathcal{B}}^{-1}b \geq 0$, and let $\mathcal{N} = [n] \setminus \mathcal{B}$ be its complement. Then, under Assumption 1, the following inequality holds (element-wise)*

$$c_{\mathcal{N}}^\top - c_{\mathcal{B}}^\top A_{\mathcal{B}}^{-1} A_{\mathcal{N}} \geq 0 \tag{2}$$

if and only if $\mathcal{B} = \mathcal{B}^$.*

The result provides a foundation for the simplex method to solve LPs. When $\mathcal{B} = \mathcal{B}^*$, the vector $p^* := c_{\mathcal{B}^*}^\top A_{\mathcal{B}^*}^{-1} \in \mathbb{R}^m$ will be the optimal solution of the dual LP of (1), also known as the dual price. It assigns a shadow price for per unit consumption of each constraint. For a decision variable index $i \in [n]$, when $c_i > A_i^\top p^*$ (where A_i is the i -th column of A), it means the choice of the i -th variable is not cost effective, and thus $x_i^* = 0$.

2.1 Maximum optimality margin

Now we present our approach of maximum optimality margin. Consider the following training data

$$\mathcal{D}_{\text{inv}}(T) = \{(x_t^*, A_t, b_t, z_t)\}_{t=1}^T.$$

Note that the training data only consists of the observations of the optimal solution x_t^* , so all the algorithms and analyses apply to both the predict-then-optimize problem and the inverse linear programming problem. Denote the sets of basic variables and non-basic variables of the t -th training sample as $\mathcal{B}_t^* \in [n]$ and $\mathcal{N}_t^* \in [n]$, respectively. Then the training data can be equivalently re-written as

$$\mathcal{D}_{\text{inv}}(T) = \{(x_t^*, A_t, b_t, z_t, \mathcal{B}_t^*, \mathcal{N}_t^*)\}_{t=1}^T.$$

Specifically, we start with a linear mapping from the covariates z_t to the objective vector c_t , i.e.,

$$c_t = g(z_t; \Theta) := \Theta z_t.$$

Our maximum optimality margin method solves the following optimization problem.

$$\begin{aligned} \hat{\Theta} := \arg \min_{\Theta \in \mathcal{K}} \quad & \frac{\lambda}{2} \|\Theta\|_2^2 + \frac{1}{T} \sum_{t=1}^T \|s_t\|_1 \\ \text{s.t.} \quad & \hat{c}_t = \Theta z_t, \quad t = 1, \dots, T, \\ & \hat{c}_{t, \mathcal{N}_t^*}^\top - \hat{c}_{t, \mathcal{B}_t^*}^\top A_{t, \mathcal{B}_t^*}^{-1} A_{t, \mathcal{N}_t^*} \geq 1_{|\mathcal{N}_t^*|} - s_t, \quad t = 1, \dots, T, \end{aligned} \quad (3)$$

where the decision variables are $\Theta \in \mathbb{R}^{n \times d}$, $\hat{c}_t \in \mathbb{R}^n$, and $s_t \in \mathbb{R}^{|\mathcal{N}_t^*|}$. \mathcal{K} is a convex set to be determined.

To interpret the optimization problem (3):

- The equality constraints encode the linear prediction function, and \hat{c}_t 's are the predicted value of c_t under parameter Θ .
- For the inequality constraints, the vector $1_{|\mathcal{N}_t^*|} \in \mathbb{R}^{|\mathcal{N}_t^*|}$ is an all-one vector of dimension $|\mathcal{N}_t^*|$. The left-hand-side of the inequality comes from the optimality condition (2) in Lemma 1, while the right-hand-side represents the *slackness* or *margin* of the optimality condition. From the objective function, it is easy to see that the optimal solution will always render $s_t \geq 0$. Then, when $s_t \in [0, 1]$ element-wise for all t , the inequality constraints fulfill the optimality condition (2) perfectly, which means that the optimal solution $\hat{\Theta}$ is consistent with all the training samples. In other words, when $s_t \in [0, 1]$ element-wise for all t , if we predict the objective coefficient c_t with $\hat{c}_t = \hat{\Theta} z_t$, the two LPs, $\text{LP}(c_t, A_t, b_t)$ and $\text{LP}(\hat{c}_t, A_t, b_t)$ share the same optimal solution for all t (by Lemma 1), and it thus results in a zero estimate loss l_{est} and a zero suboptimality loss l_{sub} on the training data. When some coordinate of s_t is greater than 1, it means the optimal solution under the predicted objective $\hat{c}_t = \hat{\Theta} z_t$ no longer satisfies the optimality condition of the original $\text{LP}(c_t, A_t, b_t)$, and consequently, this results in a mismatch between the two optimal solutions of $\text{LP}(c_t, A_t, b_t)$ and $\text{LP}(\hat{c}_t, A_t, b_t)$, and thus a non-zero loss of l_{est} and l_{sub} .
- For the objective function, the second part is justified by the above discussion on the inequality constraints. We desire to have a smaller value of s_t as this leads to a better satisfaction of the optimality condition. The first part of the objective function regularizes the parameter Θ . The rationale is that the left-hand-side of the inequality constraints that represents the realized margin of the optimal condition, scales linearly with Θ . We hope the margin to be large but do not want the large margin is due to the scaling up of Θ .

We note that the optimization problem (3) has linear constraints and a quadratic objective, and thus it is convex. Algorithm 1 describes the procedure of maximum optimality margin for solving the predict-then-optimize problem and the inverse LP problem. It is a two-step procedure in that it first estimates the parameter and then solves the optimization problem based on the estimate $\hat{\Theta}$.

Algorithm 1 Maximum Optimality Margin (MOM) Algorithm

- 1: Input: Dataset $\mathcal{D}(T) = \{(x_t^*, A_t, b_t, z_t, \mathcal{B}_t^*, \mathcal{N}_t^*)\}_{t=1}^T$, test sample $(A_{\text{new}}, b_{\text{new}}, z_{\text{new}})$, λ , \mathcal{K}
- 2: Solve the optimization problem (3) and obtain the estimate $\hat{\Theta}$
- 3: Predict $\hat{c}_{\text{new}} = \hat{\Theta} z_{\text{new}}$ and solve the following LP

$$\begin{aligned} \min \quad & \hat{c}_{\text{new}}^\top x, \\ \text{s.t.} \quad & A_{\text{new}} x = b_{\text{new}}, \quad x \geq 0. \end{aligned}$$

- 4: Denote its optimal solution as \hat{x}_{new}
 - 5: Output: \hat{x}_{new} and $\hat{\Theta}$
-

2.2 Interpreting the formulation

The key idea of the MOM formulation is that it does not explicitly minimize the error of predicting the objective c_t 's as a stand-alone machine learning problem, but it aims to minimize the violation – equivalently, maximize the margin – of the optimality conditions of the training samples (the inequality constraint in (3)). Intuitively, as long as we find a prediction \hat{c}_t that shares the same optimal solution x_t^* with c_t for most t (hopefully), we should not bother with the error between \hat{c}_t and c_t . This distinguishes from all the existing methods for predict-then-optimize and inverse LP in that it integrates the optimization problem's structure naturally into the machine learning training procedure. We make the following remarks.

First, our method does not require the knowledge of c_t 's in the training data. As far as we concern, it is the first method that works for both predict-then-optimize and inverse LP problems. Beyond that, this special feature of our method has a modeling advantage of *scale consistency* or *scale invariance*. Specifically, we note that for the LP (1), both the objective vector c and αc for any $\alpha > 0$ lead to the same optimal solution. Hence the loss of training a machine learning model should ideally bear a scale invariance in terms of the objective vector. That is, a prediction of \hat{c} and a prediction of $\alpha \hat{c}$ for any $\alpha > 0$ should incur the same training loss as both of them lead to the same prescribed solution. Our method enjoys this scale invariance property, since it only utilizes the optimal solution x_t^* in the training phase but does not involve c_t . In comparison, a method that minimizes the prediction loss l_{pre} apparently does not have this scale invariance, so do some inverse LP algorithms (see Section 3.3). This property can be critical for some application contexts such as revealed preference or stated preference (citepbeigman2006learning,zadimoghaddam2012efficiently) where one aims to predict the utility c_t of a customer based on observed covariates z_t . In such contexts, even if we have observations of the c_t 's through surveying the customers' utilities, these observations might suffer from some scale contamination because each customer may have their own scale for measuring utilities. And therefore, to strive for an accurate prediction of the observed c_t can be misleading.

Second, the inequality constraint in (3) is critical. Two tempting alternatives are to replace the inequality constraints of (3) with the following:

$$\hat{c}_{t, \mathcal{N}_t^*}^\top - \hat{c}_{t, \mathcal{B}_t^*}^\top A_{t, \mathcal{B}_t^*}^{-1} A_{t, \mathcal{N}_t^*} \geq 0, \tag{4}$$

$$\hat{c}_{t, \mathcal{N}_t^*}^\top - \hat{c}_{t, \mathcal{B}_t^*}^\top A_{t, \mathcal{B}_t^*}^{-1} A_{t, \mathcal{N}_t^*} \geq -s_t. \tag{5}$$

For (4), it directly employs the optimality condition (2) in Lemma 1. The issue with this formulation is that there may exist no Θ that is consistent all the training data, and thus (4) will lead to an infeasible problem. In comparison, the inequality constraints of (3) can be viewed as a softer version of (4). For (5), it suffers a similar scale invariance problem as mentioned above. Specifically, the constraint (5) will result in $\hat{\Theta} \rightarrow 0$ as the left-hand-side of (5) scales linearly with $\hat{\Theta}$. To prevent this, one can impose an additional unit sphere constraint by $\|\Theta\|_2 = 1$ but this will lead to a non-convexity issue.

Lastly, we note a few additional points for the formulation. First, the formulation does not involve b_t in the optimization problem (3) either. This is due to that b_t 's information is encoded by $(A_t, \mathcal{B}_t^*, \mathcal{N}_t^*)$ under the standard-form LP (1). Second, the formulation is presented under a linear mapping of z_t to c_t ; non-linearity dependency can be introduced by kernelizing the original covariates z_t (Hofmann et al., 2008). Third, the MOM formulation aims to find a parameter $\hat{\Theta}$ that best satisfies the optimality condition, and it measures the quality of satisfaction by the total margin of optimality condition violation. It does not strive for a structured prediction of the optimal bases \mathcal{B}_t 's which will lead to a less tractable formulation such as structured support vector machine (See Appendix C.1).

3 Theoretical Analysis

Now we analyze the maximum optimality margin method under both offline and online settings. We make the following boundedness assumptions mainly for notation simplicity. Specifically, we note that the parameter $\bar{\sigma}$ captures some ‘‘stability’’ of the LP’s optimal solution under perturbation of the constraint matrix. While our algorithm utilizes the optimal solutions in the training data, a better stability of the optimal solutions will lead to a more reliable learning of the parameter.

Assumption 2 (Boundedness). *Let the tuple $(c, A, b, z, \mathcal{B}^*, \mathcal{N}^*)$ be a sample drawn from the distribution \mathcal{P} . The following assumptions hold with probability 1.*

- (a) *There exists a constant $\bar{\sigma}$ such that $\sigma_{\max}(A_{\mathcal{B}^*}^{-1}) \leq \bar{\sigma}$, where $\sigma_{\max}(\cdot)$ denotes the largest singular value function of a matrix.*
- (b) *The covariates vector z is bounded by 1, i.e., $\|z\|_2 \leq 1$.*
- (c) *All entries of the LP’s input (A, b, c) are within $[-1, 1]$.*
- (d) *The feasible region $\{x \geq 0 : Ax = b\}$ is bounded by the 2-norm unit ball.*

3.1 Separable Case

We begin our discussion with the separable case where there exists a parameter that meets the optimality conditions on all the training samples with a margin.

Assumption 3. *There exists Θ^* such that the following inequality holds element-wise almost surely,*

$$\hat{c}_{\mathcal{N}^*}^\top - \hat{c}_{\mathcal{B}^*}^\top A_{\mathcal{B}^*}^{-1} A_{\mathcal{N}^*} \geq 1 \quad (6)$$

where $\hat{c} = \Theta^* z$ and $(c, A, b, z, \mathcal{B}^*, \mathcal{N}^*)$ is sampled from \mathcal{P} . Suppose $\|\Theta^*\|_F \leq \bar{\Theta}$ for some constant $\bar{\Theta} > 0$.

The assumption is weaker than to assume $c = \Theta^* z$ almost surely. It only requires the existence of a linear mapping $\hat{c} = \Theta^* z$ that meets the optimality condition almost surely. It can happen that Assumption 3 holds but $c \neq \hat{c}$ almost surely. The right-hand-side of (6) changes from that of (2) in Lemma 1 from 0 to 1. The change is not essential when the LP is nondegenerate almost surely; one can always scale up the parameter Θ^* to meet this margin requirement.

Proposition 1. *Under Assumptions 1, 2 and 3, let $\hat{\Theta}$ denote the output of Algorithm 1 with T training samples, $\lambda = \frac{1}{\sqrt{T}}$ and $\mathcal{K} = \{\Theta \in \mathbb{R}^{n \times d} : \|\Theta\|_F \leq \bar{\Theta}\}$. Suppose $(c_{new}, A_{new}, b_{new}, z_{new})$ is a new sample from \mathcal{P} and denote $\hat{c}_{new} = \hat{\Theta}z_{new}$. Let x_{new}^* and \hat{x}_{new} denote the optimal solutions of $LP(c_{new}, A_{new}, b_{new})$ and $LP(\hat{c}_{new}, A_{new}, b_{new})$. Then we have*

$$\mathbb{E}[\mathbb{P}(x_{new}^* = \hat{x}_{new})] \geq 1 - \frac{28 + 8\bar{\Theta}^2 + 7m\bar{\sigma}^2}{\sqrt{T}}, \quad (7)$$

where m is the number of constraints in each LP, the expectation is taken with respect to the training samples, and the probability is with respect to the new test sample.

The proposition states that under the separable case, the algorithm can predict the optimal solution accurately with high probability. We note that the result does not concern the prediction error in terms of the objective vector, and this fact is aligned with the design of MOM that focuses on the optimality condition instead of the objective vector. Intuitively, even when one makes some error in predicting the objective c_{new} , the prediction of the optimal solution can still be accurate due to the simplex structure of LP. The proof of the proposition mimics the algorithm stability analysis (Bousquet and Elisseeff, 2002; Shalev-Shwartz et al., 2010) where the regularization term in (3) plays a role of *stabilizing* the estimation. Here the performance bound is presented in the sense of on expectation. We remark that a high probability bound (removing the expectation in (7)) can also be achieved following the recent analysis of (Feldman and Vondrak, 2019).

3.2 Inseparable case

Now we move on to the inseparable case where Assumption 3 no longer holds. Let

$$D_{new} = (c, A, b, z, \mathcal{B}^*, \mathcal{N}^*)$$

denote a new sample from \mathcal{P} . Define the margin-violation loss function

$$l(D_{new}; \Theta) := \|s\|_1 \quad \text{where } s := 1_{|\mathcal{N}^*|} - \hat{c}_{\mathcal{N}^*}^\top - \hat{c}_{\mathcal{B}^*}^\top A_{\mathcal{B}^*}^{-1} A_{\mathcal{N}^*} \quad \text{and } \hat{c} = \Theta z.$$

The loss function is inherited from the objective function of the MOM formulation (3). For the inseparable case, we can derive the following generalization bound as Proposition 1.

Proposition 2. *Under Assumptions 1 and 2, let $\hat{\Theta}$ denote the output of Algorithm 1 with T training samples, under the choice of $\lambda = \frac{1}{\sqrt{T}}$ and $\mathcal{K} = \{\Theta \in \mathbb{R}^{n \times d} : \|\Theta\|_F \leq \bar{\Theta}\}$ for some $\bar{\Theta} > 0$. Then we have*

$$\mathbb{E}[l(D_{new}; \hat{\Theta})] \leq \min_{\Theta \in \mathcal{K}} \mathbb{E}[l(D_{new}; \Theta)] + \frac{28 + 8\bar{\Theta}^2 + 7m\bar{\sigma}^2}{\sqrt{T+1}},$$

where the expectation is taken with respect to both the new sample D_{new} and the training samples.

The proposition follows the same analysis as Proposition 1 and the right-hand-side involves an additional term which will become zero under the separability condition of Assumption 3. In the previous section, we motivate the optimization formulation (3) of MOM in its own right. The following corollary reveals an interesting connection between its objective function and the suboptimality loss. Specifically, the margin violation loss optimized in MOM can be viewed as an upper bound of the suboptimality loss.

Proposition 3. *The following inequality holds for any $\Theta \in \mathbb{R}^{n \times d}$,*

$$l_{sub}(\Theta) \leq \mathbb{E}[l(D_{new}; \Theta)].$$

Therefore, under Assumptions 1 and 2, and the same setup as Proposition 2,

$$l_{sub}(\hat{\Theta}) \leq \min_{\Theta \in \mathcal{K}} \mathbb{E}[l(D_{new}; \Theta)] + \frac{28 + 8\bar{\Theta}^2 + 7m\bar{\sigma}^2}{\sqrt{T}}.$$

The additional term on the right-hand-side in both Proposition 2 and Proposition 3 can be viewed as a measure of separability in terms of the LP's optimality condition. Specifically, if one can predict the objective c very well with the covariates z , then this term will become close to zero; otherwise, this term will become large. While the standard measurement of the predictive power of z concerns the minimum error in predicting c , it does not account for the structure of the downstream LP optimization problem.

3.3 Online maximum optimality margin

The MOM formulation also enables an online algorithm which reduces the quadratic program of (3) to a subgradient descent step per sample. Specifically, we can view the margin violation of the t -th sample as a piecewise-linear function of Θ , i.e.,

$$l(D_t; \Theta) = \|s_t\|_1 = \left\| \mathbf{1}_{|\mathcal{N}_t^*|} - \hat{c}_{t, \mathcal{N}_t^*}^\top - \hat{c}_{t, \mathcal{B}_t^*}^\top A_{t, \mathcal{B}_t^*}^{-1} A_{t, \mathcal{N}_t^*} \right\|_1$$

where D_t represents the t -th sample in the dataset $\mathcal{D}(T)$. The function $l(D_t; \Theta)$ is a convex function with respect to Θ and the piecewise linearity enables an efficient calculation of the subgradients. Algorithm 2 arises from an online subgradient descent algorithm with respect to the cumulative loss

$$\sum_{t=1}^T l(D_t; \Theta).$$

Algorithm 2 Online MOM Algorithm

- 1: Input: Dataset $\mathcal{D}(T) = \{(x_t^*, A_t, b_t, z_t, \mathcal{B}_t^*, \mathcal{N}_t^*)\}_{t=1}^T$, step size η , \mathcal{K}
- 2: Initialize $\Theta_1 = 0 \in \mathbb{R}^{n \times d}$
- 3: **for** $t = 1, \dots, T$ **do**
- 4: Predict the objective by $\hat{c}_t = \Theta_t z_t$
- 5: Solve the following LP and denote its optimal solution by x_t

$$\begin{aligned} \min \quad & \hat{c}_t^\top x, \\ \text{s.t.} \quad & A_t x = b_t, \quad x \geq 0. \end{aligned}$$

- 6: Update

$$\Theta_{t+1} = \text{Proj}_{\mathcal{K}} (\Theta_t - \eta \cdot \partial_{\Theta} l(D_t; \Theta_t))$$

- 7: **end for**

- 8: Output: $\{x_t\}_{t=1}^T, \{\Theta_t\}_{t=1}^{T+1}$
-

Proposition 4. Under Assumptions 1 and 2, with the choice of $\eta = \frac{2\bar{\Theta}}{(\sqrt{n} + \bar{\sigma} \cdot mn)\sqrt{T}}$ and $\mathcal{K} = \{\Theta \in \mathbb{R}^{n \times d} : \|\Theta\|_F \leq \bar{\Theta}\}$ for some $\bar{\Theta} > 0$, the outputs of Algorithm 2 satisfy

$$\frac{1}{T} \mathbb{E} \left[\sum_{t=1}^T \hat{c}_t^\top (x_t^* - x_t) \right] \leq \mathbb{E} \left[\min_{\Theta \in \mathcal{K}} \sum_{t=1}^T l(D_t; \Theta) \right] + \frac{3\bar{\Theta}\sqrt{n} + 3\bar{\sigma}\bar{\Theta} \cdot mn}{\sqrt{T}} \quad (8)$$

where $D_{new} = (c_{new}, A_{new}, b_{new}, z_{new})$ denotes a new sample.

Moreover, under Assumption 3, let $\hat{c}_{new} = \hat{\Theta}z_{new}$ where $\hat{\Theta}$ is uniformly randomly sampled from $\{\Theta_t\}_{t=1}^{T+1}$. Let x_{new}^* and \hat{x}_{new} denote the optimal solutions of $LP(c_{new}, A_{new}, b_{new})$ and $LP(\hat{c}_{new}, A_{new}, b_{new})$. Then we have

$$\mathbb{E}[\mathbb{P}(x_{new}^* = \hat{x}_{new})] \geq 1 - \frac{3\bar{\Theta}\sqrt{n} + 3\bar{\sigma}\bar{\Theta} \cdot mn}{\sqrt{T+1}} \quad (9)$$

where the expectation is taken with respect to both training data samples and the new sample.

The proposition states that the results in Proposition 1 and Proposition 2 can also be achieved by a subgradient descent algorithm from an online perspective. The bound (8) also recovers the regret bounds in the online inverse optimization literature (Bärmann et al., 2018; Chen and Kılınç-Karzan, 2020) under a contextual setting. However, the algorithms therein require the convex set \mathcal{K} not containing the origin (which will significantly restrict the predictive power of $z_t \rightarrow c_t$). Otherwise, we find numerically that these existing algorithms will drive the parameter $\Theta_t \rightarrow 0$ and $\hat{c}_t \rightarrow 0$, and consequently provide no meaningful prediction of the optimal solution. This reinforces the point of scale invariance raised earlier. As mentioned earlier, the margin-based formulation of MOM resolves the issue of scale invariance, and as a result, Algorithm 2 can provide an additional bound (9) and also perform stably well in numerical experiments, which we refer to Appendix A.4.

3.4 Tighter bound under separability – optimality-driven perceptron

We conclude this section with Algorithm 3 that achieves a faster rate under the separability condition (Assumption 3). Specifically, the algorithm is an online algorithm that utilizes the knowledge of separability. The idea is to treat each inequality constraint in (3) as an individual binary classification task of distinguishing non-basic variables from basic variables, and view the margin of optimality condition as the margin for classification. Then when the margin (the reduced cost in Algorithm 3) drops below a threshold of 1/2, we perform an update of the parameter.

Proposition 5. *Under Assumptions 1, 2 and 3, the number of mistakes made by Algorithm 3 is independent of T ,*

$$\#\{t \in [T] : x_t^* \neq x_t\} \leq \bar{\Theta}^2 + \bar{\sigma}^2\bar{\Theta}^2m^2n.$$

In addition, suppose $(c_{new}, A_{new}, b_{new}, z_{new})$ is a new sample from \mathcal{P} and denote $\hat{c}_{new} = \hat{\Theta}z_{new}$ where $\hat{\Theta}$ is uniformly randomly sampled from $\{\Theta_t\}_{t=1}^{T+1}$. Let x_{new}^* and \hat{x}_{new} denote the optimal solutions of $LP(c_{new}, A_{new}, b_{new})$ and $LP(\hat{c}_{new}, A_{new}, b_{new})$,

$$\mathbb{E}[\mathbb{P}(x_{new}^* = \hat{x}_{new})] \geq 1 - \frac{\bar{\Theta}^2 + \bar{\sigma}^2\bar{\Theta}^2m^2n}{T+1},$$

where the expectation is taken with respect to both the training data and the new data.

Proposition 5 provides an upper bound on the number of mistakes made by Algorithm 3. The algorithm improves the dependency on T compared with the previous bounds in Proposition 1 and Proposition 4. However, we note this improvement sacrifices the dependency on either the problem size m and n or the constants of $\bar{\Theta}$ and $\bar{\sigma}$. In this light, the result is more of theoretical interests that completes our discussion. In the numerical experiments in Appendix A.4, we observe that the performance of Algorithm 3 is indeed worse than Algorithm 1 and Algorithm 2.

4 Numerical Experiments and Discussions

We conduct numerical experiments for two underlying LP problems – the shortest path problem and the fractional knapsack problem. We present one experiment here and defer the remaining ones to Appendix

Algorithm 3 Optimality-driven Perceptron Algorithm

- 1: Input: Dataset $\mathcal{D}(T) = \{(x_t^*, A_t, b_t, z_t, \mathcal{B}_t^*, \mathcal{N}_t^*)\}_{t=1}^T$
- 2: Let $\Theta_1 = 0 \in \mathbb{R}^{n \times d}$
- 3: %% We use $(M)_i$ to denote the i -th row of the matrix M
- 4: **for** $t = 1, \dots, T$ **do**
- 5: Predict the objective by $\hat{c}_t = \Theta_t z_t$
- 6: Solve the following LP and denote its optimal solution by x_t

$$\begin{aligned} \min \quad & \hat{c}_t^\top x, \\ \text{s.t.} \quad & A_t x = b_t, \quad x \geq 0. \end{aligned}$$

- 7: Let $\Theta_{\text{tmp}} = \Theta_t$
- 8: **for** $i = 1, \dots, n$ **do**
- 9: **if** $i \notin \mathcal{N}_t^*$ **then**
- 10: Continue
- 11: **end if**
- 12: Predict the objective by $\hat{c}_t^{(i)} = \Theta_{\text{tmp}} z_t$
- 13: Compute the *reduced cost*

$$r_t^{(i)\top} = \hat{c}_t^{(i)\top} - \hat{c}_{t, \mathcal{B}_t^*}^{(i)\top} A_{t, \mathcal{B}_t^*}^{-1} A_t$$

- 14: **if** $r_{t,i}^{(i)} \leq \frac{1}{2}$ **then**
- 15: Update

$$\begin{aligned} (\Theta_{\text{tmp}})_i &\leftarrow (\Theta_{\text{tmp}})_i + z_t^\top \\ (\Theta_{\text{tmp}})_{\mathcal{B}_t^*} &\leftarrow (\Theta_{\text{tmp}})_{\mathcal{B}_t^*} - A_{\mathcal{B}_t^*}^{-1} A_t z_t \end{aligned}$$

- 16: **end if**
 - 17: **end for**
 - 18: Let $\Theta_{t+1} = \Theta_{\text{tmp}}$
 - 19: **end for**
 - 20: Output: $\{x_t\}_{t=1}^T, \{\Theta_t\}_{t=1}^{T+1}$
-

A. The experiments compare the proposed MOM algorithms against several benchmarks and illustrate different aspects, such as loss performance, computational time, scale consistency/invariance, sample complexity, kernelized version of MOM, and online setting.

Specifically, we consider a shortest path (SP) problem here following the setup of [Elmachtoub and Grigas \(2022\)](#). The SP problem is defined on a 5×5 grid network with $n = 40$ directed edges associated with a cost vector $c \in \mathbb{R}^n$, and the covariates $z \in \mathbb{R}^d$ with $d = 6$. For the training data, the covariates are generated from the Gaussian distribution, and the objective vector is generated from a polynomial mapping from the covariates with additional white noise. For this numerical experiment, we consider the performance measure of relative loss defined by

$$\text{Relative Loss} := \frac{c_{\text{new}}^\top (x_{\text{new}} - x_{\text{new}}^*)}{c_{\text{new}}^\top x_{\text{new}}^*}$$

where c_{new} is the objective vector of a new test sample, x_{new} is the predicted optimal solution, and x_{new}^* is the true optimal solution. Indeed, this relative loss normalizes the estimate loss l_{est} with the optimal objective value. We refer more details on the experiment setup to [Appendix A](#).

Figure 1 presents the experiment results for two MOM algorithms and a few benchmarks, and each panel represents a different degree of the polynomial that governs the true mapping from the covariates to the objective vector; a higher degree indicates a stronger non-linearity between the covariates and the objective. We make the following observations:

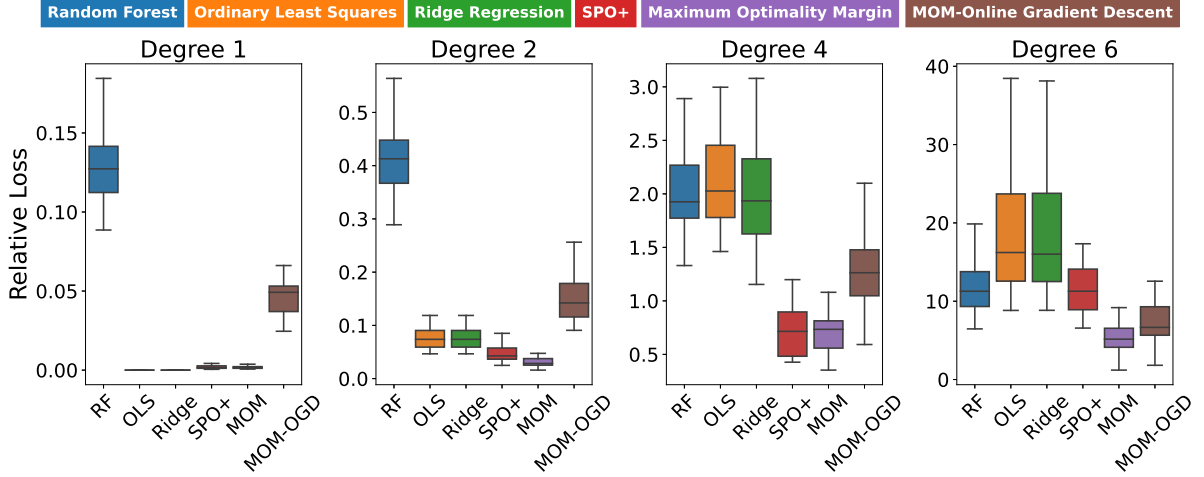


Figure 1: Relative loss. The plot (means and confidence intervals) is generated based on 30 random trials each with 1000 training samples and 1000 test samples (20% of training samples are used for tuning hyper-parameters). The degree indicates the degree of the true polynomial function that generates the objective c from the covariates z . RF denotes random forests, OLS denotes ordinary least squares, Ridge denotes the ridge linear regression, SPO+ implements the algorithm of [Elmachtoub and Grigas \(2022\)](#), MOM implements Algorithm 1, and MOM-OGD implements Algorithm 2. For all these methods, they first predict the objective vector for a test sample, and solve an LP with the predicted objective for the optimal solution as the predicted solution for this test sample.

First, from an information viewpoint, all four benchmark algorithms utilize the observations of c_t 's on the training data, while the two MOM algorithms only observe x_t^* 's on the training data. In this sense, our algorithms give a better predictive performance with less amount of information, and therefore our algorithms are the only ones applicable to the inverse LP problem.

Second, other than the two MOM algorithms, the SPO+ performs the best among the four benchmark algorithms. However, the SPO+ takes significantly longer training time than all the other algorithms. Although SPO+ is a stochastic gradient descent-based algorithm, the calculation of the stochastic gradient at each step requires solving k LPs with k being the number of training samples in the mini-batch. Comparatively, our MOM Algorithm 1 only solves a quadratic program for once, and its online version of Algorithm 2 allows a direct calculation of the online sub-gradient which makes it even faster than Algorithm 1.

Third, the three ML-based methods (RF, OLS, Ridge) perform generally worse than the other three methods (SPO+, MOM, MOM-OGD) because they do not take into account the optimization structure. To see this, for the shortest path problem, there may be some large entries for the cost vector c . The ML models treat all the dimensions of c equally and spend too much effort in fitting those large entries (as they cause large L_2 errors). However, from the optimization perspective, an accurate estimation of those large entries is not useful in that the optimal path will avoid those edges. That highlights the intuition behind the SPO+ and our MOM algorithms – one needs to incorporate the optimization structure into the learning model.

Concluding remarks. In this paper, we develop a new approach of maximum optimality margin for the problems of predict-then-optimize and inverse LP. The MOM framework leads to new characterizations of the difficulty of the problem through the separability condition of Assumption 3 and the violation loss $l(D_{\text{new}}; \Theta)$ which appears in Propositions 2, 3, and 4. With the MOM perspective, we derive bounds on correctly predicting the optimal solution,

$$\mathbb{P}(x_{\text{new}}^* = \hat{x}_{\text{new}})$$

in Propositions 1, 4 and 5, which is rarely seen in the existing literature even under strong conditions. Without the separability condition of Assumption 3, we draw a connection of our MOM objective value with the suboptimality loss l_{sub} in the inverse LP literature and derive performance bounds in terms of l_{sub} . Numerically, we observe the MOM algorithms also perform well under the estimate loss l_{est} . To theoretically quantify the performance of MOM under l_{est} , we conjecture that one needs to impose stronger structures on the dual LPs. Besides, another interesting future direction to pursue is to generalize the algorithms and analyses of MOM to non-linear optimization problems.

References

- Ahuja, Ravindra K, James B Orlin. 2001. Inverse optimization. *Operations Research* **49**(5) 771–783.
- Bärmann, Andreas, Alexander Martin, Sebastian Pokutta, Oskar Schneider. 2018. An online-learning approach to inverse optimization. *arXiv preprint arXiv:1810.12997* .
- Bertsimas, Dimitris, Vishal Gupta, Ioannis Ch Paschalidis. 2015. Data-driven estimation in equilibrium using inverse optimization. *Mathematical Programming* **153** 595–633.
- Bertsimas, Dimitris, Nathan Kallus. 2020. From predictive to prescriptive analytics. *Management Science* **66**(3) 1025–1044.
- Besbes, Omar, Yuri Fonseca, Ilan Lobel. 2021. Contextual inverse optimization: Offline and online learning. *Available at SSRN 3863366* .
- Bousquet, Olivier, André Elisseeff. 2002. Stability and generalization. *The Journal of Machine Learning Research* **2** 499–526.
- Boyd, Stephen, Lieven Vandenbergh. 2004. *Convex optimization*. Cambridge university press.
- Chen, Violet Xinying, Fatma Kılınç-Karzan. 2020. Online convex optimization perspective for learning from dynamically revealed preferences. *arXiv preprint arXiv:2008.10460* .
- El Balghiti, Othman, Adam N Elmachtoub, Paul Grigas, Ambuj Tewari. 2019. Generalization bounds in the predict-then-optimize framework. *Advances in neural information processing systems* **32**.
- Elmachtoub, Adam, Jason Cheuk Nam Liang, Ryan McNellis. 2020. Decision trees for decision-making under the predict-then-optimize framework. *International Conference on Machine Learning*. PMLR, 2858–2867.
- Elmachtoub, Adam N, Paul Grigas. 2022. Smart “predict, then optimize”. *Management Science* **68**(1) 9–26.
- Feldman, Vitaly, Jan Vondrak. 2019. High probability generalization bounds for uniformly stable algorithms with nearly optimal rate. *Conference on Learning Theory*. PMLR, 1270–1279.
- Hazan, Elad. 2016. Introduction to online convex optimization. *Foundations and Trends in Optimization* **2**(3-4) 157–325.
- Ho-Nguyen, Nam, Fatma Kılınç-Karzan. 2022. Risk guarantees for end-to-end prediction and optimization processes. *Management Science* .
- Hofmann, Thomas, Bernhard Schölkopf, Alexander J Smola. 2008. Kernel methods in machine learning. *The annals of statistics* **36**(3) 1171–1220.

- Hu, Yichun, Nathan Kallus, Xiaojie Mao. 2022. Fast rates for contextual linear optimization. *Management Science* .
- Joachims, Thorsten, Thomas Hofmann, Yisong Yue, Chun-Nam Yu. 2009. Predicting structured objects with support vector machines. *Communications of the ACM* **52**(11) 97–104.
- Luenberger, David G, Yinyu Ye, et al. 1984. *Linear and nonlinear programming*, vol. 2. Springer.
- Megiddo, Nimrod, Ramaswamy Chandrasekaran. 1989. On the ε -perturbation method for avoiding degeneracy. *Operations Research Letters* **8**(6) 305–308.
- Mohajerin Esfahani, Peyman, Soroosh Shafieezadeh-Abadeh, Grani A Hanasusanto, Daniel Kuhn. 2018. Data-driven inverse optimization with imperfect information. *Mathematical Programming* **167**(1) 191–234.
- Shalev-Shwartz, Shai, Ohad Shamir, Nathan Srebro, Karthik Sridharan. 2010. Learnability, stability and uniform convergence. *The Journal of Machine Learning Research* **11** 2635–2670.
- Tan, Yingcong, Daria Terekhov, Andrew Delong. 2020. Learning linear programs from optimal decisions. *Advances in Neural Information Processing Systems* **33** 19738–19749.
- Zhang, Jianzhong, Zhenhong Liu. 1996. Calculating some inverse linear programming problems. *Journal of Computational and Applied Mathematics* **72**(2) 261–273.

A Numerical Experiments

In this section, we provide the details of the experiment setup and more numerical results.

A.1 Basic Setup

For the numerical experiments, we compare the performance of our proposed algorithms against several benchmark methods, and we test the performance under both online and offline settings. Specifically, we consider the following benchmark methods where all of them can only be used to solve the predict-then-optimize problem (but not the contextual linear programming) as they all require the observations of c_t on the training data.

1. Linear regression models where we consider ordinary least squares (OLS) and ridge regression (RR). Accordingly, the parameter estimation follows the following loss functions:

$$l_{\text{OLS}} = \frac{1}{2} \|\Theta z - c\|_2^2, \quad l_{\text{Ridge}} = \frac{1}{2} \|\Theta z - c\|_2^2 + \frac{\lambda}{2} \|\Theta\|_F^2.$$

2. Random Forest (RF). We apply RF algorithm with squared error criterion

$$l_{\text{RF}} = \|\hat{c} - c\|_2^2.$$

3. Predict-then-optimize method. We take SPO+ algorithm (Elmachtoub and Grigas, 2022) as an example, where the loss function is as follows

$$l_{\text{SPO+}} = (2\Theta z - c)^\top x^*(c) - \min_{A x = b, x \geq 0} \{(2\Theta z - c)^\top x\}.$$

Following the previous implementations, we optimize the SPO+ loss under stochastic gradient descent (SGD) approach and Frobenius regularization.

Underlying LP problems.

We study two canonical LP problems for the numerical experiments, namely the shortest path (SP) problem and the fractional knapsack (FK) problem, and we present their results in the following two sections A.2 and A.3, respectively. The experiment setup follows that of Elmachtoub and Grigas (2022); Ho-Nguyen and Kılınç-Karzan (2022); Besbes et al. (2021).

Performance Measurements.

We compare different algorithms by the performance measure of *relative loss* for the offline setting and *cumulative Regret* in the online setting.

Under the offline setting, the relative loss normalizes the estimate loss l_{est} by the optimal value,

$$\text{Rel-Loss}_{\text{SP}} := \frac{c^\top (x - x^*)}{c^\top x^*}.$$

Specifically, for the shortest path (SP) problem, the optimal value is always non-zero (unless for trivial c) so the loss is well defined.

For the fractional knapsack (FK) problem, due to the random noise, the optimal value may be zero with positive probability. So we consider another normalization which leads to

$$\text{Rel-Loss}_{\text{FK}} := \frac{c^\top (x^* - x)}{\|c\|_2}.$$

Under the online setting, we define the cumulative regret by the cumulative sum of the relative loss of each time step.

Overview of the results.

In Appendix A.2, we demonstrate the algorithm performance under the effect of degree (see Figure 1) and also investigate numerically the issue of scale inconsistency/invariance (see Figure 2). In Appendix A.3, we examine the sample complexity under the offline setting (see Figure 3) and compare the performance of several online algorithms (see Figure 5). In addition, we consider the kernelized version of the MOM formulation and present its performance in Figure 4.

A.2 Shortest Path Problem

For the shortest path problem, we follow the experiment setup of (Elmachtoub and Grigas, 2022). Consider a 5×5 grid network with $n = 40$ directed edges associated with a cost vector $c \in \mathbb{R}^n$. Each edge is either from south to north or west to east, where the goal is to minimize the cost to traverse from the southwest corner to the northeast corner. For each node of the network, there is a flow balance constraint, encoded by $Ax = b$. The problem can then be formulated as the standard-form LP (1).

For the methods of ordinary least square, ridge regression, and our maximum optimality margin, we solve the corresponding optimization problems using `cvxpy` package with `GUROBI` solver. For the random forest algorithm, we implement the `sklearn.ensemble.RandomForestRegressor` package. For the SPO+ algorithm and the online version of our MOM approach, we implement gradient descent approach. For each simulation trial, the training sets and test sets both consist of $N = 1000$ sample sizes. All regularization parameters are chosen from 10^{-6} to 10^2 , and all step sizes are chosen from 10^{-3} to 10^1 . All projection radius (the diameter of \mathcal{K}) are chosen from $0.8\|B\|_F$ to $2.0\|B\|_F$. The hyper-parameters are chosen via a validation subset of $N/4$ samples from the training data.

Data generation.

Now we describe the data generation mechanism for Figure 1. For each trial of our experiments, we generate a ground-truth coefficient matrix $\Theta^* \in \mathbb{R}^{n \times d}$ independently, where each component of Θ^* is drawn from Bernoulli(0.5). Here $n = 40$ and $d = 6$.

1. For the feature vector z_t : the first $d - 1$ components are generated independently from a `Unif[0, 1]` distribution, and the last component of each z_t is set to be 1 (to model the intercept term).
2. The true cost vectors are generated as follows:

$$c_{t,j} = \left(\frac{1}{\sqrt{d}} (\Theta^* z_t)_j + 3 \right)^{\text{deg}} + 1$$

where `deg` is a fixed integer to be chosen to represent the non-linearity of the problem.

Scale inconsistency.

Figure 2 presents an experiment on scale attack that aims to illustrate the robustness of the underlying methods in terms of scale invariance. Specifically, in generating the training data, we follow the same mechanism as Figure 1 except that we multiply some objective vectors c_t 's with a factor α_t . Specifically, we have

$$c_{t,j} = \left[\left(\frac{1}{\sqrt{d}} (\Theta^* z_t)_j + 3 \right)^{\text{deg}} + 1 \right] \cdot \alpha_t,$$

where the scaling factor

$$\alpha_t = \begin{cases} 1 + \bar{\alpha}, & \text{if } z_{t,1} > 0.5, \\ 1, & \text{else.} \end{cases}$$

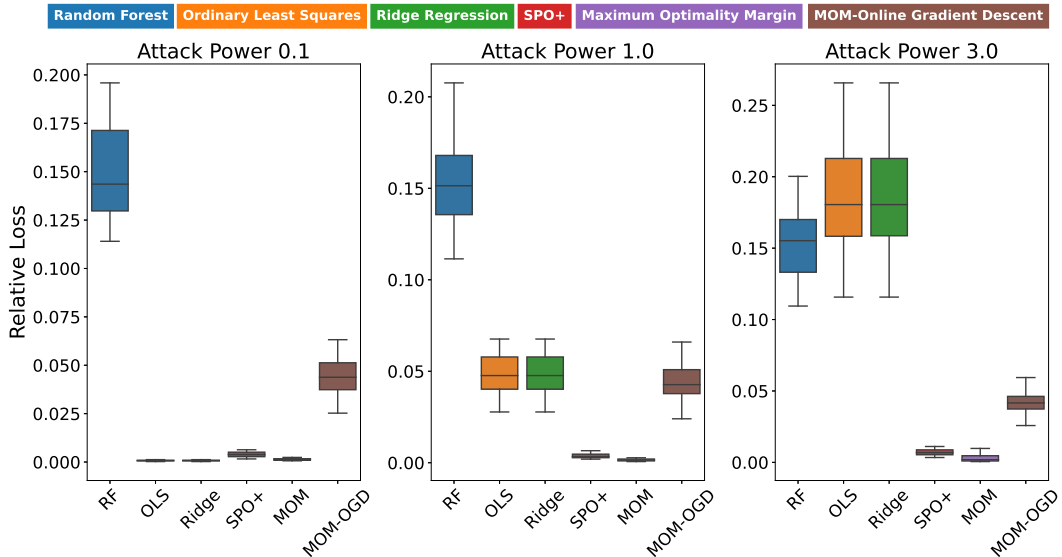


Figure 2: Relative loss under different scale attack.

In Figure 2, we note that the performances of three ML models are more or less affected by this scale attack. However, the scale attack will not change the optimal solutions on the training data, so the method of SPO+ and our MOM algorithms which all rely on the optimal solutions, give a stable performance under this scale attack. Interestingly, the scale noise α_t here is dependent on the covariates z_t . When these two are independent, we establish that the linear regression model also has the property of scale invariance, which we refer to Appendix C.2.

A.3 Fractional Knapsack Problem

For this experiment, we follow the problem setup of (Ho-Nguyen and Kılınç-Karzan, 2022). Specifically, each decision maker is presented with a bunch of items, and their aim is to maximize the utility (or equivalently, to minimize the cost) under a knapsack constraint. Different from the discrete case, fractional knapsack problem allows the decision maker to select a fraction of some certain item, making it a linear program. Mathematically, the decision maker solves the following LP

$$\min_{x, s_1, s_2} c^\top x, \quad \text{s.t. } p^\top x + s_1 = B, \quad x + s_2 = 1, \quad x, s_1, s_2 \geq 0.$$

Here $p \in \mathbb{R}^n$ can be interpreted as the price vector, and $B \in \mathbb{R}$ is the budget of the decision maker. The corresponding utility vector should be interpreted as the opposite of the objective vector c since the LP considers a minimization problem. The slack variables s_1 and s_2 are introduced simply to convert the problem into a standard form.

Data generation.

For each simulation trial, we generate a true coefficient matrix $\Theta^* \in \mathbb{R}^{n \times d}$, where each component is a Bernoulli random variable with expectation $1/2$. Here $n = 10$ and $d = 5$. We then generate the price vector, where each component is selected to be a random integer between 1 and 1000 in the offline setting. To ease the pain of large constants, we re-scale the price vector in the online setting of the next

subsection, where each component is uniformly distributed between 0 and 1. We generate two auxiliary variables low and $high$, where $low = \max_j p_j$ and $high = \mathbf{1}^\top p - u \cdot low$, and $u \sim \text{Unif}[0, 1]$. Then the budget is chosen as $\text{Unif}[low, high]$.

1. For the feature vector z_t : the first $d - 1$ components are generated independently from a $\text{Unif}[0, 1]$ distribution, and the last component of each z_t is set to be 1 (to model the intercept term).
2. The true cost vectors are generated as follows:

$$c_{t,j} = (\Theta^* z_t)_j^{\text{deg}} \cdot \epsilon_{t,j} + \bar{\eta} \eta_{t,j},$$

where deg is a fixed integer that represents the intensity of the non-linearity dependency, $\epsilon_{t,j}$ represents the intrinsic diverse noise, and $\eta_{t,j}$ is the additive noise. The constants $\bar{\epsilon}$ and $\bar{\eta}$ are non-negative parameters chosen to control the power of each noise. Specifically,

$$\epsilon_{t,j} \sim \text{Unif}[1 - \bar{\epsilon}, 1 + \bar{\epsilon}],$$

$$2\eta_{t,j} + 1 \sim \text{Exponential}(1).$$

Sample complexity.

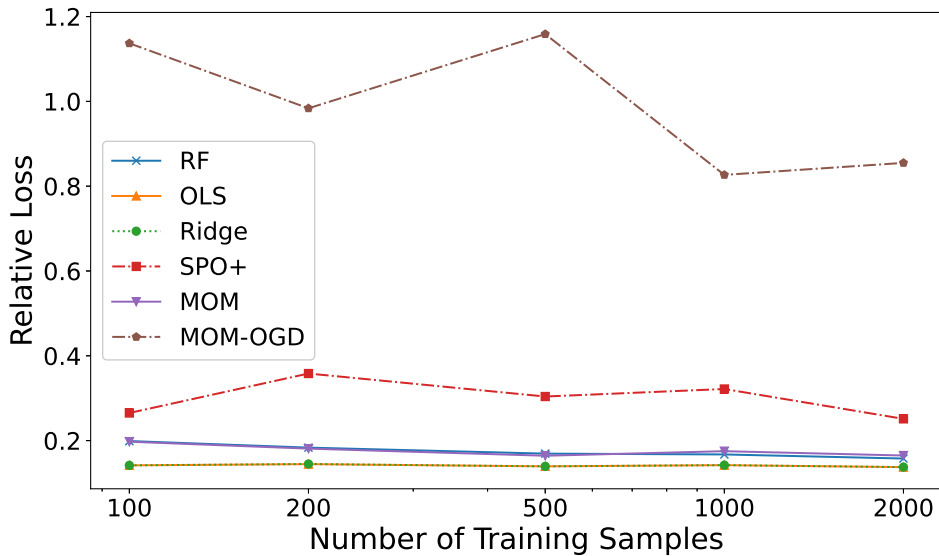


Figure 3: Sample complexity of different algorithms.

Figure 3 illustrates the sample efficiency of different algorithms, and the plot is based on an average over 30 random trails. The parameters are chosen by $\text{deg} = 1$, $\bar{\epsilon} = 0.1$, $\bar{\eta} = 1.0$, and $\bar{\alpha} = 0.0$. For training sets, we generate different numbers of training samples $N = 100, 200, 500, 1000, 5000$, and test the performance against 1000 test samples. As the underlying true model is a linear model, the two linear ML models unsurprisingly achieve the best performance. The performance of the random forest algorithm is similar to that of offline MOM algorithm (Algorithm 1), and both are slightly worse than that of linear regression models. As for SPO+ method, their averaged performance is undermined by the noise to a fairly large extent, compared with its performance under noiseless environment (see Figure 1 and Figure 2). The performance difference between SPO+ and MOM can be partially explained by the different ways of dealing with noisy data. The SPO+ method directly utilizes the optimal solution of the noisy data to the gradient, while the optimal solution could probably vary drastically due to some

noise to the cost vector. In comparison, the margin-based MOM performs more steadily: for those noisy cost vectors, their optimal solutions could be far from the noiseless cost vectors, but the change with respect to optimal basis will usually be only a few components which only affects a few corresponding lines in estimated Θ . Compared to these ML models which utilize the observations of c_t , although the MOM algorithm (Algorithm 1) consumes less information in the training phase, it does not exhibit a higher requirement of the number of training samples. The online version of MOM (Algorithm 2) does see a decreasing error with more training samples, and this is because the nature of the gradient-based algorithm does not take the full advantage of observed samples.

Kernelization and non-linear MOM.

In Figure 1, the performances of all the methods deteriorate significantly as there is a stronger non-linearity between the objective c and the covariates z . Here we explore the kernelized version of MOM and find that it effectively improves the performance of MOM when the underlying dependency is non-linear. Specifically, we consider three kernelized versions of MOM by different ways to kernelize the covariates: Linear MOM (Linear), Polynomial Kernelized MOM (PolyKer), and Radial Basis Function Kernelized MOM (RbfKer). The degree of the polynomial kernelized MOM is chosen from $\{1, 2, 3, 4\}$ and the scale parameters γ 's of both kernelized MOM methods are chosen from $\{0.1, 0.5, 1, 2, 3, 4, 5\}$. All regularization parameters are chosen from 10^{-6} to 10^2 . The hyper-parameters are determined via a validation set of 25% training samples.

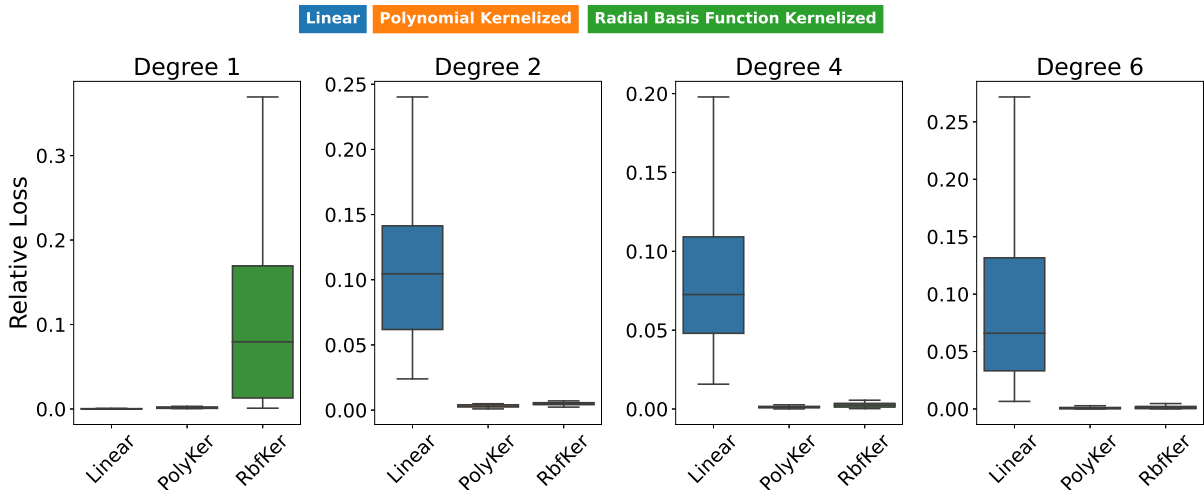


Figure 4: Relative loss for kernelized MOMs.

Figure 4 presents the performance of the three kernelized MOM models. The performance of linear MOM (Algorithm 1) is worsened as the degree of the model grows (just as Figure 1), since the linear mapping induces a stronger model misspecification. But kernelized MOM methods give good performance under high degrees. In comparison of Figure 1, we note that the kernelized versions of MOM can be quite effective in handling nonlinear dependency, and the loss does not increase much with the increase of the degree of non-linearity.

A.4 Online Setting

Next we analyze the online setting for the MOM algorithms. We compare the performance of the OGD version of MOM (Algorithm 2), the perceptron version of MOM (Algorithm 3), and also a follow-the-regularized-leader (FTRL) version of the MOM Algorithm 1 as follows. Basically, Algorithm 4 solves the

MOM optimization formulation 3 at each time t and use the estimated parameter to predict the optimal solution of the next time step.

Algorithm 4 Follow-the-Regularized-Leader MOM

- 1: Input: Dataset $\mathcal{D}(T) = \{(x_t^*, A_t, b_t, z_t, \mathcal{B}_t^*, \mathcal{N}_t^*)\}_{t=1}^T$, the set \mathcal{K}
- 2: Initialize $\Theta_1 = 0 \in \mathbb{R}^{n \times d}$
- 3: **for** $t = 1, \dots, T$ **do**
- 4: Predict the objective by $\hat{c}_t = \Theta_t z_t$
- 5: Solve the following LP and denote its optimal solution by x_t

$$\begin{aligned} \min \quad & \hat{c}_t^\top x, \\ \text{s.t.} \quad & A_t x = b_t, \quad x \geq 0. \end{aligned}$$

- 6: Solve the optimization problem (3) with $\{(x_s^*, A_s, b_s, z_s, \mathcal{B}_s^*, \mathcal{N}_s^*)\}_{s=1}^t$, $\lambda = 1/\sqrt{t}$ and \mathcal{K}
 - 7: Let Θ_{t+1} be the optimal solution
 - 8: **end for**
 - 9: Output: $\{x_t\}_{t=1}^T$
-

Algorithm 4 gives another interpretation of the MOM formulation. Under an online setting, if we solve the MOM optimization problem (3) at each time, this is equivalent to a follow-the-regularized online algorithm to solve the problem. The theoretical analysis of Algorithm 4 can be extended from Proposition 1 and Proposition 2.

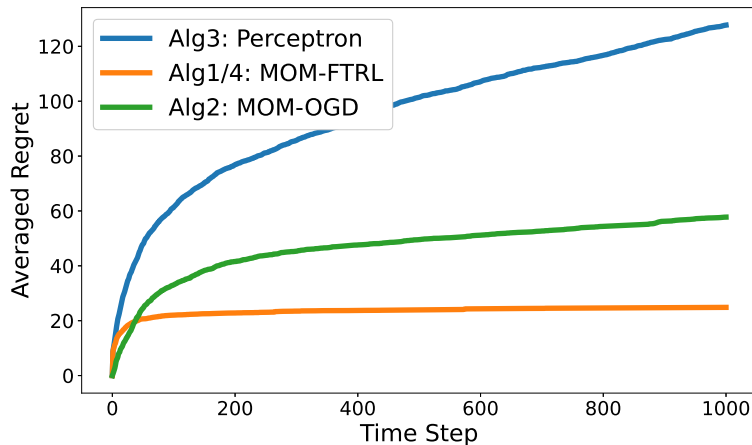


Figure 5: Cumulative regret curve (averaged over 30 trials) for online algorithms.

Figure 5 presents the cumulative regret of several algorithms for a fractional knapsack problem. In this numerical experiment, we let the objective vector $c = \Theta^* z$ almost surely for some fixed Θ^* so as to achieve the separability condition. We emphasize that it only ensures the existence of a parameter Θ^* to meet the optimality condition (2) but not with a margin of 1 as Assumption 3. From the plot, we observe that Algorithm 3 has the worst performance though it features for the best theoretical dependency on T . We remark that this regret curve does not contradict the bounded number of mistakes in Proposition 5; we find that when we increase the horizon to $T = 100,000$, the regret curve of Algorithm 3 becomes flattened. For Algorithm 2 and Algorithm 4, both achieve significantly better performance. Comparatively, 4 performs better than Algorithm 2, with the price of more computation cost (to solve a quadratic program at each time period).

Importantly, we also implement the online algorithm of (Bärmann et al., 2018; Chen and Kilinç-Karzan, 2020) under the same setting, and it incurs a regret linearly increasing with T ; so we do not include its regret curve as it will clap all the regret curves of Figure 5 to x-axis. A closer investigation shows that

the online algorithm of (Bärmann et al., 2018; Chen and Kılınç-Karzan, 2020) will render the estimate $\Theta_t \rightarrow 0$, as noted by the scale inconsistency issue in earlier sections. In contrast, our margin-based formulation plays an important rule to ensure that a small optimality condition violation is caused by discovering the correct mapping from z to c but not by the scale of the predicted \hat{c} .

B Proofs

B.1 Proof of Lemma 1

Here we show a stronger version of Lemma 1 as follows.

Lemma 2. *Consider an LP of the standard form (1). For any feasible basis $\mathcal{B} \subset [n]$ satisfying $|\mathcal{B}| = m$ and its complement $\mathcal{N} = [n] \setminus \mathcal{B}$, denote $x = (x_1, \dots, x_n)^\top$ and $r = (r_1, \dots, r_n)^\top$ as the solution and reduced cost vector corresponding the basis \mathcal{B} , respectively, i.e.,*

$$x_{\mathcal{B}} = A_{\mathcal{B}}^{-1}b, \quad x_{\mathcal{N}} = 0, \quad r = c - A^\top(A_{\mathcal{B}}^{-1})^\top c_{\mathcal{B}}.$$

Denote $x^* = (x_1^*, \dots, x_n^*)^\top$ as one optimal solution of LP (1). Then, we have that $r_{\mathcal{B}} = 0$, and

$$c^\top x - c^\top x^* \leq \max_{i \in [n]} x_i^* \cdot \sum_{i \in \mathcal{N}} (-r_i)_+. \quad (10)$$

Furthermore, (10) implies that x is an optimal solution if $r \geq 0$.

Proof. First, it is easy to verify that $r_{\mathcal{B}} = 0$. Then, we only need to show that the inequality (10) holds.

For any feasible solution $x' = (x'_1, \dots, x'_n) \geq 0$ satisfying $Ax' = b$, we have

$$x'_{\mathcal{B}} = A_{\mathcal{B}}^{-1}b - A_{\mathcal{B}}^{-1}A_{\mathcal{N}}x'_{\mathcal{N}}.$$

It implies

$$c^\top x' = c_{\mathcal{B}}^\top A_{\mathcal{B}}^{-1}b - c_{\mathcal{B}}^\top A_{\mathcal{B}}^{-1}A_{\mathcal{N}}x'_{\mathcal{N}} + c_{\mathcal{N}}^\top x'_{\mathcal{N}} = c_{\mathcal{B}}^\top A_{\mathcal{B}}^{-1}b + r_{\mathcal{N}}^\top x'_{\mathcal{N}}. \quad (11)$$

Next, from (11), we have

$$\begin{aligned} c^\top x - c^\top x' &= -r_{\mathcal{N}}^\top x'_{\mathcal{N}} \\ &\leq \sum_{i \in \mathcal{N}} x'_i (-r_i)_+ \\ &\leq \max_{i \in [n]} x'_i \cdot \sum_{i \in \mathcal{N}} (-r_i)_+, \end{aligned}$$

where the first line comes from equality (11) directly, and the last two lines come from the non-negativity of x' and $(r_i)_+$ for all i . Note that the above inequality holds for any feasible solution x' ; by plugging in $x' = x^*$, we obtain (10). \square

B.2 Proof of Proposition 2

We first show Proposition 2 and then utilize the result for the proof of 1. The key is to utilize the algorithm stability analysis where we cite the result from (Shalev-Shwartz et al., 2010) as the following proposition. We refer to (Bousquet and Elisseeff, 2002; Shalev-Shwartz et al., 2010; Feldman and Vondrak, 2019) for more related analysis such as the high probability bound.

Theorem 1 (Theorem 3 in [Shalev-Shwartz et al. \(2010\)](#)). *Let $f : \mathcal{H} \times \mathcal{Z} \rightarrow R$ be such that \mathcal{H} is bounded by B and $f(h, z)$ is convex and L -Lipschitz with respect to h . Let z_0, z_1, \dots, z_T be i.i.d. samples and let*

$$\hat{h}_\lambda = \arg \min_{h \in \mathcal{H}} \left(\sum_{t=1}^T f(h, z_t) + \frac{\lambda}{2} \|h\|_2^2 \right).$$

Then, we have

$$\mathbb{E} [f(\hat{h}_\lambda, z_0)] \leq \inf_{h \in \mathcal{H}} \mathbb{E} [f(h, z_0)] + \frac{\lambda}{2} B^2 + \frac{4(L + \lambda B)^2}{\lambda T}.$$

Proof. We refer to Theorem 2 and Theorem 3 in [Shalev-Shwartz et al. \(2010\)](#). \square

Now we show Proposition 2 with Theorem 1.

Proof. Recall that

$$D_{\text{new}} = (c, A, b, z, \mathcal{B}^*, \mathcal{N}^*)$$

denotes a new sample from \mathcal{P} , and the loss function

$$l(D_{\text{new}}; \Theta) := \|s\|_1 \quad \text{where } s := (1_{|\mathcal{N}^*|} - \hat{c}_{\mathcal{N}^*}^\top - \hat{c}_{\mathcal{B}^*}^\top A_{\mathcal{B}^*}^{-1} A_{\mathcal{N}^*})_+.$$

Here, $(\cdot)_+$ denotes the entry-wise positive part function, and \mathcal{B}^* and \mathcal{N}^* are defined as in Section 2. Here, with a slight abuse of notation, we drop the sample tuple D_{new} and let $l(\Theta) = l(D_{\text{new}}; \Theta)$. Then, under Assumption 2, $l(\Theta)$ is $(2 + \sqrt{m\bar{\sigma}})$ -Lipschitz with respect to Θ in the Frobenius norm for a fixed D_{new} . To see this, for any two parameters $\Theta = (\Theta_1, \dots, \Theta_n)^\top$, $\hat{\Theta} = (\hat{\Theta}_1, \dots, \hat{\Theta}_n)^\top \in \mathbb{R}^{n \times d}$

$$\begin{aligned} |l(\Theta) - l(\hat{\Theta})| &= \left| \sum_{i \in \mathcal{N}} \left((1 - \Theta_i^\top z + A_i^\top (A_{\mathcal{B}^*}^{-1})^\top \Theta_{\mathcal{B}^*} z)_+ - (1 - \hat{\Theta}_i^\top z + A_i^\top (A_{\mathcal{B}^*}^{-1})^\top \hat{\Theta}_{\mathcal{B}^*} z)_+ \right) \right| \\ &\leq \sum_{i \in \mathcal{N}} \left| (1 - \Theta_i^\top z + A_i^\top (A_{\mathcal{B}^*}^{-1})^\top \Theta_{\mathcal{B}^*} z)_+ - (1 - \hat{\Theta}_i^\top z + A_i^\top (A_{\mathcal{B}^*}^{-1})^\top \hat{\Theta}_{\mathcal{B}^*} z)_+ \right| \\ &\leq \sum_{i \in \mathcal{N}} \left| -\Theta_i^\top z + A_i^\top (A_{\mathcal{B}^*}^{-1})^\top \Theta_{\mathcal{B}^*} z + \hat{\Theta}_i^\top z - A_i^\top (A_{\mathcal{B}^*}^{-1})^\top \hat{\Theta}_{\mathcal{B}^*} z \right| \\ &\leq \sum_{i \in \mathcal{N}} \left(\left| (\Theta_i - \hat{\Theta}_i)^\top z \right| + \left| A_i^\top (A_{\mathcal{B}^*}^{-1})^\top (\Theta_{\mathcal{B}^*} - \hat{\Theta}_{\mathcal{B}^*}) z \right| \right) \\ &\leq \sum_{i \in \mathcal{N}} \left(\left\| \Theta_i - \hat{\Theta}_i \right\|_2 \|z\|_2 + \sigma_{\max} \left((A_{\mathcal{B}^*}^{-1})^\top (\Theta_{\mathcal{B}^*} - \hat{\Theta}_{\mathcal{B}^*}) \right) \|A_i\|_2 \|z\|_2 \right) \\ &\leq 2 \|\Theta - \hat{\Theta}\|_F + \sqrt{m} \sigma_{\max} \left((A_{\mathcal{B}^*}^{-1})^\top \right) \sigma_{\max} \left(\Theta_{\mathcal{B}^*} - \hat{\Theta}_{\mathcal{B}^*} \right) \\ &\leq (2 + \sqrt{m\bar{\sigma}}) \left\| \Theta - \hat{\Theta} \right\|_F. \end{aligned}$$

Here the first line comes from the definition of $l(\cdot)$, the second and fourth lines are obtained by the convexity of the absolute value function, the third line comes from a direct computation of the positive part function, the fifth line is obtained by Cauchy's inequality and the definition of σ_{\max} , the sixth line comes from the inequality that

$$\sigma_{\max}(XY) \leq \sigma_{\max}(X) \sigma_{\max}(Y)$$

for any two matrices X, Y , and the last line comes from Assumption 2 and the inequality $\sigma_{\max}(X) \leq \|X\|_F$ for any matrix X .

By Theorem 1 and Assumption 2, we have

$$\mathbb{E}[l(\hat{\Theta})] \leq \min_{\Theta \in \mathcal{K}} \mathbb{E}[l(\Theta)] + \frac{\lambda}{2} \bar{\Theta}^2 + \frac{4(2 + \sqrt{m\bar{\sigma}} + \lambda \bar{\Theta})^2}{\lambda T}, \quad (12)$$

where

$$\hat{\Theta} = \arg \min_{\Theta \in \mathcal{K}} \left(\sum_{t=1}^T l(D_{new}, \Theta) + \frac{\lambda}{2} \|\Theta\|_F \right).$$

Finally, plugging $\lambda = \frac{1}{\sqrt{T}}$ into (12), we have

$$\mathbb{E}[l(\hat{\Theta})] \leq \min_{\Theta \in \mathcal{K}} \mathbb{E}[l(\Theta)] + \frac{28 + 8\bar{\Theta}^2 + 7m\bar{\sigma}^2}{\sqrt{T}}.$$

□

B.3 Proof of Proposition 1

Proof. Under Assumption 3, there exists a $\Theta^* \in \mathcal{K}$ such that the following inequality holds almost surely

$$\Theta_{\mathcal{N}^*}^* z - A_{\mathcal{N}^*}^\top (A_{\mathcal{B}^*}^{-1})^\top \Theta_{\mathcal{B}^*}^* z \geq 1.$$

Thus we have

$$\min_{\Theta \in \mathcal{K}} \mathbb{E}[l(\Theta)] = 0,$$

where $l(\Theta)$ is defined following the previous proof of Proposition 2. Then, from Proposition 2,

$$\mathbb{E}[l(\hat{\Theta})] \leq \frac{28 + 8\bar{\Theta}^2 + 7m\bar{\sigma}^2}{\sqrt{T}}. \quad (13)$$

For a new sample $(c_{new}, A_{new}, b_{new}, z_{new})$ with $\hat{c}_{new} = \hat{\Theta} z_{new}$, we can utilize Lemma 2 and bound the suboptimality loss as follows

$$\begin{aligned} \mathbb{E} [\hat{c}_{new}^\top x_{new}^* - \hat{c}_{new}^\top \hat{x}_{new}] &\leq \mathbb{E} \left[\max_{i \in [n]} (\hat{x}_{new})_i \cdot \sum_{i \in \mathcal{N}_{new}^*} (-r_i)_+ \right] \\ &\leq \mathbb{E} \left[\sum_{i \in \mathcal{N}_{new}^*} (-r_i)_+ \right] \\ &\leq \mathbb{E} \left[\sum_{i \in \mathcal{N}_{new}^*} (1 - r_i)_+ \right] \\ &\leq \frac{28 + 8\bar{\Theta}^2 + 7m\bar{\sigma}^2}{\sqrt{T}}. \end{aligned} \quad (14)$$

Here the first line comes from Lemma 2, the second line comes from Assumption 2, the third line comes from the monotonicity of the positive part function, and the last line comes from (13).

Now, we note that if $\hat{\Theta}$ renders any non-basic variables in \mathcal{N}^* as basic variables, i.e.,

$$\hat{c}_{new, \mathcal{N}_{new}^*}^\top - \hat{c}_{new, \mathcal{B}_{new}^*}^\top A_{new, \mathcal{B}_{new}^*}^{-1} A_{new, \mathcal{N}_{new}^*} \geq 0$$

does not hold, we have $l(D_{new}; \hat{\Theta}) \geq 1$. Thus, by applying Markov's inequality to , we have that with probability no less than $1 - \frac{28 + 8\bar{\Theta}^2 + 7m\bar{\sigma}^2}{\sqrt{T}}$, $\hat{\Theta}$ can identify both the true optimal basis and the true optimal solution correctly. □

B.4 Proof of Proposition 4

The proof in this part is basically an application of the following lemma.

Lemma 3 (Theorem 3.1 in Hazan (2016)). Let $\{f_t(x)\}_{t=1}^T$ be a sequence of convex functions defined on $\{x : \|x\|_2 \leq K\}$. Suppose $\|\nabla f_t(x)\|_2 \leq G$ for all x such that $\|x\|_2 \leq K$ and all $t = 1, \dots, T$. Let $x_{t+1} = x_t - \frac{2K}{G\sqrt{t}} \nabla f_t(x_t)$. Then, the following inequality holds

$$\sum_{t=1}^T f_t(x_t) - \min_{x: \|x\|_2 \leq K} \sum_{t=1}^T f_t(x) \leq 3KG\sqrt{T}.$$

Proof. We refer to Theorem 3.1 in Hazan (2016). □

Next, we show Proposition 4.

Proof. Recall the definition of $l_t(D_t, \Theta)$ as follows

$$l(D_t; \Theta) = \left\| (1_{|\mathcal{N}_t^*|} - \hat{c}_{t, \mathcal{N}_t^*}^\top - \hat{c}_{t, \mathcal{B}_t^*}^\top A_{t, \mathcal{B}_t^*}^{-1} A_{t, \mathcal{N}_t^*})_+ \right\|_1,$$

where $\hat{c} = \Theta z_t$, and $(\cdot)_+$ denotes the entry-wise positive part function. For the sake of simplicity, we use $l_t(\Theta)$ to denote $l(D_t; \Theta)$. By calculating the derivative of $l_t(\Theta)$, we have

$$\nabla_{\Theta_{\mathcal{N}_t}} l_t(\Theta) = -g_t z_t^\top, \quad \nabla_{\Theta_{\mathcal{B}_t}} l_t(\Theta) = (A_{t, \mathcal{B}_t}^{-1})^\top A_{t, \mathcal{N}_t} g_t z_t^\top. \quad (15)$$

Here, $g_t \in \mathbb{R}^{n-m}$ is defined as follows. For the i -th element in \mathcal{N}_t for $i = 1, \dots, m$, correspondingly, we define the i -th element of g_t as

$$g_{t,i} = \begin{cases} 1, & \text{if } \left((e_{\mathcal{N}_t} - \Theta_{\mathcal{N}_t} z_t + A_{t, \mathcal{N}_t}^\top (A_{t, \mathcal{B}_t}^{-1})^\top \Theta_{\mathcal{B}_t} z_t)_+ \right)_i > 0 \\ 0, & \text{otherwise.} \end{cases}$$

Then, we have

$$\begin{aligned} \|\nabla l_t(\Theta)\|_F &\leq \|g_t z_t^\top\|_F + \|(A_{t, \mathcal{B}_t}^{-1})^\top A_{t, \mathcal{N}_t} g_t z_t^\top\|_F \\ &\leq \|g_t\|_2 \|z_t\|_2 + \|A_{t, \mathcal{B}_t}^{-1}\|_F \|A_{t, \mathcal{N}_t}\|_F \|g_t\|_2 \|z_t\|_2 \\ &\leq \sqrt{n} + \|A_{t, \mathcal{B}_t}^{-1}\|_F \|A_{t, \mathcal{N}_t}\|_F \cdot \sqrt{n} \\ &\leq \sqrt{n} + \bar{\sigma} mn, \end{aligned}$$

where the first line comes from the equalities in (15) and the triangle inequality $\|A + B\|_F \leq \|A\|_F + \|B\|_F$ for any two matrices A, B with the same size, the second line comes from the inequality $\|AB\|_F \leq \|A\|_F \|B\|_F$ for any two matrices A, B and the fact that $\|g\|_F = \|g\|_2$ for any vector g , the third line comes from the definition of g_t and Assumption 2 that $\|z_t\|_2 \leq 1$, and the last line comes from Assumption 2 that all entries of A_t are in $[-1, 1]$ and the inequality $\|A\|_F \leq \sqrt{m} \sigma_{\max}(A)$ for any matrix $A \in \mathbb{R}^{m \times m}$. Next, by Lemma 3, with $\eta = \frac{2\bar{\Theta}}{(\sqrt{n} + \bar{\sigma} mn)\sqrt{T}}$,

$$\sum_{t=1}^T l_t(\Theta_t) - \min_{\Theta: \|\Theta\|_F \leq \hat{\Theta}} \sum_{t=1}^T l_t(\Theta) \leq (3\bar{\Theta}\sqrt{n} + 3\bar{\sigma}\bar{\Theta}mn) \sqrt{T}. \quad (16)$$

Then, we show inequality (8) by

$$\begin{aligned} \frac{1}{T} \mathbb{E}[z_t^\top \Theta_t^\top (x_t^* - x_t)] &\leq \mathbb{E} \left[\sum_{t=1}^T l_t(\Theta_t) \right] \\ &\leq \mathbb{E} \left[\min_{\Theta: \|\Theta\|_F \leq \hat{\Theta}} \sum_{t=1}^T l_t(\Theta) \right] + \frac{3\bar{\Theta}\sqrt{n} + 3\bar{\sigma}\bar{\Theta} \cdot mn}{\sqrt{T}}. \end{aligned}$$

Here, we can obtain the first line by Lemma 2 and a similar proof as in the proof of Proposition 1, and obtain the second line by inequality (16).

Furthermore, under Assumption 3, we have with probability 1,

$$\min_{\Theta: \|\Theta\|_F \leq \hat{\Theta}} \sum_{t=1}^T l_t(\Theta) = 0,$$

which implies

$$\mathbb{E} \left[\sum_{t=1}^T l_t(\Theta_t) \right] \leq \frac{3\bar{\Theta}\sqrt{n} + 3\bar{\sigma}\bar{\Theta} \cdot mn}{\sqrt{T}}. \quad (17)$$

Recall that $\hat{\Theta}$ denotes the matrix sampled uniformly from $\{\Theta_t\}_{t=1}^T$, x_{new}^* denotes the optimal solution of $\text{LP}(c_{\text{new}}, A_{\text{new}}, b_{\text{new}})$, \hat{x}_{new} denotes the optimal solution of $\text{LP}(\hat{c}_{\text{new}}, A_{\text{new}}, b_{\text{new}})$, and $\hat{c}_{\text{new}} = \hat{\Theta}z_{\text{new}}$. Similar to the last paragraph of the proof of Proposition 1, we have if $\hat{\Theta}$ misclassifies any non-basic variable in \mathcal{N}_{new} , we have $l(D_{\text{new}}; \hat{\Theta}) \geq 1$. Thus,

$$\begin{aligned} \mathbb{E}[\mathbb{P}(x_{\text{new}}^* \neq \hat{x}_{\text{new}})] &\leq \mathbb{E}[\mathbb{P}(l(D_{\text{new}}; \hat{\Theta}) \geq 1)] \\ &\leq \mathbb{E}[l(D_{\text{new}}; \hat{\Theta})] \\ &= \frac{1}{T+1} \mathbb{E} \left[\sum_{t=1}^{T+1} l(D_{\text{new}}; \Theta_t) \right] \\ &= \frac{1}{T+1} \mathbb{E} \left[\sum_{t=1}^{T+1} l(D_t; \Theta_t) \right] \\ &\leq \frac{3\bar{\Theta}\sqrt{n} + 3\bar{\sigma}\bar{\Theta} \cdot mn}{\sqrt{T+1}}, \end{aligned}$$

by which we have shown that, with probability no less than $1 - \frac{3\bar{\Theta}\sqrt{n} + 3\bar{\sigma}\bar{\Theta} \cdot mn}{\sqrt{T+1}}$, Algorithm 2 can identify both the true optimal basis and the true optimal solution correctly. Here, the first line comes from the fact that $l(D_{\text{new}}; \hat{\Theta}) \geq 1$ if $x_{\text{new}}^* \neq \hat{x}_{\text{new}}$, the second line comes from Markov's inequality, the third line comes from the definition of $\hat{\Theta}$, the fourth line comes from the fact that D_t and D_{new} are two i.i.d. samples that are also independent of Θ_t , and the last line comes from inequality (17). \square

B.5 Proof of Proposition 5

The proof integrates the standard analysis of the perceptron algorithm with the structure of the linear program.

Proof. In this part, we denote $\Theta_{t,i}$ as the value of matrix Θ_{tmp} at the beginning on the t -th iteration of the outer loop and the i -th iteration of the inner loop for $t \in [T]$ and $i \in [n]$. Also, we view $\Theta_{t,n+1}$ and

$\Theta_{t+1,1}$ as the same to avoid undefined boundary cases. Recall the definition of the reduced cost vector

$$r_t(\Theta) = \Theta z_t - A_t^\top (A_{t, \mathcal{B}_t}^{-1})^\top \Theta_{\mathcal{B}_t} z_t, \text{ for } t = 1, \dots, T,$$

which is a linear function of Θ entry-wisely. Thus, we have that for each $t = 1, \dots, T$ and $i \in [n]$, there exists a matrix $W_{t,i} \in \mathbb{R}^{n \times d}$ such that $r_{t,i}^{(i)}(\Theta) = \text{Trace}(W_{t,i}^\top \Theta)$ and $\|W_{t,i}\|_F \leq 1 + \bar{\sigma} \sqrt{mn}$, where $\text{Trace}(W) = \sum_{i=1}^n w_{ii}$ for any square matrix $W = (w_{ij})_{i,j=1}^n \in \mathbb{R}^{n \times n}$. Then, we define

$$h_{t,i}(\Theta) = \text{sign}(\text{Trace}(W_{t,i}^\top \Theta) - .5),$$

where $\text{sign}(\cdot)$ denotes the sign function. Moreover, if there is an $i \in \mathcal{N}_t$ at some time t such that $h_{t,i}(\Theta_{t,i}) = -1$, we have $\Theta_{t,i+1} = \Theta_{t,i} + W_{t,i}$. The updating rule in Algorithm 3 is obtained as mentioned above. Specifically, as in Algorithm 3, for any $i \in \mathcal{N}_t$ and $t \in [T]$, $W_{t,i}$ is defined as follows

$$(W_{t,i})_i = z_t^\top, \quad (W_{t,i})_{\mathcal{B}_t^*} = A_{\mathcal{B}_t^*}^{-1} A_t z_t,$$

and all other entries are 0. Then, we have

$$\begin{aligned} \|W_{t,i}\|_F^2 &= \|z_t\|_F^2 + \|A_{\mathcal{B}_t^*}^{-1} A_t z_t\|_F^2 \\ &\leq \|z_t\|_F^2 + \|A_{\mathcal{B}_t^*}\|_F^2 \|A_t\|_F^2 \|z_t\|_F^2, \\ &\leq 1 + \bar{\sigma}^2 m^2 n \end{aligned} \tag{18}$$

where the first line comes directly from the definition of $W_{t,i}$, the second line comes from the inequality that $\|AB\|_F \leq \|A\|_F \|B\|_F$ for any two matrices A, B , and the last line comes from Assumption 2.

We say that Algorithm 3 misclassifies one non-basic variable $i \in \mathcal{N}_t$ if $h_{t,i}(\Theta_{t,i}) \leq 0$, and it misclassifies one basic variable $i \in \mathcal{B}_t$ if $h_{t,i}(\Theta_T) > 0$. Since the values of entries of the reduced cost vector corresponding to the true basis \mathcal{B}_t are 0 for all t and i , Algorithm 3 makes a mistake only if it misclassifies one non-basic variable. Denote the number of identification mistakes at the t -th iteration as K_t for $t = 1, \dots, T$. Let $K = \sum_{t=1}^T K_t$ be the number of all mistakes. From the updating rule, inequality (18) and the triangle inequality of the Frobenius norm, we have $\|\Theta_{t,i+1}\|_F^2 \leq K_t(1 + \bar{\sigma}^2 m^2 n)$, and then,

$$\|\Theta_{T+1}\|_F^2 \leq K(1 + \bar{\sigma}^2 m^2 n). \tag{19}$$

Moreover, under Assumption 3, there exists a matrix Θ^* such that

$$\begin{aligned} \text{Trace}(W_{t,i}^\top \Theta^*) &\geq 1, & \text{if } i \in \mathcal{N}_t, \\ \text{Trace}(W_{t,i}^\top \Theta^*) &\leq 0, & \text{if } i \in \mathcal{B}_t, \end{aligned}$$

for all $t = 1, \dots, T$. Then, we have once a mistake is made for some $i \in \mathcal{N}_t$ at time t

$$\text{Trace}((\Theta_{t,i+1} - \Theta_{t,i})^\top \Theta^*) = \text{Trace}(W_{t,i}^\top \Theta^*) \geq 1,$$

which implies

$$\text{trace}(\Theta_{T,n+1}^\top \Theta^*) \leq K. \tag{20}$$

Then, combining inequalities (19) and (20), we have

$$\begin{aligned} K &\leq \text{trace}(\Theta_{T,n+1}^\top \Theta^*) \\ &\leq \bar{\Theta} \|\Theta_{T,n+1}\|_F \\ &\leq \bar{\Theta} \sqrt{K(1 + \bar{\sigma}^2 m^2 n)}, \end{aligned}$$

where the first line comes from (20), the second line comes from Assumption 3 that $\|\Theta^*\|_F \leq \bar{\Theta}$ and the Cauchy-Schwartz inequality, and the last line comes from (19). Dividing both sides by \sqrt{K} and taking square,

$$K \leq \bar{\Theta}^2 + \bar{\sigma}^2 \bar{\Theta}^2 m^2 n.$$

Moreover, Lemma 1 tells that one can recover the optimal solution if the optimal basis is identified. This statement implies that K is an upper bound of times that we cannot identify the true optimal solutions by Algorithm 3. Thus, we have

$$|\{t \in [T] : x_t^* \neq x_t\}| \leq \bar{\Theta}^2 + \bar{\sigma}^2 \bar{\Theta}^2 m^2 n.$$

For the generalization bound, we apply the symmetry of samples. Following a similar argument as in the last paragraph of the proof of Proposition 4, we obtain

$$\mathbb{E} [\mathbb{P}(x_{\text{new}}^* \neq \hat{x}_{\text{new}})] \leq \frac{\bar{\Theta}^2 + \bar{\sigma}^2 \bar{\Theta}^2 m^2 n}{T}.$$

□

C Additional Discussions

C.1 Why Structured Prediction Not Work

We argued earlier that the inequality constraints in (3) is critical in that alternative formulations such as (4) and (5) will fail. Here we explore another alternative – structured support vector machine (SVM) (Joachims et al., 2009) and show that it leads to an computationally intractable formulation of the problem.

The goal of a structured SVM classifier under our context to estimate the optimal basis (or equivalently, the non-basic variables) by observing $\{(z, A)\}$ and a predictor trained on $\{(z_t, A_t)\}$'s and their corresponding labels $\{y_t\}$'s, where we define $(y_t)_i = +1$ for $i \in \mathcal{N}_t$ and $(y_t)_i = -1$ for $i \in \mathcal{B}_t$. The Maximum Optimality Margin approach is a principle to maximize the estimated reduced cost vectors for non-basic variables. To express this principle more explicitly, the margin term one wants to maximize in structured SVM can be written as

$$\max_{\Theta \in \mathcal{K}} \sum_{j \in \mathcal{N}} \hat{r}_j,$$

where \hat{r}_j 's are to be specified later.

For the simplicity of notations, we define some auxiliary vectors and matrices named as $\mathbf{1}$, $J_{\mathcal{B}_t}$, $J_{\mathcal{N}_t}$, and Φ_{t,y_t} , where

$$\mathbf{1} \in \mathbb{R}^{n-m}, \quad \mathbf{1}_j = 1, \forall j \in [n-m],$$

$$J_{\mathcal{B}_t} v = v_{\mathcal{B}_t}, \quad \forall v \in \mathbb{R}^n,$$

$$J_{\mathcal{N}_t} v = v_{\mathcal{N}_t}, \quad \forall v \in \mathbb{R}^n,$$

$$\Phi_{t,y_t} := J_{\mathcal{N}_t} - A_{t,\mathcal{N}_t}^\top A_{t,\mathcal{B}_t}^{-\top} J_{\mathcal{B}_t}.$$

Specifically, the estimated reduced cost with respect to y_t can be written as

$$\hat{r}_{t,y_t} = \Phi_{t,y_t} \Theta z_t.$$

Hence the margin term (where the subscript t is sometimes omitted for simplicity) is

$$\sum_{j \in \mathcal{N}} \hat{r}_j = \mathbf{1}^\top \hat{r} = \langle \Theta, \Phi_y^\top \mathbf{1} z^\top \rangle,$$

which implies the feature map

$$\phi((z_t, A_t), y_t) = \Phi_{t,y_t}^\top \mathbf{1} z_t^\top.$$

Note that the corresponding label space

$$\mathcal{Y} = \{y \in \{-1, +1\}^n, \#\{i, y_i = +1\} = m\}$$

is exponentially large in n in general cases. We also define some measurement of difference $\Delta(\cdot, \cdot) \in \mathcal{Y} \times \mathcal{Y} \rightarrow \mathbb{R}$, where $\Delta(y, y') \geq 0$ and $\Delta(y, y) = 0$. For example, the $\Delta(y, y')$ function can be $\mathbb{1}\{y \neq y'\}$ and we retrieve the multiclass Hinge loss. Such $\Delta(y, y')$ can also be defined to be the Hamming distance and so on.

Equipped with those notations, the structured SVM problem can now be formulated as:

$$\begin{aligned} \min_{\Theta \in \mathcal{K}, s \in \mathbb{R}^N, y \in \mathcal{Y}} \quad & \frac{\lambda}{2} \|\Theta\|^2 + \frac{1}{N} \sum_{i=1}^N s_i, \\ \text{s.t.} \quad & s_i \geq \Delta(y_i, y) - \langle \Theta, \phi((z_i, A_i), y_i) \rangle + \langle \Theta, \phi((z_i, A_i), y) \rangle, \quad \forall i \in [N], \forall y \in \mathcal{Y}, \\ & s_i \geq 0, \quad \forall i \in [N]. \end{aligned}$$

We thereby note that solving the above problem requires solving another sub-problem where

$$g_i(\Theta) := s_i^* = \max_{y \in \mathcal{Y}} \{ \Delta(y_i, y) - \langle \Theta, \phi((z_i, A_i), y_i) \rangle + \langle \Theta, \phi((z_i, A_i), y) \rangle \}.$$

But the above sub-problem is computationally intractable, since the precise evaluation of $g_i(\Theta)$ requires solving a discrete optimization problem with exponentially large feasible set \mathcal{Y} . Such an obstacle makes the training hard to implement. Besides, even if we get the training result $\tilde{\Theta}$, the following inference problem

$$\tilde{f}(z, A) = \arg \max_{y \in \mathcal{Y}} \langle \tilde{\Theta}, \phi((z, A), y) \rangle$$

is still highly intractable.

C.2 Scale Consistency of Least Squares Linear Regression

In the previous sections, we raise the point of scale consistency several times. Specifically, the key point made is that the objective vectors of c and αc for $\alpha > 0$ produce the same optimal solution. Therefore, the algorithm should account for this scale invariance as there might be some scale contamination of the training data in application contexts such as revealed preference/stated preference. Here we present a self-contained result on the scale consistency of the linear regression model that might be of independent interests.

Consider the linear regression model where one wants to estimate the true coefficient matrix using

cost vectors $c_i \in \mathbb{R}^n$ and feature vectors $z_i \in \mathbb{R}^d$. Instead of observing true c_i 's, we only observe their perturbed/contaminated versions with scale noises $(1 + \alpha_i)c_i$'s, where α_i 's here are some random variables. We claim that if α_i 's are i.i.d. generated and independent of z_i and c_i , then the ordinary least squares method is still consistent if $\mathbb{E}[\alpha] = 0$.

Proposition 6 (Scale Consistency of Ordinary Least Squares). *Assume $c = \Theta^*z + \epsilon$, where $\mathbb{E}[\epsilon|z] = 0$, $\Theta^* \in \mathbb{R}^{n \times d}$ is the true underlying coefficient matrix. Assume α is independent of z and c . Assume we observe N i.i.d. samples $(z_i, (1 + \alpha_i)c_i)$'s. Assume z_i , c_i , and α_i have finite second order moments, which implies that they follow the strong law of large numbers. Further assume that c_i and α_i have finite fourth order moment, which implies the strong law of large numbers for c_i^2 and α_i^2 . Assume $\mathbb{E}[z_i z_i^\top] = \Sigma$, and Σ is non-singular. We estimate the underlying coefficient matrix by ordinary least squares method:*

$$\hat{\Theta}_N = \arg \min_{\Theta} \left\{ f_N(\Theta) := \sum_{i=1}^N \frac{1}{N} \|(1 + \alpha_i)c_i - \Theta z_i\|_2^2 \right\}.$$

Then

$$\hat{\Theta}_N \xrightarrow{\text{a.s.}} (1 + \mathbb{E}[\alpha])\Theta^*, \quad \text{as } N \rightarrow \infty.$$

Proof. W.l.o.g. we only prove the one-dimensional case $c \in \mathbb{R}$, since multi-dimensional cases can be proved similarly by breaking $\Theta = (\Theta_1, \dots, \Theta_n)^\top$ into n independent Θ_i 's. For one-dimensional case, the estimator is now minimizing

$$\begin{aligned} f_N(\Theta) &= \frac{1}{N} \sum_{i=1}^N \|z_i^\top \Theta - (1 + \alpha_i)c_i\|_2^2 \\ &= \Theta^\top \left[\frac{1}{N} \sum_{i=1}^N z_i z_i^\top \right] \Theta - \left[\frac{1}{N} \sum_{i=1}^N 2(1 + \alpha_i)c_i z_i^\top \right] \Theta + \frac{1}{N} \sum_{i=1}^N (1 + \alpha_i)^2 c_i^2. \end{aligned}$$

Note that we assume that z_i 's, c_i 's, c_i^2 's, α_i 's, α_i^2 's all have finite second order moments, which implies

$$\frac{1}{N} \sum_{i=1}^N z_i z_i^\top \xrightarrow{\text{a.s.}} \Sigma, \quad \text{as } N \rightarrow \infty,$$

$$\frac{1}{N} \sum_{i=1}^N 2(1 + \alpha_i)c_i z_i^\top \xrightarrow{\text{a.s.}} 2\mathbb{E}[(1 + \alpha)cz^\top], \quad \text{as } N \rightarrow \infty,$$

$$\frac{1}{N} \sum_{i=1}^N (1 + \alpha_i)^2 c_i^2 \xrightarrow{\text{a.s.}} \mathbb{E}[(1 + \alpha)^2 c^2] = (1 + 2\mathbb{E}[\alpha] + \mathbb{E}[\alpha^2])\mathbb{E}[c^2] < \infty, \quad \text{as } N \rightarrow \infty.$$

Combining the boundedness of the last component with the fact that Σ is non-singular and positive semidefinite and the fact that $2\mathbb{E}[(1 + \alpha)cz^\top]$ is bounded (which will be shown later), we have

$$f_N \xrightarrow{\text{a.s.}} f, \quad \text{as } N \rightarrow \infty,$$

where f is a positive definite quadratic function of Θ .

Therefore, the unique minimizer of f must be its first order stationary point. We now compute the

partial derivatives. We have

$$\begin{aligned}
\mathbb{E}[(1 + \alpha)cz^\top] &= \mathbb{E}[1 + \alpha]\mathbb{E}[cz^\top] \\
&= (1 + \mathbb{E}[\alpha])\mathbb{E}[\mathbb{E}[cz^\top | z]] \\
&= (1 + \mathbb{E}[\alpha])\mathbb{E}[\mathbb{E}[\Theta^{*\top}zz^\top + \epsilon z^\top | z]] \\
&= (1 + \mathbb{E}[\alpha])\mathbb{E}[\Theta^{*\top}zz^\top], \\
&= (1 + \mathbb{E}[\alpha])\Theta^{*\top}\Sigma.
\end{aligned}$$

where the first equality is from the fact that α_i 's are independent of z_i 's and c_i 's, the second equality follows the tower law of conditional expectation, the third equality comes from the linear assumption, and the fourth equality comes from $\mathbb{E}[\epsilon|z] = 0$. It follows immediately that

$$\frac{\partial f}{\partial \Theta} = 2\Sigma\Theta - 2(1 + \mathbb{E}[\alpha])\Sigma\Theta^*.$$

Since Σ is non-singular, we have proved that the unique minimizer of f is exactly $(1 + \mathbb{E}[\alpha])\Theta^*$.

Then from the fact that $f_N \xrightarrow{\text{a.s.}} f$ and f is positive definite quadratic function, we have

$$\hat{\Theta}_N = \arg \min f_N \xrightarrow{\text{a.s.}} \arg \min f = (1 + \mathbb{E}[\alpha])\Theta^*, \quad \text{as } N \rightarrow \infty.$$

Specifically, if $\mathbb{E}[\alpha] = 0$, we retrieve the true Θ^* . □