

# Ananke: A Python Package For Causal Inference Using Graphical Models

Jaron J. R. Lee<sup>†,1</sup>

JARON.LEE@JHU.EDU

Rohit Bhattacharya<sup>†,2</sup>

RB17@WILLIAMS.EDU

Razieh Nabi<sup>3</sup>

RAZIEH.NABI@EMORY.EDU

Ilya Shpitser<sup>1</sup>

ILYAS@CS.JHU.EDU

† **Equal contribution**

<sup>1</sup>*Department of Computer Science, Johns Hopkins University*

<sup>2</sup>*Department of Computer Science, Williams College*

<sup>3</sup>*Department of Biostatistics and Bioinformatics, Emory University*

## Abstract

We implement **Ananke**: an object-oriented Python package for causal inference with graphical models. At the top of our inheritance structure is an easily extensible **Graph** class that provides an interface to several broadly useful graph-based algorithms and methods for visualization. We use best practices of object-oriented programming to implement subclasses of the **Graph** superclass that correspond to types of causal graphs that are popular in the current literature. This includes directed acyclic graphs for modeling causally sufficient systems, acyclic directed mixed graphs for modeling unmeasured confounding, and chain graphs for modeling data dependence and interference. Within these subclasses, we implement specialized algorithms for common statistical and causal modeling tasks, such as separation criteria for reading conditional independence, nonparametric identification, and parametric and semiparametric estimation of model parameters. Here, we present a broad overview of the package and example usage for a problem with unmeasured confounding. Up to date documentation is available at <https://ananke.readthedocs.io/en/latest/>.

**Keywords:** causal graphical models, causal identification, semiparametric estimation

## 1. Introduction

Causal inference is a pipeline comprised of many steps – specification of a causal model, identification of the desired causal parameter under assumptions of this model, estimation of the parameter from data based on the identifying functional, and robustness checks via sensitivity analysis and uncertainty quantification. Any of these steps may be complicated by unmeasured confounding, data dependence, and missing data. In **Ananke**, we implement methods that span all of these steps, including nonparametric identification and semiparametric estimation strategies, to provide analysts a unifying interface that allows them to set up end-to-end pipelines that exhibit robustness to the aforementioned complications.

In particular, we adopt an object-oriented paradigm to implement graph-based causal inference methods. We build an inheritance structure spanning causal graphical models that use any combination of directed ( $\rightarrow$ ), bidirected ( $\leftrightarrow$ ), and undirected ( $-$ ) edges. We hope that due to its object-oriented nature and easily accessible Python implementation

**Ananke** will improve the accessibility of many graph-based causal inference methods, and allow interested users to easily extend and build on its current infrastructure.

**Related work:** The `doWhy` package and `DAGitty` aim to provide a unifying interface for distinct steps in the causal inference pipeline. However, their estimation capabilities are largely limited to settings without unmeasured confounders or selection bias. In the case of `doWhy`, the causal graph interface is still under active development with plans to interface with **Ananke** rather than build one from scratch (personal communication with developers.) Other existing packages emphasize a single step in the pipeline. `TETRAD` and its Python port `causal-learn` (Scheines et al., 1998), `pcaIlg` (Kalisch et al., 2012), and `cdt` (Kalainathan et al., 2020) focus on graph representation and model selection; `causaleffect` focuses on nonparametric identification; `npcausal` (Kennedy, 2021), `zEpid` (Zevich, 2018), `tmle3` (Coyle, 2021), and `DoubleML` (Bach et al., 2022) focus on semiparametric estimation. Other standalone packages exist as appendices to papers, and in certain cases we reimplement these algorithms in **Ananke**, e.g., the maximum likelihood algorithms in Evans (2013) and Drton et al. (2009). The principle advantage of **Ananke** over peers is that it offers a unified and easily extended interface for causal inference in a single package, with an active community.

## 2. Overview of Ananke’s Graph Inheritance Structure

An overview of graphical models in **Ananke** and their inheritance structure is shown in Fig. 1. The `Graph` class currently supports the creation of graphs  $\mathcal{G} = (V, D, B, U)$ , where  $V$  denotes a set of vertices and  $D, B, U$  denote sets of directed ( $\rightarrow$ ), bidirected ( $\leftrightarrow$ ), and undirected ( $-$ ) respectively. Within this class we implement methods and algorithms that are broadly applicable to any subclass: simple methods involving addition and deletion of edges, finding a subgraph  $\mathcal{G}_S$  comprised of only vertices in  $S \subseteq V$  (and associated edges), and computing genealogical sets of a vertex, such as its ancestors, descendants, and siblings. We also implement a lightweight `draw` method using a Python interface to `graphviz` (Ellson et al., 2001; Hagberg et al., 2022) for visualizing any instance of the class or subclasses of it – all figures in this paper are produced using this functionality. The rest of the inheritance structure is based on the types of edges each graph class contains. At the lowest levels are graphs only containing a single edge type: Directed acyclic graphs (DAGs) (only  $\rightarrow$  edges) are the most popular type of causal graph (Robins, 1986; Spirtes et al., 2000; Pearl, 2009); Bidirected graphs (only  $\leftrightarrow$  edges) are used to represent marginal correlations and are popular in genomics (Chaudhuri et al., 2007; Cox and Wermuth, 2014); Undirected graphs (only  $-$  edges) can be used to encode feedback relationships (Lauritzen, 1996). Next, we have graphs containing a mixture of edges types: Acyclic directed mixed graphs (ADMGs) model systems with causal influence (via  $\rightarrow$  edges) and correlation due to unmeasured confounding (via  $\leftrightarrow$  edges) (Wright, 1921; Verma and Pearl, 1990); Chain graphs model causal influence (via  $\rightarrow$  edges) as well as non-iid phenomena such as conta-

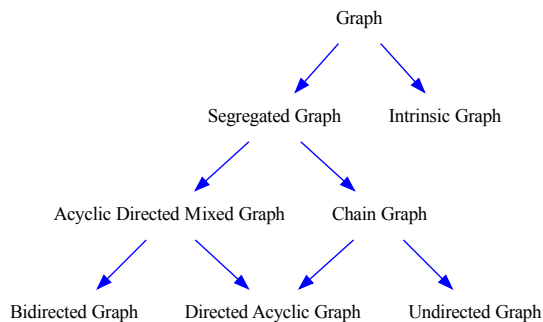


Figure 1: **Ananke**’s graph inheritance structure.

gion, feedback, and symmetric relationships (via  $-$  edges) (Lauritzen and Richardson, 2002; Ogburn et al., 2020; Bhattacharya et al., 2019a); Segregated graphs consisting of all three kinds of edges are capable of modeling all three mechanisms discussed above (Shpitser, 2015). We note that intrinsic graphs shown in the hierarchy of Fig. 1 are not causal graphical models, but rather a graphical representation created by us to efficiently compute all statistical kernels required to parameterize a hidden variable causal model – a necessary step for estimation discussed in Section 3. This illustrates additional use cases of our graph inheritance structure for intermediate tasks. As another example, we use our chain graph implementation to encode equivalence classes of causal DAGs – different models that imply the same restrictions on the observed data distribution – known as Complete Partially Directed Acyclic Graphs (CPDAGs). This allows **Ananke** to easily interface with or extend causal discovery algorithms that output such objects, e.g., implementations of greedy equivalence search or the PC algorithm in the `causal-learn` package (Zhang et al., 2022).

### 3. Data Analysis in Ananke

To illustrate usage of **Ananke** we step through a hypothetical analysis for assessing the effect of smoking on diabetes using a teaching dataset derived<sup>1</sup> from the Framingham Heart Study (Kannel and Gordon, 1968). We start by encoding substantive assumptions using an ADMG shown in Fig. 2 along with the **Ananke** commands used to create and visualize it.

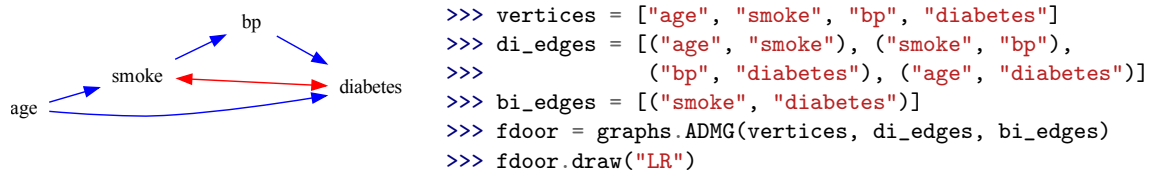


Figure 2: Front-door model visualized using built-in capability.

An ADMG can imply certain testable independence statements (amongst other general constraints) that can be read via  $m$ -separation (Richardson, 2003). For example, we can verify that `age` is  $m$ -separated from `bp` given `smoke` implying `age  $\perp\!\!\!\perp$  bp | smoke`.

```

>>> fdoor.m_separated("age", "bp", ["smoke"])
True

```

An analyst may verify whether the data supports such assumptions using any standard conditional independence test. Assuming Fig. 2 is correct, the next step is to apply identification theory to determine whether the desired causal effect can be expressed as a function of observed data. Applying **Ananke**'s implementation of a sound and complete algorithm for identification in presence of unmeasured confounding (Richardson et al., 2017) gives:

```

>>> treatments = ["smoke"]; outcomes = ["diabetes"]
>>> id_fdoor = identification.OneLineID(graph=fdoor, treatments=treatments, outcomes=outcomes)
>>> print('Identified =', id_fdoor.id(), '; Functional =', id_fdoor.functional())
Identified = True
Functional =  $\Sigma_{agebp} \phi_{diabetessmokebp}(p(V);G) \phi_{smokediabetesage}(p(V);G) \phi_{smokebp}(p(V);G)$ 

```

1. The teaching extract of the Framingham Heart Study can be requested from <https://biolincc.nhlbi.nih.gov/teaching/>.


That is, the counterfactual distribution  $p(\text{diabetes}(\text{smoke}))$ , and hence the effect, is indeed identified. Interpreting the output based on Richardson et al. (2017) gives

$$p(\text{diabetes}(\text{smoke})) = \sum_{\text{age, bp}} p(\text{bp} \mid \text{smoke}) p(\text{age}) \left( \sum_{\text{smoke}'} p(\text{diabetes} \mid \text{smoke}', \text{bp}, \text{age}) p(\text{smoke}' \mid \text{age}) \right).$$

While the focus of this analysis is on identification under unmeasured confounding, **Ananke** also implements identification algorithms for missing data (Bhattacharya et al., 2019b; Nabi et al., 2020), selection bias, and data fusion (Lee et al., 2020; Lee and Shpitser, 2020). After identification, we may choose from a variety of estimation strategies offered in **Ananke**.

### 3.1 Linear Gaussian Structural Equation Models

One possible choice is to assume a linear structural equation model with correlated errors (Wright, 1934). In **Ananke**, we implement the iterative algorithm described in Drton et al. (2009) to obtain maximum likelihood estimates for all edge coefficients; causal effects are then computed via path analysis. Applying this to standardized Framingham data gives:

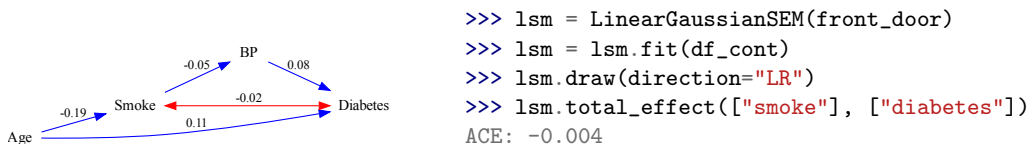

### 3.2 Möbius Parameterization for Discrete Data

An alternative is to use the Möbius parameterization of the observed data likelihood, which assumes all observed variables are discrete (Evans and Richardson, 2012). We implement a coordinate descent algorithm to compute maximum likelihood estimates for the Möbius parameters (which may be variationally dependent in general.) Using binary versions of variables in the dataset, we obtain the following result for the average causal effect.

```

    >>> bnm = binary_nested.BinaryNestedModel(front_door)
    >>> bnm = bnm.fit(X=binary_nested.process_data(df_bin), tol=1e-12 )
    >>> pY1_A0 = bnm.estimate(treatment_dict={"smoke": 0}, outcome_dict={"diabetes": 1})
    >>> pY1_A1 = bnm.estimate(treatment_dict={"smoke": 1}, outcome_dict={"diabetes": 1})
    >>> print("ACE: ", pY1_A1 - pY1_A0)
    ACE: 0.004
  
```

### 3.3 Semiparametric Estimation of Causal Effects

If the effect is identified, **Ananke** lists several semiparametric estimation strategies, proposed by Bhattacharya et al. (2022), and suggests the best one according to semiparametric efficiency theory. The implementation only requires specification of the ADMG, treatment, and outcome. Using **Ananke**'s suggestion of *efficient augmented primal IPW* estimator gives:

```

    >>> ace_obj = CausalEffect(graph=front_door, treatment='smoke', outcome='diabetes')
    >>> ace = ace_obj.compute_effect(df_bin, "eff-apipw"); print("ACE: ", ace)
    ACE: -0.002
  
```

## Acknowledgments

We thank Preethi Prakash and Ranjani Srinivasan for contributions to *Ananke*, and Carson Kurtz for assisting R.B. in testing code.

## References

- Philipp Bach, Victor Chernozhukov, Malte S. Kurz, and Martin Spindler. DoubleML – An object-oriented implementation of double machine learning in Python. *Journal of Machine Learning Research*, 23(53):1–6, 2022. URL <http://jmlr.org/papers/v23/21-0862.html>.
- Rohit Bhattacharya, Daniel Malinsky, and Ilya Shpitser. Causal inference under interference and network uncertainty. In *Proceedings of the 35th Conference on Uncertainty in Artificial Intelligence*. AUAI Press, 2019a.
- Rohit Bhattacharya, Razieh Nabi, Ilya Shpitser, and James M. Robins. Identification in missing data models represented by directed acyclic graphs. In *Proceedings of the 35th Conference on Uncertainty in Artificial Intelligence*. AUAI Press, 2019b.
- Rohit Bhattacharya, Razieh Nabi, and Ilya Shpitser. Semiparametric inference for causal effects in graphical models with hidden variables. *Journal of Machine Learning Research*, 23:1–76, 2022.
- Sanjay Chaudhuri, Mathias Drton, and Thomas S Richardson. Estimation of a covariance matrix with zeros. *Biometrika*, 94(1):199–216, 2007.
- David Roxbee Cox and Nanny Wermuth. *Multivariate dependencies: Models, analysis and interpretation*. Chapman and Hall/CRC, 2014.
- Jeremy R Coyle. tmle3: The extensible TMLE framework. <https://github.com/tlverse/tmle3>, 2021. URL <https://doi.org/10.5281/zenodo.4603358>. R package version 0.2.0.
- Mathias Drton, Michael Eichler, and Thomas S. Richardson. Computing maximum likelihood estimates in recursive linear models with correlated errors. *Journal of Machine Learning Research*, 10(10), 2009.
- John Ellson, Emden Gansner, Lefteris Koutsofios, Stephen C North, and Gordon Woodhull. Graphviz—open source graph drawing tools. In *International Symposium on Graph Drawing*, pages 483–484. Springer, 2001.
- Robin J Evans. ADMGs. <https://www.stats.ox.ac.uk/~evans/software.htm>, 2013.
- Robin J. Evans and Thomas S. Richardson. Maximum likelihood fitting of acyclic directed mixed graphs to binary data. 2012. URL <http://arxiv.org/abs/1203.3479>.
- Aric Hagberg, Dan Schult, and Manos Renieris. Pygraphviz. 2022. URL <https://github.com/pygraphviz/pygraphviz>.

- Diviyani Kalainathan, Olivier Goudet, and Ritik Dutta. Causal discovery toolbox: Uncovering causal relationships in python. *Journal of Machine Learning Research*, 21(37):1–5, 2020.
- Markus Kalisch, Martin Mächler, Diego Colombo, Marloes H. Maathuis, and Peter Bühlmann. Causal inference using graphical models with the R package pcalg. *Journal of Statistical Software*, 47:1–26, 2012.
- William B. Kannel and Tavia Gordon. *The Framingham Study: an epidemiological investigation of cardiovascular disease*. Number 9-13. Department of Health, Education, and Welfare, 1968.
- Ed Kennedy. npcausal: Nonparametric causal inference methods. <https://github.com/ehkennedy/npcausal>, 2021.
- Steffen L. Lauritzen. *Graphical Models*. Oxford, U.K.: Clarendon, 1996.
- Steffen L. Lauritzen and Thomas S. Richardson. Chain graph models and their causal interpretations. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*, 64(3):321–348, 2002.
- Jaron J. R. Lee and Ilya Shpitser. Identification methods with arbitrary interventional distributions as inputs. *arXiv preprint arXiv:2004.01157*, 2020.
- Sanghack Lee, Juan D Correa, and Elias Bareinboim. General identifiability with arbitrary surrogate experiments. In *Uncertainty in artificial intelligence*, pages 389–398. PMLR, 2020.
- Razieh Nabi, Rohit Bhattacharya, and Ilya Shpitser. Full law identification in graphical models of missing data: completeness results. In *International Conference on Machine Learning*, pages 7153–7163. PMLR, 2020.
- Elizabeth L. Ogburn, Ilya Shpitser, and Youjin Lee. Causal inference, social networks and chain graphs. *Journal of the Royal Statistical Society: Series A (Statistics in Society)*, 183(4):1659–1676, 2020.
- Judea Pearl. *Causality*. Cambridge University Press, 2009.
- Thomas S. Richardson. Markov properties for acyclic directed mixed graphs. *Scandinavian Journal of Statistics*, 30(1):145–157, 2003.
- Thomas S. Richardson, Robin J. Evans, James M. Robins, and Ilya Shpitser. Nested Markov properties for acyclic directed mixed graphs, 2017. Working paper.
- James M. Robins. A new approach to causal inference in mortality studies with a sustained exposure period – application to control of the healthy worker survivor effect. *Mathematical Modelling*, 7(9-12):1393–1512, 1986.
- Richard Scheines, Peter Spirtes, Clark Glymour, Christopher Meek, and Thomas Richardson. The tetrad project: Constraint based aids to causal model specification. *Multivariate Behavioral Research*, 33(1):65–117, 1998.

- Ilya Shpitser. Segregated graphs and marginals of chain graph models. In *Advances in Neural Information Processing Systems*, pages 1720–1728, 2015.
- Peter L. Spirtes, Clark N. Glymour, and Richard Scheines. *Causation, Prediction, and Search*. MIT press, 2000.
- Thomas Verma and Judea Pearl. Equivalence and synthesis of causal models. In *Proceedings of the 6th Annual Conference on Uncertainty in Artificial Intelligence*, 1990.
- Sewall Wright. Correlation and causation. *Journal of Agricultural Research*, 20:557–580, 1921.
- Sewall Wright. The method of path coefficients. *Annals of Mathematical Statistics*, 5(3): 161–215, 1934.
- Paul Zevich. zEpid: An epidemiology analysis toolkit. <https://github.com/pzivich/zepid/>, 2018. Python package.
- Kun Zhang, Joseph Ramsey, Mingming Gong, Ruichu Cai, Shohei Shimizu, Peter Spirtes, Clark Glymour, et al. causal-learn: Causal Discovery for Python. <https://github.com/cmu-phil/causal-learn>, 2022.