

Incorporating Knowledge into Document Summarization — an Application of Prefix-Tuning on GPT-2

Chen Chen and Wei Emma Zhang and Alireza Seyed Shakeri

The University of Adelaide
South Australia 5005, Australia

Abstract

Despite the great development of document summarization techniques nowadays, factual inconsistencies between the generated summaries and the original text still occur from time to time. This paper proposes a prefix-tuning-based approach that uses a set of trainable continuous prefix prompt together with discrete prompts to aid model generation, which makes a significant impact on both CNN/Daily Mail and XSum summaries generated using GPT-2. The improvements on fact preservation in the generated summaries indicates the effectiveness of adopting this prefix-tuning-based method in knowledge-enhanced document summarization, and also shows a great potential on other natural language processing tasks.

1 Introduction

With the explosive growth of information on the Internet in recent years, document summarization has become an area of increasing interest. There are two main approaches for document summarization, one is extractive and the other is abstractive (Qu et al., 2022). Decades ago, there were more studies on extractive abstraction. In recent years, benefits from the proposal of Transformer (Vaswani et al., 2017) and the emergence of various large-scale pre-trained language models such as GPT (Radford et al., 2018), BART (Lewis et al., 2020), more and more researches now focus on using pre-trained language models to do abstractive summarization.

Abstractive summarization allows us to generate natural summaries that are more like human-written ones, rather than simply extracting sentences from the original text, but one problem with it is that the summaries a model generates are not always factually consistent (Zhu et al., 2021). The presence of the model prior makes it likely that the model will generate sentences that do not match the facts of the original text when we use the pre-

trained model for document summarization. Although we can fine tune the model using our own data, fine-tuning a model usually still requires a large dataset containing tens of thousands of data (Brown et al., 2020), which often poses a dilemma for the users of the model.

To solve this problem, one approach is to incorporate knowledge into the model to aid summary generation. This reduces the need for training data and ensures that the facts we add will always have an impact on the model. For example, Liu et al. (2021c) proposed KG-BART (knowledge-graph BART), which can help BART to generate summaries by adding KG-encoder and KG-decoder to the model, while Zhu et al. (2021) designed a graph attention network (GAT) to take in external knowledge and enhance the factual consistency of the generated summaries by passing the output of the GAT to the cross attention layer of decoder. However, as we can see in the above studies, adding knowledge to a model usually requires not only embedding knowledge, but also designing new structures to receive it, so it is not very practical in many cases, still leaving the problem unresolved.

Stopping to rethink this sequence-to-sequence problem of document summarization, we realized that, in fact, when generating summaries using pre-trained models, we had actually been trying to figure out how to generate correct summaries using the documents together with the model’s prior. If the model’s prior was correct or the input documents could effectively influence the summary generation, then the generated summaries would be correct, and conversely, the summaries would have inconsistencies with the original text (Xie et al., 2021). Thus, the problem of adding knowledge to a model to steer it to generate correct summaries can be transformed into the problem of how to combine texts more effectively with the model prior in document summarization. Following this idea, we propose a method for incorporating knowledge into

document summarization based on prefix-tuning.

Prefix-tuning is a type of prompt-based learning. Prompting methods assume that there is already enough knowledge in a pre-trained language model, so that we can modify tasks to take advantage of the model prior and let the model spit out the correct answer on its own (Liu et al., 2021a). Prefix-tuning is to train a set of continuous task specific prefix prompts to steer the model to perform text generation for different generation tasks. (Li and Liang, 2021). To incorporate knowledge into generation, we simply add a segment of natural language prompts extracted by OpenIE (Angeli et al., 2015) in front of the original text to emphasize the relations we care about. Through experiments, we found that since the continuous prefix is very expressive, after training, the continuous prefix can recognize the patterns in the natural language prompts, thus pick out the key information from them and then combine the extracted information with the original text to perform summary generation, so this is a very direct way to influence the summary generation by data.

To test the effectiveness of this approach, we finally use both CoCo (Xie et al., 2021) and ROUGE (Lin, 2004) to evaluate the generated summaries. CoCo scores the factual consistency of the generated summaries by averaging the positional scores of important words, while ROUGE is based on the overlap of n-grams. Experiments demonstrate that since the calculation of the positional score relies on the occurrence of important words in the original text, the scoring model will prefer summaries generated by other models that contain more words from the original text, and instead considers the more abstract golden summaries written by humans to have lower factual consistency. Nonetheless, the ROUGE scores of the summaries generated based on this approach are indisputably higher than when there is no relation added.

2 Literature Review

Our research mainly related to two directions. One is prompt-based learning, the other is controllable generation.

Prompt-based learning: Prompting method is a new paradigm for using pre-trained language models and was summarized and presented by Liu et al. (2021a). The philosophy of Prompt-based learning is to modify tasks to fit models instead of modifying models to fit tasks. According to the survey,

prompts can be divided into cloze prompts (Petroni et al., 2019) and prefix prompts (Li and Liang, 2021) by location, discrete prompts (Petroni et al., 2019), continuous prompts (Li and Liang, 2021) and hybrid prompts (Liu et al., 2021b) by shape. To find the best prompt for a specific task, we can either manually design different prompts and try out the performance of them on the task (Petroni et al., 2019), or we can use automated methods such as prompt mining (Jiang et al., 2020) or prompt tuning (Li and Liang, 2021) to continuously optimize a prompt. The studies that can be done using prompt-based learning are even more varied. This new paradigm has been widely adopted for more than 20 natural language processing related tasks including text classification, knowledge probing, and so forth with good results Liu et al. (2021a). Here we mainly refer to prefix-tuning, training a set of continuous prefix prompts that can emphasize the added information at the beginning of the original text, thus achieving controllable generation.

Controllable generation: Controllable generation is a topic that has been studied for a long time, and the prefix-tuning proposed in recent years has opened up more possibilities in this field. Prefix-tuning itself is considered to be a way to steer pre-trained language models (Qian et al., 2022). By training a set of contrastive prefixes, Qian et al. (2022) improved the controllability of the prefixes and guided the model for the generation of specific sentiments and attributes. Clive et al. (2021) then customize prefixes for different documents, and achieve controllable generation by combining task specific prefix and particular control prefixes. A similar study is Tailor (Yang et al., 2022), who steers the model to generate sentences with multiple attributes at the same time by ‘weaving’ together the prefix prompts of different attributes. However, most of the above studies have all worked on changing prefixes, and few studies have looked into the properties of prefix-tuning and what happens if we directly change the document, which is what we are going to do in this paper.

3 Methodology

In this paper we use OpenIE to extract the relations exist in a sentence, and then select the triplet containing the entities we care about as the relation to be added to the original text by part of speech tagging (POS) or named entity recognition (NER). After adding the triadic relation to the text, we train

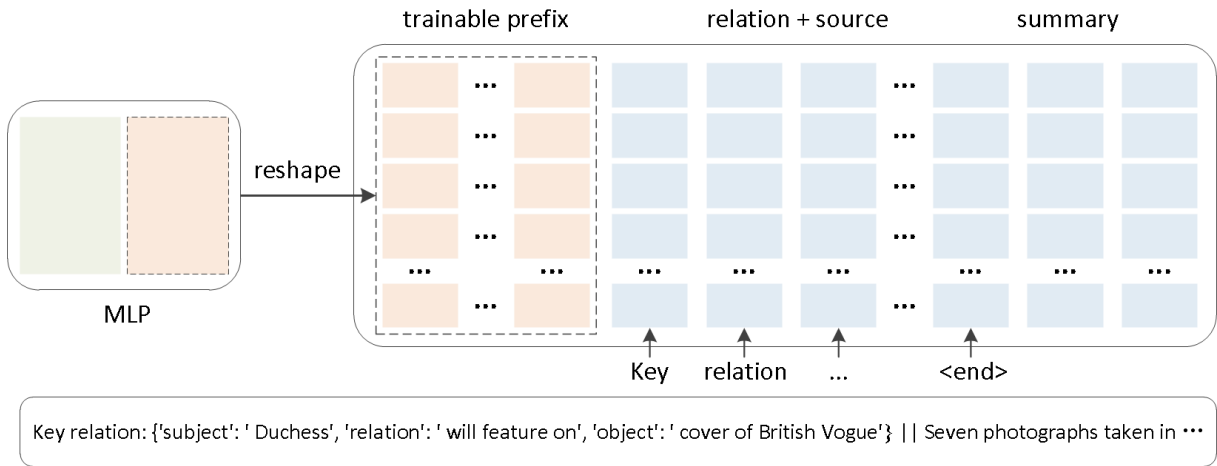


Figure 1: An overhead view of the proposed method. The salmon pink block in MLP represents the last layer of the MLP. Prefix-tuning reshapes it and passes it to the ‘past_key_values’ parameter of GPT-2, thus achieving the purpose of adding continuous prefix prompts to the model. The short text below is an example of X_{rel} .

a set of continuous prefix prompts on the modified text, hoping that this set of prefixes will recognize the information we added and help the model to generate factually consistent sentences with the added relations in combination with the original texts. To evaluate the generation results, we score the golden summaries and the generated summaries separately using CoCo against the original texts and calculate the ROUGE score of the generated summaries on the golden summaries. The following details the techniques we use in this paper.

3.1 Preliminary

Before presenting the solution we propose, we would like to first introduce prefix-tuning. Prefix-tuning is a kind of prompt-based learning proposed by Li and Liang (2021). Compared with traditional fine-tuning-based approaches, the most distinctive feature of prompt-based learning is that it tends to modify tasks to let the model use its own knowledge to accomplish the tasks, without specifically designing additional structures to adapt the model to a task. For example, TL;DR is the prompt trained by GPT-2 to prompt the model for summarization task. In contrast to TL;DR, prefix-tuning does not include natural language prompts in the text, but instead uses ‘past_key_values’ to concatenate a set of trainable parameters as a prefix in front of the text X . In training, keeping the parameters of the model constant and training only the parameters in the prefix, we obtain a set of prefixes that allow the model to perform a specific task. Specifically, since the structure of GPT-2 is a multi-layer Transformer decoder (Radford et al.,

2018), its prediction of the next word is jointly determined by all the preceding words, so as long as we can make targeted changes to the left context, then we can control the generation of the model. ‘past_key_values’ was originally used to store the previous computation results of the model to speed up the computation, but prefix-tuning cleverly exploits this by mapping a set of parameters to the size required by ‘past_key_values’ through a fully connected neural network (MLP) and then passing them to the model’s ‘past_key_values’ parameter to achieve the purpose of adding prefix before X . Having been passed to the model, this parameter will be concatenated with the existing keys and values of the model in the dimension of sequence length, thus controlling the summary generation.

3.2 Knowledge incorporation

Although language models contain a large amount of knowledge, this knowledge is also the reason why the summaries generated by the models do not always agree with the facts of the original text (Xie et al., 2021). Therefore, how to use the knowledge we need and eliminate wrong priors becomes a problem. To do this, we emphasize the fact we care about by adding a set of natural language prompts before the text. Intuitively, if we add a structured set of relation leading by keywords (such as ‘key relation’) in front of the original text, this is equivalent to giving a model a hint for generation. Then first, the model’s prior will assume that some important information is contained here. Second, the added relation increases the weights of the words in the relation and make them more likely to ap-

pear in the generated summaries. Third, through experiments we found that prefix-tuning is very good at extracting structured information, so structurally adding prefix prompts allows the trainable continuous prefix to help the model focus on this structured information.

In our experiments, we first apply this approach to the preliminary experiment of sentence extraction, giving the model some information about a sentence to see if the model could extract that sentence accurately, and then apply this idea to the knowledge-enhanced document summarization. For sentence extraction, we first test whether the model can extract the first sentence accurately by training the model with the first sentence of the source text without any guidance. Then we add the first three tokens of any sentence in front of a source text and train the model with those sentences to see whether the model could extract those sentences accurately. Finally, we extract any 3 tokens from a sentence and train the model, to see whether the model can extract that sentence accurately. For knowledge-enhance document summarization, we use OpenIE to first extract all the triadic relations contained in the golden summary, then perform NER on the golden summary to pick out all entities. Adding the triplet containing the entities we care about in front of the source text, we have a training data X_{rel} . The overhead view of our proposed method is shown as Figure 1

3.3 Metrics

A common metric used in natural language processing is ROUGE, which scores the generated summaries based on the overlap of n-grams (Lin, 2004). This is effective when evaluating the similarity between the generated summary and the golden summary, but it is hard to measure how well a sentence agrees with the facts of the original. As shown in Table 1, perhaps the generated summary and the golden summary have a high degree of overlap in words, this generated summary is not necessarily consistent with the original facts. To overcome this issue, in addition to ROUGE, we also use CoCo (Xie et al., 2021). CoCo is a new metric based on positional scores to evaluate the factual consistency between the summary and the original text. The basic idea is to first detect the keywords in the summary, mask them in the original text to generate masked document X' , and then use X' and the original X to calculate the positional score of each

ref:	Hong Kong-based airline Cathay Pacific has announced a ban on shipments of shark fin in a move that has been welcomed by conservationists.
gen:	Cathay Pacific is to ban shark fin shipments to Hong Kong.

Table 1: A comparison between a golden summary and a generated summary (without relation added). Although the ROUGE score for the generated summary may be high, these two sentences are actually telling different stories.

word in the summary, i.e., the score of each word appearing in a specific position in the summary. If the positional score of a word appearing at a certain position in the summary under X is significantly higher than the positional score of the word appearing at that position under X' , then we assume that the word at that position in the summary is more influenced by the original text, the fact related to this word is more likely consistent with the fact of the original text. Conversely, if the difference between the positional score of a word in the summary under X and X' is not significant, i.e., whether the original text is X or X' has little effect on the positional score of the word, then we consider that the word is not strongly dependent on the original text, the presence of the word in this position is likely to cause the summary to be factually inconsistent (Xie et al., 2021). When using CoCo we use POS or NER to pick the important words to be masked. For scoring model, we use BART. We will further discuss CoCo in experiments.

4 Experiment

In experiments, we first examine the properties of prefix-tuning through a couple of preliminary experiments, then conduct knowledge-enhance document summarization on this basis. Below we first introduce the datasets and baselines we use in our experiments, and then present all the experiments in detail.

4.1 Dataset

CNN/Daily Mail: CNN/Daily Mail is a dataset proposed in 2016 for abstractive summarization tasks (Nallapati et al., 2016). The source of each data is a long article and the target is the corresponding summary crawled by Nallapati et al. (2016). The CNN/Daily Mail dataset contains

286,817 training data, 13,368 validation data and 11,487 test data. The average length of source is 766 words, and target is usually three to four sentences, with an average length of 53 words (Nallapati et al., 2016). Since the GPT-2 model has a limit on the input length and the parameters required to train for prefix-tuning are not many, here we only use the first 50,000 data where the sum of the length of source and target does not exceed 800. If the added relation is very long, then we will further reduce the data usage according to the length of the new text.

XSum: XSum (Narayan et al., 2018) is another commonly used dataset in the field of document summarization. The full name of it is extreme summarization, and its source is BBC’s online articles. It contains 204,045 training data, 11,332 validation data and 11,334 test data. As its name indicates, XSum seeks to summarize an article with a very short sentence, so its target is shorter than that of CNN/Daily Mail, and also more abstract. The average length of XSum’s sources is 431 words, but the average length of its targets is only about 23 words (Narayan et al., 2018). The abstract nature of XSum makes the abstractive summarization task more challenging, so getting good results on XSum can also make a model more convincing. As same as CNN/Daily Mail, we only use the first 50,000 data with the sum of the length of source and target less than 800 for training.

4.2 Baseline

To evaluate the performance of the model, we used two metrics in our experiments. ROUGE to evaluate the degree of overlap between the generated summary and the golden summary, and CoCo to evaluate the factual consistency of the generated summary with the original text. Since there are now many models trained specifically for document summarization, it is difficult for GPT-2 to surpass the performance of them. Therefore, when comparing ROUGE scores we only compare with the ROUGE scores reported by GPT-2 obtained when using TL;DR. Given that prefix-tuning is far more expressive than this one hard prompt, the scores for prefix-tuning should at least exceed those of GPT-2, and if relations are added to the text, then theoretically the summaries generated by modified text should have higher ROUGE scores than if no relations are added.

CoCo, on the other hand, is not a commonly used

metric like Rouge. It is rare to see articles that use CoCo to evaluate the factual consistency of a model on summarization tasks, so for the CoCo score, we use the summaries generated by the model without the addition of relations as the baseline. The CoCo score with the addition of relations should be higher than the CoCo score when there is no relation added.

4.3 Preliminary Experiment

Preliminary experiment is of two parts, the first is abstractive summarization, and the second part is sentence extraction. The experimental results show that prefix-tuning is effective for document summarization task on GPT-2, and it is good at extracting information from structured content in texts. This properties of prefix-tuning fit well with our purpose.

4.3.1 Abstractive summarization

Abstractive summarization is a preliminary experiment to examine the performance of prefix tuning for document summarization on GPT-2 without the addition of relations. The results can be used as a baseline for knowledge-enhanced document summarization.

CNN/Daily Mail: When using prefix-tuning for document summarization task on CNN/Daily Mail, the ROUGE-1 is only about 20 if we only use a prefix of length 5, but if a longer prefix is used, then the performance of the model immediately improves significantly. If we use a prefix of length 100 and allow the model to generate summaries with a maximum length of 100, then the ROUGE-1 for summaries generated on CNN/Daily Mail using GPT-2 can reach 30, which is consistent with the conclusion reported in Li and Liang (2021) that the longer the prefix the more expressive it is. For the part of the data we use, the ROUGE scores exceed those reported by GPT-2 for document summarization on CNN/Daily Mail using TL;DR, see Table 2.

	ROUGE-1	ROUGE-2	ROUGE-L
TL;DR	29.34	8.27	26.58
Prefix	32.89	14.58	30.78

Table 2: Results of TL;DR and Prefix-tuning

However, we found a problem in the generated summaries of CNN/Daily Mail using prefix-tuning that the original sentences from the source texts

often appear in the summaries. Since there are many studies reporting a significant difference in the level of abstraction between the summaries of CNN/Daily Mail generated by a model and those of XSum (Lewis et al., 2020; Xu et al., 2020), we conducted another abstractive summarization experiment using XSum in order to determine whether prefix-tuning causes sentences and words from the original text to appear in the summaries, or whether the characteristics of the training data make the model behave this way.

XSum: As described above, the golden summaries of the XSum dataset are very concise and refined, which poses a higher challenge to a pre-trained language model. If a 100-length prefix is used and the model is allowed to generate summaries with a maximum length of 100, the ROUGE-1 of the summaries generated by GPT-2 is very low, only about 20%, but the good news is that the generated summaries are indeed more abstract, and almost no original sentences from the original text appear. This experiment shows that the appearance of the original sentence of the article in the summaries is a result of the dataset. This does not happen if a very abstract dataset is replaced. In addition, since prefix-tuning can perfectly pick out the key information in data2text task as shown in (Li and Liang, 2021) and identifies the range of sentences in CNN/Daily Mail without any processing such as mask on the training data, we found that prefix-tuning may be very sensitive to the situation that target overlaps with source and can accurately recognize the structured information with certain pattern from source by only a small amount of training. We carried out the preliminary experiment of sentence extraction with this hypothesis, explored whether prefix-tuning can actually identify sentence ranges and extract sentences from the sources as we expected.

Another interesting finding in abstractive summarization is that by taking the prefixes trained on CNN/Daily Mail for abstractive summarization and having the model generate summaries of XSum, the model also exhibits similar behavior to generating summaries of CNN/Daily Mail, i.e., many times it generates sentences from the original text rather than more abstract sentences. This shows that trained prefix prompts with certain properties can be transferred to other datasets for use, and allows texts generated using other datasets to exhibit similar properties.

4.3.2 Sentence extraction

Sentence extraction is to further explore the properties of prefix tuning. Specifically, this preliminary experiment uses the method proposed in methodology to test whether prefix-tuning can truly identify the information we want to extract accurately, especially their boundaries. The experiments demonstrate that, When experimenting with CNN/Daily Mail for sentence extraction, if the model is trained directly with the first sentence of source without any guidance (SenEx1), the model can extract that sentence almost perfectly. If the first three tokens of a sentence are added to the front of the source and then the model is trained (SenEx2), then the model can extract that sentence most of the time, but with reduced accuracy. If any three tokens from a sentence are added to the source and the model is trained with that sentence (SenEx3), the model can still extract that sentence, but the ROUGE-1 score drops to about 65%, as Table 3 shows.

	ROUGE-1	ROUGE-2	ROUGE-L
SenEx1	99.98	99.79	99.98
SenEx2	96.56	95.64	96.46
SenEx3	65.50	59.38	64.25

Table 3: Results of Extracting Sentences. The tokens we use here are tokens after byte pair encoding of the original text, so it is not guaranteed to be three complete words.

It is worth noting that, first of all, the extraction is exact to the token. For example, the periods ‘.’ and ‘.’ (with a space) are two tokens in GPT-2 embedding, then if we take the first period ‘.’ as the criterion for extracting a sentence, the generated summary will definitely be bounded by the first period, and will never stop at the second kind of period ‘.’. Second, if the model does not correctly extract the sentence we want to extract, the result is still necessarily a sentence from the original text and will not be generated arbitrarily, so we believe that when using any 3 tokens of a sentence for extraction, the model is still able to recognize the boundaries, even though in many cases the model does not correctly identify the sentence we are extracting. As long as we provide more special tokens (e.g., tokens of low-frequency words instead of tokens of conjunctions or punctuations), the model will be able to identify which sentence we are extracting and extract that sentence precisely.

The above preliminary experiments show that prefix-tuning can indeed extract key information directly from the original text, and its extraction is so precise that it can identify the patterns of structured information in the text, extract the important information with token precision, and filter out the frames that contain this information in the original text. Therefore, theoretically we could add the knowledge we care about to the text in this way, and then let the text combine the added knowledge to generate a factually consistent summary. This is what knowledge-enhanced document summarization does below.

4.4 Knowledge-enhanced document summarization

We extracted the relations in the targets of CNN/Daily Mail and XSum respectively as described in the methodology section, and then added the selected relations to the original text and trained prefixes for summary generation. The results show that the dataset with the added relations do generate summaries that are more relevant to the topic of the relations we added, and most of the generated summaries maintain factual consistency with the added relations. However, there are still some cases where this solution can go wrong. We show some examples of correct and incorrect generation in the next page, and each of these examples is analyzed below.

4.4.1 CNN/Daily Mail

We first conducted experiments using CNN/Daily Mail. Here we only select the sentence that the relation best meets our requirements from the three to four sentences of a target, instead of using the whole target for training. By analyzing the first ten cases of CNN/Daily Mail and comparing the summaries generated with and without the addition of relation, we found that when a) the added relation covers thoroughly; b) there is a reference sentence in the original text, then the generated summary will be correct, as shown in Tables 4(a) and 4(b).

However, the added relations only ensure that the generated summary is consistent with the facts described by the relation, and if the summary is not generated according to the added relations or the generated summary is beyond the coverage of the added relation, inconsistency may occur. This is manifested in a) the generated summary does not refer to the added relation at all, as shown in Ta-

ble 4(c); b) the generated summary extracts part of the content of the added relation, but this changes the correct summary, resulting in factual inconsistency, as shown in Table 4(d). c) the summary completely contains the keywords of the added relation, but factual inconsistency occurs beyond the added relation, as Table 4(e) shows.

Since the model tends to refer to the original text or extract the exact sentences from the original text when generating summaries with CNN/Daily Mail, the effect of this approach is likely to be amplified or obscured. To examine the performance of this approach on a more abstract dataset, we conducted another experiment on XSum.

4.4.2 XSum

Overall, the results of generation using prefix-tuning on XSum with added relations are similar to CNN/Daily Mail. However, since the results of GPT-2 for summarization on XSum are originally not good, XSum with added relations improves the results to a larger extent compared to the dataset without added relations. It is experimentally demonstrated that the generated summaries can be correct without referring to the original text, as shown in Table 4(f). However, similar to CNN/Daily Mail, there is a possibility of error in the parts that the added relations are not included to, such as time, place, and so forth. But overall, the addition of relations has helped the model to perform better.

4.5 Evaluation

In this subsection we score the above generated results and analyze the scoring results in detail. As mentioned above, the CoCo score for the factual consistency of the summary with the original text is based on the positional scores of important words in the target. Specifically, if the original text is ‘Biden is the president of the United States.’, and the golden summary is the same as the original text, also ‘Biden is the president of the United States.’, but the generated text is ‘Obama is the president of the United States.’, then CoCo will first use POS or NER to pick out the important words. Suppose we use NER and keep all the ‘PERSON’, ‘TITLE’ and ‘COUNTRY’ in the results, then the keywords picked from reference will be ‘Biden’, ‘president’, ‘United’, ‘States’, and the keywords picked from generation will be ‘Obama’, ‘president’, ‘United’, ‘States’. Masking off the corresponding word in the original text X , we get X'_{ref} :

relation:	Key relation: ‘subject’: ‘ Sally Forrest ’, ‘relation’: ‘ died on ’, ‘object’: ‘ March 15 ’
reference:	Sally Forrest , an actress-dancer who graced the silver screen throughout the ’40s and ’50s in MGM musicals and films died on March 15 .
X gen:	Actress: Sally Forrest was in the 1951 Ida Lupino-directed film ‘Hard, Fast and Beautiful’
X _{rel} gen:	Sally Forrest died on March 15 at her home in Beverly Hills, California.

(a) A correct case from CNN/Daily Mail. The second half of the sentence is the original article.

relation:	Key relation: ‘subject’: ‘ Prince Harry ’, ‘relation’: ‘ is in ’, ‘object’: " attendance for England ’s crunch match against France "
reference:	Prince Harry in attendance for England’s crunch match against France .
X gen:	England beat France 55-35 in ‘Le Crunch’.
X _{rel} gen:	Prince Harry in attendance for England’s crunch match against France .

(b) A correct case from CNN/Daily Mail. Added relation covers through the sentence.

relation:	Key relation: ‘subject’: ‘ valuable stock ’, ‘relation’: ‘ taken from ’, ‘object’: ‘ his antiques shop in Basingstoke ’
reference:	Discovered valuable stock taken from his antiques shop in Basingstoke .
X gen:	Alan Stone, 51, arrested on suspicion of theft.
X _{rel} gen:	The father-of-four admitted he had a ‘lump in his throat’

(c) An incorrect case from CNN/Daily Mail. The generated summary does not follow the added relation at all.

relation:	Key relation: ‘subject’: ‘ 1,000 pieces ’, ‘relation’: ‘ is in ’, ‘object’: ‘ last two years ’
reference:	Has inked 1,000 pieces of art on leaves in last two years .
X gen:	Teacher Wang Lian has drawn hundreds of doodles on leaves for the last 10 years.
X _{rel} gen:	Teacher Wang Lian has drawn hundreds of doodles on leaves for the last two years .

(d) An incorrect case from CNN/Daily Mail. Added relation wrongly affected the model and causes errors


relation:	Key relation: ‘subject’: ‘ could first preventive tool ’, ‘relation’: ‘ is in ’, ‘object’: ‘ history ’
reference:	WHO leader: This vaccine could be "the first preventive tool against Ebola in history "
X gen:	A vaccine will be tested in a subsequent study.
X _{rel} gen:	The trial could be the first preventive tool in history .

(e) An incorrect case from CNN/Daily Mail. Error occurs beyond the added relation.


relation:	Key relation: ‘subject’: ‘ Former Premier League footballer Sam Sodje ’, ‘relation’: ‘ has appeared alongside ’, ‘object’: ‘ three brothers accused ’
reference:	Former Premier League footballer Sam Sodje has appeared in court alongside three brothers accused of charity fraud.
X gen:	A former Leeds United defender has been charged with conspiracy to commit fraud.
X _{rel} gen:	Former Premier League footballer Sam Sodje has appeared alongside three brothers accused of fraud.

(f) A correct case from XSum. The word ‘fraudulent’ appears in the original, but ‘fraud’ does not

Table 4: Analysis

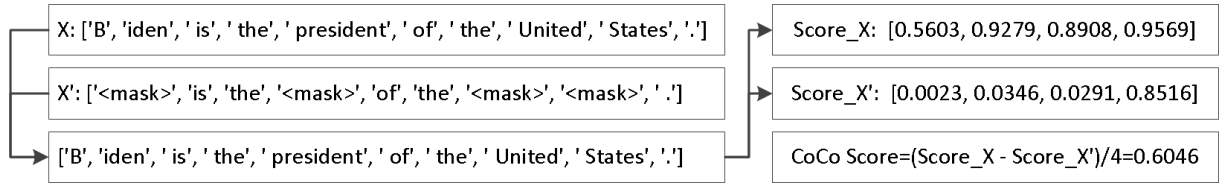

(a) CoCo score for the reference. Score_X and Score_X' are the positional scores of 'B', 'president', 'United', 'States' on X and X'

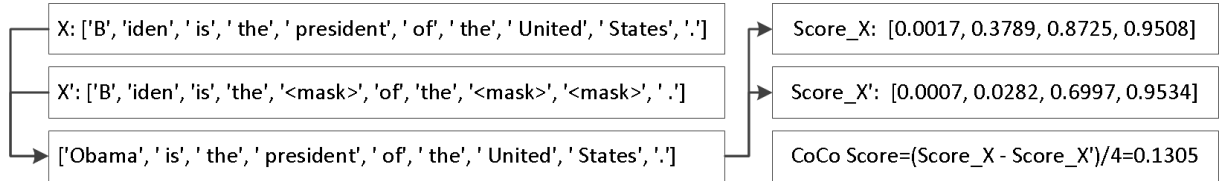

(b) CoCo score for the generated summary. Score_X and Score_X' are the positional scores of 'Obama', 'president', 'United', 'States' on X and X'

Figure 2: Calculation of CoCo score

'<mask>' is the <mask> of the <mask> <mask>.' and X'_{gen} 'Biden is the <mask> of the <mask> <mask>.'. This allows us to score reference and generated summary using X , X'_{ref} and X'_{gen} respectively. When they are put into the scoring model BART for scoring, BART will perform byte pair encoding (BPE) to these sentences. Regardless of how BPE splits a word, if we only take the first token for each important word, then assuming that there are N key words picked out, the CoCo score is $CoCo = (Score_X - Score_{X'})/N$. For example, if we want to calculate the CoCo score for the reference, the process can be illustrated as Figure 2(a). The same is true for calculating the score of generated summary. Here we can see that since the word 'Biden' appears in X , the $Score_X$ for the first token of that word is very high, while in X' , i.e., where the first word is '<mask>', the score for 'B' is considerably lower. Thus, the larger the difference between $Score_X$ and $Score_{X'}$, the more likely the sentence is factually consistent. On the contrary, for the score of generated summary, since the two positional scores for 'Obama' against 'Biden' are equivalently small, the $Score_X - Score_{X'}$ will be small and the CoCo score will be low, which means the sentence is likely to be factually inconsistent with the original.

The Pearson correlation and Spearman correlation between CoCo and human judgments of factual consistency on document summarization task is higher than that of other matrices (Xie et al., 2021), indicating that it does provide a better mea-

sure than other metrics of how well a sentence is factually consistent with the original text. However, we found that it is not suitable for comparing factual consistency of golden summaries and generated summaries, because CoCo relies on the positional scores of the words in a sentence, but the summaries generated from the original texts X are often more likely to have words from the original text than the golden summaries, which results in higher CoCo scores for the generated summaries and lower scores for the golden summaries. And since our relations are drawn from the golden summaries, this results in the summaries generated from texts with added relations X_{rel} being closer to the golden summaries, thereby making the CoCo scores lower than those summaries generated from the original texts X , despite the summaries generated from X_{rel} are often more consistent with the facts of the original text. This problem is more obvious on CNN/Daily Mail, because the summaries generated on X are mostly the original text, while the summaries generated on X_{rel} are closer to the references. Although the summaries generated on XSum with and without added relations are similarly abstract, the CoCo score without added relations is still slightly higher than the CoCo score with added relations. Nonetheless, for ROUGE, the ROUGE score of the summaries generated with the added relations is indisputably higher than the ROUGE score of the summaries generated without the added relations. CoCo and ROUGE scores are shown in Table 5 and Table 6.

	Only Noun	Noun+Verb
X	0.0264	0.0253
X_{rel}	0.0179	0.0163

(a) CNN/Daily Mail

	Only Noun	Noun+Verb
X	0.0086	0.0074
X_{rel}	0.0074	0.0063

(b) XSum

Table 5: CoCo scores

	ROUGE-1	ROUGE-2	ROUGE-L
X	25.07	12.13	23.46
X_{rel}	62.38	49.46	61.44

(a) CNN/Daily Mail

	ROUGE-1	ROUGE-2	ROUGE-L
X	23.77	7.06	19.73
X_{rel}	45.69	31.06	43.01

(b) XSum

Table 6: ROUGE scores

5 Conclusion

This paper explores the properties of prefix-tuning, proposes a knowledge-enhanced document summarization method that combines prefix-tuning and natural language prompts, and makes a significant impact on the summaries generated using GPT-2 for both CNN/Daily Mail and XSum. However, as discussed in the paper, this approach still has many shortcomings and can be improved. For example, the relations we add to the source are only the relations extracted by OpenIE. The extracted content may not be the relations we care about, and the relations are often not a good representation of the relationship of two entities. In addition, we consider that OpenIE many times extracts too long content, so that the original texts expose too much information to the model, which may have an excessive impact on the summary generation. To deal with these two issues, in the future, instead of adding relations extracted by OpenIE, we can add existing knowledge in knowledge bases to the model. This ensures the cleanliness and purity of the information and avoids the influence of low-quality data on the model. Furthermore, since the

maximum text length that GPT-2 can handle is only 1024, this not only limits the amount of training data that can be used, but also indirectly limits the length of prefixes that can be attempted and the length of summaries that are allowed to be generated. Therefore, if GPT-2 can be replaced with a model that can handle infinite length preferably trained specifically for summarization task, then perhaps we can generate longer summaries using more training data with longer prefixes, thus further improving the performance of this approach. However, too long prefixes may lead to a decrease but not an increase in the performance of the model due to inadequate training, or too long prefixes may dominate model generation instead of text, so how long prefixes should be used in what models and on what datasets is also a valuable direction for future research.

References

- Gabor Angeli, Melvin Jose Johnson Premkumar, and Christopher D. Manning. 2015. [Leveraging linguistic structure for open domain information extraction](#). In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing of the Asian Federation of Natural Language Processing, ACL 2015, July 26-31, 2015, Beijing, China, Volume 1: Long Papers*, pages 344–354. The Association for Computer Linguistics.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. [Language models are few-shot learners](#). In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*.
- Jordan Clive, Kris Cao, and Marek Rei. 2021. [Control prefixes for parameter-efficient text generation](#).
- Zhengbao Jiang, Frank F. Xu, Jun Araki, and Graham Neubig. 2020. [How can we know what language models know](#). *Transactions of the Association for Computational Linguistics*, 8:423–438.
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer.

2020. [BART: denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, ACL 2020, Online, July 5-10, 2020*, pages 7871–7880. Association for Computational Linguistics.
- Xiang Lisa Li and Percy Liang. 2021. [Prefix-tuning: Optimizing continuous prompts for generation](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing, ACL/IJCNLP 2021, (Volume 1: Long Papers), Virtual Event, August 1-6, 2021*, pages 4582–4597. Association for Computational Linguistics.
- Chin-Yew Lin. 2004. [ROUGE: A package for automatic evaluation of summaries](#). In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Pengfei Liu, Weizhe Yuan, Jinlan Fu, Zhengbao Jiang, Hiroaki Hayashi, and Graham Neubig. 2021a. [Pre-train, prompt, and predict: A systematic survey of prompting methods in natural language processing](#).
- Xiao Liu, Yanan Zheng, Zhengxiao Du, Ming Ding, Yujie Qian, Zhilin Yang, and Jie Tang. 2021b. [Gpt understands, too](#).
- Ye Liu, Yao Wan, Lifang He, Hao Peng, and Philip S. Yu. 2021c. [KG-BART: knowledge graph-augmented BART for generative commonsense reasoning](#). In *Thirty-Fifth AAAI Conference on Artificial Intelligence, AAAI 2021, Thirty-Third Conference on Innovative Applications of Artificial Intelligence, IAAI 2021, The Eleventh Symposium on Educational Advances in Artificial Intelligence, EAAI 2021, Virtual Event, February 2-9, 2021*, pages 6418–6425. AAAI Press.
- Ramesh Nallapati, Bowen Zhou, Cícero Nogueira dos Santos, Çağlar Gülçehre, and Bing Xiang. 2016. [Abstractive text summarization using sequence-to-sequence rnns and beyond](#). In *Proceedings of the 20th SIGNLL Conference on Computational Natural Language Learning, CoNLL 2016, Berlin, Germany, August 11-12, 2016*, pages 280–290. ACL.
- Shashi Narayan, Shay B. Cohen, and Mirella Lapata. 2018. [Don’t give me the details, just the summary! topic-aware convolutional neural networks for extreme summarization](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, Brussels, Belgium, October 31 - November 4, 2018*, pages 1797–1807. Association for Computational Linguistics.
- Fabio Petroni, Tim Rocktäschel, Sebastian Riedel, Patrick S. H. Lewis, Anton Bakhtin, Yuxiang Wu, and Alexander H. Miller. 2019. [Language models as knowledge bases?](#) In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing, EMNLP-IJCNLP 2019, Hong Kong, China, November 3-7, 2019*, pages 2463–2473. Association for Computational Linguistics.
- Jing Qian, Li Dong, Yelong Shen, Furu Wei, and Weizhu Chen. 2022. [Controllable natural language generation with contrastive prefixes](#). In *Findings of the Association for Computational Linguistics: ACL 2022, Dublin, Ireland, May 22-27, 2022*, pages 2912–2924. Association for Computational Linguistics.
- Yutong Qu, Wei Emma Zhang, Jian Yang, Lingfei Wu, and Jia Wu. 2022. [Knowledge-aware document summarization: A survey of knowledge, embedding methods and architectures](#).
- Alec Radford, Karthik Narasimhan, Tim Salimans, and Ilya Sutskever. 2018. [Improving language understanding by generative pre-training](#).
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. [Attention is all you need](#).
- Yuexiang Xie, Fei Sun, Yang Deng, Yaliang Li, and Bolin Ding. 2021. [Factual consistency evaluation for text summarization via counterfactual estimation](#). In *Findings of the Association for Computational Linguistics: EMNLP 2021, Virtual Event / Punta Cana, Dominican Republic, 16-20 November, 2021*, pages 100–110. Association for Computational Linguistics.
- Jiacheng Xu, Shrey Desai, and Greg Durrett. 2020. [Understanding neural abstractive summarization models via uncertainty](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing, EMNLP 2020, Online, November 16-20, 2020*, pages 6275–6281. Association for Computational Linguistics.
- Kexin Yang, Dayiheng Liu, Wenqiang Lei, Baosong Yang, Mingfeng Xue, Boxing Chen, and Jun Xie. 2022. [Tailor: A prompt-based approach to attribute-based controlled text generation](#).
- Chenguang Zhu, William Hinthorn, Ruochen Xu, Qingkai Zeng, Michael Zeng, Xuedong Huang, and Meng Jiang. 2021. [Enhancing factual consistency of abstractive summarization](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2021, Online, June 6-11, 2021*, pages 718–733. Association for Computational Linguistics.