

Adapting Neural Link Predictors for Complex Query Answering

Erik Arakelyan ^{*‡}Pasquale Minervini ^{*†}Isabelle Augenstein [‡]

Abstract

Answering complex queries on incomplete knowledge graphs is a challenging task where a model needs to answer complex logical queries in the presence of missing knowledge. Recently, Arakelyan et al. (2021); Minervini et al. (2022) showed that neural link predictors could also be used for answering complex queries: their Continuous Query Decomposition (CQD) method works by decomposing complex queries into atomic sub-queries, answers them using neural link predictors and aggregates their scores via t-norms for ranking the answers to each complex query. However, CQD does not handle negations and only uses the training signal from atomic training queries: neural link prediction scores are not calibrated to interact together via fuzzy logic t-norms during complex query answering. In this work, we propose to address this problem by training a parameter-efficient score adaptation model to re-calibrate neural link prediction scores: this new component is trained on complex queries by back-propagating through the complex query-answering process. Our method, CQD^A, produces significantly more accurate results than current state-of-the-art methods, improving from 34.4 to 35.1 Mean Reciprocal Rank values averaged across all datasets and query types while using $\leq 35\%$ of the available training query types. We further show that CQD^A is data-efficient, achieving competitive results with only 1% of the training data, and robust in out-of-domain evaluations.

^{*}Equal contribution, alphabetical order [‡]Department of Computer Science, University of Copenhagen, Copenhagen, Denmark [†]School of Informatics, University of Edinburgh, Edinburgh, United Kingdom. Correspondence to: Pasquale Minervini <p.minervini@ed.ac.uk>, Erik Arakelyan <erik.a@di.ku.dk>.

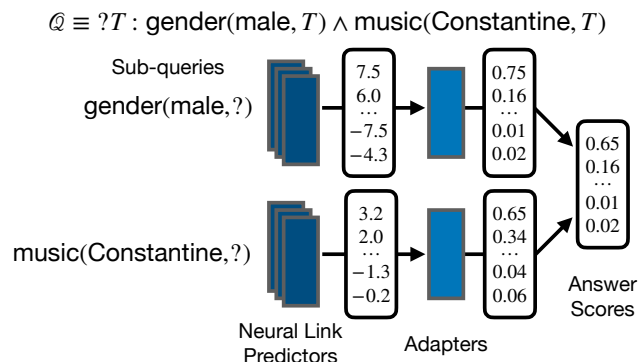


Figure 1. Outline of CQD^A—given a complex query Q , the neural link prediction scores for the sub-queries are further adapted by neural layers for improving the interaction between them. The adaptation layers are trained on the downstream complex query-answering task via back-propagation.

1. Introduction

Knowledge Graphs (KGs) are knowledge bases representing the relationships between entities in a relational graph structure. The flexibility of this knowledge representation formalism allows KGs to be widely used in various domains. Examples of KGs include general-purpose knowledge bases such as Wikidata (Vrandečić & Krötzsch, 2014), DBpedia (Auer et al., 2007), Freebase (Bollacker et al., 2008), and YAGO (Suchanek et al., 2007); application-driven graphs such as the Google Knowledge Graph, Microsoft’s Bing Knowledge Graph, and Facebook’s Social Graph (Noy et al., 2019); and domain-specific ones such as SNOMED CT (Bodenreider et al., 2018), MeSH (Lipscomb, 2000), and Hetionet (Himmelstein et al., 2017) for life sciences; and WordNet (Miller, 1992) for linguistics. Answering complex queries over Knowledge Graphs involves a logical reasoning process where a conclusion should be inferred from the available knowledge.

Neural link predictors (Nickel et al., 2016) tackle the problem of identifying missing edges in large KGs. However, in many complex domains, it is challenging to develop techniques for answering complex queries involving multiple and potentially unobserved edges, entities, and variables rather than just single edges.

Example 1.1 (Complex Query). Consider the question “Which people are male and produced the music for the film *Constantine*?”, which corresponds to a query from the FB15K-237 dataset. It can be formalised as a complex query $Q \equiv ?T : \text{gender}(\text{male}, T) \wedge \text{producerOf}(\text{Constantine}, T)$, where *male* and *Constantine* are anchor nodes and T is the target of the query, as presented in Figure 1. The answer set is denoted as $[[Q]]$ and corresponds to all the entities in the knowledge graph that are male composers for the film *Constantine*.

Continuous Query Decomposition (CQD, Arakelyan et al., 2021; Minervini et al., 2022) is a framework for answering First-Order Logic Queries, where the query is compiled in an end-to-end differentiable function, modelling the interactions between its atoms. Despite only being trained on atomic queries, CQD achieves significantly more accurate results than other complex query-answering methods while also being more explainable (Arakelyan et al., 2021; Minervini et al., 2022). A limitation of this method is that the model is only trained to answer simple atomic queries: the scores of atoms can be accurate when used individually for answering atomic queries but do not interact when answering more complex queries.

We propose a new method CQD^A , introduced in Section 4, for answering complex logical queries on knowledge graphs with the addition of negations. The main idea in CQD^A is to incorporate additional neural components that improve the interaction between atomic query scores; these components are trained end-to-end on complex query-answering tasks. An evaluation of the method on three benchmark datasets for complex query answering shows an increase from 34.4 to 35.1 MRR over the current state-of-the-art averaged across all datasets while using $\leq 35\%$ of the available training query types. The ablations show that the method is data-efficient by achieving results comparable to the state-of-the-art while using 1% of the training data. Our experiments reveal that CQD^A can generalise across unseen query types while using only 1% of the instances from a single query type during training.

2. Related Work

Link Predictors in Knowledge Graphs Reasoning over KGs with missing nodes has been widely explored throughout the last few years. One can approach the task using latent feature models, such as neural link predictors (Bordes et al., 2013; Trouillon et al., 2016; Yang et al., 2014; Dettmers et al., 2018; Sun et al., 2019; Balažević et al., 2019; Amin et al., 2020) which learn continuous representations for the entities and relation types in the graph and can answer atomic queries over incomplete KGs, and Graph Neural Networks (GNNs, Schlichtkrull et al., 2018; Vashishth et al., 2019; Teru et al., 2020). Other lines of research

tackle the link prediction problem through graph feature models (Xiong et al., 2017; Das et al., 2017; Hildebrandt et al., 2020; Yang et al., 2017; Sadeghian et al., 2019).

Complex Query Answering Complex queries over knowledge graphs can be formalised by extending one-hop atomic queries with First Order Logic (FOL) operators, such as the existential quantifier (\exists), conjunctions (\wedge), disjunctions (\vee) and negations (\neg). These FOL constructs can be represented as directed acyclic graphs, which are used by embedding-based methods that represent the queries using geometric objects (Ren et al., 2020; Hamilton et al., 2018) or probabilistic distributions (Ren & Leskovec, 2020; Zhang et al., 2021; Choudhary et al., 2021) and search the embedding space for the answer set. It is also possible to enhance the properties of the embedding space using GNNs and Fuzzy Logic (Zhu et al., 2022; Chen et al., 2022). Recent work (Daza & Cochez, 2020; Hamilton et al., 2018; Ren & Leskovec, 2020) suggests that such methods require a large dataset with millions of diverse queries during the training, and it can be hard to explain their predictions.

Our work is closely associated with CQD (Arakelyan et al., 2021; Minervini et al., 2022), which uses a pre-trained neural link predictor along with fuzzy logical t-norms and t-conorms for complex query answering. One limitation of CQD is that the pre-trained neural link predictors are not calibrated to interact during the complex query-answering process. This means that the final scores of the model are highly dependent on the choice of the particular t-(co)norm aggregation functions. This leads to discrepancies within the intermediate reasoning process and final predictions. CQD was also not designed to leverage complex queries during training and does not support logical negations.

Our method, CQD^A , extends CQD so that it can be trained on complex queries via gradient-based optimisation and can answer a broader class of FOL queries – for example, queries with logical negations.

3. Background

In this section, we introduce the complex query types we consider and the CQD complex query answering method.

Existential Positive First-Order Logical Queries A Knowledge Graph $\mathcal{G} \subseteq \mathcal{E} \times \mathcal{R} \times \mathcal{E}$ can be defined as a set of subject-predicate-object $\langle s, p, o \rangle$ triples, where each triple encodes a relationship of type $p \in \mathcal{R}$ between the subject $s \in \mathcal{E}$ and the object $o \in \mathcal{E}$ of the triple, where \mathcal{E} and \mathcal{R} denote the set of all entities and relation types, respectively. One can think of a Knowledge Graph as a labelled multi-graph, where entities \mathcal{E} represent nodes, and edges are labelled with relation types \mathcal{R} . Without loss of generality, a Knowledge Graph can be represented as a First-Order

Logic Knowledge Base, where each triple $\langle s, p, o \rangle$ denotes an atomic formula $p(s, o)$, with $p \in \mathcal{R}$ a binary predicate and $s, o \in \mathcal{E}$ its arguments.

Conjunctive queries are a sub-class of First-Order Logical queries that use existential quantification (\exists) and conjunction (\wedge) operations. We consider conjunctive queries \mathcal{Q} in the following form:

$$\begin{aligned} \mathcal{Q}[A] \triangleq ?A : \quad & \exists V_1, \dots, V_m. e_1 \wedge \dots \wedge e_n \quad (1) \\ \text{where } e_i = & p(c, V), \\ \text{with } V \in & \{A, V_1, \dots, V_m\}, c \in \mathcal{E}, p \in \mathcal{R}, \\ \text{or } e_i = & p(V, V'), \\ \text{with } V, V' \in & \{A, V_1, \dots, V_m\}, V \neq V', p \in \mathcal{R}. \end{aligned}$$

In Equation (1), the variable A is the *target* of the query, V_1, \dots, V_m denote the *bound variable nodes*, while $c \in \mathcal{E}$ represent the *input anchor nodes*. Each e_i denotes a logical atom, with either one ($p(c, V)$) or two variables ($p(V, V')$), and $e_1 \wedge \dots \wedge e_n$ denotes a conjunction between n atoms.

The goal of answering the logical query \mathcal{Q} consists in finding a set of entities $[\mathcal{Q}] \subseteq \mathcal{E}$ such that $a \in [\mathcal{Q}]$ iff $\mathcal{Q}[a]$ holds true, where $[\mathcal{Q}]$ is the *answer set* of the query \mathcal{Q} .

As illustrated in Figure 1, the *dependency graph* of a conjunctive query \mathcal{Q} is a graph representation of \mathcal{Q} where nodes correspond to variable or non-variable atom arguments in \mathcal{Q} and edges correspond to atom predicates. We follow Hamilton et al. (2018) and focus on *valid* conjunctive queries – i.e. the dependency graph needs to be a directed acyclic graph, where anchor entities correspond to source nodes, and the query target A is the unique sink node.

Handling Disjunctions and Negations We aim to answer a broader class First Order Logical queries (Dalvi & Suciu, 2004), which include the Existential Positive First-Order (EPFO) family, but in addition to existential quantification and conjunctions, also include disjunctions (\vee) and negations (\neg). We follow Ren et al. (2020) by transforming a given EPFO query into Disjunctive Normal Form (DNF, Davey & Priestley, 2002), i.e. a disjunction of conjunctive queries, along with the subsequent extension with negations in (Ren & Leskovec, 2020). See Figure 1 for an example.

Continuous Query Decomposition CQD is a framework for answering EPFO logical queries in the presence of missing edges. Given a query \mathcal{Q} , CQD defines the score of a target node $a \in \mathcal{E}$ as a candidate answer for a query as a function of the score of all atomic queries in \mathcal{Q} , given a variable-to-entity substitution for all variables in \mathcal{Q} .

Each variable is mapped to an *embedding vector* that can either correspond to an entity $c \in \mathcal{E}$ or to a virtual entity. The score of each of the query atoms is determined individually

using a neural link predictor (Nickel et al., 2016). Then, the query score for a given candidate answer $\mathcal{Q}[a]$ is computed by aggregating all of the atom scores using t-norms and t-conorms – continuous relaxations of the logical conjunction and disjunction operators.

T-norms and Negations Fuzzy logic generalises over Boolean by extending the operators of conjunction (\wedge), disjunction (\vee) and negation (\neg) through the use of t-norms and fuzzy negations. A *t-norm* $\top : [0, 1] \times [0, 1] \mapsto [0, 1]$ is a generalisation of conjunction in fuzzy logic (Klement et al., 2000; 2004). Some examples include the *Gödel t-norm* $\top_{\min}(x, y) = \min\{x, y\}$, the *product t-norm* $\top_{\text{prod}}(x, y) = x \times y$, and the *Lukasiewicz t-norm* $\top_{\text{Luk}}(x, y) = \max\{0, x + y - 1\}$.

Analogously, *t-conorms* are dual to t-norms for disjunctions – given a t-norm \top , the complementary t-conorm is defined by $\perp(x, y) = 1 - \top(1 - x, 1 - y)$. Fuzzy logic also encompasses negations $n : [0, 1] \mapsto [0, 1]$. The *standard* $n_{\text{stand}}(x) = 1 - x$ and *strict cosine* $n_{\text{cos}} = \frac{1}{2}(1 + \cos(\pi x))$ are common examples of fuzzy negations. In our experiments, we use Gödel t-norm and product t-norm with their corresponding conorms, and *standard* and *strict cosine* as fuzzy negations.

Neural Link Predictors A neural link predictor is a differentiable model where atom arguments are first mapped into a k -dimensional embedding space and then used to produce a score for the atom. More formally, given a query atom $p(s, o)$, where $p \in \mathcal{R}$ and $s, o \in \mathcal{E}$, the score for $p(s, o)$ is computed as $\phi_p(\mathbf{e}_s, \mathbf{e}_o)$, where $\mathbf{e}_s, \mathbf{e}_o \in \mathbb{R}^k$ are the embedding vectors of s and o , and $\phi_p : \mathbb{R}^k \times \mathbb{R}^k \mapsto [0, 1]$ is a *scoring function* computing the likelihood that entities s and o are related by the relationship p . Following Arakelyan et al. (2021); Minervini et al. (2022), in our experiments, we use a regularised variant of ComplEx (Trouillon et al., 2016; Lacroix et al., 2018) as the neural link predictor of choice, due to its simplicity, efficiency, and generalisation properties (Ruffinelli et al., 2020). To ensure that the output of the neural link predictor is always in $[0, 1]$, following Arakelyan et al. (2021); Minervini et al. (2022), we use a sigmoid function or min-max re-scaling.

Continuous Query Decomposition Let \mathcal{Q} denote the following DNF query:

$$\begin{aligned} \mathcal{Q}[A] \triangleq ?A : \quad & \exists V_1, \dots, V_m. (e_1^1 \wedge \dots \wedge e_{n_1}^1) \vee \dots \quad (2) \\ & \dots \vee (e_1^d \wedge \dots \wedge e_{n_d}^d), \\ \text{where } e_i^j = & p(c, V), \\ \text{with } V \in & \{A, V_1, \dots, V_m\}, c \in \mathcal{E}, p \in \mathcal{R}, \\ \text{or } e_i^j = & p(V, V'), \\ \text{with } V, V' \in & \{A, V_1, \dots, V_m\}, V \neq V', p \in \mathcal{R}. \end{aligned}$$

CQD aims to find the variable assignments that render Q true. To achieve this, CQD casts the problem of answering the query in Equation (2) as an optimisation problem, where the aim is finding a mapping from variables to entities that *maximises* the score of Q :

$$\arg \max_{A, V_1, \dots, m \in \mathcal{E}} (e_1^1 \top \dots \top e_{n_1}^1) \perp \dots \perp (e_1^d \top \dots \top e_{n_d}^d) \quad (3)$$

$$\text{where } e_i^j = \phi_p(\mathbf{e}_c, \mathbf{e}_V),$$

$$\text{with } V \in \{A, V_1, \dots, V_m\}, c \in \mathcal{E}, p \in \mathcal{R}$$

$$\text{or } e_i^j = \phi_p(\mathbf{e}_V, \mathbf{e}_{V'}),$$

$$\text{with } V, V' \in \{A, V_1, \dots, V_m\}, V \neq V', p \in \mathcal{R},$$

where \top and \perp denote a t-norm and a t-conorm – a continuous generalisation of the logical conjunction and disjunction, respectively – and $\phi_p(\mathbf{e}_s, \mathbf{e}_o) \in [0, 1]$ denotes the neural link prediction score for the atom $p(s, o)$.

Arakelyan et al. (2021) propose two possible strategies for solving the optimisation problem in Equation (3) – one is based on a greedy combinatorial search of the optimal variable-to-entity mappings, while the other is based on a gradient-based continuous optimisation process of the variable embeddings. In their results, Arakelyan et al. (2021); Minervini et al. (2022) show that the former discrete search strategy systematically produces significantly better results than the latter. Hence, we use it in this work as the query-answering process of choice.

Complex Query Answering via Combinatorial Optimisation Following Arakelyan et al. (2021); Minervini et al. (2022), we solve the optimisation problem in Equation (3) by greedily searching for a set of variable substitutions $S = \{A \leftarrow a, V_1 \leftarrow v_1, \dots, V_m \leftarrow v_m\}$, with $a, v_1, \dots, v_m \in \mathcal{E}$, that maximises the complex query score, in a procedure akin to *beam search*. We do so by traversing the dependency graph of a query Q and, whenever we find an atom in the form $p(c, V)$, where $p \in \mathcal{R}$, c is either an entity or a variable for which we already have a substitution, and V is a variable for which we do not have a substitution yet, we replace V with all entities in \mathcal{E} and retain the top- k entities $t \in \mathcal{E}$ that maximise $\phi_p(\mathbf{e}_c, \mathbf{e}_t)$ – i.e. the most likely entities to appear as a substitution of V according to the neural link predictor. As we traverse the dependency graph of a query, we keep a beam with the most likely variable-to-entity substitutions identified so far.

Example 3.1 (Combinatorial Optimisation). Consider the query “Which musicians M received awards associated with a genre g ?”, which can be rewritten as $?M : \exists A.\text{received}(M, A) \wedge \text{assoc}(A, g)$. To answer this query using combinatorial optimisation, we must find the top- k awards a that are candidates to substitute the variable A in $\text{received}(A, g)$. This will allow us to understand the awards associated with the genre g . Afterwards, for each candidate

substitution for A , we search for the top- k musicians m that are most likely to substitute M in $\text{interacts}(M, A)$, ending up with at most k^2 candidate musicians. We rank the candidate musicians’ M using the final query score produced by a t-norm. ■

4. Adapting Neural Link Prediction Scores

The main limitation in the CQD method outlined in Section 3 is that neural link predictors ϕ are trained to answer simple, atomic queries, and the resulting answer scores are not trained to interact with one another.

Example 4.1. Consider the running example query “Which people are male and produced the music for the film Constantine?” which can be rewritten as a complex query $Q \equiv ?T : \text{gender}(\text{male}, T) \wedge \text{producerOf}(\text{Constantine}, T)$. To answer this complex query, CQD answers the atomic sub-queries $Q_1 = \text{gender}(\text{male}, T)$ and $Q_2 = \text{producerOf}(\text{Constantine}, T)$ using a neural link predictor, and aggregates the resulting scores using a t-norm. However, the neural link predictor was only trained on answering atomic queries, and the resulting scores are not calibrated to interact with each other. For example, the scores for the atomic queries about the relations *gender* and *producerOf* may be on different scales, which causes problems when aggregating such scores via t-norms. Let us assume the top candidates for the variable T coming from the atomic queries Q_1, Q_2 are $\mathcal{A}_1 \leftarrow \text{Sam Shepard}$ and $\mathcal{A}_2 \leftarrow \text{Klaus Badelt}$, with their corresponding neural link prediction scores 1.2 and 8.9, produced using $\phi_{\text{gender}}, \phi_{\text{producerOf}}$. We must also factor in the neural link prediction score of the candidate \mathcal{A}_1 for query Q_2 at 7.4 and vice versa at 0.5. When using the Gödel t-norm $\top_{\min}(x, y) = \min\{x, y\}$, the scores associated with the variable assignments $\mathcal{A}_1, \mathcal{A}_2$ are computed as, $\min(8.0, 0.5) = 0.5$ $\min(7.4, 1.2) = 1.2$. We see that for both answers \mathcal{A}_1 and \mathcal{A}_2 , the scores produced by ϕ_{gender} for Q_1 are always lower than the scores produced with $\phi_{\text{producerOf}}$ for Q_2 , meaning that the scores of the latter are not considered when producing the final answer. This phenomenon can be broadly observed in CQD, illustrated in Figure 2. We can see that smaller values dominate the aggregated results, meaning that atomic relations with higher distribution bounds tend not to be considered during the complex query-answering process. ■

To this end, we propose a method for adaptively learning to re-calibrate neural link prediction scores by back-propagating through the complex query-answering process. More formally, let ϕ_p denote a neural link predictor. We learn an additional adaptation function ρ_θ , parameterised by θ , and use the composition of ρ_θ and ϕ_p , $\rho_\theta \circ \phi_p$, such that:

$$\rho_\theta(\phi_p(\mathbf{e}_V, \mathbf{e}_{V'})) = \phi_p(\mathbf{e}_V, \mathbf{e}_{V'})(1 + \alpha) + \beta, \quad (4)$$

where $\theta = \{\alpha, \beta\}$, with $\alpha, \beta \in \mathbb{R}$, are parameters of the

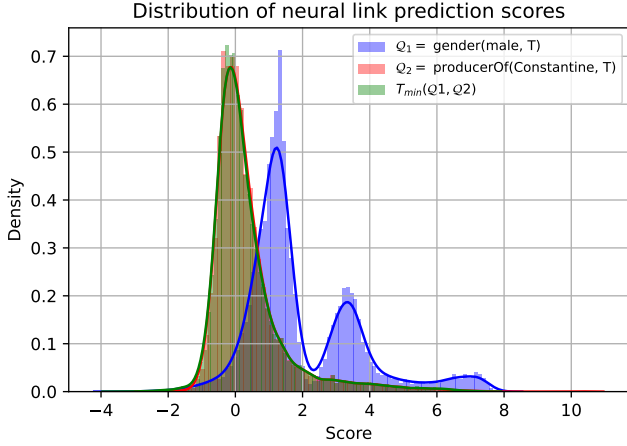


Figure 2. The distributions of two atomic scores and the T_{\min} t-norm aggregated results – we can see that the scores from Q_2 dominate the comparison.

adaptation function ρ . Here, the function ρ defines an affine transformation of the score and when the parameters $\alpha = \beta = 0$, the transformed score $\rho_{\theta}(\phi_p(\mathbf{e}_V, \mathbf{e}_{V'}))$ recovers the original scoring function. The parameters θ can then be conditioned on the representation of the predicate p or the entities V or V' . We experimented with several variants of this model by modelling the affine transformation parameters θ as a function of a) the predicate representation, i.e. $\theta = \mathbf{W}\mathbf{e}_p$, with $\mathbf{W} \in \mathbb{R}^{2 \times k}$; b) the source entity representation, i.e. $\theta = \mathbf{W}\mathbf{e}_c$, with $\mathbf{W} \in \mathbb{R}^{2 \times k}$; c) or both the source entity and the predicate representation, i.e. $\theta = \mathbf{W}[\mathbf{e}_p; \mathbf{e}_c]$, with $\mathbf{W} \in \mathbb{R}^{2 \times 2k}$.

Training As mentioned in Section 3, for answering a complex query \mathcal{Q} , CQD identifies the variable assignment $S = \{A \leftarrow a, V_1 \leftarrow v_1, \dots, V_m \leftarrow v_m\}$, where $a, v_1, \dots, v_m \in \mathcal{E}$ are entities and A, V_1, \dots, V_m are variables, that maximises the complex query score from Equation (3):

$$\begin{aligned} \text{score}(\mathcal{Q}, S) \\ = (e_1^1 \top \dots \top e_{n_1}^1) \perp \dots \perp (e_1^d \top \dots \top e_{n_d}^d), \end{aligned} \quad (5)$$

where $e_i^j = \phi_p(\mathbf{e}_c, \mathbf{e}_V)$ or $e_i^j = \phi_p(\mathbf{e}_V, \mathbf{e}_{V'})$ corresponds to the atomic query score produced by a neural link predictor, where \top and \perp are t-norms and t-conorms, respectively. In Equation (5), \mathbf{e}_c denotes the representation of the entity $c \in \mathcal{E}$, while \mathbf{e}_V and $\mathbf{e}_{V'}$ denote the embedding of the entities associated with the variables V and V' in the substitution S . More formally, during the complex query-answering process, CQD solves the following optimisation problem:

$$\arg \max_S \text{score}(\mathcal{Q}, S), \quad (6)$$

Table 1. Statistics on the different types of query structures in FB15K, FB15K-237, and NELL995.

Split	Query Type	FB15K	FB15K-237	NELL995
Training	1p, 2p, 3p, 2i, 3i	273,710	149,689	107,982
	2in, 3in, inp, pin, pni	27,371	14,968	10,798
Validation	1p	59,078	20,094	16,910
	Others	8,000	5,000	4,000
Test	1p	66,990	22,804	17,021
	Others	8,000	5,000	4,000

where $S = \{A \leftarrow a, V_1 \leftarrow v_1, \dots, V_m \leftarrow v_m\}$ is the resulting substitution that maximises the query score, where A is the answer variable.

For training the score calibration component in Equation (4), we first compute how likely each entity $a' \in \mathcal{E}$ is to be an answer to the query \mathcal{Q} . To this end, for each candidate answer $a' \in \mathcal{E}$, we compute the *answer score* as the complex query score assuming that $a' \in \mathcal{E}$ is the final answer as:

$$\begin{aligned} \text{score}(\mathcal{Q}, A \leftarrow a') = \max_S \text{score}(\mathcal{Q}, S) \\ \text{where } A \leftarrow a' \in S. \end{aligned} \quad (7)$$

Equation (7) identifies the variable-to-entity substitution S that 1) maximises the query score $\text{score}(\mathcal{Q}, S)$, provided in Equation (5), and 2) associates the answer variable A with $a' \in \mathcal{E}$, i.e. $A \leftarrow a' \in S$. For computing S with the additional constraint that $A \leftarrow a' \in S$, we use the complex query answering procedure outlined in Section 3.

For training the additional parameters \mathbf{W} introduced in Section 4, we maximise the likelihood of the true answers on a dataset $\mathcal{D} = \{(\mathcal{Q}, a)\}$ of query-answer pairs by using a *one-versus-all* cross-entropy loss, introduced by Lacroix et al. (2018), which was also used to train the neural link prediction model:

$$\begin{aligned} \mathcal{L}(\mathcal{D}) = \sum_{(\mathcal{Q}, a) \in \mathcal{D}} -\text{score}(\mathcal{Q}, A \leftarrow a) \\ + \log \left[\sum_{a' \in \mathcal{E}} \exp(\text{score}(\mathcal{Q}, A \leftarrow a')) \right]. \end{aligned} \quad (8)$$

In addition to the *one-versus-all* loss in Equation (8), we also use a binary cross-entropy loss, using the negative sampling procedure from Ren & Leskovec (2020).

5. Experiments

Datasets To evaluate the complex query answering capabilities of our method, we use a benchmark comprising of 3 KGs: FB15K (Bordes et al., 2013), FB15K-237 (Toutanova & Chen, 2015) and NELL995 (Xiong et al., 2017). For a fair comparison with previous work, we use the datasets of

Adapting Neural Link Predictors for Complex Query Answering

Table 2. MRR results for FOL queries on the testing sets. avg_p designates the averaged results for EPFO queries (\wedge, \vee), while avg_n pertains to queries including negations (\neg). The results for CQD are taken from Minervini et al. (2022), while all the remaining come from Zhu et al. (2022).

Model	avg_p	avg_n	1p	2p	3p	2i	3i	pi	ip	2u	up	2in	3in	inp	pin	pni
FB15K																
GQE	28.0	-	54.6	15.3	10.8	39.7	51.4	27.6	19.1	22.1	11.6	-	-	-	-	-
Q2B	38.0	-	68.0	21.0	14.2	55.1	66.5	39.4	26.1	35.1	16.7	-	-	-	-	-
BetaE	41.6	11.8	65.1	25.7	24.7	55.8	66.5	43.9	28.1	40.1	25.2	14.3	14.7	11.5	6.5	12.4
CQD-CO	46.9	-	89.2	25.3	13.4	74.4	78.3	44.1	33.2	41.8	21.9	-	-	-	-	-
CQD-Beam	58.2	-	89.2	54.3	28.6	74.4	78.3	58.2	67.7	42.4	30.9	-	-	-	-	-
ConE	49.8	14.8	73.3	33.8	29.2	64.4	73.7	50.9	35.7	55.7	31.4	17.9	18.7	12.5	9.8	15.1
GNN-QE	72.8	38.6	88.5	69.3	58.7	79.7	83.5	69.9	70.4	74.1	61.0	44.7	41.7	42.0	30.1	34.3
CQD ^A	70.4	42.8	89.2	64.5	57.9	76.1	79.4	70.0	70.6	68.4	57.9	54.7	47.1	37.6	35.3	24.6
FB15K-237																
GQE	16.3	-	35.0	7.2	5.3	23.3	34.6	16.5	10.7	8.2	5.7	-	-	-	-	-
Q2B	20.1	-	40.6	9.4	6.8	29.5	42.3	21.2	12.6	11.3	7.6	-	-	-	-	-
BetaE	20.9	5.5	39.0	10.9	10.0	28.8	42.5	22.4	12.6	12.4	9.7	5.1	7.9	7.4	3.5	3.4
CQD-CO	21.8	-	46.7	9.5	6.3	31.2	40.6	23.6	16.0	14.5	8.2	-	-	-	-	-
CQD-Beam	22.3	-	46.7	11.6	8.0	31.2	40.6	21.2	18.7	14.6	8.4	-	-	-	-	-
ConE	23.4	5.9	41.8	12.8	11.0	32.6	47.3	25.5	14.0	14.5	10.8	5.4	8.6	7.8	4.0	3.6
GNN-QE	26.8	10.2	42.8	14.7	11.8	38.3	54.1	31.1	18.9	16.2	13.4	10.0	16.8	9.3	7.2	7.8
CQD ^A	25.3	10.9	46.7	13.6	11.4	33.1	45.4	26.5	20.4	17.5	11.4	13.6	16.8	9.5	8.9	5.8
NELL995																
GQE	18.6	-	32.8	11.9	9.6	27.5	35.2	18.4	14.4	8.5	8.8	-	-	-	-	-
Q2B	22.9	-	42.2	14.0	11.2	33.3	44.5	22.4	16.8	11.3	10.3	-	-	-	-	-
BetaE	24.6	5.9	53.0	13.0	11.4	37.6	47.5	24.1	14.3	12.2	8.5	5.1	7.8	10.0	3.1	3.5
CQD-CO	28.8	-	60.4	17.8	12.7	39.3	46.6	30.1	22.0	17.3	13.2	-	-	-	-	-
CQD-Beam	28.6	-	60.4	20.6	11.6	39.3	46.6	25.4	23.9	17.5	12.2	-	-	-	-	-
ConE	27.2	6.4	53.1	16.1	13.9	40.0	50.8	26.3	17.5	15.3	11.3	5.7	8.1	10.8	3.5	3.9
GNN-QE	28.9	9.7	53.3	18.9	14.9	42.4	52.5	30.8	18.9	15.9	12.6	9.9	14.6	11.4	6.3	6.3
CQD ^A	32.3	13.3	60.4	22.9	16.7	43.4	52.6	32.1	26.4	20.0	17.0	15.1	18.6	15.8	10.7	6.5

FOL queries proposed by Ren & Leskovec (2020), which includes 9 structures of EPFO queries and 5 query types with negations, seen in Figure 3. The datasets provided by Ren & Leskovec (2020) introduce queries with *hard* answers, where the answers cannot be obtained by direct graph traversal and do not include queries with an excessive amount of feasible answers, increasing the difficulty of the complex query answering task. The statistics for each dataset can be seen in Table 1.

Note that during training, we only use $2i$, $3i$, $2in$, and $3in$ queries, $\leq 35\%$ of the training dataset for the Adaptation of the Neural Link Predictor. To assess the ability of the model to generalise, we evaluate it on all query types.

Evaluation Protocol For a fair comparison with prior work, we follow the evaluation scheme in Ren & Leskovec (2020) by separating the answer of each query into *easy* and *hard* sets. For test and validation splits, we define *hard* queries as those that cannot be accessed via direct search along the KG and should be reached by predicting a missing

link, meaning *non-trivial* reasoning should be completed. We evaluate the method on non-trivial queries by calculating the rank r for each hard answer against non-answers and computing the Mean Reciprocal Rank (MRR).

Baselines We compare CQD^A with state-of-the-art methods from various solution families presented in Section 2. In particular, we choose GQE (Hamilton et al., 2018), Query2Box (Ren et al., 2020), BetaE (Ren & Leskovec, 2020) and ConE (Zhang et al., 2021) as strong baselines for embedding methods. We also compare with methods that utilise Fuzzy Logic and GNNs for enhancing the properties of the embedding space, such as FuzzQE (Chen et al., 2022) and the current state-of-the-art GNN-QE (Zhu et al., 2022). Finally, we evaluate the method against CQD (Arakelyan et al., 2021) that uses neural link predictors for answering EPFO queries.

Model Details Our method is model-agnostic and can be used with any neural link prediction model. Following

Adapting Neural Link Predictors for Complex Query Answering

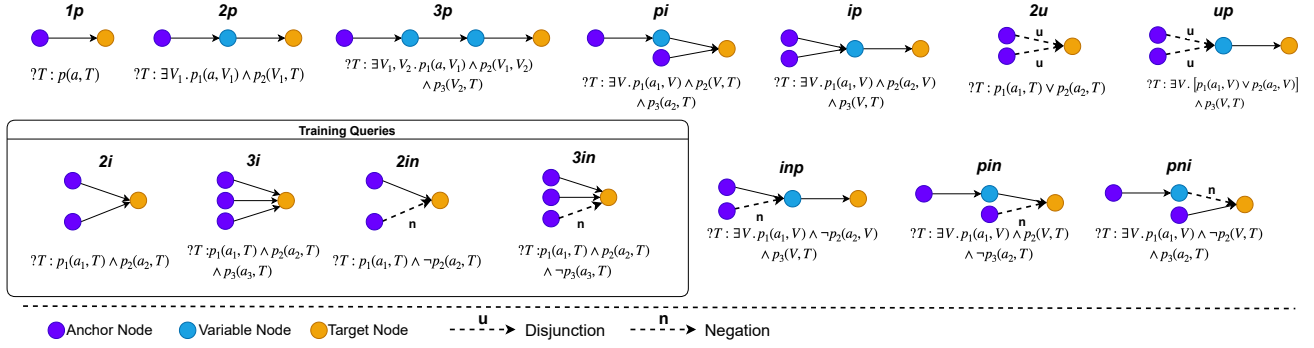


Figure 3. Query structures considered in our experiments, as proposed by Ren & Leskovec (2020) – the naming of each query structure corresponds to *projection* (**p**), *intersection* (**i**), *union* (**u**) and *negation* (**n**), reflecting how they were generated in the BetaE paper (Ren & Leskovec, 2020). An example of a **pin** query is $?T : \exists V.p(a, V), q(V, T), \neg r(b, T)$, where a and b are anchor nodes, V is a variable node, and T is the query target node.

Arakelyan et al. (2021); Minervini et al. (2022), we use ComplEx-N3 (Lacroix et al., 2018). We identify the optimal hyper-parameters using the validation MRR. We train for 50000 steps using Adagrad as an optimiser and 0.1 as the learning rate. The beam-size hyper-parameter k was selected in $k \in \{512, 1024, \dots, 8192\}$, and the loss was selected across *one-versus-all* (Lacroix et al., 2018) and binary cross-entropy with one negative sample.

Parameter Efficiency We use the query types $2i$, $3i$, $2in$, $3in$ for training the calibration module proposed in Section 4. We selected these query types as they do not require variable assignments other than for the answer variable A , making the training process efficient. As the neural link prediction model is frozen, we only train the adapter layers that have a maximum of $\mathbf{W} \in \mathbb{R}^{2 \times 2k}$ learnable weights. Compared to previous works, we have $\approx 10^3$ times fewer trainable parameters, as shown in Table 3, while maintaining competitive results.

During inference, for queries requiring multiple hops of reasoning, we confine the beam size of the search, meaning that all the candidate branches can fit on a single GPU, allowing for faster computation.

Results

Complex Query Answering Table 2 shows the predictive accuracy of CQD^A for answering complex FOL queries compared to the current state-of-the-art methods. Some methods do not support queries that include negations, so we leave the corresponding entries blank. We can see that CQD^A achieves an increase from 34.4 to 35.1 averaged across all query types and datasets. In particular, CQD^A shows the most substantial increase in predictive accuracy on NELL995 by producing more accurate results than all

Table 3. The number of parameters of other methods is approximated based on the dimensionality of entity/relation representations chosen by the designated method and excluding any learnable operators/functions. The numbers for GNN-QE are approximated using the backbone NBFNet (Zhu et al., 2021), while the remaining use their original studies.

	Number of parameters		
	FB15K	FB15K-237	NELL
CQD ^A	1.3×10^7	1.3×10^7	7.5×10^7
	frozen $+4 \times 10^3$	frozen $+4 \times 10^3$	frozen $+4 \times 10^3$
BetaE	1.3×10^7	1.3×10^7	6×10^7
Q2B	1.2×10^7	1.2×10^7	6×10^7
GNN-QE	3×10^6	3×10^6	3×10^6
ConE	1.2×10^7	1.2×10^7	6×10^7
GQE	1.5×10^7	1.5×10^7	7.5×10^7

other methods for all query types. CQD^A can achieve these results while using $\leq 35\%$ of the complex query types during training while maintaining competitive results across each of the datasets and query types. In our experiments, we found that calculating the neural adaptation parameters θ of the adaptation function ρ_θ in Section 4 as a function of the predicate representation yields the most accurate results followed by computing θ as a function of the source entity and predicate representation, which is strictly more expressive. In Appendix A, we show the impact of the adaptation layers on the neural link prediction scores.

Additionally, the adaptation process does not require data-intensive training and allows the model to generalise to queries it was not explicitly trained on. This prompts us to investigate the minimal amount of data samples and query types required for adaptation. We explore the full scale

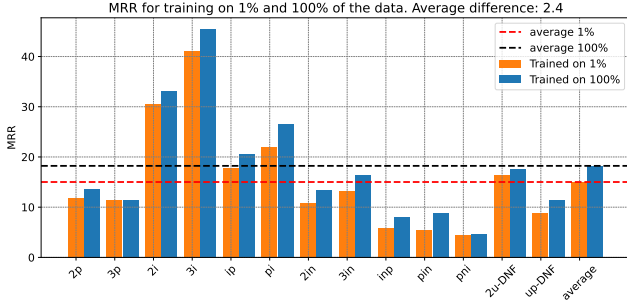


Figure 4. Evaluation of CQD^A using 1% and 100% of the training queries from FB15K-237. The link prediction task ip does not require adaptation and is thus omitted.

of the data efficiency and generalisation robustness of the method in the following paragraphs.

Negations We can observe from Table 2 that the method can achieve a relative improvement of 6.8% to 37.1% for queries, including negations. We attribute this to the fact that the training included query types $2in$ and $3in$ that include negation, which allows for learning an adaptation layer that is robust for these types of queries.

Data Efficiency One benefit of our method is that adapting the scores of the neural link predictor does not require a large amount of data. To this end, we systematically study the data-efficiency of CQD^A by comparing the behaviour of the models trained with 1% and 100% of the training complex query examples in FB15K-237, presented in Figure 4. For adapting on 1% of the training complex queries, we used the same hyper-parameters we identified when training on the full dataset. Even when using 1% of the dataset from the training queries (3290 samples), the model still achieves competitive results, with an average MRR difference of 2.4 in comparison with the model trained using the full training set.

We can also confirm that the adaptation process converges after $\leq 10\%$ of the training epochs as seen in Figure 5. The rate of convergence is not hindered when using only 1% of the training queries. This shows that CQD^A is a scalable method with a fast convergence rate that can be trained in a data-efficient manner.

Out-of-Distribution Generalisation To study the generalisation properties of CQD^A , we trained the adaptation layer on only 1% of samples for *one* training query type $2i$, which does not require a greedy beam search during the complex query answering process. We see in Figure 6 that CQD^A can generalise to other types of complex queries not observed during training with an average MRR difference of 2.9 compared to training on all of the training query types.

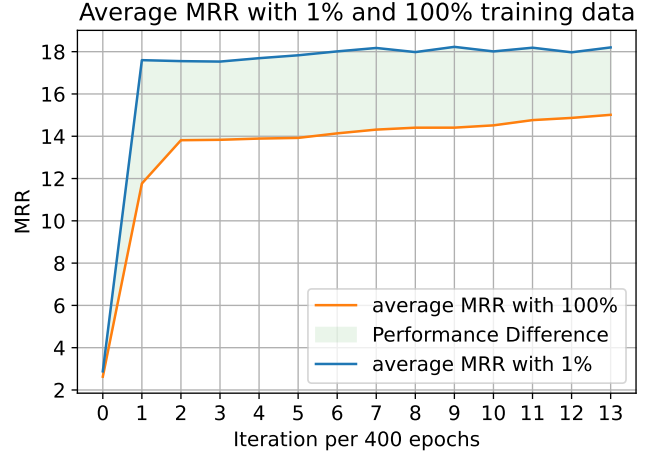


Figure 5. Average MRR score increase of CQD^A using 1% and 100% of the training queries from FB15K-237 throughout the epochs. The X-axis corresponds to 10% of training epochs.

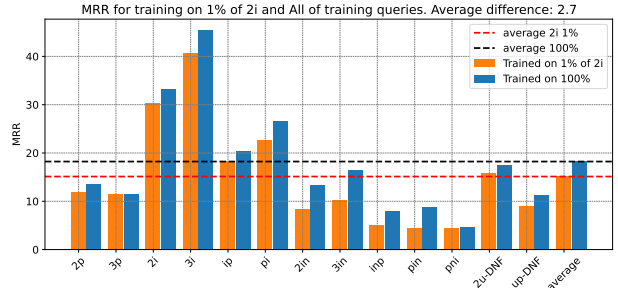


Figure 6. Evaluation of CQD^A using 1% of $2i$ and all of the training queries from FB15K-237. The link prediction task ip does not require adaptation and is thus omitted.

The greatest degradation in predictive accuracy occurs for the queries containing negations, with an average decrease of 2.7. This prompts us to conjecture that being able to answer general EPFO queries may not be enough to generalise to the complete set of FOL queries. However, our method can competitively generalise on all FOL queries, using only 1% of $2i$ queries, with 1496 overall samples for adaptation.

6. Conclusions

In this work, we propose the novel method CQD^A for answering complex FOL queries over KGs, which achieves an increase in averaged MRR over the previous state-of-the-art from 34.4 to 35.1 while using $\leq 35\%$ of query types. Our method uses a single adaptation layer over neural link predictors, which allows for training in a data-efficient manner. We show that the method can maintain competitive predictive accuracy even when using 1% of the training

data. Furthermore, our experiments on training on a subset (1%) of the training queries from a single query type (2i) show that it can generalise to new queries that were not used during training while being data-efficient.

References

- Amin, S., Varanasi, S., Dunfield, K. A., and Neumann, G. Lower: Low-rank bilinear pooling for link prediction. In *International Conference on Machine Learning*, pp. 257–268. PMLR, 2020.
- Arakelyan, E., Daza, D., Minervini, P., and Cochez, M. Complex query answering with neural link predictors. In *ICLR*. OpenReview.net, 2021.
- Auer, S., Bizer, C., Kobilarov, G., Lehmann, J., Cyganiak, R., and Ives, Z. G. DBpedia: A nucleus for a web of open data. In *ISWC/ASWC*, volume 4825 of *Lecture Notes in Computer Science*, pp. 722–735. Springer, 2007.
- Balažević, I., Allen, C., and Hospedales, T. M. Tucker: Tensor factorization for knowledge graph completion. *arXiv preprint arXiv:1901.09590*, 2019.
- Bodenreider, O., Cornet, R., and Vreeman, D. J. Recent developments in clinical terminologies - snomed ct, loinc, and rxnorm. *Yearbook of medical informatics*, 27:129–139, Aug 2018. ISSN 2364-0502.
- Bollacker, K. D., Evans, C., Paritosh, P., Sturge, T., and Taylor, J. Freebase: a collaboratively created graph database for structuring human knowledge. In *SIGMOD Conference*, pp. 1247–1250. ACM, 2008.
- Bordes, A., Usunier, N., García-Durán, A., Weston, J., and Yakhnenko, O. Translating embeddings for modeling multi-relational data. In *NIPS*, pp. 2787–2795, 2013.
- Chen, X., Hu, Z., and Sun, Y. Fuzzy logic based logical query answering on knowledge graphs. In *AAAI*, pp. 3939–3948. AAAI Press, 2022.
- Choudhary, N., Rao, N., Katariya, S., Subbian, K., and Reddy, C. K. Self-supervised hyperboloid representations from logical queries over knowledge graphs. In *Proceedings of the Web Conference 2021*, pp. 1373–1384, 2021.
- Dalvi, N. N. and Suciu, D. Efficient query evaluation on probabilistic databases. In *VLDB*, pp. 864–875. Morgan Kaufmann, 2004.
- Das, R., Dhuliawala, S., Zaheer, M., Vilnis, L., Durugkar, I., Krishnamurthy, A., Smola, A., and McCallum, A. Go for a walk and arrive at the answer: Reasoning over paths in knowledge bases using reinforcement learning. *arXiv preprint arXiv:1711.05851*, 2017.
- Davey, B. A. and Priestley, H. A. *Introduction to Lattices and Order, Second Edition*. Cambridge University Press, 2002.
- Daza, D. and Cochez, M. Message passing query embedding. In *ICML Workshop - Graph Representation Learning and Beyond*, 2020. URL <https://arxiv.org/abs/2002.02406>.
- Dettmers, T., Minervini, P., Stenetorp, P., and Riedel, S. Convolutional 2d knowledge graph embeddings. In *AAAI*, pp. 1811–1818. AAAI Press, 2018.
- Hamilton, W. L., Bajaj, P., Zitnik, M., Jurafsky, D., and Leskovec, J. Embedding logical queries on knowledge graphs. In *NeurIPS*, pp. 2030–2041, 2018.
- Hildebrandt, M., Serna, J. A. Q., Ma, Y., Ringsquandl, M., Joblin, M., and Tresp, V. Reasoning on knowledge graphs with debate dynamics. In *AAAI*, pp. 4123–4131. AAAI Press, 2020.
- Himmelstein, D. S., Lizee, A., Hessler, C., Brueggeman, L., Chen, S. L., Hadley, D., Green, A., Khankhanian, P., and Baranzini, S. E. Systematic integration of biomedical knowledge prioritizes drugs for repurposing. *bioRxiv*, 2017. doi: 10.1101/087619. URL <https://www.biorxiv.org/content/early/2017/08/31/087619>.
- Klement, E., Mesiar, R., and Pap, E. *Triangular Norms*, volume 8 of *Trends in Logic*. Springer, 2000.
- Klement, E., Mesiar, R., and Pap, E. Triangular norms. position paper I: basic analytical and algebraic properties. *Fuzzy Sets Syst.*, 143(1):5–26, 2004.
- Lacroix, T., Usunier, N., and Obozinski, G. Canonical tensor decomposition for knowledge base completion. In *ICML*, volume 80 of *Proceedings of Machine Learning Research*, pp. 2869–2878. PMLR, 2018.
- Lipscomb, C. E. Medical subject headings (mesh). *Bull Med Libr Assoc.*, 2000. URL <http://www.pubmedcentral.nih.gov/articlerender.fcgi?artid=35238>. 88(3): 265–266.
- Miller, G. A. WORDNET: a lexical database for english. In *HLT*. Morgan Kaufmann, 1992.
- Minervini, P., Arakelyan, E., Daza, D., and Cochez, M. Complex query answering with neural link predictors (extended abstract). In *IJCAI*, pp. 5309–5313. ijcai.org, 2022.
- Nickel, M., Murphy, K., Tresp, V., and Gabrilovich, E. A review of relational machine learning for knowledge graphs. *Proceedings of the IEEE*, 104(1):11–33, 2016.

- Noy, N. F., Gao, Y., Jain, A., Narayanan, A., Patterson, A., and Taylor, J. Industry-scale knowledge graphs: lessons and challenges. *Commun. ACM*, 62(8):36–43, 2019.
- Ren, H. and Leskovec, J. Beta embeddings for multi-hop logical reasoning in knowledge graphs. *Advances in Neural Information Processing Systems*, 33:19716–19726, 2020.
- Ren, H., Hu, W., and Leskovec, J. Query2box: Reasoning over knowledge graphs in vector space using box embeddings. In *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net, 2020. URL <https://openreview.net/forum?id=BJgr4kSFDS>.
- Ruffinelli, D., Broscheit, S., and Gemulla, R. You CAN teach an old dog new tricks! on training knowledge graph embeddings. In *ICLR*. OpenReview.net, 2020.
- Sadeghian, A., Armandpour, M., Ding, P., and Wang, D. Z. Drum: End-to-end differentiable rule mining on knowledge graphs. *Advances in Neural Information Processing Systems*, 32, 2019.
- Schlichtkrull, M., Kipf, T. N., Bloem, P., Berg, R. v. d., Titov, I., and Welling, M. Modeling relational data with graph convolutional networks. In *European semantic web conference*, pp. 593–607. Springer, 2018.
- Suchanek, F. M., Kasneci, G., and Weikum, G. Yago: a core of semantic knowledge. In *WWW*, pp. 697–706. ACM, 2007.
- Sun, Z., Deng, Z.-H., Nie, J.-Y., and Tang, J. Rotate: Knowledge graph embedding by relational rotation in complex space. *arXiv preprint arXiv:1902.10197*, 2019.
- Teru, K., Denis, E., and Hamilton, W. Inductive relation prediction by subgraph reasoning. In *International Conference on Machine Learning*, pp. 9448–9457. PMLR, 2020.
- Toutanova, K. and Chen, D. Observed versus latent features for knowledge base and text inference. In *Proceedings of the 3rd Workshop on Continuous Vector Space Models and their Compositionality*, pp. 57–66, Beijing, China, July 2015. Association for Computational Linguistics. doi: 10.18653/v1/W15-4007. URL <https://www.aclweb.org/anthology/W15-4007>.
- Trouillon, T., Welbl, J., Riedel, S., Gaussier, É., and Bouchard, G. Complex embeddings for simple link prediction. In *ICML*, volume 48 of *JMLR Workshop and Conference Proceedings*, pp. 2071–2080. JMLR.org, 2016.
- Vashishth, S., Sanyal, S., Nitin, V., and Talukdar, P. Composition-based multi-relational graph convolutional networks. *arXiv preprint arXiv:1911.03082*, 2019.
- Vrandečić, D. and Krötzsch, M. Wikidata: A free collaborative knowledge base. *Communications of the ACM*, 57:78–85, 2014. URL <http://cacm.acm.org/magazines/2014/10/178785-wikidata/fulltext>.
- Xiong, W., Hoang, T., and Wang, W. Y. Deeppath: A reinforcement learning method for knowledge graph reasoning. In *EMNLP*, pp. 564–573. Association for Computational Linguistics, 2017.
- Yang, B., Yih, W.-t., He, X., Gao, J., and Deng, L. Embedding entities and relations for learning and inference in knowledge bases. *arXiv preprint arXiv:1412.6575*, 2014.
- Yang, F., Yang, Z., and Cohen, W. W. Differentiable learning of logical rules for knowledge base reasoning. *Advances in neural information processing systems*, 30, 2017.
- Zhang, Z., Wang, J., Chen, J., Ji, S., and Wu, F. Cone: Cone embeddings for multi-hop reasoning over knowledge graphs. *Advances in Neural Information Processing Systems*, 34:19172–19183, 2021.
- Zhu, Z., Zhang, Z., Xhonneux, L.-P., and Tang, J. Neural bellman-ford networks: A general graph neural network framework for link prediction. *Advances in Neural Information Processing Systems*, 34:29476–29490, 2021.
- Zhu, Z., Galkin, M., Zhang, Z., and Tang, J. Neural-symbolic models for logical queries on knowledge graphs. *arXiv preprint arXiv:2205.10128*, 2022.

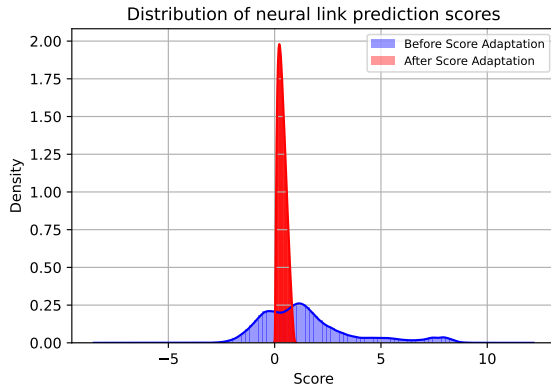


Figure 7. The distribution of the scores of the neural link predictor before applying the adaptation layer and after.

A. Impact of adaptation

We investigate the effect of the adaptation process in CQD^A by comparing the score of the neural link predictor before and after applying the adaptation layer. As we see from Figure 7, the scores before adaptation have a variation of 5.04 with the boundaries at $[-8, 12]$. This makes them problematic for complex query answering as discussed in Section 4. The Adapted scores have a smaller variation at 0.03 while the maximum and minimum lie in the range $[0, 1]$.