

On the Opportunity of Causal Deep Generative Models: A Survey and Future Directions

Guanglin Zhou¹, Lina Yao^{1,2}, Xiwei Xu², Chen Wang², Liming Zhu², Kun Zhang^{3,4}

¹University of New South Wales, Sydney, Australia

²Data61, CSIRO, Australia

³Carnegie Mellon University, Pittsburgh, United States

⁴Mohamed bin Zayed University of Artificial Intelligence, Abu Dhabi, United Arab Emirates
{guanglin.zhou, lina.yao}@unsw.edu.au, {lina.yao, xiwei.xu, chen.wang, liming.zhu}@data61.csiro.au, kunz1@cmu.edu

Abstract

Deep generative models have gained popularity in recent years due to their ability to accurately replicate inherent empirical distributions and yield novel samples. In particular, certain advances are proposed wherein the model engenders data examples following specified attributes. Nevertheless, several challenges still exist and are to be overcome, i.e., difficulty in extrapolating out-of-sample data and insufficient learning of disentangled representations. Structural causal models (SCMs), on the other hand, encapsulate the causal factors that govern a generative process and characterize a generative model based on causal relationships, providing crucial insights for addressing the current obstacles in deep generative models. In this paper, we present a comprehensive survey of Causal deep Generative Models (CGMs), which combine SCMs and deep generative models in a way that boosts several trustworthy properties such as robustness, fairness, and interpretability. We provide an overview of the recent advances in CGMs, categorize them based on generative types, and discuss how causality is introduced into the family of deep generative models. We also explore potential avenues for future research in this field.

1 Introduction

Deep generative models are a class of paradigms to estimate and represent probability distributions of training samples with deep neural networks, involving broad applications such as image synthesis, attribute manipulation, pose estimation, and speech and text synthesis. Recent advances enforce a set of attribute conditions that novel generated samples should satisfy [Wang *et al.*, 2022; Kaddour *et al.*, 2022] and contribute to controllable data generation, which is substantial in critical fields, i.e., images editing [Liu *et al.*, 2019] and medical detection [Sanchez *et al.*, 2022].

Still, inherent limitations exist due to the constraint of sampling from conditional distributions. We could desire generated samples that extrapolate beyond the empirical distribu-

tions and edit data examples while considering the relationships among attributes [Kaddour *et al.*, 2022].

Unlike deep generative models such as generative adversarial networks (GANs) and variational auto-encoders (VAEs), structural causal models (SCMs) characterize a generative model derived from causal relationships, encapsulate causal knowledge, and enable to answer interventional and counterfactual queries [Pearl, 2009], thus providing crucial insights that have the potential for eliminating notable limitations in current deep generative models. We present the introduction regarding SCMs in Section 3.3.

Causal deep Generative Models (CGMs), which incorporate both deep generative models and SCMs, seek to address the limitations of existing generative models, and enhance multiple reliable properties. To this end, various studies have been conducted: GANs-based models [Kocaoglu *et al.*, 2018; Xu *et al.*, 2019; Mao *et al.*, 2021; Zhang *et al.*, 2021; Sauer and Geiger, 2021; Feng *et al.*, 2022; Shen *et al.*, 2022], VAEs-based models [Suter *et al.*, 2019; Pawlowski *et al.*, 2020; Yang *et al.*, 2021; Sánchez-Martín *et al.*, 2021; Hu and Li, 2021], and diffusion-based models [Sanchez and Tsafaris, 2022; Sanchez *et al.*, 2022; Augustin *et al.*, 2022]. These studies, such as those described in the cited works, aim to facilitate causal controllable generation and interpretable disentanglement in representation learning.

This paper presents a first comprehensive survey (to the best of our knowledge) on CGMs, and the emphasis is placed on the contribution of causality to the family of deep generative models. We focus on models, trustworthy properties, datasets and applications, and discuss the challenges and promising directions in this field. Our goal is to provide valuable guidance for future research in this area.

2 Causality Matters in Deep Generative Models

To demonstrate the benefits of incorporating causality into deep generative models, we highlight several issues with current deep generative models and explain why considering causality is important in addressing these issues.

- **Enhancing extrapolation capability for controllable generations.** Deep generative models are able to replicate complex data distributions and generate novel sam-

ples based on specified attributes, such as synthesizing a face image with facts of $\{Mustache = 1, Gender = Male\}$. However, their ability to extrapolate beyond the training distribution is limited due to their reliance on sampling from observational distribution. In contrast, CGMs incorporate encoded causal knowledge, potentially allowing to generalize beyond the support of the training distribution [Besserve *et al.*, 2021] and produce data examples in the previously unobserved contexts, i.e., $\{Mustache = 1, Gender = Female\}$ [Kocaoglu *et al.*, 2018; Feng *et al.*, 2022]. This enhanced extrapolation capability is valuable in fields such as medical detection and images editing, where the ability to generate samples beyond the empirical distribution is critical.

- Improving interpretability through causal disentanglement in representation learning.** Deep generative models are applicable to learn effective feature representations that disentangle the underlying factors of variation [Bengio *et al.*, 2013] for downstream discrimination tasks [Donahue *et al.*, 2016], i.e., multiple mutual independent factors of digit type, rotation, and width in the MNIST dataset [Higgins *et al.*, 2017]. However, as demonstrated in [Hyvärinen and Pajunen, 1999; Hyvarinen *et al.*, 2019], statistical independence alone is generally not strong enough to enforce identifiability of the underlying sources from their nonlinear mixtures. Furthermore, recent studies [Locatello *et al.*, 2019; Besserve *et al.*, 2020] also argue that enforcing independence between latent factors in existing disentangled representation learning is not sufficient for complex real-world scenarios. Instead, causality, especially *Independent Causal Mechanisms (ICM) Principle*, represents a more general concept that contains statistical independence as a special case [Schölkopf *et al.*, 2021]. In particular, the process of causal disentanglement, which uncovers and establishes the causal correlations between latent variables, is crucial for providing more practicable and explainable representations. For example, in a facial image, the attribute of *Smiling* is more likely to result in *Mouth_Slightly_Open* and *Narrow_Eyes* [Kocaoglu *et al.*, 2018; Shen *et al.*, 2022], as illustrated in Figure 1. This improved interpretability can be valuable in fields such as medical detection, where understanding the relationships between features is crucial.
- Governing multiple attributes consistently.** [Wang *et al.*, 2022] highlight current research on controllable deep data generation is limited in that it can only manipulate one attribute at a time, while it is often necessary to control multiple attributes simultaneously in real scenarios. CGMs, on the other hand, possess the inherent capability to handle diverse attributes across generations through the incorporation of causal learning. This enables interventions on causal variables in SCMs (see *Definition 4.9* in [Schölkopf and von Kügelgen, 2022]), allowing for the generation of data examples with multiple attributes. For example, by intervening $\{Bald = 1, Smiling = 1\}$, it is possible to generate facial images that simultaneously display both baldness

and smiling attributes [Shen *et al.*, 2022].

We also provide a definition of CGMs to clarify the scope and focus of this class of models.

Definition 1. (*Causal deep Generative Models*). *Causal deep Generative Models (CGMs) are a class of deep generative models that either straightforwardly translate a structural causal model into generative processes or enforce generative strategies that align with causal mechanisms and are primarily concerned with causal controllable generations and interpretable representation learning.*

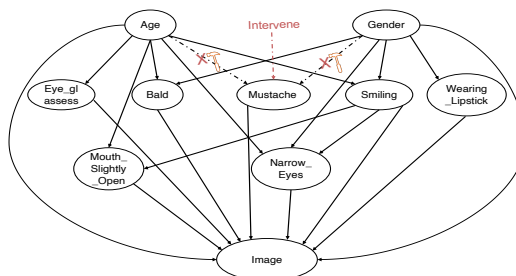


Figure 1: In CausalGAN [Kocaoglu *et al.*, 2018], the assumed causal graph for a subset in the CelebFaces Attributes Dataset (CelebA) [Liu *et al.*, 2015] reveals that deep generative models can mitigate the causal effects of *Age* and *Gender* on the *Mustache* variable when intervening on it.

3 Methodologies

In this section, we provide a comprehensive overview of current CGMs. We classify these models based on the generative method used, including adversarial training, variational inference, and diffusion processes. Our focus is on how causality is incorporated into the family of deep generative models.

3.1 GANs-Based Models

Although GANs [Goodfellow *et al.*, 2014] have achieved state-of-the-art performance on many generation tasks and several studies have designed controllable data generation [Wang *et al.*, 2022], i.e., InfoGAN [Chen *et al.*, 2016], issues in Section 2 still exist. In an attempt to improve controllability and interpretability of GAN-generated data, some studies have combined GANs with causality by either translating SCMs into GAN architectures or enforcing causal mechanisms in the generative strategies of GANs.

Translate SCMs into GANs

Specific approaches explicitly convert SCMs into the architecture of GANs, including the generator, the prior for latent variables and auxiliary internal representations.

SCMs as a Generator in GANs. [Kocaoglu *et al.*, 2018] introduce CausalGAN, the first work combining GANs with SCMs. In particular, the generator architecture in CausalGAN is structured based on an assumed causal graph illustrated in Figure 1, and we present a simplified illustration in Figure 2. For example, there are two attributes named *Gender* and *Mustache* in CelebA dataset [Liu *et al.*,

2015]. Obviously, a causal relationship exists with $\{Age \rightarrow Mustache \leftarrow Gender\}$ in Figure 1. Supposing that we sample from a conditional distribution of $P(\cdot | Mustache = 1)$, then we attain data examples only with $\{Gender = Male\}$ since there is a causal factor of $\{Gender = Male\}$ that induces $\{Mustache = 1\}$. However, causality allows us to sample from different distributions when performing interventions on causal variables in an SCM. As Figure 1 shows, we intervene on the *Mustache* variable by replacing the structural assignments on *Mustache* variable with a new mechanism, which the simplest mechanism is atomic intervention when *Mustache* is one or zero. In this way, we cut off the causal relationships from $\{Age, Gender\}$ to *Mustache*, and the causal effects disappear. Then specific samples, which are unseen in observables, are expected to generate, i.e., a female with mustache or a child with mustache, able to extrapolate current training distributions. In such a manner, they extend beyond previous conditional generations by exploiting causal relationships among attribute variables. Besides, CausalGAN provides a theoretical guarantee for the correctness of sampling from interventional distributions but is only limited to binary attributes. Although CausalGAN contributes to more creative models that yield samples different from training ones in multiple ways, there is no further demonstration of the benefits of the generated data for subsequent tasks [Kocaoglu *et al.*, 2018].

Similar to CausalGAN, the counterfactual generative network (CGN) [Sauer and Geiger, 2021] also induces the proposed SCMs into the architecture of the generator network, controlling factors of variation, including shape, texture and background. Unlike CausalGAN, CGN aims to obtain more robust and interpretable classifiers and prevent classifiers from learning shortcuts [Geirhos *et al.*, 2020]. They regard counterfactual samples generated from CGN for data augmentation and investigate whether these counterfactual images enable invariant classifiers. Empirical evaluations confirm that counterfactual data augmentation leads to invariant classifiers on MNIST. However, the gap to a fully invariant classifier still exists on ImageNet-9.

In a scenario of tabular data generation, [Wen *et al.*, 2022] propose designing a causally-aware generator architecture in GANs by modeling predefined causal relationships. Unlike previous studies, [Xu *et al.*, 2019] and [van Breugel *et al.*, 2021] start from a fairness perspective. [Xu *et al.*, 2019] build a causal fairness-aware GAN (CFGAN) that enforces various causal fairness principles, such as total effect, direct or indirect discrimination and counterfactual fairness. [van Breugel *et al.*, 2021] develop DECAF, a causally-aware GAN for gen-

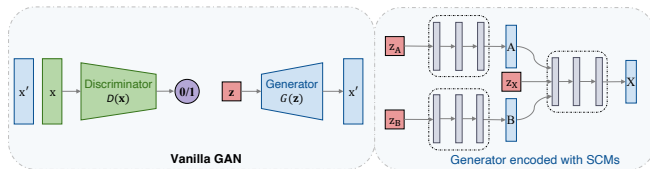


Figure 2: [Kocaoglu *et al.*, 2018] illustrate the process of translating an SCM into the structure of a generator architecture using a simplified causal graph $\{A \rightarrow X \leftarrow B\}$.

erating fair synthetic data, and explicitly model the data generating process with an SCM in the input layers of the generator.

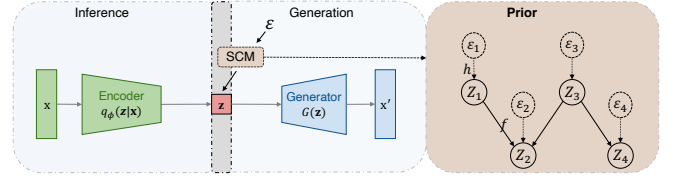


Figure 3: The illustration of encoding an SCM as the prior for latent variables in bidirectional generative models [Shen *et al.*, 2022].

SCMs as a Prior for Latent Variables. In their study, [Shen *et al.*, 2022] propose a disentangled generative learning method that relaxes the requirement for careful hand-crafting in the translation of SCMs into generator networks. As shown in Figure 3, this method integrates an SCM as the prior of a bidirectional generative model, such as BiGAN [Donahue *et al.*, 2016]. A key difference from former studies is that [Shen *et al.*, 2022] only require causal variable labels, rather than specifying a complete causal graph. To represent the directed acyclic graph (DAG) \mathcal{G} , the study uses a weighted adjacency matrix A and learns both the causal structure and assignments simultaneously through the use of general nonlinear function f and h for structural assignments.

$$z = f((I - A^T)^{-1}h(\epsilon)) \quad (1)$$

where A is the weighted adjacency matrix and ϵ is exogenous noise variables. The authors aim to learn a disentangled causal representation in which underlying factors can be causally related, in contrast to existing disentanglement methods that assume a prior latent variable distribution with mutually independent components [Locatello *et al.*, 2019]. It is important to note that the method proposed in [Shen *et al.*, 2022] utilizes a more direct and somehow stronger form of supervision in comparison to that of [Khemakhem *et al.*, 2020]. Specifically, the method requires annotated labels of true factors to guarantee the identifiability of latent causal variables.

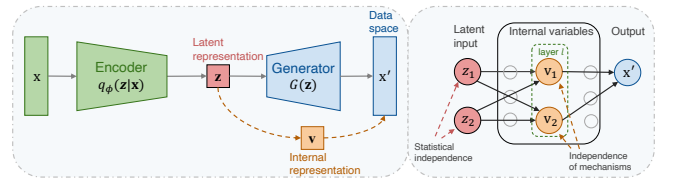


Figure 4: The illustration of the generative mapping and the intrinsic disentangled transformation in [Besserve *et al.*, 2020].

SCMs as Internal Representation. [Besserve *et al.*, 2020] introduce the concept of intrinsic disentanglement as a way to perform interpretable and extrapolated transformation on data using a set of internal (endogenous) variables structured by an SCM. They argue that many disentanglement transformations are statistically dependent and unlikely to be disentangled in the latent space, and instead propose the use

of modular parts of the network architecture (specifically, internal variables v_1 and v_2 as shown in Figure 4) to ascribe properties to an image. To do this, they use the channels c of convolutional layers l in deep generative models as initial interval variables, grouping these channels into modules using clustering algorithms based on the similarity of their influence maps. Through experimentation, they validate the existence of these modules in various trained deep generative models and provide theoretical insights into how they can enable interpretable and extrapolated generations in pre-trained generative models [Besserve *et al.*, 2021].

GANs conform to SCMs

Unlike the approach of explicitly encoding SCMs into structures of GANs, additional studies have explored more straightforward methods for downstream tasks, implementing generative strategies that follow the SCMs.

Generative Intervention. In both [Mao *et al.*, 2021] and [Zhang *et al.*, 2021], the use of GANs is utilized to simulate interventions based on an SCM. In the case of [Mao *et al.*, 2021], the goal is to improve the robustness of visual representations for downstream classification tasks. Since spurious correlations rarely exist beyond the training distribution, they analyze the causal relationships among stable and spurious features in visual classification tasks. Then this work utilizes conditional GAN (cGAN) [Mirza and Osindero, 2014] to perform interventions on spurious variables. This procedure can also be interpreted as adversarial augmentation but under the constraint of interventions. The augmented data sampling with intervention possesses joint distributions that differ from the original observational data, thus eliminating spurious correlation and improving robust performance.

Similarly, [Zhang *et al.*, 2021] extend the concept of generative intervention to the realm of 3D pose estimation. They consider shifts in domains as interventions and conduct deep generative models to manufacture these interventions. The counterfactual features, in this case, belong to sample content, such as the person and object, but vary in terms of domain-specific information, such as background and viewpoint. Empirical validation presents that such transferable and causal representations contribute to the performance of 3D pose estimation tasks.

Knowledge Extrapolation. In order to bypass the limitations of using structural constructions corresponding to a causal graph with state-of-the-art GANs such as BigGAN [Brock *et al.*, 2019], [Feng *et al.*, 2022] propose a method for generating counterfactual samples directly using pre-trained generators. They assume that the extrapolation distribution only differs from the original distribution in the extrapolated knowledge dimension, which can be modeled through an adversarial game. This approach allows for greater flexibility in integration with state-of-the-art GANs and results in the production of counterfactual results with high fidelity.

3.2 VAEs-Based Models

VAEs have been widely utilized for their ability to provide disentangled latent representations [Kingma and Welling, 2014], and are considered a state-of-the-art in deep generative models [Higgins *et al.*, 2017]. Several studies have posited

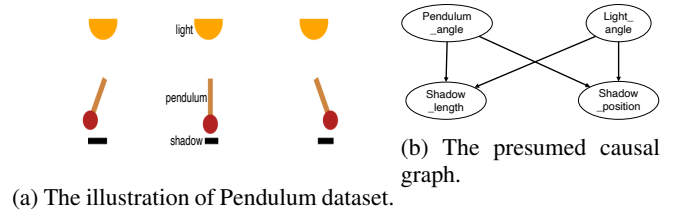


Figure 5: A swinging pendulum [Yang *et al.*, 2021].

that the latent variables within VAEs are mutually independent. This issue is closely aligned with nonlinear Independent Component Analysis (ICA), in which it is well-established that the generative procedure is not identifiable in the general nonlinear case. However, recent developments in this field [Hyvärinen and Pajunen, 1999; Hyvärinen *et al.*, 2019] have demonstrated that if there are multiple distribution of the data that share the same generative function but have different distributions of the underlying independent latent variables, the generative function becomes identifiable [Khemakhem *et al.*, 2020; Kong *et al.*, 2022].

SCMs Integrated in VAEs

In their work, [Locatello *et al.*, 2019] define disentangled representation as the attempt to identify the distinct, semantic and informative factors of variations in the data. However, [Yang *et al.*, 2021] argue that in real scenarios, these factors of variations may not be only independent, as is commonly assumed in existing disentanglement approaches, but may also be causally related. As an example, when the light source or pendulum moves, the shadow’s length and position also change, as shown in Figure 5a. In order to address this issue, [Yang *et al.*, 2021] introduce CausalVAE, an approach to integrate an SCM into a vanilla variational autoencoder, as illustrated in Figure 6.

It is worth noting that the identifiability [Khemakhem *et al.*, 2020] of CausalVAE is guaranteed through the utilization of surrogate information, specifically weak supervision of the labels on the latent causal variables of interest. CausalVAE can be seen as a pioneering study in the field [Shen *et al.*, 2022], as it automatically learns causal structure through the use of adjacency matrices, which is distinct from that utilized in the CausalGAN [Kocaoglu *et al.*, 2018]. Additionally, it should be noted, that CausalVAE implements a linear structural causal model with a maximum of four causal variables.

Estimate SCMs with VAEs

In contrast to explicitly encoding SCMs, several studies have utilized VAEs to learn structural assignments [Pawlowski *et al.*, 2020; Reinhold *et al.*, 2021; Sánchez-Martín *et al.*, 2021]. Specifically, [Pawlowski *et al.*, 2020] propose a novel deep generative framework called DeepSCM, which aims to infer counterfactual effects using a fully specified causal graph. They apply normalizing flow techniques and a VAE model to infer the exogenous noise variables related to endogenous variables and the structural assignments among causal variables. The complete SCM enables to perform a three-step causal procedure, namely abduction, action and prediction,

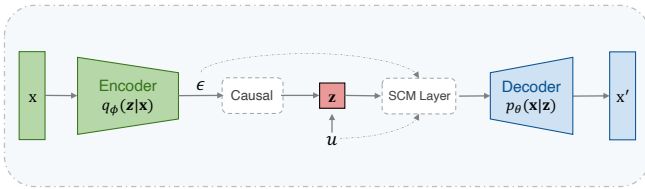


Figure 6: The model structure of CausalVAE, as depicted in [Yang *et al.*, 2021], consists of a causal module and a SCM layer. The causal module utilizes an adjacency matrix to transform independent exogenous factors, represented by ϵ , into causal representations. The SCM layer then reconstructs the causal representation z , simulating the transmission of causal effects. Additionally, the variables of interest are supervised by u .

providing a novel effective approach for answering causal questions. They extend the DeepSCM to model brain MRI scans images and present interesting and practical findings, whereas only present plausible counterfactual changes and lack quantifiable evaluations. However, this study is unable to account for unobserved confounders and operates under the assumption of causal sufficiency [Scholkopf and von Kügelgen, 2022].

[Sánchez-Martín *et al.*, 2021] utilize graph neural networks (GNNs) to encode SCMs, as both belong to graph structures. They leverage Variational Graph Auto-Encoders (VGAE) and approximate the interventional effects using GNN message-passing algorithms. They represent the causal graph with an adjacency matrix embedded in each layer of the GNN, but also assume a known causal graph and the absence of hidden confounders. However, the use of message aggregations in GNNs may limit the expressiveness and prevent it from handling larger causal graphs.

In their work, [Hu and Li, 2021] pivot the focus of text generations to a causal perspective. Controllable text generation involves generating texts that possess specific attributes and modifying samples to incorporate these attributes. This study, similar to DeepSCM [Pawlowski *et al.*, 2020], utilizes a VAE to infer exogenous variables and structural assignments among causal variables, despite examining various application domains.

3.3 Diffusion-Based Models

Recent research has demonstrated the potential for combining generative diffusion models and SCMs for counterfactual estimation and explanation through the use of diffusion probabilistic models [Dhariwal and Nichol, 2021]. This approach has been explored in a number of studies [Sanchez and Tsafaris, 2022; Augustin *et al.*, 2022].

Namely, an SCM $\mathcal{M} := (\mathbf{S}, p(U))$ consists of structural assignments $\mathbf{S} = \{f^{(i)}\}_{i=1}^K$,

$$\mathbf{x}^{(k)} := f^{(k)}(\mathbf{pa}^{(k)}; \mathbf{u}^{(k)}) \quad (2)$$

where $\mathbf{x}^{(k)}$ represents the k -th known endogenous variable as a green node in Figure 7; $\mathbf{pa}^{(k)}$ is the set of parents of $\mathbf{x}^{(k)}$ (its direct causes), such as $\mathbf{pa}^{(1)} = \{\mathbf{x}^{(2)}, \mathbf{x}^{(3)}\}$ in Figure 7; $p(U) = \prod_{i=1}^K p(\mathbf{u}^{(i)})$ refers to a joint distribution over mutually independent exogenous noise variables. Each

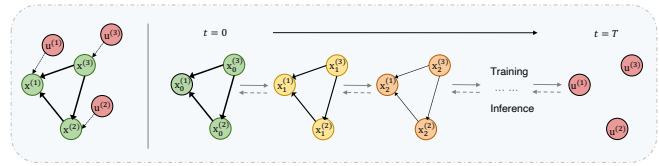


Figure 7: The Diff-SCM model, which is a structured generative model, illustrates how the diffusion process can weaken the causal relationships between endogenous variables that are causally linked [Sanchez and Tsafaris, 2022].

$\mathbf{u}^{(k)}$ is only related to $\mathbf{x}^{(k)}$. The joint distribution of endogenous variables can be decomposed using *causal mechanisms*, represented by $p(\mathbf{x}^{(i)}|\mathbf{pa}^{(i)})$, rather than entangled factorizations, as implied by the *Causal Markov condition* in [Pearl, 2009; Spirtes *et al.*, 2000; Scholkopf *et al.*, 2021; Scholkopf and von Kügelgen, 2022]:

$$p_{\mathcal{M}}(\mathbf{x}^{(1)}, \dots, \mathbf{x}^{(K)}) = \prod_{k=1}^K p(\mathbf{x}^{(k)}|\mathbf{pa}^{(k)}) \quad (3)$$

[Sanchez and Tsafaris, 2022] propose Diff-SCM as a way to unite SCMs and the stochastic differential equation (SDE) framework [Song *et al.*, 2021; Weng, 2021]. As depicted in Figure 7, they formulate a forward diffusion as a process of weakening the causal relations between endogenous variables. Specifically, the original joint distribution entailed by the Eq. (3) that diffuses to independent Gaussian distributions $p(U)$, as $p(\mathbf{x}_{t=T}^{(k)}) = p(\mathbf{u}^{(k)})$ and $p(\mathbf{x}_{t=0}^{(k)}) = p_{\mathcal{M}}(\mathbf{x}^{(k)})$ with $t \in [0, T]$. Following the time-dependent SDE [Song *et al.*, 2021], Diff-SCM is defined as:

$$d\mathbf{x}^{(k)} = -\frac{1}{2}\beta_t \mathbf{x}^{(k)} dt + \sqrt{\beta_t} d\mathbf{w}, \forall k \in [1, K],$$

$$\text{where } p(\mathbf{x}_0^{(k)}) = \prod_{j=k}^K p(\mathbf{x}^{(j)}|\mathbf{pa}^{(j)}), p(\mathbf{x}_T^{(k)}) = p(\mathbf{u}^{(k)}) \quad (4)$$

where $\beta_t \in [0, 1]$ represents the time-dependent variance of a Gaussian noise introduced in each forward process and \mathbf{w} is the Brownian motion leading to a Gaussian distribution.

This study utilizes an anti-causal predictor inspired by the classifier-guided diffusion introduced in previous work [Dhariwal and Nichol, 2021]. This approach involves transforming the prior distribution $p(U)$ into the data distribution through a gradual removal of noise using the gradient of the data distribution, until $\mathbf{x}_{t=0}^{(k)} = \mathbf{x}^{(k)}$ (as described in [Song *et al.*, 2021]). With the aim of achieving conditional generation, [Dhariwal and Nichol, 2021] train a classifier and use its gradients to guide the diffusion process towards the desired conditioning information. To obtain counterfactual samples, they pass the gradients of the predictor through a reverse-diffusion process after performing an intervention (assigning a specific value to the cause). These counterfactual samples are highly similar images that differ only in their class label. This work follows three steps of causal hierarchy, similar to [Pawlowski *et al.*, 2020], but is limited to a bi-variable SCM with the causal relationship $\mathbf{x}^{(2)} \rightarrow \mathbf{x}^{(1)}$, where $\mathbf{x}^{(1)}$ represents an image, $\mathbf{x}^{(2)}$ represents a class label.

Subsequently, [Sanchez *et al.*, 2022] improve the Diff-SCM by introducing implicit attention guidance for lesion segmentation. Given an input image, the authors synthesize healthy counterfactual images by making minimal changes to the input but altering the domain. The difference between the original patient image and the healthy counterfactual is used to create a heatmap that indicates the location of the pathology. By using implicit attention guidance in the counterfactual diffusion probabilistic model (CDPM) rather than a downstream classifier, they demonstrate the superior performance of their approach. Other research has also explored the use of diffusion models for generating counterfactual images and providing counterfactual explanations (CEs) [Goyal *et al.*, 2019; Augustin *et al.*, 2022].

4 Trustworthy Properties

According to [Kaur *et al.*, 2022], trustworthy artificial intelligence requires several essential characteristics to make machine learning models reliable. In this section, we introduce three trustworthy properties that CGMs contribute to deep generative models: robustness, fairness, and interpretability. CGMs, through their incorporation of causal knowledge, make them more reliable and trustworthy in various applications.

Robustness

Deep neural networks have seen widespread use in numerous applications; however, there have also been instances of failure such as shortcut learning and spurious correlations [Geirhos *et al.*, 2020]. Counterfactual samples generated by CGMs can improve the robustness of downstream tasks by enabling extrapolation of the support of training data, including novel combinations of attributes. These generated counterfactual samples also capture stable semantic features across various distributions. In comparison with classifiers using samples generated by GANs, an impressive improvement is achieved [Sauer and Geiger, 2021]. Deep generative models have also been used to create samples with causal semantics for data augmentation [Mao *et al.*, 2021] and [Zhang *et al.*, 2021]. This allows for the learning of robust visual representations that can generalize to new scene contexts or for the creation of robust models for 3D pose estimation. The benefits of causal disentangled representation for improving distributional robustness in downstream tasks have also been demonstrated [Shen *et al.*, 2022]. [Pawlowski *et al.*, 2020] and [Sanchez *et al.*, 2022] expand counterfactual samples generation to the medical imaging setup, providing better understanding of the physical manifestation of brain MRI and enabling transferable features for downstream classifiers in this setting [Sanchez *et al.*, 2022].

Fairness

The use of machine learning models can often result in biased decisions due to the inherent biases present in the training data. This can lead to discrimination in certain applications, such as insurance, hiring and lending, particularly towards subgroups with sensitive attributes like race and gender [Kusner *et al.*, 2017]. Several studies have attempted to address

this issue through the use of causal fairness [Wu *et al.*, 2019], including the use of causal generative models like CFGAN [Xu *et al.*, 2019] and DECAF, which enforce various causal fairness principles through the assumption of a causal graph. Other approaches, such as the VGAE [Sánchez-Martín *et al.*, 2021], have demonstrated effectiveness in assessing counterfactual fairness and training counterfactually fair classifiers through the incorporation of a prior causal graph structure. Overall, addressing bias and discrimination in machine learning models through the use of causal fairness techniques is crucial in ensuring fair and unbiased decision-making.

Interpretability

Deep generative models are designed to control underlying factors of variation, but some studies have challenged the statistical independence assumption of latent variables [Locatello *et al.*, 2019; Besserve *et al.*, 2020; Xie *et al.*, 2020]. Instead, CGMs assume that factors of interest are causally related under an underlying causal structure. For example, the Pendulum dataset [Yang *et al.*, 2021] includes four variables, as illustrated in Figure 5. If we shift the light source from top-left to top-right in Figure 5a, then $\{Shadow_position, Shadow_length\}$ would both change due to the physical mechanism or causal effects. Therefore, the use of causal lens can enhance the interpretability of deep generative models [Pawlowski *et al.*, 2020]. In addition, counterfactual explanations, in combination with deep generative models, can also act as a crucial tool in understanding the decisions of a classifier [Augustin *et al.*, 2022; Khorram and Fuxin, 2022; Jeanneret *et al.*, 2022].

5 Datasets and Applications

In this section, we provide an overview of the benchmark datasets and applications of CGMs in various fields, including computer vision, health science, and social science. By examining the performance of CGMs on these datasets, we can better understand the capabilities and limitations of this type of model in various contexts.

Computer Vision. In the field of computer vision, several benchmark datasets have been used to evaluate the effectiveness of CGMs. These include MNIST and its variants, such as ColoredMNIST, Wildlife MNIST [Sauer and Geiger, 2021], Morpho MNIST¹. CGMs have also been applied to the Pendulum dataset [Yang *et al.*, 2021] and facial datasets such as CelebA [Liu *et al.*, 2015] and FFHQ faces², in order to generate images with specific attributes. Additionally, CGMs have been tested on high-resolution generative models and their ability to enhance the robustness of classifiers on ImageNet dataset [Deng *et al.*, 2009]. In the realm of sequential data generation, CGMs have been used to model human action sequences [Xu *et al.*, 2020]. Other applications include 3D pose estimation tasks, such as human and hand pose estimation [Zhang *et al.*, 2021], the use of causally disentangled representations on dSprites [Locatello *et al.*, 2019] and MPI3D datasets³, and recovering latent causal variables from tempo-

¹<https://github.com/dccastro/Morpho-MNIST>

²<https://github.com/NVlabs/ffhq-dataset>

³https://github.com/rr-learning/disentanglement_dataset

ral data [Yao *et al.*, 2021] on the KittiMask dataset [Klindt *et al.*, 2020] and the Mass-spring system dataset [Li *et al.*, 2020].

Health Science. CGMs have been applied in a variety of scientific medical investigations. For example, [Nemirovsky *et al.*, 2020] demonstrate that their proposed CounterGAN is capable of improving classifier accuracy on a low-dimensional tabular disease dataset, such as Pima Indians Diabetes dataset⁴ [Smith *et al.*, 1988]. [Feng *et al.*, 2022] highlight the potential for CGMs to infer the expected generation results of tissue slices on BreCaHAD dataset. DeepSCM [Pawlowski *et al.*, 2020] presents exciting findings on the brain scan dataset, enabling intervention of variables such as age and the induction of plausible counterfactual brain images. [Rasal *et al.*, 2022] expand upon the work of [Pawlowski *et al.*, 2020] by applying counterfactual reasoning to 3D brain structures from the UK Biobank Imaging Study⁵. [Sanchez *et al.*, 2022] investigate the use of CGMs for medical image segmentation tasks on brain tumour data from the BraTS 2021 challenge [Bakas *et al.*, 2018].

Social Science. [Xu *et al.*, 2019] develop a causal fairness-aware GAN to generate fair data on the UCI Adult income dataset [Dua and Graff, 2017] and eliminate the bias induced by the sensitive attribute *sex* on target *income*. [Nemirovsky *et al.*, 2020] show that meaningful counterfactuals could successfully support fairness by eliminating racial and gender biases on COMPAS recidivism dataset [ProPublica, 2017]. [Wen *et al.*, 2022] conduct experiments on several tabular datasets in the field of social science, including Adult⁶, Census⁷, News⁸, loan⁹, and housesales¹⁰. [van Breugel *et al.*, 2021] construct causally-aware generative networks to generate fair synthetic data for fair credit approval [Dua and Graff, 2017]. [Hu and Li, 2021] focus on reducing sentiment bias on the YELP dataset¹¹.

6 Discussion

Understanding generated counterfactuals. One significant challenge is that true counterfactuals are generally unverifiable [Pawlowski *et al.*, 2020; Reinhold *et al.*, 2021]. Thus, understanding and validating the counterfactual samples generated by CGMs is an fundamental area of research.

Existing works in this area include: (1) CausalGAN [Kocaoglu *et al.*, 2018], a pioneering work on CGMs, demonstrates the causality can enhance the creativity of deep generative models by allowing them to produce samples outside of training distributions. While CausalGAN shows that it can distinguish between conditional and counterfactual generated images on CelebA and presents illustrative counterfactual images, i.e., $\{Gender = Female, Mustache = 1\}$, practical

⁴<https://www.kaggle.com/datasets/uciml/pima-indians-diabetes-database>

⁵<https://www.ukbiobank.ac.uk/>

⁶<http://archive.ics.uci.edu/ml/datasets/adult>

⁷<https://archive.ics.uci.edu/ml/datasets/census+income>

⁸<https://archive.ics.uci.edu/ml/datasets/online+news+popularity>

⁹<https://www.kaggle.com/datasets/zaurbegiev/my-dataset>

¹⁰<https://www.kaggle.com/datasets/harifaxem/housesalesprediction>

¹¹<https://www.yelp.com/dataset/challenge>

and quantifiable metrics for evaluating generated counterfactuals are still lacking. (2) Some works demonstrate the usefulness of counterfactuals through proxy tasks, i.e., whether these samples improve the downstream tasks or not, such as enabling the training of invariant classifiers and improving out-of-distribution robustness [Sauer and Geiger, 2021]; eliminating spurious features and enhancing distributional robustness [Mao *et al.*, 2021; Zhang *et al.*, 2021]. This type of work can be regarded as counterfactual data augmentation (CFDA). Still, when and how much CFDA would be used are rarely explored [Wiles *et al.*, 2021; Kaddour *et al.*, 2022]. (3) Quantifiable metrics [Reddy *et al.*, 2022] for evaluating the generated counterfactuals are necessary and perhaps require domain knowledge and supervisory signals, especially for critical fields like medical areas [Reinhold *et al.*, 2021; Sanchez *et al.*, 2022]. The field will greatly benefit from the use of well-designed benchmark datasets for evaluating the performance of counterfactual reasoning approaches.

Scaling to the high-orders causal graph. One limitation of current CGMs is their scalability. To the best of our knowledge, the papers reviewed in this work do not scale beyond dozens of variables, as they primarily focus on image generations. For example, CausalGAN [Kocaoglu *et al.*, 2018], as shown in Figure 1, has integrated a relatively complex causal structure among all reviewed works, but only covers a causal graph with a maximum order of ten and degree of three. Some works have acknowledged the limitations of their simplified SCMs, such as bi-variable SCMs [Sanchez and Tsafaris, 2022]. However, in complex real-world datasets, the causal graph can be much more complicated, with numerous variables, such as the Colorectal Cancer Dataset¹² which has 400k variables. Therefore, scalability to high-order causal graphs is an fundamental challenge that needs to be addressed in future research.

Incorporating causal discovery and causal representation learning. Most CGMs require prior knowledge of the underlying causal structure. While some works have relaxed this requirement, they still need to specify causal variable labels and provide supervised information for identifiability [Yang *et al.*, 2021; Shen *et al.*, 2022]. Nevertheless, they must specify causal variable labels and provide supervised information for identifiability [Kaddour *et al.*, 2022]. However, in some real-world scenarios, causal orderings may not be available. Incorporating methods for causal discovery [Huang *et al.*, 2020; Xie *et al.*, 2020; Xie *et al.*, 2022; Huang *et al.*, 2022], which can learn the causal variables and the graph structure under structure identifiability, is a potential direction for future research [Shen *et al.*, 2022].

On the other hand, the hidden causal variables that govern the relationships between the observables (such as image pixel values) may generally not be directly measured. As a result, researchers have been focused on developing techniques for causal representation learning to learn these variables from data [Schölkopf *et al.*, 2021]. Recent developments in this area have focused on a variety of data types, including independent and identically distributed (IID) data [Xie *et al.*, 2020; Xie *et al.*, 2022; Huang *et al.*, 2022],

¹²<https://cdas.cancer.gov/datasets/plco/22/>

nonstationary data [Pfister *et al.*, 2017; Bengio *et al.*, 2019; Khemakhem *et al.*, 2020; Yao *et al.*, 2021], and time series data with temporal dependence [Yao *et al.*, 2022].

7 Conclusion

In this article, we present a first survey of CGMs, providing a taxonomy according to the generative types and highlighting how causality is induced into the family of deep generative models. We also provide an in-depth analysis of the current models, discuss their potential applications, and highlight the benefits of incorporating causality in deep generative models. Finally, we discuss research challenges and directions and aim to provide beneficial insights for future researchers in this field.

References

- [Augustin *et al.*, 2022] Maximilian Augustin, Valentyn Borieko, Francesco Croce, and Matthias Hein. Diffusion visual counterfactual explanations. *ArXiv*, abs/2210.11841, 2022.
- [Bakas *et al.*, 2018] Spyridon Bakas, Mauricio Reyes, Andras Jakab, Stefan Bauer, Markus Rempfler, Alessandro Crimi, Russell Takeshi Shinohara, Christoph Berger, Sung Min Ha, Martin Rozycki, et al. Identifying the best machine learning algorithms for brain tumor segmentation, progression assessment, and overall survival prediction in the brats challenge. *arXiv preprint arXiv:1811.02629*, 2018.
- [Bengio *et al.*, 2013] Yoshua Bengio, Aaron C. Courville, and Pascal Vincent. Representation learning: A review and new perspectives. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 35:1798–1828, 2013.
- [Bengio *et al.*, 2019] Yoshua Bengio, Tristan Deleu, Nasim Rahaman, Rosemary Ke, Sébastien Lachapelle, Olexa Bilaniuk, Anirudh Goyal, and Christopher Pal. A meta-transfer objective for learning to disentangle causal mechanisms. *arXiv preprint arXiv:1901.10912*, 2019.
- [Besserve *et al.*, 2020] M. Besserve, Rémy Sun, and Bernhard Schölkopf. Counterfactuals uncover the modular structure of deep generative models. *ArXiv*, abs/1812.03253, 2020.
- [Besserve *et al.*, 2021] M. Besserve, Rémy Sun, Dominik Janzing, and Bernhard Schölkopf. A theory of independent mechanisms for extrapolation in generative models. In *AAAI*, 2021.
- [Brock *et al.*, 2019] Andrew Brock, Jeff Donahue, and Karen Simonyan. Large scale gan training for high fidelity natural image synthesis. *ArXiv*, abs/1809.11096, 2019.
- [Chen *et al.*, 2016] Xi Chen, Yan Duan, Rein Houthoofd, John Schulman, Ilya Sutskever, and P. Abbeel. Infogan: Interpretable representation learning by information maximizing generative adversarial nets. In *NIPS*, 2016.
- [Deng *et al.*, 2009] J. Deng, W. Dong, R. Socher, L.-J. Li, K. Li, and L. Fei-Fei. ImageNet: A Large-Scale Hierarchical Image Database. In *CVPR09*, 2009.
- [Dhariwal and Nichol, 2021] Prafulla Dhariwal and Alex Nichol. Diffusion models beat gans on image synthesis. *ArXiv*, abs/2105.05233, 2021.
- [Donahue *et al.*, 2016] Jeff Donahue, Philipp Krähenbühl, and Trevor Darrell. Adversarial feature learning. *arXiv preprint arXiv:1605.09782*, 2016.
- [Dua and Graff, 2017] Dheeru Dua and Casey Graff. UCI machine learning repository, 2017.
- [Feng *et al.*, 2022] Ruili Feng, Jie Xiao, Kecheng Zheng, Deli Zhao, Jingren Zhou, Qibin Sun, and Zhengjun Zha. Principled knowledge extrapolation with gans. In *ICML*, 2022.
- [Geirhos *et al.*, 2020] Robert Geirhos, Jörn-Henrik Jacobsen, Claudio Michaelis, Richard S. Zemel, Wieland Brendel, Matthias Bethge, and Felix Wichmann. Shortcut learning in deep neural networks. *Nat. Mach. Intell.*, 2:665–673, 2020.
- [Goodfellow *et al.*, 2014] Ian J. Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron C. Courville, and Yoshua Bengio. Generative adversarial nets. In *NIPS*, 2014.
- [Goyal *et al.*, 2019] Yash Goyal, Ziyang Wu, Jan Ernst, Dhruv Batra, Devi Parikh, and Stefan Lee. Counterfactual visual explanations. *ArXiv*, abs/1904.07451, 2019.
- [Higgins *et al.*, 2017] Irina Higgins, Loïc Matthey, Arka Pal, Christopher P. Burgess, Xavier Glorot, Matthew M. Botvinick, Shakir Mohamed, and Alexander Lerchner. beta-vae: Learning basic visual concepts with a constrained variational framework. In *ICLR*, 2017.
- [Hu and Li, 2021] Zhiting Hu and Erran L. Li. A causal lens for controllable text generation. In *NeurIPS*, 2021.
- [Huang *et al.*, 2020] Biwei Huang, Kun Zhang, Jiji Zhang, Joseph D Ramsey, Ruben Sanchez-Romero, Clark Glymour, and Bernhard Schölkopf. Causal discovery from heterogeneous/nonstationary data. *J. Mach. Learn. Res.*, 21(89):1–53, 2020.
- [Huang *et al.*, 2022] Biwei Huang, Charles Jia Han Low, Feng Xie, Clark Glymour, and Kun Zhang. Latent hierarchical causal structure discovery with rank constraints. *arXiv preprint arXiv:2210.01798*, 2022.
- [Hyvärinen and Pajunen, 1999] Aapo Hyvärinen and Petteri Pajunen. Nonlinear independent component analysis: Existence and uniqueness results. *Neural networks : the official journal of the International Neural Network Society*, 12 3:429–439, 1999.
- [Hyvarinen *et al.*, 2019] Aapo Hyvarinen, Hiroaki Sasaki, and Richard Turner. Nonlinear ica using auxiliary variables and generalized contrastive learning. In *The 22nd International Conference on Artificial Intelligence and Statistics*, pages 859–868. PMLR, 2019.
- [Jeanneret *et al.*, 2022] Guillaume Jeanneret, Loïc Simon, and Frédéric Jurie. Diffusion models for counterfactual explanations. *ArXiv*, abs/2203.15636, 2022.
- [Kaddour *et al.*, 2022] Jean Kaddour, Aengus Lynch, Qi Liu, Matt J. Kusner, and Ricardo Silva. Causal machine learning: A survey and open problems. *ArXiv*, abs/2206.15475, 2022.
- [Kaur *et al.*, 2022] Davinder Kaur, Suleyman Uslu, Kaley J. Rittichier, and Arjan Durrresi. Trustworthy artificial intelligence: A review. *ACM Computing Surveys (CSUR)*, 55:1–38, 2022.
- [Khemakhem *et al.*, 2020] Ilyes Khemakhem, Diederik Kingma, Ricardo Monti, and Aapo Hyvarinen. Variational autoencoders and nonlinear ica: A unifying framework. In *International Conference on Artificial Intelligence and Statistics*, pages 2207–2217. PMLR, 2020.
- [Khorram and Fuxin, 2022] S. Khorram and Li Fuxin. Cycle-consistent counterfactuals by latent transformations. *2022 IEEE/CVF Conference on Computer Vision*

- and *Pattern Recognition (CVPR)*, pages 10193–10202, 2022.
- [Kingma and Welling, 2014] Diederik P. Kingma and Max Welling. Auto-encoding variational bayes. *CoRR*, abs/1312.6114, 2014.
- [Klindt *et al.*, 2020] David Klindt, Lukas Schott, Yash Sharma, Ivan Ustyuzhaninov, Wieland Brendel, Matthias Bethge, and Dylan Païton. Towards nonlinear disentanglement in natural data with temporal sparse coding. *arXiv preprint arXiv:2007.10930*, 2020.
- [Kocaoglu *et al.*, 2018] M. Kocaoglu, Christopher Snyder, Alexandros G. Dimakis, and Sriram Vishwanath. Causalgan: Learning causal implicit generative models with adversarial training. *ArXiv*, abs/1709.02023, 2018.
- [Kong *et al.*, 2022] Lingjing Kong, Shaoan Xie, Weiran Yao, Yujia Zheng, Guangyi Chen, Petar Stojanov, Victor Akinwande, and Kun Zhang. Partial disentanglement for domain adaptation. In *International Conference on Machine Learning*, 2022.
- [Kusner *et al.*, 2017] Matt J Kusner, Joshua Loftus, Chris Russell, and Ricardo Silva. Counterfactual fairness. *Advances in neural information processing systems*, 30, 2017.
- [Li *et al.*, 2020] Yunzhu Li, Antonio Torralba, Anima Anandkumar, Dieter Fox, and Animesh Garg. Causal discovery in physical systems from videos. *Advances in Neural Information Processing Systems*, 33:9180–9192, 2020.
- [Liu *et al.*, 2015] Ziwei Liu, Ping Luo, Xiaogang Wang, and Xiaoou Tang. Deep learning face attributes in the wild. In *Proceedings of International Conference on Computer Vision (ICCV)*, December 2015.
- [Liu *et al.*, 2019] R. Liu, Yu Liu, Xinyu Gong, Xiaogang Wang, and Hongsheng Li. Conditional adversarial generative flow for controllable image synthesis. *2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 7984–7993, 2019.
- [Locatello *et al.*, 2019] Francesco Locatello, Stefan Bauer, Mario Lucic, Gunnar Raetsch, Sylvain Gelly, Bernhard Schölkopf, and Olivier Bachem. Challenging common assumptions in the unsupervised learning of disentangled representations. In *international conference on machine learning*, pages 4114–4124. PMLR, 2019.
- [Mao *et al.*, 2021] Chengzhi Mao, Amogh Gupta, Augustine Cha, Hongya Wang, Junfeng Yang, and Carl Vondrick. Generative interventions for causal learning. *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 3946–3955, 2021.
- [Mirza and Osindero, 2014] Mehdi Mirza and Simon Osindero. Conditional generative adversarial nets. *ArXiv*, abs/1411.1784, 2014.
- [Nemirovsky *et al.*, 2020] Daniel Nemirovsky, Nicolas Thiebaud, Ye Xu, and Abhishek Gupta. CounterGAN: generating realistic counterfactuals with residual generative adversarial nets. *arXiv preprint arXiv:2009.05199*, 2020.
- [Pawlowski *et al.*, 2020] Nick Pawlowski, Daniel Coelho de Castro, and Ben Glocker. Deep structural causal models for tractable counterfactual inference. *ArXiv*, abs/2006.06485, 2020.
- [Pearl, 2009] Judea Pearl. Causal inference in statistics: An overview. *Statistics surveys*, 3:96–146, 2009.
- [Pfister *et al.*, 2017] Niklas Pfister, Peter Bühlmann, and J. Peters. Invariant causal prediction for sequential data. *Journal of the American Statistical Association*, 114:1264–1276, 2017.
- [ProPublica, 2017] ProPublica. Compas, 2017.
- [Rasal *et al.*, 2022] Rajat Rasal, Daniel C Castro, Nick Pawlowski, and Ben Glocker. Deep structural causal shape models. *arXiv preprint arXiv:2208.10950*, 2022.
- [Reddy *et al.*, 2022] Abbavaram Gowtham Reddy, L BeninGodfrey, and Vineeth N. Balasubramanian. On causally disentangled representations. In *AAAI*, 2022.
- [Reinhold *et al.*, 2021] Jacob C. Reinhold, Aaron Carass, and Jerry L Prince. A structural causal model for mr images of multiple sclerosis. In *MICCAI*, 2021.
- [Sanchez and Tsaftaris, 2022] Pedro Sanchez and Sotirios A. Tsaftaris. Diffusion causal models for counterfactual estimation. In *CLear*, 2022.
- [Sanchez *et al.*, 2022] Pedro Sanchez, Antanas Kascenas, Xiao Liu, Alison Q. O’Neil, and Sotirios A. Tsaftaris. What is healthy? generative counterfactual diffusion for lesion localization. In *DGM4MICCAI@MICCAI*, 2022.
- [Sánchez-Martín *et al.*, 2021] Pablo Sánchez-Martín, Miriam Rateike, and Isabel Valera. Vaca: Design of variational graph autoencoders for interventional and counterfactual queries. *ArXiv*, abs/2110.14690, 2021.
- [Sauer and Geiger, 2021] Axel Sauer and Andreas Geiger. Counterfactual generative networks. *ArXiv*, abs/2101.06046, 2021.
- [Scholkopf and von Kügelgen, 2022] Bernhard Scholkopf and Julius von Kügelgen. From statistical to causal learning. *ArXiv*, abs/2204.00607, 2022.
- [Schölkopf *et al.*, 2021] Bernhard Schölkopf, Francesco Locatello, Stefan Bauer, Nan Rosemary Ke, Nal Kalchbrenner, Anirudh Goyal, and Yoshua Bengio. Toward causal representation learning. *Proceedings of the IEEE*, 109(5):612–634, 2021.
- [Shen *et al.*, 2022] Xinwei Shen, Furui Liu, Hanze Dong, Qing Lian, Zhitang Chen, and Tong Zhang. Weakly supervised disentangled generative causal representation learning. *Journal of Machine Learning Research*, 23:1–55, 2022.
- [Smith *et al.*, 1988] Jack W Smith, James E Everhart, WC Dickson, William C Knowler, and Robert Scott Johannes. Using the adap learning algorithm to forecast the onset of diabetes mellitus. In *Proceedings of the annual symposium on computer application in medical care*, page 261. American Medical Informatics Association, 1988.

- [Song *et al.*, 2021] Yang Song, Jascha Narain Sohl-Dickstein, Diederik P. Kingma, Abhishek Kumar, Stefano Ermon, and Ben Poole. Score-based generative modeling through stochastic differential equations. *ArXiv*, abs/2011.13456, 2021.
- [Spirtes *et al.*, 2000] Peter Spirtes, Clark N Glymour, Richard Scheines, and David Heckerman. *Causation, prediction, and search*. MIT press, 2000.
- [Suter *et al.*, 2019] Raphael Suter, Djordje Miladinovic, Bernhard Schölkopf, and Stefan Bauer. Robustly disentangled causal mechanisms: Validating deep representations for interventional robustness. In *International Conference on Machine Learning*, pages 6056–6065. PMLR, 2019.
- [van Breugel *et al.*, 2021] Boris van Breugel, Trent Kyono, Jeroen Berrevoets, and Mihaela van der Schaar. Decaf: Generating fair synthetic data using causally-aware generative networks. In *NeurIPS*, 2021.
- [Wang *et al.*, 2022] Shiyu Wang, Yuanqi Du, Xiaojie Guo, Bo Pan, Zhaohui Qin, and Liang Zhao. Controllable data generation by deep learning: A review. *arXiv preprint arXiv:2207.09542*, 2022.
- [Wen *et al.*, 2022] Bingyang Wen, Yupeng Cao, Fan Yang, Koduvayur Subbalakshmi, and Rajarathnam Chandramouli. Causal-TGAN: Causally-aware synthetic tabular data generative adversarial network, 2022.
- [Weng, 2021] Lilian Weng. What are diffusion models? *lilianweng.github.io*, Jul 2021.
- [Wiles *et al.*, 2021] Olivia Wiles, Sven Gowal, Florian Stimberg, Sylvestre-Alvise Rebuffi, Ira Ktena, Krishnamurthy Dj Dvijotham, and Ali Taylan Cemgil. A fine-grained analysis on distribution shift. In *International Conference on Learning Representations*, 2021.
- [Wu *et al.*, 2019] Yongkai Wu, Lu Zhang, and Xintao Wu. Counterfactual fairness: Unidentification, bound and algorithm. In *IJCAI*, 2019.
- [Xie *et al.*, 2020] Feng Xie, Ruichu Cai, Biwei Huang, Clark Glymour, Zhifeng Hao, and Kun Zhang. Generalized independent noise condition for estimating latent variable causal graphs. *Advances in Neural Information Processing Systems*, 33:14891–14902, 2020.
- [Xie *et al.*, 2022] Feng Xie, Biwei Huang, Zhengming Chen, Yangbo He, Zhi Geng, and Kun Zhang. Identification of linear non-gaussian latent hierarchical structure. In *International Conference on Machine Learning*, pages 24370–24387. PMLR, 2022.
- [Xu *et al.*, 2019] Depeng Xu, Yongkai Wu, Shuhan Yuan, Lu Zhang, and Xintao Wu. Achieving causal fairness through generative adversarial networks. In *IJCAI*, 2019.
- [Xu *et al.*, 2020] Tianlin Xu, Li Kevin Wenliang, Michael Munn, and Beatrice Acciaio. Cot-gan: Generating sequential data via causal optimal transport. *ArXiv*, abs/2006.08571, 2020.
- [Yang *et al.*, 2021] Mengyue Yang, Furui Liu, Zhitang Chen, Xinwei Shen, Jianye Hao, and Jun Wang. Causalvae: Disentangled representation learning via neural structural causal models. *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 9588–9597, 2021.
- [Yao *et al.*, 2021] Weiran Yao, Yuwen Sun, Alex Ho, Changyin Sun, and Kun Zhang. Learning temporally causal latent processes from general temporal data. *arXiv preprint arXiv:2110.05428*, 2021.
- [Yao *et al.*, 2022] Weiran Yao, Guangyi Chen, and Kun Zhang. Temporally disentangled representation learning. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho, editors, *Advances in Neural Information Processing Systems*, 2022.
- [Zhang *et al.*, 2021] Xiheng Zhang, Yongkang Wong, Xiaofei Wu, Juwei Lu, Mohan S. Kankanhalli, Xiangdong Li, and Wei dong Geng. Learning causal representation for training cross-domain pose estimator via generative interventions. *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 11250–11260, 2021.