

# Alternating Updates for Efficient Transformers

Cenk Baykal  
Google Research

Dylan Cutler  
Google Research

Nishanth Dikkala  
Google Research

Nikhil Ghosh\*  
UC Berkeley

Rina Panigrahy  
Google Research

Xin Wang  
Google Research

## Abstract

It is well established that increasing scale in deep transformer networks leads to improved quality and performance. This increase in scale often comes with an increase in compute cost and inference latency. Consequently, research into methods which help realize the benefits of increased scale without leading to an increase in the compute cost becomes important. We introduce Alternating Updates (AltUp), a simple-to-implement method to increase a model’s capacity without the computational burden. AltUp enables the widening of the learned representation without increasing the computation time by working on a subblock of the representation at each layer. Our experiments on various transformer models and language tasks demonstrate the consistent effectiveness of alternating updates on a diverse set of benchmarks. Finally, we present extensions of AltUp to the sequence dimension, and demonstrate how AltUp can be synergistically combined with existing approaches, such as Sparse Mixture-of-Experts models, to obtain efficient models with even higher capacity.

## 1 Introduction

Contemporary machine learning models have been remarkably successful in many domains, ranging from natural language [CND<sup>+</sup>22, HBM<sup>+</sup>22] to computer vision [YWV<sup>+</sup>22, RPM<sup>+</sup>21]. Many of these successes have come in part through sheer scale. A vast amount of empirical studies justify the conventional wisdom that bigger (models and data sets) is better [HKHM21, KMH<sup>+</sup>20]. Accordingly, state-of-the-art Transformer [VSP<sup>+</sup>17] models often contain billions of parameters and are trained for weeks on enormously large data sets using thousands of AI accelerators. Their immense size leads to prohibitive compute and energy costs [PGL<sup>+</sup>21] and prevents their deployment to resource or compute-constrained applications (e.g., autonomous driving) [LBC<sup>+</sup>21].

To alleviate these costs and enable scalability of modern Transformers, a recent line of works have proposed techniques to increase the capacity of models without drastically increasing the computational costs. A notable paradigm is *sparsely-activated networks*, such as Mixture-of-Experts (MoE) models [FDZ22, ZLL<sup>+</sup>22, PWZ21, BDP<sup>+</sup>22, LLX<sup>+</sup>20, RSW<sup>+</sup>21, SMM<sup>+</sup>17]. The main idea of MoE is to effectively *widen* each network layer by accessing dynamically invoked parameters, i.e., experts, where each expert corresponds to a small subset of disjoint parameters that can be acted on by the input. During training and inference, a given input to the network is *routed* to a small subset of experts (parameters) to compute the output. As a result, the computation cost remains small relative to the total number of parameters. This scheme enables models with higher capacity with only a relatively small increase in computation.

Despite their appeal, approaches like MoE necessitate sharding of the experts’ parameters (often in the excess of billions overall) across shards [LLX<sup>+</sup>20], auxiliary load balancing losses to ensure each expert is sufficiently trained, and tedious hyper-parameter tuning [ZBK<sup>+</sup>22]. The engineering and resource burdens of sharding alone complicates the application of MoE to many impactful tasks. Even when resources are available for sharding, there is a high degree of implementation and maintenance complexity involved with sharding-aware models [LLX<sup>+</sup>20].

In this paper, we introduce *Alternating Updates* (AltUp) to increase model capacity in a simple and efficient way. AltUp is motivated by the empirical and theoretical observation that wider token representations (i.e., larger embedding vector dimension) helps in learning more complicated functions by enabling more information to be packed in the representation vectors [HKHM21, KMH<sup>+</sup>20, YH20]. To this end, AltUp increases the token representation width, but does so without incurring (significant) additional computational complexity. At a high level (see Fig. 1), AltUp achieves this by working on a single subblock of the representation at each layer and using a learned prediction mechanism to infer the outputs of the other blocks. Unlike prior approaches, e.g., Sparse Mixture of Experts, AltUp is easy to implement, requires minimal

\*Work done while Nikhil was an intern at Google Research

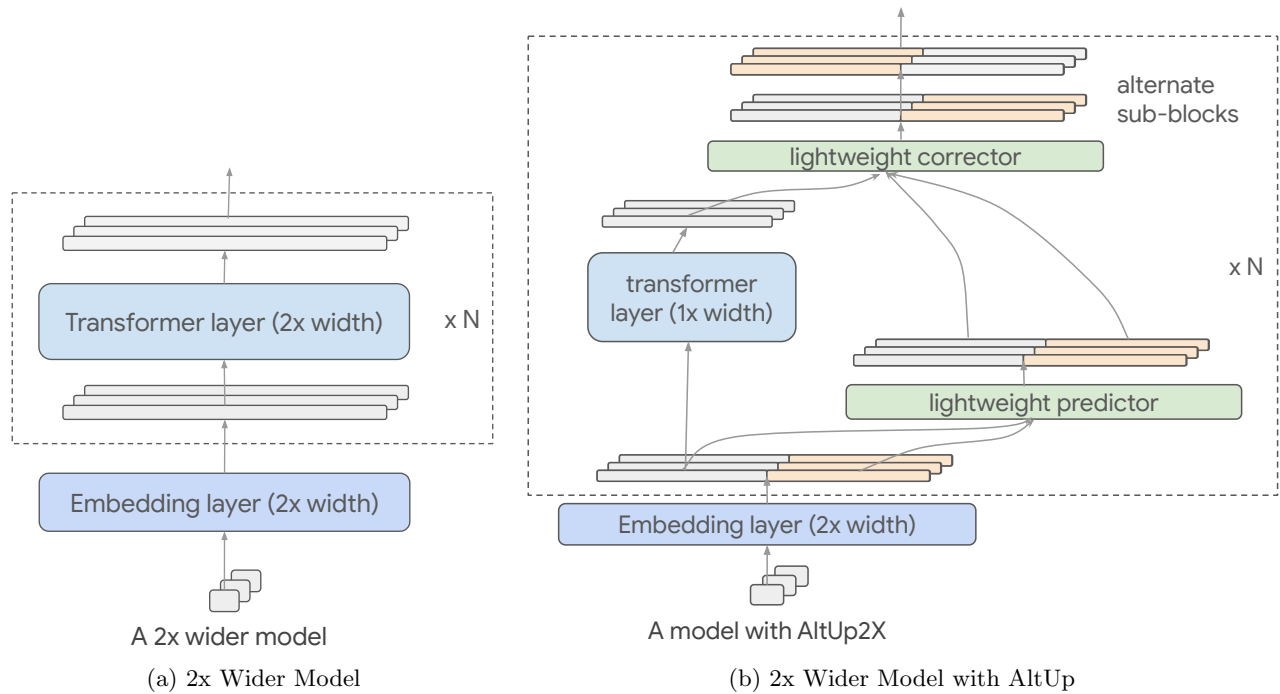


Figure 1: An illustration of widening the token representation without (left) and with the method of Alternating Updates (right). This widening causes a quadratic increase in computation time in a vanilla transformer due to the increased layer width. In contrast, Alternating Updates keeps the layer width the same and efficiently computes the output by operating on a block of the representation at each layer.

hyperparameter tuning, and does not necessitate sharding. Moreover, we empirically show that AltUp can be applied synergistically with existing techniques like MoE to obtain additive performance gains.

In particular, our contributions are:

1. We introduce the method of *Alternating Updates* (AltUp) to enable increased token (representation) dimension with little additional computation cost. AltUp is simple-to-implement, requires minimal hyperparameter tuning, and does not necessitate sharding.
2. We present an extensive evaluation of *Alternating Updates* on T5X Encoder-Decoder models of various sizes on benchmark language tasks. Our experimental results show that AltUp consistently leads to increased model performance, with only a marginal increase in computation time.
3. We show how Alternating Updates can be extended to the *sequence* dimension and present results demonstrating its effectiveness in sequence (e.g., language) tasks. We also compare and demonstrate the synergistic combination of AltUp with existing techniques for efficient architectures.

## 2 Related Work

Prior work is rich with a diverse set of techniques to increase the efficiency of contemporary transformer models. Here, we cover the most relevant subset of state-of-the-art techniques and refer the interested reader to [TDBM20] for a more comprehensive survey.

Recent works have introduced extremely large, yet scalable models with the use of conditional routing of inputs to a learnable subset of parameters. These sparsely-activated models have achieved state-of-the-art performance on various benchmarks [FDZ22] and exhibit favorable theoretical properties [CDW<sup>+</sup>22, BDP<sup>+</sup>22]. Notably, the Sparse Mixture of Experts (SMoE) [SMM<sup>+</sup>17, YWG12, JJNH91] family of models use a learned softmax probability distribution to conditionally direct the computation to *experts*, i.e., subsets of network parameters. By routing the computation to a small subset of parameters on an input-dependent basis, SMoE leads to higher capacity models with a relatively small and controllable increase in computation. Switch Transformers [FZS21] show that routing to a single expert on an input-dependent basis reduces computation and outperforms prior SMoE approaches on language tasks.

Follow-up work on SMOE include those that improve the load balancing of experts [ZBK<sup>+</sup>22, LBD<sup>+</sup>21], use reinforcement learning to learn the routing function [CdLCG<sup>+</sup>22], and leverage smooth top- $k$  expert selection [HZC<sup>+</sup>21] (see [FDZ22] for a survey). Other choices for the routing function include non-learnable ones such as Locality Sensitivity Hashing (LSH) [PWZ21] which generally maps similar inputs to the same expert, Hash Layers that use token-based hashing [RSW<sup>+</sup>21], and language-specific deterministic routing [FBS<sup>+</sup>21]. Residual Mixture of Experts [WLC<sup>+</sup>22] separates the expert weights into input-independent and input-dependent components, similar to the partial expert setting we have.

Conditionally accessing *external memory* is another related approach to vastly increase model capacity at the cost of a relatively small increase in computation [GWR<sup>+</sup>16, GWD14]. For examples, Memorizing Transformers [WRHS22], Memformer [WLG20], and Product key memory [LSR<sup>+</sup>19] leverage dynamic memory to encode and retrieve relevant information. Additional works include those that use an immensely large untrainable corpus, such as Wikipedia, REALM [GLT<sup>+</sup>20], or a 2 trillion token database, RETRO [BMH<sup>+</sup>22]. These prior works that focus on routing(expert)-based mechanisms often necessitate complicated, sharded implementations due to the sheer number of additional parameters that they introduce — often on the order of billions. Our work, on the other hand, is simple-to-implement and requires virtually no hyperparameter tuning. Moreover, AltUp can be synergistically combined with sparsely-activated models like MoE to obtain complementary improvements in efficiency.

Additional relevant works in the realm of efficient transformers include Funnel transformers [DLYL20], Reformers [KKL20], Performers [CLD<sup>+</sup>20], Big-Bird [ZGD<sup>+</sup>20], and LongT5 [GAU<sup>+</sup>21], among others. These works notably present methods to reduce the quadratic cost of the attention mechanism of transformers. AltUp achieves its efficiency via an orthogonal direction and hence can be easily combined with these techniques. Another flavor of methods complementary to our work on Alternating Updates is that of adaptive computation, e.g., CALM [SFG<sup>+</sup>22], DynaBERT [HHS<sup>+</sup>20] CascadeBERT [LLC<sup>+</sup>20] and DeeCap [FYWT22], where different amounts of computational power is allotted on an example-specific basis via some type of early-exit strategy.

### 3 Alternating Updates

In this section, we introduce the method of *Alternating Updates*, an approach to enable increased token dimension with little additional computation cost.

It is empirically well established that language models benefit from wider model dimensions, for example, as model sizes scale up, model dimension grows from 512 (small) to 768 (base) and 1024 (large, 3B, and 11B) in T5 models [RSR<sup>+</sup>20], and from 4096 (8B) to 8192 (64B) and 18432 (540B) in PaLM models [CND<sup>+</sup>22].

As the model dimension increases, both representation dimension and transformer layer dimension increase. However, the two dimensions account for different capacities of the model: wider representations store more information about the input, while wider transformer layers give more processing power. They also differ significantly in computation cost: widening the representation increases computation minimally, while widening transformer layers quadratically increases computation cost. A natural question arises: how can we incorporate wider representations without widening the transformer layers?

#### 3.1 A Predict-Compute-Correct Algorithm

We propose to widen the representation vector, but *perform computation with a sub-block, and estimate the updated representation* using a Predict-Compute-Correct algorithm, as illustrated in Figure 2. Taking this view, higher capacity is now enabled by the increased dimensional of the tokens’ embeddings: suppose the original embedding dimension is  $d \in \mathbb{N}$ , it is now increased to  $d + d_+ \in \mathbb{N}$ , which introduces  $Vd_+$  additional parameters, where  $V$  is the vocabulary size for the tokens. While  $d_+$  can be any nonnegative integer, we first discuss our algorithm in the simpler case in which  $d_+$  is a multiple of  $d$ , i.e.  $d_+ = (K - 1)d$ , where  $K \in \mathbb{N}$  and  $K > 1$ .

More specifically, let the input embedding vector be  $Kd$  dimensional, where  $K, d \in \mathbb{N}$ . Our algorithm keeps the dimension of the representation vector at every layer as  $Kd$ , but it uses layers of width  $d$  to transform the representation vector. Denote the representation vector at layer  $i$  by  $x_i = \text{concat}(x_i^1, x_i^2, \dots, x_i^K)$ , where  $x_i^j \in \mathbb{R}^d, j = 1, 2, \dots, K$  are contiguous sub-blocks of  $x_i$  and  $\text{concat}$  is the concatenation operation. Denote layer  $i$ ’s transformation function by  $\mathcal{L}_i : \mathbb{R}^d \rightarrow \mathbb{R}^d$ . The representation vector  $x_{i+1}$  at layer  $i + 1$  is obtained in three steps:

1. **Prediction:** predict the representation vector at next layer with a trainable linear map

$$\hat{x}_{i+1} = P_i x_i,$$

where  $P_i \in \mathbb{R}^{Kd \times Kd}$ ,

2. **Computation:** select a sub-block  $x_i^{j*}$  and update this block with  $\mathcal{L}_i$ :

$$\tilde{x}_{i+1}^{j*} = \mathcal{L}_i(x_i^{j*})$$

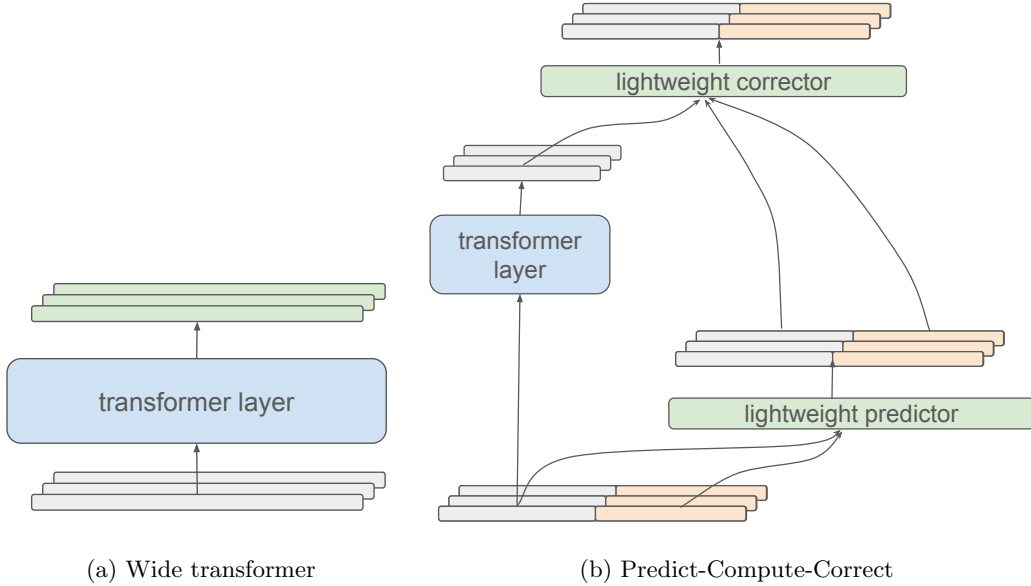


Figure 2: Updating a wide representation vector: (a) wide transformer layers scales quadratically with the representation dimension; (b) Predict-Compute-Correct algorithm uses a narrow transformer layer along with lightweight predictor and corrector to update a wide representation vector.

(selection of  $j^*$  is discussed in the next section); more than one sub-blocks can be selected if needed;

3. **Correction:** correct the prediction with the computation result:

$$x_{i+1} = \hat{x}_{i+1} + G_i(\tilde{x}_{i+1}^{j^*} - \hat{x}_i^{j^*}),$$

where  $G_i \in \mathbb{R}^{Kd \times d}$  is a trainable matrix.

When there is no ambiguity about the layer index, we drop the subscript  $i$ , and denote  $x_{old} := x_i$  and  $x_{new} := x_{i+1}$ . The three steps are summarized in Algorithm 1.

---

**Algorithm 1** Predict-Compute-Correct algorithm

---

**input** Representation vector  $x_{old} = \text{concat}(x_{old}^1, x_{old}^2, \dots, x_{old}^K)$ , where  $x_{old}^j \in \mathbb{R}^d, j = 1, 2, \dots, K$  are contiguous sub-blocks of  $x_{old}$ .

**output** Updated representation vector  $x_{new}$ .

**Prediction:** predict the updated representation vector with a trainable linear map:  $\hat{x} = Px_{old}$ , where  $P \in \mathbb{R}^{Kd \times Kd}$  is a trainable matrix;

**Computation:** select a sub-block  $x_{old}^{j^*}$  and update this block with  $\mathcal{L}$ :  $\tilde{x}^{j^*} = \mathcal{L}(x_{old}^{j^*})$ ;

**Correction:** correct the prediction with the computation result:  $x_{new} = \hat{x} + G(\tilde{x}^{j^*} - \hat{x}^{j^*})$ , where  $G \in \mathbb{R}^{Kd \times d}$  is a trainable matrix.

---

This Predict-Compute-Correct algorithm is inspired by the Kalman filter algorithm [Kal60]. Cast in the Kalman filtering framework, the prediction step utilizes a simple linear dynamic model, the computation step is viewed as a form of “measurement”, and the correction step performs a weighted sum of prediction and “measurement” through the gain matrix  $G$ . Note that the noise in the prediction and measurement are not modeled in the above algorithm. Estimation of noises and covariance updates are left for future work.

Alternatively, one could also view the Predict-Compute-Correct algorithm as a Taylor expansion of a target function that we are looking to estimate. Here, the prediction function computes an approximation of the target function and the corrector adds a fine-grained first-order correction.

### 3.2 Alternating Updates

To further reduce the computation cost of the prediction and correction steps, we impose a particular block matrix structure on  $P$  and  $G$ . Let  $P = (p_{i,j}I_{d \times d})_{i,j \in [K]}$ ,  $G = (g_i I_{d \times d})_{i \in [K]}$ , where  $p_{i,j}, g_i \in \mathbb{R}$  are scalars and  $I_{d \times d} \in \mathbb{R}^{d \times d}$  is the identity matrix. Note that this amounts to treating each sub-block  $x^i$  as an atomic quantity.

---

**Algorithm 2** Alternating Updates (AltUp)

---

**input** Representation vector  $x_{old} = \text{concat}(x_{old}^1, x_{old}^2, \dots, x_{old}^K)$ , where  $x_{old}^j \in \mathbb{R}^d, j = 1, 2, \dots, K$  are contiguous sub-blocks of  $x_{old}$ .

**output** Updated representation vector  $x_{new}$ .

**Prediction:** predict the updated representation vector with a trainable linear map:

$$\hat{x}^i = \sum_{j=1}^K p_{i,j} x_{old}^j$$

for  $i = 1, 2, \dots, K$ , where  $p_{i,j} \in \mathbb{R}$  are trainable scalars;

**Computation:** select a sub-block  $x_{old}^{j^*}$  and update this block with  $\mathcal{L}$ :

$$\tilde{x}^{j^*} = \mathcal{L}(x_{old}^{j^*});$$

**Correction:** correct the prediction with the computation result:

$$x_{new}^i = \hat{x}^i + g_i(\tilde{x}^{j^*} - \hat{x}^{j^*})$$

for  $i = 1, 2, \dots, K$ , where  $g_i \in \mathbb{R}$  are trainable scalars.

---

The simplified Predict-Compute-Correct algorithm is the *Alternating Updates* method that we propose in this paper and is summarized in Algorithm 2. In the simplified algorithm, prediction and correction steps involve only vector addition and scalar-vector multiplication, which both incur  $O(d)$  computation cost and much less than the  $O(d^2)$  cost of the layer transformer  $\mathcal{L}$ .

We remark on the parameter initialization choices for the predictor and corrector here. While different initialization choices are possible for the predictor coefficients  $p_{i,j}$  and corrector coefficients  $g_i$ , we found the following choices consistently yield the best results: for the predictor coefficients  $p_{i,j}$ , we initialize  $p_{i,i} = 1$  and  $p_{i,j} \sim \mathcal{N}(0, 0.01)$  (normal distribution with expectation 0 and standard deviation 0.01, the exact value of the standard deviation is not important as long as it is a small number) for  $j \neq i$ ; for the corrector coefficient  $g_i$ , we initialize  $g_i = 1$ . With this initialization scheme, initially the predictor is close to an identity map, which has been suggested to be beneficial as it encourages the map to be close to an isometry [BMM<sup>+</sup>21]. Moreover, an initial value of 1 for  $g_i$  encourages information flow from the computed sub-block to other sub-blocks.

### 3.3 Selection of sub-blocks

The selection of sub-blocks for the computation step is not specified in Algorithm 1 and 2. We consider two simple, deterministic selection methods in this paper and leave more sophisticated methods for future work.

1. **Same:** choose the same sub-block for all the layers in a neural network;
2. **Alternating:** for a sequence of layers, alternating through the sub-blocks, that is, if the sub-blocks are indexed with zero-based index, then sub-block  $i \bmod K$  is selected for the computation step for layer  $i$ . Algorithm 2 with alternating selection is referred to as **Alternating Updates(AltUp)** in the following sections.

We compare the two selection methods empirically in Section 5.2 and find that using alternating blocks performs better empirically.

### 3.4 Non-integer multiples

In the above description of the Predict-Compute-Correct algorithms, we assumed the augmented dimension  $d_+$  is a multiple of the original embedding dimension  $d$ . For the more general case when  $d_+$  is not a multiple of  $d$ , we add a divide-and-project step before we apply Algorithm 1 or Algorithm 2: choose an integer factor  $(K - 1)$  of  $d$ , divide the augmented vectors into  $(K - 1)$  sub-blocks, and project each sub-block to  $d$  dimension. Here  $K$  becomes another hyper-parameter of the algorithm.

## 4 Extension of AltUp to the sequence dimension

In this section, we consider a natural extension of Alternating Updates to reduce the apparent sequence length. This extension is motivated by the computation cost associated with the cost of the attention mechanism for long input sequence lengths. Our approach is similar in its goal to those of prior techniques focused on designing efficient attention mechanisms to reduce the quadratic dependency of attention cost on the sequence length: Funnel transformers [DLYL20], Reformers [KKL20], Performers [CLD+20], Big-Bird [ZGD+20], and LongT5 [GAU+21].

Given an input sequence of vectors  $(x_0, x_1, \dots, x_{T-1})$  to a transformer layer  $\mathcal{L}$ , we propose the following extension of Algorithm 2 to reduce the effective sequence length by a factor of  $k$ . First, we apply a lightweight predictor on the full sequence to obtain a predicted output  $\hat{y} = (\hat{y}_0, \dots, \hat{y}_{T-1})$ . Next, we subsample the input with a fixed stride  $k$  and apply  $\mathcal{L}$  on the subsampled input and get computed output

$$\begin{aligned} \tilde{y} &= (\tilde{y}_0, \tilde{y}_k, \tilde{y}_{2k}, \dots, \tilde{y}_{\lfloor (T-1)/k \rfloor * k}) \\ &= \mathcal{L}(x_0, x_k, \dots, x_{\lfloor (T-1)/k \rfloor * k}). \end{aligned}$$

Finally, we use a lightweight corrector to combine  $\hat{y}$  and  $\tilde{y}$  to form the final output sequence, see Figure 3 for an illustration of the algorithm and Algorithm 3 for the details.

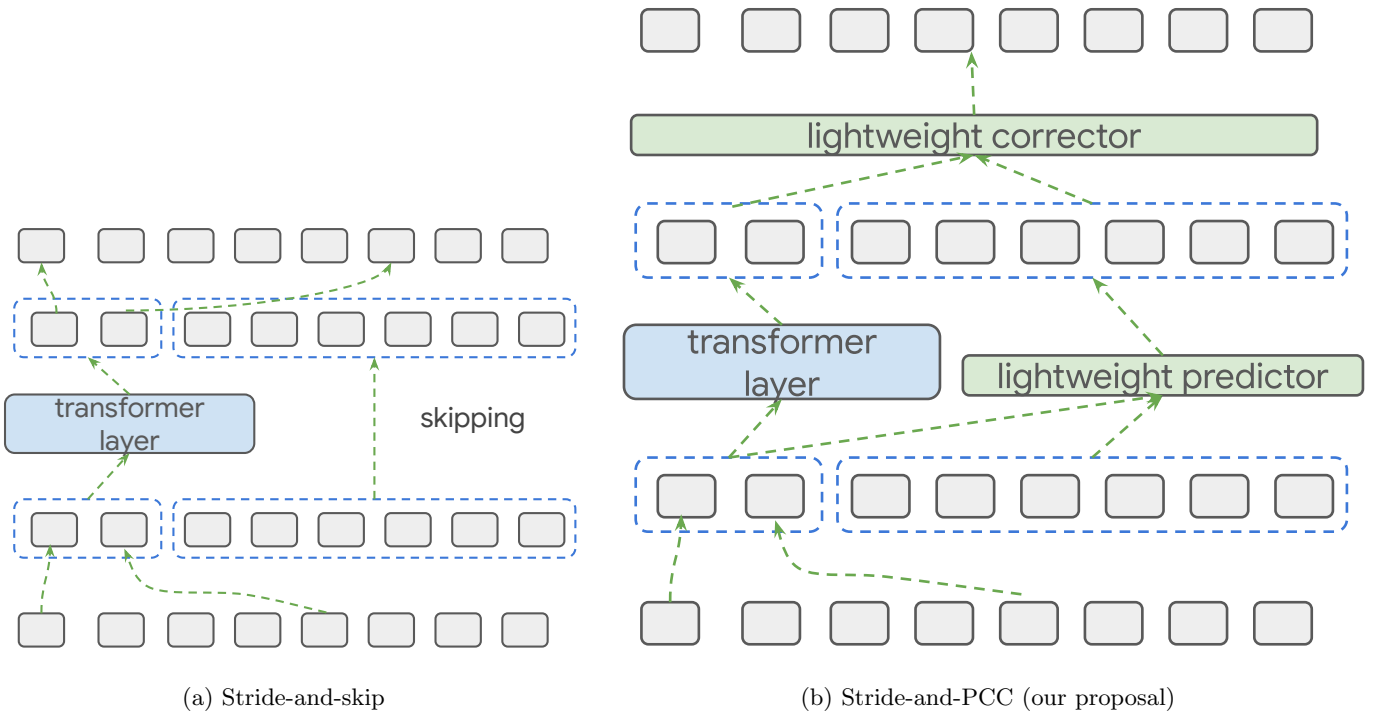


Figure 3: An illustration of Algorithm 3 (right) and a simple stride and skip approach (left). The stride and skip is a simple and natural method to reduce sequence length and computation cost, but the skipped token vectors lose the contextual information; stride and PCC (Algorithm 3 has almost the same computation cost, with the ability to bring contextual information to the skipped tokens.

Similar to Funnel transformer [DLYL20] and Conformer [GQC+20], a simple striding operation is used in Algorithm 3 to reduce the sequence length. Only sampled tokens are processed by the transformer layer while the rest of the tokens require little computation, leading to a computation cost reduction by a factor of  $k$ , where  $k$  is the stride parameter. A crucial design choice in the predictor and corrector is that the sampled tokens are used to update unsampled tokens. This design allows unsampled token vectors to obtain contextual information, even they are not processed by the transformer layer directly. In contrast, a simple stride-and-skip approach (Figure 3, left) with almost the same computation cost lacks the ability to bring contextual information to the skipped tokens. We compare these two approaches and a simple pooling approach in Section 5.5 and found Stride-and-PCC offers the best quality-speed tradeoff.

Similar to Algorithm 2, the preferred initialization scheme is as follows: initialize  $a_1 = 1$ ,  $a_2 \sim \mathcal{N}(0, 0.01)$  (normal distribution with mean 0 and standard deviation 0.01) and  $b = 1$ . Again, this means initially the prediction map is close to an identity map and the correction map encourages information flow from sampled tokens to unsampled tokens.

---

**Algorithm 3** Stride-and-PCC (AltUp extension to sequence dimension)

---

**input** A sequence of vector  $x = (x_0, x_2, \dots, x_{T-1})$ , where  $x_i \in \mathbb{R}^d$ . Transformer layer  $\mathcal{L}$  and stride parameter  $k$ .

**output** A sequence of vector  $y = (y_0, y_2, \dots, y_{T-1})$ .

**Prediction:** predict the output sequence with a trainable linear map:

$$\hat{y}_i = a_1 x_i + a_2 x_{\lfloor i/k \rfloor * k}$$

for  $i = 0, 1, \dots, T - 1$ , where  $a_1, a_2 \in \mathbb{R}$  are trainable scalars;

**Computation:** subsample the input sequence with stride  $k$  and apply the transformer layer on the subsampled sequence:

$$(\tilde{y}_0, \tilde{y}_k, \dots, \tilde{y}_{\lfloor (T-1)/k \rfloor * k}) = \mathcal{L}(x_0, x_k, \dots, x_{\lfloor (T-1)/k \rfloor * k});$$

**Correction:** correct the prediction with the computation result:

$$y_i = \hat{y}_i + b(\tilde{y}_{\lfloor i/k \rfloor * k} - \hat{y}_{\lfloor i/k \rfloor * k})$$

for  $i = 0, 1, \dots, T - 1$ , where  $b \in \mathbb{R}$  is a trainable scalar.

---

## 5 Results

In this section, we apply Alternating Updates and its variants to benchmark language models and tasks. Namely, in Sec. 5.1 we describe the full experimental details; in Sec. 5.2 we present the performance of AltUp with varying configurations on models of various sizes; in Sec. 5.3 we experiment with AltUp for differing amounts of model widening; in Sec. 5.4, we compare AltUp to MoE-style routing mechanisms and show how they can be combined in a complementary way; finally, in Sec. 5.5 we show the performance of AltUp when it is extended to the sequence dimension. Overall, our experiments show that AltUp and its variants consistently lead to sizeable performance gains across all evaluations on standard benchmarks.

### 5.1 Setting

We performed all of our experiments using T5-model architectures [RSR+20] of varying sizes (small, base, and large) which we pretrained on the C4 dataset for 500,000 steps with a batch size of 256. The pretrained models were then finetuned on either the GLUE [WSM+18], SuperGLUE [WPN+19], or SQuAD [RZLL16] benchmark tasks for a further 50,000 steps with a batch-size of 256. The pretraining task is to predict corrupted text spans, and the finetuning tasks are re-cast into text generation tasks. We report both pretraining and finetuning metrics: for pretraining, we report span prediction accuracy on a hold-out validation set, and for finetuning, we follow the same recipe as the T5 models, see [RSR+20] for more details.

We experiment with three T5 baseline model sizes: small (S), base (B) and large (L). The base (B) and large (L) models follow the same model configurations as in the T5 paper, while the small model is shallower than the T5 paper [RSR+20] to cover a larger range of model sizes (4 encoder/decoder layers instead of 8 encoder/decoder layers). In particular, we use the T5 version 1.1 models with gated GELU feedforward network and pre layer norm. The models are implemented on top of the T5X [RCL+22] codebase. During pretraining, we use 256 batch size, Adafactor optimizer [SS18] with base learning rate 1.0 and reciprocal square-root decay with 10000 warmup steps, and zero dropout. During finetuning, we use 256 batch size, Adafactor optimizer with constant learning rate of 0.001 and 0.1 dropout. Unless explicitly stated, we pretrain for  $500k$  steps and finetune for  $50k$  steps.

### 5.2 Alternating updates with varying model sizes

In this section, we present empirical results on the alternating updates technique and comparison with other techniques that widen token representation vectors. In all the subsequent experiments, we increase the token representation dimension by a factor of 2 (corresponding to  $K = 2$  in Algorithm 2) unless otherwise specified. The model capacity increase comes from a wider embedding table at the bottom layer of the model while the transformer layers remain the same, which results in minimal additional computation cost.

In Table 1, we compare the summation method (Sum) in which additional embedding vectors are added to the token representation vector, Algorithm 2 with same block selection (SameUp), and Algorithm 2 with alternating block selection (AltUp), all on top of the T5 version 1.1 small (S), base (B), and large (L) models. We observe the Prediction-Compute-Correct algorithm with *same* and *alternating* block selection methods outperforms the summation method. For the small

Model	Pretrain accuracy	Finetune GLUE	Finetune SG	Finetune SQuAD (EM/F1)
S (baseline)	61.21	75.83	59.52	76.44/84.97
S + Sum	61.67	77.54	59.63	75.06/83.82
S + SameUp	<b>61.91</b>	<b>77.75</b>	<b>60.81</b>	76.85/85.51
S + AltUp	61.86	76.82	59.60	<b>77.51/85.79</b>
B (baseline)	66.42	84.25	73.56	83.78/91.19
B + Sum	66.82	84.85	75.2	84.36/91.36
B + SameUp	66.82	84.06	74.15	84.41/91.76
B + AltUp	<b>66.96</b>	<b>85.32</b>	<b>75.80</b>	<b>85.24/92.36</b>
L (baseline)	69.13	87.23	81.21	86.77/93.56
L + Sum	69.09	86.18	78.93	86.19/93.08
L + SameUp	<b>69.45</b>	87.95	82.72	<b>87.65/94.13</b>
L + AltUp	69.32	<b>88.20</b>	<b>82.75</b>	87.58/ <b>94.27</b>

Table 1: Comparison of memory consumption methods: summation (Sum), Predict-Compute-Correct with “same” block selection (SameUp), and Predict-Compute-Correct with “alternating” block selection (AltUp).

models, *same* block selection method performs better in most tasks, while for the base and large models, *alternating* block selection method performs better in most tasks. We note all three methods bring improvements in both pretraining and finetuning, and AltUp is generally the most effective one. While pretraining accuracies for all three methods are mostly similar, differences in finetuning metrics are large, and AltUp generally achieves roughly twice the gains of the other two variants. Moreover, we observe that the gains of AltUp in pretraining accuracies show diminishing returns when model sizes grows, but the gains in finetuning metrics do not.

Model	# emb params	# non-emb params	train speed
S	3.29E+07	3.78E+07	166.1
S + AltUp	6.58E+07	3.99E+07	119.4
B	4.93E+07	1.98E+08	52.4
B + AltUp	9.87E+07	2.12E+08	42.3
L	6.58E+07	7.17E+08	17.1
L + AltUp	1.32E+08	7.68E+08	14.4

Table 2: Model size and train speed comparisons on T5X models. Embedding parameters include input embedding table parameters (shared between encoder and decoder) and output embedding table. Non-embedding parameters include all the transformer blocks. Train speed is measured by number of examples per second per core.

Table 2 documents the parameter count and training speed comparison. Note that Alternating Updates increases the number of embedding parameters while leaving the non-embedding parameters roughly the same. Since the transformer computation is not changed by alternating updates, we incur a very small increase in the computation cost.

### 5.3 AltUp with varying representation size

Scaling up in another dimension, we also compare model qualities with increasing token representation dimensions. Table 3 presents the model performance for alternating updated small, base, and large sized models with  $K = 2$  and  $K = 4$ , where  $K$  denotes the number of alternating update blocks and also the multiplier for factor increase in the representation width. For T5 base, for example, we observe a monotonically increasing trend for the pretraining accuracy as memory sizes increases. On finetuning tasks, we observe some tasks (SuperGLUE) continue to benefit from more memory, while others (GLUE and SQuAD) do not.

We hypothesize this might be attributed to the nature of the tasks: while some tasks requires more knowledge about the input and can be improved with a wider input representation, other tasks depend more heavily on function approximation capacity, which is not significantly increased with a wider input representation. Similar behaviors are observed for the small and large sized T5 models. For T5 large, the trend is similar to the T5 base sized model, i.e., using wider representations (i.e., larger  $K$ ) improves both pretrain and finetune quality. While the same holds for the pretrain performance of T5 small,



Model	Pretrain accuracy	Finetune GLUE	Finetune SG	Finetune SQuAD (EM/F1)
S	61.21	75.83	59.52	76.44/84.97
S + AltUp (K=2)	61.86	<b>76.82</b>	<b>59.60</b>	<b>77.51/85.79</b>
S + AltUp (K=4)	<b>62.00</b>	76.40	59.54	76.38/84.86
B	66.42	84.25	73.56	83.78/91.19
B + AltUp (K=2)	66.96	<b>85.32</b>	75.80	<b>85.24/92.36</b>
B + AltUp (K=4)	<b>67.18</b>	84.95	<b>78.91</b>	84.82/92.07
L	69.13	87.23	81.21	86.77/93.56
L + AltUp (K=2)	69.32	88.20	82.75	<b>87.81/94.29</b>
L + AltUp (K=4)	<b>69.55</b>	<b>88.42</b>	<b>82.94</b>	87.59/94.02

Table 3: Performance with different embedding dimensions: T5 version 1.1 models augmented with larger embeddings, with  $K = 2$  and  $K = 4$  corresponding to doubling and quadrupling the representation dimension.

here we observe that the fine-tuning performance does not monotonically improve with larger  $K$ . We posit that this is due to increased overfitting caused by the additional parameters – a phenomenon also observed in Mixture-of-Experts work [ZBK<sup>+</sup>22].

## 5.4 Comparison with existing techniques

Here, we compare AltUp to popular routing-based techniques for increased model capacity and evaluate the combination of AltUp and MoE on T5 pretrain accuracy. In particular, we consider the *partial experts* setting similar to [RLY<sup>+</sup>22, PWZ21], where at each layer, in addition to the layer’s module, we route the input to a smaller expert module and combine the outputs of the main and auxiliary modules as the input to the subsequent layer (see Fig. 4). We experiment with Token-ID routing [RSW<sup>+</sup>21], Locality-Sensitive Hashing (LSH) [PWZ21] based routing, and softmax-based routing as in Mixture-of-Experts [ZBK<sup>+</sup>22]. We perform a grid search over the number of experts (2, 16,  $\dots$ ,  $2^{15}$ ) and the size (width) of each expert (1, 4,  $\dots$ , 128) and report the best result subject to the constraint that the added computation time is comparable to that of AltUp.

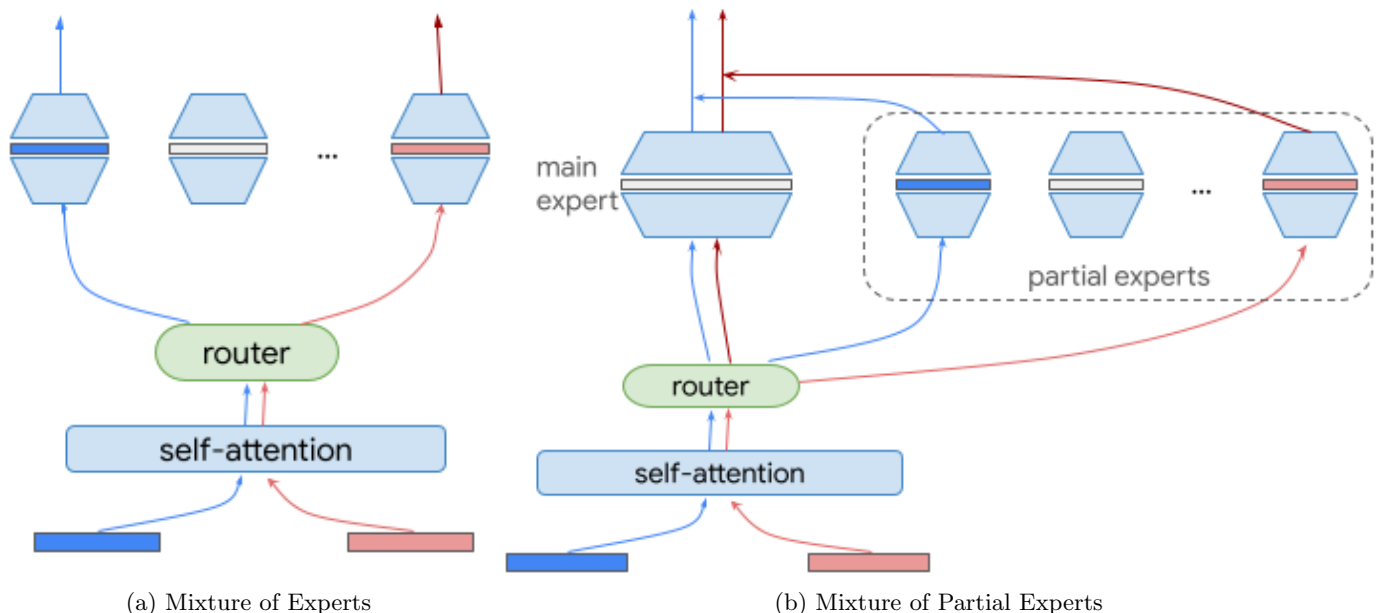


Figure 4: The partial experts setting in the context of the evaluations in Sec. 5.4. The standard MoE model (left) routes the inputs to one or more  $n$  experts based on a routing function. Mixture of Partial Experts (right) always routes the input to the main expert and additionally routes the input to one or more partial experts; the output is a function of the main expert’s and partial experts’ outputs.

For Token-ID, we use  $\approx 2^{15}$  experts (vocabulary size) and for LSH-based routing, we use the hyperparameters as

in [PWZ21]. For MoE, we used the simplified implementation of the top-1 softmax routing of [FZS21]. For sake of fair comparison to Token-ID and LSH-based routing, we did not incorporate a sophisticated mechanism for load balancing such as load balancing loss [FZS21] or router z loss [ZBK+22]. We use multiplicative jitter noise sampled from a uniform distribution over  $[1 - \varepsilon, 1 + \varepsilon]^{d_{in}}$  with  $\varepsilon = 0.01$ . The router matrix  $W$  was initialized by drawing from a zero mean Normal distribution with standard deviation  $2 \times 10^{-2}$ .

Method	T5 Small	T5 Base	T5 Large
baseline	59.10	63.35	65.58
AltUp (K=2)	<b>59.67</b>	<b>63.97</b>	<b>65.73</b>
MoE [ZBK+22]	59.42	63.62	65.71
Token-ID [RSW+21]	59.44	63.76	65.49
LSH [PWZ21]	59.12	63.47	65.60
AltUp (K=2) + MoE	<b>59.91</b>	<b>64.13</b>	<b>65.95</b>

Table 4: Pretrain accuracy at 100k steps of T5 models augmented with Alternating Updates (see Sec. 3) and various routing-based techniques for increased capacity with the best configuration subject to an upper bound of 128 on the expert (or memory table) width and  $2^{15}$  on the number of experts (or table entries).

Table 4 synthesizes the pretraining performance on the C4 dataset at 100k training steps of AltUp and compared techniques on T5 Small, Base, and Large models. We observe that in terms of the standalone methods, AltUp achieves the highest performance across all compared approaches, often by a large margin. Perhaps most notably, we show that combining AltUp and MoE leads to even further sizable improvements in the pretrain performance (last row of Table 4). For example, the combination of MoE and AltUp improves over the baseline by 0.81, over AltUp alone by 0.24, and over MoE alone by 0.49. For all model sizes, the combination of AltUp and MoE is synergistic and leads to significant improvements compared to not only the baseline, but also to each approach in isolation.

## 5.5 AltUp in the sequence axis

In this section, we present empirical results on the Stride-and-PCC algorithm (Alg. 3) which employs the predict-compute-correct method to reduce apparent sequence length, i.e., it extends AltUp to the sequence axis. On top of the T5 base model, we apply average pooling, stride-and-skip and stride-and-PCC to the encoder layers to reduce the apparent input sequence length for the encoder layers.

To obtain a good speed-up while maintaining reasonable model quality, we keep the input sequence length for the first encoder transformer layer, and apply the sequence length reduction techniques (average pooling, stride-and-skip, stride-and-PCC) with a stride of 4 starting from the second encoder transformer layer, all the way up to the second-to-last layer. For the last layer, we pass the full sequence to the transformer layer when possible: note sequence length is permanently reduced after an average pooling operation, so this is not possible for the average pooling technique. This results in a larger speed-up, but at the same time, a larger quality hit for the average pooling method.

Model	Pretrain accuracy	Finetune SG	Finetune SQuAD (EM/F1)	Pretrain Speed
S	61.21	59.52	76.44/84.97	166.1
B (Baseline)	66.42	73.56	83.78/91.19	52.4
Average pooling	63.89	57.85	71.37/81.87	91.9
Stride-and-Skip	65.02	65.98	79.72/87.64	79.4
Stride-and-PCC	<b>65.39</b>	<b>66.94</b>	<b>81.67/89.37</b>	74.9

Table 5: Performance and pretrain speed of different methods for sequence length reduction on the T5 base model.

In Table 5, we compare these three methods for pretrain/finetune metrics and pretrain speed (measured by the number of sequences per second per core). Note that we also list both the T5 Base (which is the baseline model) and T5 Small as reference points in the table. We observe that average pooling gives a large speed-up, but suffers from severe quality degradation, especially on the finetune metrics where it performs even worse than T5 small. Stride-and-skip and Stride-and-PCC, on the other hand, offer an improved quality and speed trade-off. In particular, Stride-and-PCC is only slightly slower than Stride-and-skip (yet, still  $\approx 40\%$  faster than the baseline), but is much closer to the baseline

model’s quality. Overall, despite the simplicity of the AltUp in the sequence axis (i.e., Stride-and-PCC), we find that it is consistently effective in boosting model performance.

## 6 Conclusion

In this paper, we introduce *Alternating Updates* (AltUp) for efficient transformers with higher capacity. AltUp utilizes lightweight prediction and correction steps to update a wider representation vector without increasing the transformer layer’s computation cost. As a result, we achieve strong performance improvements on language modeling and language understanding benchmarks. We show how AltUp can be combined with existing techniques, such as MoE [ZBK<sup>+</sup>22], and extended to the *sequence* dimension, similar to Funnel transformers [DLYL20], to obtain further improvements in efficiency.

In future work, we plan to conduct a theoretical investigation of alternating updates to develop a deeper understanding of its effectiveness across differing applications. We also plan to experiment with the use of a very large number of alternating blocks. Towards taming the ever-increasing computational complexity and sheer size of modern models, we envision that AltUp can serve as a valuable component of efficient architectures of the future.

## References

- [BDP<sup>+</sup>22] Cenk Baykal, Nishanth Dikkala, Rina Panigrahy, Cyrus Rashtchian, and Xin Wang. A theoretical view on sparsely activated networks. *arXiv preprint arXiv:2208.04461*, 2022. 1, 2
- [BMH<sup>+</sup>22] Sebastian Borgeaud, Arthur Mensch, Jordan Hoffmann, Trevor Cai, Eliza Rutherford, Katie Millican, George Bm Van Den Driessche, Jean-Baptiste Lespiau, Bogdan Damoc, Aidan Clark, et al. Improving language models by retrieving from trillions of tokens. In *International Conference on Machine Learning*, pages 2206–2240. PMLR, 2022. 3
- [BMM<sup>+</sup>21] Thomas Bachlechner, Bodhisattwa Prasad Majumder, Henry Mao, Gary Cottrell, and Julian McAuley. Rezero is all you need: Fast convergence at large depth. In *Uncertainty in Artificial Intelligence*, pages 1352–1361. PMLR, 2021. 5
- [CdLCG<sup>+</sup>22] Aidan Clark, Diego de Las Casas, Aurelia Guy, Arthur Mensch, Michela Paganini, Jordan Hoffmann, Bogdan Damoc, Blake Hechtman, Trevor Cai, Sebastian Borgeaud, et al. Unified scaling laws for routed language models. In *International Conference on Machine Learning*, pages 4057–4086. PMLR, 2022. 3
- [CDW<sup>+</sup>22] Zixiang Chen, Yihe Deng, Yue Wu, Quanquan Gu, and Yuanzhi Li. Towards understanding mixture of experts in deep learning. *arXiv preprint arXiv:2208.02813*, 2022. 2
- [CLD<sup>+</sup>20] Krzysztof Choromanski, Valerii Likhoshesterov, David Dohan, Xingyou Song, Andreea Gane, Tamas Sarlos, Peter Hawkins, Jared Davis, Afroz Mohiuddin, Lukasz Kaiser, et al. Rethinking attention with performers. *arXiv preprint arXiv:2009.14794*, 2020. 3, 6
- [CND<sup>+</sup>22] Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. Palm: Scaling language modeling with pathways. *arXiv preprint arXiv:2204.02311*, 2022. 1, 3
- [DLYL20] Zihang Dai, Guokun Lai, Yiming Yang, and Quoc Le. Funnel-transformer: Filtering out sequential redundancy for efficient language processing. *Advances in neural information processing systems*, 33:4271–4282, 2020. 3, 6, 11
- [FBS<sup>+</sup>21] Angela Fan, Shruti Bhosale, Holger Schwenk, Zhiyi Ma, Ahmed El-Kishky, Siddharth Goyal, Mandeep Baines, Onur Celebi, Guillaume Wenzek, Vishrav Chaudhary, et al. Beyond english-centric multilingual machine translation. *J. Mach. Learn. Res.*, 22(107):1–48, 2021. 3
- [FDZ22] William Fedus, Jeff Dean, and Barret Zoph. A review of sparse expert models in deep learning. *arXiv preprint arXiv:2209.01667*, 2022. 1, 2, 3
- [FYWT22] Zhengcong Fei, Xu Yan, Shuhui Wang, and Qi Tian. Deecap: dynamic early exiting for efficient image captioning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 12216–12226, 2022. 3

- [FZS21] William Fedus, Barret Zoph, and Noam Shazeer. Switch transformers: Scaling to trillion parameter models with simple and efficient sparsity, 2021. [2](#), [10](#)
- [GAU<sup>+</sup>21] Mandy Guo, Joshua Ainslie, David Uthus, Santiago Ontanon, Jianmo Ni, Yun-Hsuan Sung, and Yinfei Yang. Longt5: Efficient text-to-text transformer for long sequences. *arXiv preprint arXiv:2112.07916*, 2021. [3](#), [6](#)
- [GLT<sup>+</sup>20] Kelvin Guu, Kenton Lee, Zora Tung, Panupong Pasupat, and Mingwei Chang. Retrieval augmented language model pre-training. In *International Conference on Machine Learning*, pages 3929–3938. PMLR, 2020. [3](#)
- [GQC<sup>+</sup>20] Anmol Gulati, James Qin, Chung-Cheng Chiu, Niki Parmar, Yu Zhang, Jiahui Yu, Wei Han, Shibo Wang, Zhengdong Zhang, Yonghui Wu, et al. Conformer: Convolution-augmented transformer for speech recognition. *arXiv preprint arXiv:2005.08100*, 2020. [6](#)
- [GWD14] Alex Graves, Greg Wayne, and Ivo Danihelka. Neural turing machines. *arXiv preprint arXiv:1410.5401*, 2014. [3](#)
- [GWR<sup>+</sup>16] Alex Graves, Greg Wayne, Malcolm Reynolds, Tim Harley, Ivo Danihelka, Agnieszka Grabska-Barwińska, Sergio Gómez Colmenarejo, Edward Grefenstette, Tiago Ramalho, John Agapiou, et al. Hybrid computing using a neural network with dynamic external memory. *Nature*, 538(7626):471–476, 2016. [3](#)
- [HBM<sup>+</sup>22] Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, et al. Training compute-optimal large language models. *arXiv preprint arXiv:2203.15556*, 2022. [1](#)
- [HHS<sup>+</sup>20] Lu Hou, Zhiqi Huang, Lifeng Shang, Xin Jiang, Xiao Chen, and Qun Liu. Dynabert: Dynamic bert with adaptive width and depth. *Advances in Neural Information Processing Systems*, 33:9782–9793, 2020. [3](#)
- [HKHM21] Danny Hernandez, Jared Kaplan, Tom Henighan, and Sam McCandlish. Scaling laws for transfer. *arXiv preprint arXiv:2102.01293*, 2021. [1](#)
- [HZC<sup>+</sup>21] Hussein Hazimeh, Zhe Zhao, Aakanksha Chowdhery, Maheswaran Sathiamoorthy, Yihua Chen, Rahul Mazumder, Lichan Hong, and Ed Chi. Dselect-k: Differentiable selection in the mixture of experts with applications to multi-task learning. *Advances in Neural Information Processing Systems*, 34:29335–29347, 2021. [3](#)
- [JJNH91] Robert A Jacobs, Michael I Jordan, Steven J Nowlan, and Geoffrey E Hinton. Adaptive mixtures of local experts. *Neural computation*, 3(1):79–87, 1991. [2](#)
- [Kal60] R. E. Kalman. A New Approach to Linear Filtering and Prediction Problems. *Journal of Basic Engineering*, 82(1):35–45, 03 1960. [4](#)
- [KKL20] Nikita Kitaev, Łukasz Kaiser, and Anselm Levskaya. Reformer: The efficient transformer. *arXiv preprint arXiv:2001.04451*, 2020. [3](#), [6](#)
- [KMH<sup>+</sup>20] Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*, 2020. [1](#)
- [LBC<sup>+</sup>21] Lucas Liebenwein, Cenk Baykal, Brandon Carter, David Gifford, and Daniela Rus. Lost in pruning: The effects of pruning neural networks beyond test accuracy. *Proceedings of Machine Learning and Systems*, 3:93–138, 2021. [1](#)
- [LBD<sup>+</sup>21] Mike Lewis, Shruti Bhosale, Tim Dettmers, Naman Goyal, and Luke Zettlemoyer. Base layers: Simplifying training of large, sparse models. In *International Conference on Machine Learning*, pages 6265–6274. PMLR, 2021. [3](#)
- [LLC<sup>+</sup>20] Lei Li, Yankai Lin, Deli Chen, Shuhuai Ren, Peng Li, Jie Zhou, and Xu Sun. Cascadebert: Accelerating inference of pre-trained language models via calibrated complete models cascade. *arXiv preprint arXiv:2012.14682*, 2020. [3](#)
- [LLX<sup>+</sup>20] Dmitry Lepikhin, HyoukJoong Lee, Yuanzhong Xu, Dehao Chen, Orhan Firat, Yanping Huang, Maxim Krikun, Noam Shazeer, and Zhifeng Chen. Gshard: Scaling giant models with conditional computation and automatic sharding. *arXiv preprint arXiv:2006.16668*, 2020. [1](#)

- [LSR<sup>+</sup>19] Guillaume Lample, Alexandre Sablayrolles, Marc’Aurelio Ranzato, Ludovic Denoyer, and Hervé Jégou. Large memory layers with product keys. *Advances in Neural Information Processing Systems*, 32, 2019. 3
- [PGL<sup>+</sup>21] David Patterson, Joseph Gonzalez, Quoc Le, Chen Liang, Lluís-Miquel Munguia, Daniel Rothchild, David So, Maud Texier, and Jeff Dean. Carbon emissions and large neural network training. *arXiv preprint arXiv:2104.10350*, 2021. 1
- [PWZ21] Rina Panigrahy, Xin Wang, and Manzil Zaheer. Sketch based memory for neural networks. In *International Conference on Artificial Intelligence and Statistics*, pages 3169–3177. PMLR, 2021. 1, 3, 9, 10
- [RCL<sup>+</sup>22] Adam Roberts, Hyung Won Chung, Anselm Levskaya, Gaurav Mishra, James Bradbury, Daniel Andor, Sharan Narang, Brian Lester, Colin Gaffney, Afroz Mohiuddin, Curtis Hawthorne, Aitor Lewkowycz, Alex Salcianu, Marc van Zee, Jacob Austin, Sebastian Goodman, Livio Baldini Soares, Haitang Hu, Sasha Tsvyashchenko, Aakanksha Chowdhery, Jasmijn Bastings, Jannis Bulian, Xavier Garcia, Jianmo Ni, Andrew Chen, Kathleen Kenealy, Jonathan H. Clark, Stephan Lee, Dan Garrette, James Lee-Thorp, Colin Raffel, Noam Shazeer, Marvin Ritter, Maarten Bosma, Alexandre Passos, Jeremy Maitin-Shepard, Noah Fiedel, Mark Omernick, Brennan Saeta, Ryan Sepassi, Alexander Spiridonov, Joshua Newlan, and Andrea Gesmundo. Scaling up models and data with `t5x` and `seqio`. *arXiv preprint arXiv:2203.17189*, 2022. 7
- [RLY<sup>+</sup>22] Samyam Rajbhandari, Conglong Li, Zhewei Yao, Minjia Zhang, Reza Yazdani Aminabadi, Ammar Ahmad Awan, Jeff Rasley, and Yuxiong He. Deepspeed-moe: Advancing mixture-of-experts inference and training to power next-generation ai scale. In *International Conference on Machine Learning*, pages 18332–18346. PMLR, 2022. 9
- [RPM<sup>+</sup>21] Carlos Riquelme, Joan Puigcerver, Basil Mustafa, Maxim Neumann, Rodolphe Jenatton, André Susano Pinto, Daniel Keysers, and Neil Houlsby. Scaling vision with sparse mixture of experts. *Advances in Neural Information Processing Systems*, 34:8583–8595, 2021. 1
- [RSR<sup>+</sup>20] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, Peter J Liu, et al. Exploring the limits of transfer learning with a unified text-to-text transformer. *J. Mach. Learn. Res.*, 21(140):1–67, 2020. 3, 7
- [RSW<sup>+</sup>21] Stephen Roller, Sainbayar Sukhbaatar, Jason Weston, et al. Hash layers for large sparse models. *Advances in Neural Information Processing Systems*, 34:17555–17566, 2021. 1, 3, 9, 10
- [RZLL16] Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. Squad: 100,000+ questions for machine comprehension of text. *arXiv preprint arXiv:1606.05250*, 2016. 7
- [SFG<sup>+</sup>22] Tal Schuster, Adam Fisch, Jai Gupta, Mostafa Dehghani, Dara Bahri, Vinh Q Tran, Yi Tay, and Donald Metzler. Confident adaptive language modeling. *arXiv preprint arXiv:2207.07061*, 2022. 3
- [SMM<sup>+</sup>17] Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. *arXiv preprint arXiv:1701.06538*, 2017. 1, 2
- [SS18] Noam Shazeer and Mitchell Stern. Adafactor: Adaptive learning rates with sublinear memory cost. In *International Conference on Machine Learning*, pages 4596–4604. PMLR, 2018. 7
- [TDBM20] Yi Tay, Mostafa Dehghani, Dara Bahri, and Donald Metzler. Efficient transformers: A survey. *ACM Computing Surveys (CSUR)*, 2020. 2
- [VSP<sup>+</sup>17] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in Neural Information Processing Systems*, volume 30, 2017. 1
- [WLC<sup>+</sup>22] Lemeng Wu, Mengchen Liu, Yinpeng Chen, Dongdong Chen, Xiyang Dai, and Lu Yuan. Residual mixture of experts. *arXiv preprint arXiv:2204.09636*, 2022. 3
- [WLGY20] Qingyang Wu, Zhenzhong Lan, Jing Gu, and Zhou Yu. Memformer: The memory-augmented transformer. *arXiv preprint arXiv:2010.06891*, 2020. 3

- [WPN<sup>+</sup>19] Alex Wang, Yada Pruksachatkun, Nikita Nangia, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. Superglue: A stickier benchmark for general-purpose language understanding systems. *Advances in neural information processing systems*, 32, 2019. [7](#)
- [WRHS22] Yuhuai Wu, Markus N Rabe, DeLesley Hutchins, and Christian Szegedy. Memorizing transformers. *arXiv preprint arXiv:2203.08913*, 2022. [3](#)
- [WSM<sup>+</sup>18] Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R Bowman. Glue: A multi-task benchmark and analysis platform for natural language understanding. *arXiv preprint arXiv:1804.07461*, 2018. [7](#)
- [YH20] Greg Yang and Edward J Hu. Feature learning in infinite-width neural networks. *arXiv preprint arXiv:2011.14522*, 2020. [1](#)
- [YWG12] Seniha Esen Yuksel, Joseph N Wilson, and Paul D Gader. Twenty years of mixture of experts. *IEEE transactions on neural networks and learning systems*, 23(8):1177–1193, 2012. [2](#)
- [YWV<sup>+</sup>22] Jiahui Yu, Zirui Wang, Vijay Vasudevan, Legg Yeung, Mojtaba Seyedhosseini, and Yonghui Wu. Coca: Contrastive captioners are image-text foundation models. *arXiv preprint arXiv:2205.01917*, 2022. [1](#)
- [ZBK<sup>+</sup>22] Barret Zoph, Irwan Bello, Sameer Kumar, Nan Du, Yanping Huang, Jeff Dean, Noam Shazeer, and William Fedus. Designing effective sparse expert models. *arXiv preprint arXiv:2202.08906*, 2022. [1](#), [3](#), [9](#), [10](#), [11](#)
- [ZGD<sup>+</sup>20] Manzil Zaheer, Guru Guruganesh, Kumar Avinava Dubey, Joshua Ainslie, Chris Alberti, Santiago Ontanon, Philip Pham, Anirudh Ravula, Qifan Wang, Li Yang, et al. Big bird: Transformers for longer sequences. *Advances in neural information processing systems*, 33:17283–17297, 2020. [3](#), [6](#)
- [ZLL<sup>+</sup>22] Yanqi Zhou, Tao Lei, Hanxiao Liu, Nan Du, Yanping Huang, Vincent Zhao, Andrew Dai, Zhifeng Chen, Quoc Le, and James Laudon. Mixture-of-experts with expert choice routing. *arXiv preprint arXiv:2202.09368*, 2022. [1](#)