

# The Quantum Effect: A Recipe for Quantum $\Pi$

Jacques Carette      Chris Heunen      Robin Kaarsgaard      Amr Sabry

February 6, 2023

## Abstract

Free categorical constructions characterise quantum computing as the combination of two copies of a reversible classical model, glued by the complementarity equations of classical structures. This recipe effectively constructs a computationally universal quantum programming language from two copies of  $\Pi$ , the internal language of rig groupoids. The construction consists of Hughes’ arrows. Thus answer positively the question whether a computational effect exists that turns reversible classical computation into quantum computation: the quantum effect. Measurements can be added by layering a further effect on top. Our construction also enables some reasoning about quantum programs (with or without measurement) through a combination of classical reasoning and reasoning about complementarity.

## 1 Introduction

A distinguishing and well-established aspect of quantum mechanics is the concept of *complementarity*. Roughly speaking quantum data is such that an observation in a one experimental setting excludes the possibility of gaining any information in *complementary* settings. This experimental characterisation has been formalised as an equation that relates a particular collection of “classical morphisms” in the category of finite-dimensional Hilbert spaces, and has inspired the development of axiomatic models of quantum theory [16].

From a programming language perspective, one thus expects that a particular collection of “classical subexpressions” in any universal quantum programming language exhibits this complementarity property. More foundationally, and of practical significance, is the opposite question: is it possible to induce quantum behaviour by imposing the complementarity property on two classical structures, each modeled by a classical reversible programming language? The most important practical significance of such a construction would be that some forms of reasoning about quantum programs reduces to classical reasoning augmented with one complementarity equation. Additionally, the design of quantum programming languages itself would reduce to designing two appropriate classical languages whose interaction is constrained by complementarity. Foundationally, this construction would turn around the prevalent view of quantum computing [21, 52, 53, 57], potentially shedding some light on a long-standing foundational question in physics about the relationship between quantum and classical theories [10].

This article gives just such a recipe, namely constructing a computationally universal quantum programming language from two copies of a (particular) universal classical reversible language. The mathematical formalism is expressed using free categorical constructions, and makes heavy use of Hughes’ arrows [30, 31]. To also demonstrate the recipe in action and explore its pragmatics in programming and reasoning about quantum circuits, we apply it to a canonical reversible programming language  $\Pi$  yielding the computationally universal quantum programming language Quantum $\Pi$ , and implement the entire project in Agda<sup>1</sup>

**Related work.** We discuss related work in detail where appropriate, and provide just a brief summary here. Quantum programming languages [57, 8, 21, 53, 50, 51, 46], classical reversible programming languages [33, 15, 13, 32, 61, 60], their categorical semantics [47, 14, 49, 58, 34, 25, 26, 20], complementarity of

---

<sup>1</sup>Available from the repository <https://github.com/JacquesCarette/QuantumPi>.

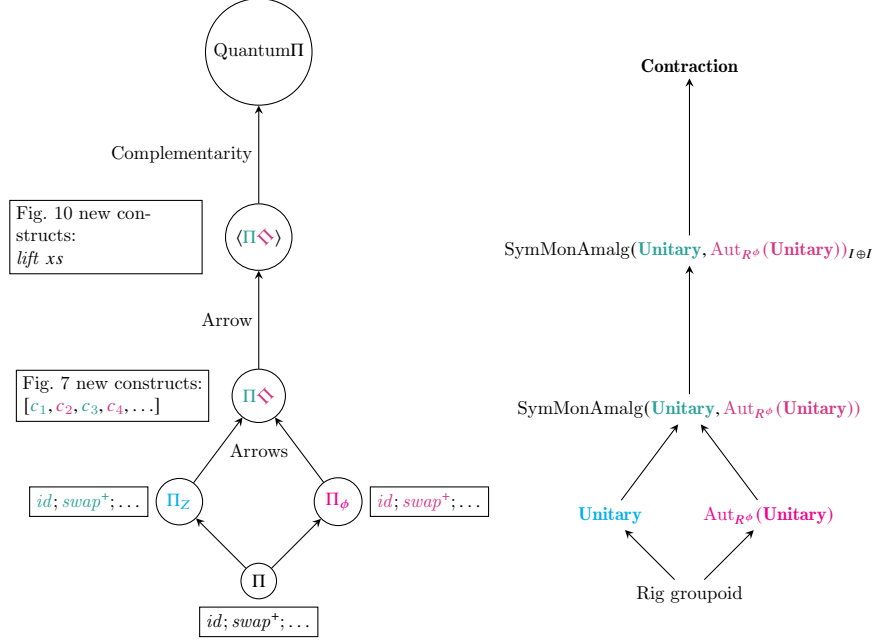


Figure 1: General overview of the approach to computationally universal quantum computation. The left diagram shows the progression of languages and the right diagram shows the corresponding progression of categories. We start at the bottom with a classical reversible language universal for finite types, that take semantics in rig groupoids. Moving up, we make two copies of the language that are rotated with respect to each other and embed them in the category **Unitary**. The two copies are amalgamated in a first effectful arrow layer that provides interleaving constructs. A second arrow layer is then added in which classical information can be created and deleted. Once the complementarity equation is imposed on the final language at the top, we get a computationally universal quantum programming language, with semantics in the category **Contraction** of finite-dimensional Hilbert spaces and linear contractions.

classical structures [16, 17], and amalgamation of categories [41] have all been individually studied before. In particular, complementarity is central to the ZX- [16] and ZH-calculi [6, 19], though more axioms are needed for completeness. Given this wealth of prior work, our main contribution is to design an infrastructure in which these established ideas can be organised in a way for quantum behaviour to emerge from classical programming languages using computational effects in the form of arrows. The quest for such a computational ‘quantum effect’ also underlies [4], and the current article vastly improves on that very early work.

**Outline.** Fig. 1 provides a summary of our technical development, which proceeds in two parallel threads: the design of a computationally universal quantum programming language on the left and the corresponding categorical models on the right. This summary is expanded in Sec. 2, which presents the resulting programming language and its model without exposing or explaining the intermediate steps. The main point is for the reader to appreciate the main technical result — the canonicity theorem — without the distraction of some of the more involved technical properties and their proofs. The full technical development starts in Sec. 3 with a review of relevant background on the categorical semantics of quantum computing. Sec. 4 then reviews the core classical reversible programming language  $\Pi$  and its semantics in rig groupoids. The first step of our construction in Sec. 5 is to take two copies of  $\Pi$ , called  $\Pi_Z$  and  $\Pi_\phi$ , and embeds their semantics, in two different ways, in the category **Unitary** of finite-dimensional Hilbert spaces and unitaries. These two languages are then amalgamated in Sec. 6 to produce a language  $\Pi \diamond$  in which expressions from  $\Pi_Z$  and  $\Pi_\phi$  can be freely interleaved. The amalgamated language is then extended in Sec. 7 to the language  $\langle \Pi \diamond \rangle$  which

exposes the classical structures explicitly. Sec. 8 proves our main result, the canonicity theorem. Sec. 9 introduces Quantum $\Pi$ , the user-level interface of  $\langle \Pi \diamond \rangle$ . Unlike the previous section, the development uses our Agda specification to provide executable circuits *and* machine checkable proofs of various circuit equivalences. This section demonstrates that some forms of reasoning about quantum programs in Quantum $\Pi$  indeed reduces to classical reasoning augmented with the complementarity equation. It also shows that Quantum $\Pi$  can model gates with complex numbers and be extended with a measurement postulate to model complete quantum algorithms. The article concludes with a section summarising the results and discussing possible future directions.

## 2 Three Arrows to Quantum

We first present a complete, somewhat informal, overview of our main result. The necessary categorical constructions, models, and their properties that are needed to justify the result are quite involved and form the main body of the paper.

Usually computational effects are introduced as a layer above a pure language using monads or arrows. Here, we take the unusual step of using *two* copies of a core language and introduce an arrow that amalgamates them, allowing arbitrary interleaving of expressions from either language. As will be explained in the remainder of the paper, the core language is  $\Pi$ , a universal language for classical reversible circuits providing facilities for sequential, additive, and multiplicative compositions of circuits. The language  $\Pi$  includes many constructs, the most important of which for this section is  $swap^+ : \varepsilon \leftrightarrow \varepsilon$  where  $\varepsilon$  is the type containing two values, namely a left injection and a right injection; the semantics of  $swap^+$  is an automorphism of the type  $\varepsilon$  that exchanges the left and right injections. Distributivity of the multiplicative structure over the additive one allows the language to express conditional (or controlled) execution via an expression `CTRL  $c$`  which takes a pair of inputs, one of which is of type  $\varepsilon$  and executes  $c$  only if the given value of type  $\varepsilon$  is the one denoting true.

The two copies of  $\Pi$ , called  $\Pi_Z$  and  $\Pi_\phi$ , are amalgamated into a larger language via their own constructor  $arr_Z$  and  $arr_\phi$ . We think of  $\phi$  as an angle which specifies how much one language is “rotated” with respect to the other. The rotations for general expressions are generated in a compositional type-directed manner from the rotation on  $swap^+$ . As a consequence, the two arrows share the same multiplicative structure, whose semantics is identical in each of the sublanguages and in their amalgamation. The semantics of the additive structure is however not lifted to the amalgamated language. Finally, a third arrow, which also shares the same multiplicative structure, is layered above the amalgamated language allowing the introduction of partially reversible maps for a state *zero* and an effect *assertZero*.

Collecting these ideas, given a classical reversible language whose expressions are denoted by  $c$ , the syntax of Quantum $\Pi$  is:

$$\begin{aligned}
 d ::= & arr_Z c \mid arr_\phi c \\
 & \mid unite^{\times l} \mid unti^{\times l} \mid swap^{\times} \mid assoc^{\times} \mid assocl^{\times} \\
 & \mid id \mid d \ggg d \mid d ** d \mid inv d \mid zero \mid assertZero
 \end{aligned}$$

The first line lifts the underlying  $c$  expressions using two different arrows. The next line provides a multiplicative monoidal structure. The last line provides identity, sequential and parallel compositions, a (partial) inverse, and the two state and effect constants.

The intention is for the underlying languages to be lifted in such a way that  $arr_\phi swap^+$  can be thought of as a change of basis between a pair of complementary orthonormal bases. Let  $\{F_Z, T_Z\}$  be the denotations of the two values of  $\varepsilon$  lifted via  $arr_Z$ , and let  $\{F_X, T_X\}$  be these values applied to  $arr_\phi swap^+$  (note that this is strictly different from the denotations of the two values of  $\varepsilon$  lifted via  $arr_\phi$ ). We require that the denotation of *zero* be  $F_Z$  which is the one value recognized by the predicate *assertZero*. Formally, the semantics satisfies

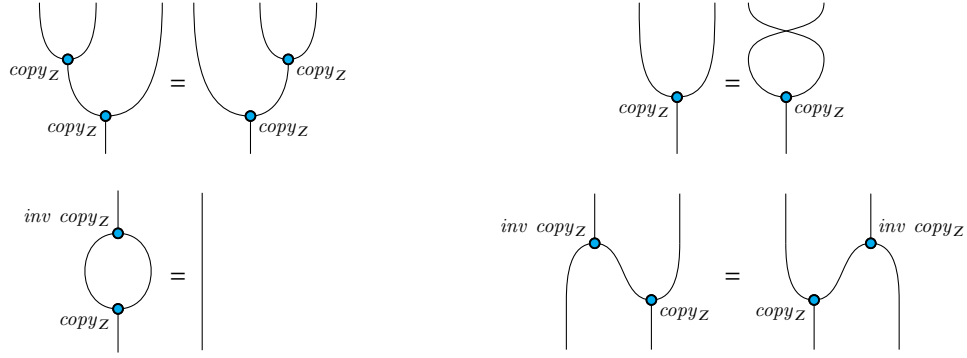


Figure 2: Depictions of the properties for the classical structure for  $copy_Z$ . The laws for  $copy_X$  are identical. These diagrams are provided only as illustration; the graphical language of monoidal categories [28] will not be used in the rest of this article.

the following execution equations:

$$\begin{aligned}
 zero \ggg assertZero &= id \\
 (zero \*** id) \ggg arr_Z \text{ (CTRL } c) &= zero \*** id \\
 ((zero \ggg arr_Z \text{ swap}^+) \*** id) \ggg arr_Z \text{ (CTRL } c) &= (zero \ggg arr_Z \text{ swap}^+) \*** arr_Z c
 \end{aligned}$$


The first equation states that  $assertZero$  is the partial inverse of  $zero$ . The second and third equation ensure that  $F_Z$  behaves as false in conditional expressions and that  $T_Z$  behaves as true.


With the introduction of state  $zero$  and effect  $assertZero$ , the arrow layer can express two different computations that copy and merge expressions of type  $\#$ :

$$\begin{aligned}
 copy_Z &= (unit_i^{\times l} \ggg swap^{\times}) \ggg (id \*** zero) \ggg arr_Z \text{ (CTRL } swap^+) \\
 copy_X &= arr_{\phi} \text{ swap}^+ \ggg copy_Z \ggg (arr_{\phi} \text{ swap}^+ \*** arr_{\phi} \text{ swap}^+)
 \end{aligned}$$

The expression  $copy_Z$  takes a value  $b$  which is either  $F_Z$  or  $T_Z$  and duplicates it. The expression  $copy_X$  rotates the values of type  $\#$  before and after invoking  $copy_Z$  which has the result of duplicating  $F_X$  or  $T_X$ . Intuitively, the inverse copy maps merge two equal values and are undefined otherwise. Formally, each  $copy$  and its inverse form a classical structure that satisfies the laws depicted in Fig. 2. These properties state that the duplicated values are indistinguishable, that the duplication can happen in any order, and that immediately applying the inverse perfectly undoes the effect of copying.

Recall however that the amalgamated language allows arbitrary interleaving of expressions from either copy of  $\Pi$ . In other words, it is possible to apply  $copy_Z$  to  $F_X$  or the inverse of  $copy_X$  to  $(F_Z, F_X)$ . Specifically, consider the execution diagram on the right. By the laws of classical structures we know that the two copying actions in the execution diagram duplicate the given value but, a priori, we have no idea what would happen in the two magenta nodes. However if we require that the entire diagram behaves as the identify, there is one choice for the marked values that forces  $inv \text{ copy}_X (F_Z, F_X) = F_X$  and  $inv \text{ copy}_Z (F_Z, F_X) = F_Z$ . Formally, this requirement is expressed by the complementarity equation with the following graphical representations:

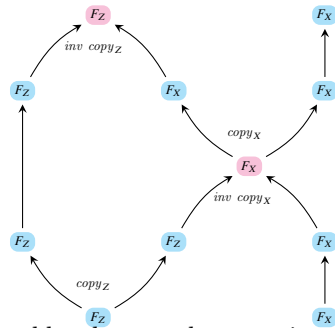

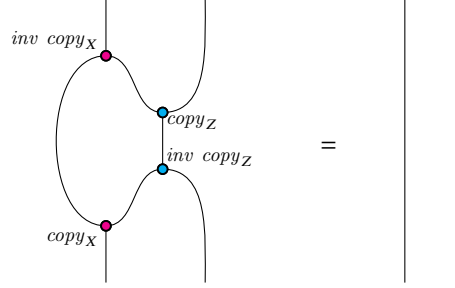

Remarkably, requiring that the semantics of our language satisfies this equation induces full quantum behaviour: the language becomes computationally universal for quantum computing. The informal argument, to be made precise in Thm. 27, follows.

**Theorem 1** (Canonicity (informal)). *If a categorical semantics  $\llbracket - \rrbracket$  for our language satisfies the classical structure laws, the execution laws, and the complementarity law, then the language is computationally universal for quantum computing.*

*Proof.* (Informal) Without loss of generality, we may assume that  $\{F_Z, T_Z\}$  is the computational  $Z$  basis and that  $arr_\phi$  rotates to another basis related to the  $Z$  basis by  $arr_\phi swap^+$ . The laws of classical structures ensure that  $\{F_Z, T_Z\}$  and  $\{F_X, T_X\}$  form orthonormal bases; the execution equations ensure that these sets of values are copyable by  $copy_Z$  and  $copy_X$  respectively; and the complementarity equation further ensures that they form a complementarity pair of bases for  $\mathbb{C}^2$ . By assumption  $\{F_Z, T_Z\}$  form the  $Z$  basis, so the only possibilities for  $\{F_X, T_X\}$  are either the  $X$  basis or the  $Y$  basis. Thus the unitary that turns the former basis into the latter must be Hadamard  $H$  or Hadamard composed with the  $S$  gate. However,  $SH$  is not involutive, whereas  $arr_\phi swap^+$  must be, as it is (the lifting of) a symmetry in the underlying symmetric monoidal category. We conclude that the language has semantics for both the classical reversible gates and the Hadamard gate and hence is computationally universal for quantum computing.  $\square$

### 3 Categories; Quantum Computing; Computational Universality

Category theory deals with abstractions in a uniform and systematic way, and is widely used to provide compositional programming semantics. We may think of objects as types, and morphisms as terms. For the basics we refer to [39]. To fix notation and the background knowledge assumed, we briefly discuss the types of categories that are useful in reversible programming: dagger categories and rig categories. Then we will discuss quantum computing in categorical terms, complementarity, and computational universality.

#### 3.1 Dagger Categories and Groupoids

A morphism  $f: A \rightarrow B$  is *invertible*, or an *isomorphism*, when there exists a morphism  $f^{-1}: B \rightarrow A$  such that  $f^{-1} \circ f = id_A$  and  $f \circ f^{-1} = id_B$ . This inverse  $f^{-1}$  is necessarily unique. A category where every morphism is invertible is called a *groupoid*.

At first sight, groupoids form the perfect semantics for reversible computing. But every step in a computation being reversible is slightly less restrictive than it being invertible. For each step  $f: A \rightarrow B$ , there must still be a way to ‘undo’ it, given by  $f^\dagger: B \rightarrow A$ . This should also still respect composition, in that  $(g \circ f)^\dagger = f^\dagger \circ g^\dagger$  and  $id_A^\dagger = id_A$ . Moreover, a ‘cancelled undo’ should not change anything:  $f^{\dagger\dagger} = f$ . Therefore every morphism  $f$  has a partner  $f^\dagger$ . A category equipped with such a choice of partners is called a *dagger category*.

A groupoid is an example of a dagger category, where every morphism is *unitary*, that is,  $f^\dagger = f^{-1}$ . Think, for example, of the category **FinBij** with finite sets for objects and bijections for morphisms. But not

every dagger category is a groupoid. For example, the dagger category **PInj** has sets as objects, and partial injections as morphisms. Here, the dagger satisfies  $f \circ f^\dagger \circ f = f$ , but not necessarily  $f^\dagger \circ f = \text{id}$  because  $f$  may only be partially defined. In a sense, the dagger category **PInj** is the universal model for reversible computation [36, 24].

When a category has a dagger, it makes sense to demand that every other structure on the category respects the dagger, and we will do so. The theory of dagger categories is similar to the theory of categories in some ways, but very different in others [27].

### 3.2 Monoidal Categories and Rig Categories

Programming becomes easier when the programmer can express more programs natively. For example, it is handy to have type combinators like sums and products. Semantically, this is modelled by considering not mere categories, but monoidal ones. A *monoidal category* is a category equipped with a type combinator that turns two objects  $A$  and  $B$  into an object  $A \otimes B$ , and a term combinator that turns two morphisms  $f: A \rightarrow B$  and  $f': A' \rightarrow B'$  into a morphism  $f \otimes f': A \otimes A' \rightarrow B \otimes B'$ . This has to respect composition and identities. Moreover, there has to be an object  $I$  that acts as a unit for  $\otimes$ , and isomorphisms  $\alpha: A \otimes (B \otimes C) \rightarrow (A \otimes B) \otimes C$  and  $\lambda: I \otimes A \rightarrow A$  and  $\rho: A \otimes I \rightarrow A$ . In a *symmetric monoidal category*, there are additionally isomorphisms  $\sigma: A \otimes B \rightarrow B \otimes A$ . All these isomorphisms have to respect composition and satisfy certain coherence conditions, see [28, Chapter 1]. We speak of a (*symmetric*) *monoidal dagger category* when the coherence isomorphisms are unitary. Intuitively,  $g \circ f$  models sequential composition, and  $f \otimes g$  models parallel composition. For example, **FinBij** and **PInj** are symmetric monoidal dagger categories under cartesian product.

A *rig category* is monoidal in two ways in a distributive fashion. More precisely, it has two monoidal structures  $\oplus$  and  $\otimes$ , such that  $\oplus$  is symmetric monoidal but  $\otimes$  not necessarily, and there are isomorphisms  $\delta_L: A \otimes (B \oplus C) \rightarrow (A \otimes B) \oplus (A \otimes C)$  and  $\delta_0: A \otimes 0 \rightarrow 0$ . These isomorphisms again have to respect composition and certain coherence conditions [38]. For example, **FinBij** and **PInj** are not only monoidal under cartesian product, but also under disjoint union, and the appropriate distributivity holds. Intuitively,  $f \oplus g$  models a choice between  $f$  and  $g$ .

### 3.3 Quantum Computing (categorically)

Quantum computing with pure states is a specific kind of reversible computing. Good references are [59, 43]. A quantum system is modelled by a finite-dimensional Hilbert space  $A$ . For example, *qubits* are modelled by  $\mathbb{C}^2$ . The category giving semantics to finite-dimensional pure state quantum theory is therefore **FHilb**, whose objects are finite-dimensional Hilbert spaces, and whose morphisms are linear maps. Categorical semantics for pure state quantum computing is the groupoid **Unitary** of finite-dimensional Hilbert spaces as objects with unitaries as morphisms. Both are rig categories under direct sum  $\oplus$  and tensor product  $\otimes$ . For example, a sum type of a triple of qubits and a pair of qubits is modelled by  $(\mathbb{C}^2 \otimes \mathbb{C}^2 \otimes \mathbb{C}^2) \oplus (\mathbb{C}^2 \otimes \mathbb{C}^2)$ .

The pure *states* of a quantum system modelled by a Hilbert space  $A$  are the vectors of unit norm, conventionally denoted by a *ket*  $|y\rangle \in A$ . These are equivalently given by morphisms  $\mathbb{C} \rightarrow A$  in **FHilb** that map  $z \in \mathbb{C}$  to  $z|y\rangle \in A$ . Dually, the functional  $A \rightarrow \mathbb{C}$  maps  $x \in A$  to the inner product  $\langle x|y\rangle$  is conventionally written as a *bra*  $\langle x|$ . Morphisms  $A \rightarrow \mathbb{C}$  are also called *effects*.

In fact, **FHilb** is a dagger rig category. The *dagger* of linear map  $f: A \rightarrow B$  is uniquely determined via the inner product by  $\langle f(x)|y\rangle = \langle x|f^\dagger(y)\rangle$ . The dagger of a state is an effect, and vice versa. In quantum computing, pure states evolve along unitary gates. These are exactly the morphisms that are unitary in the sense of dagger categories in that  $f^\dagger \circ f = \text{id}$  and  $f \circ f^\dagger = \text{id}$ , exhibiting the groupoid **Unitary** as a dagger subcategory of **FHilb**.

Once orthonormal bases  $\{|i\rangle\}$  and  $\{|j\rangle\}$  for finite-dimensional Hilbert spaces  $A$  and  $B$  are fixed, we can express morphisms  $f: A \rightarrow B$  as a matrix with entries  $\langle i|f|j\rangle$ . The dagger then becomes the complex conjugate transpose, the tensor product becomes the Kronecker product of matrices, and the direct sum becomes a block diagonal matrix. The Hilbert spaces  $\mathbb{C}^n$  come with the canonical *computational basis*

consisting of the  $n$  vectors with a single entry 1 and otherwise 0, also called the  $Z$ -basis and denoted  $\{|0\rangle, \dots, |n-1\rangle\}$ .

In fact, there is a way to translate the category **FPInj** of finite sets and partial injections to the category **FHilb**, that sends  $\{0, \dots, n-1\}$  to  $\mathbb{C}^n$ . This translation preserves composition, identities, tensor product, direct sum, and dagger: it is a dagger rig functor  $\ell^2: \mathbf{FPInj} \rightarrow \mathbf{FHilb}$ , that restricts to a dagger rig functor **FinBij**  $\rightarrow$  **Unitary**. Thus reversible computing (**FinBij**) is to classical reversible theory (**FPInj**) as quantum computing (**Unitary**) is to quantum theory (**FHilb**). In particular, in this way, the Boolean controlled-controlled-not function (known as the *Toffoli gate*), which is universal for reversible computing, transfers to a quantum gate with the same name that acts on vectors.

There are many ways to embed classical reversible computing into quantum computing like this, one for every uniform choice of computational basis [24]. If we only care about computation with qubits (rather than qutrits or the more general qudits), we could also send a bijection  $f: \{0, \dots, 2n-1\} \rightarrow \{0, \dots, 2n-1\}$  to  $(H^{\otimes n})^\dagger \circ \ell^2(f) \circ H^{\otimes n}$ , where  $H$  is the Hadamard matrix, to compute in the  $X$  basis rather than the computational ( $Z$ ) basis.

### 3.4 Complementarity

A choice of basis  $\{|i\rangle\}$  on an  $n$ -dimensional Hilbert space  $A$  defines a morphism  $\delta: A \rightarrow A \otimes A$  in **FHilb** that maps  $|i\rangle$  to  $|ii\rangle = |i\rangle \otimes |i\rangle$ . In fact, the morphisms arising this way are characterised by certain equational laws that make them into a so-called *classical structures*, or *commutative special dagger Frobenius structures* [28, Chapter 5].

$$(\delta \otimes \text{id}_A) \circ \delta = (\text{id}_A \otimes \delta) \circ \delta \qquad \sigma_{A,A} \circ \delta = \delta \qquad (1)$$

$$(\text{id}_A \otimes \delta^\dagger) \circ (\delta \otimes \text{id}_A) = (\delta^\dagger \otimes \text{id}_A) \circ (\text{id}_A \otimes \delta) \qquad \delta^\dagger \circ \delta = \text{id}_A \qquad (2)$$

(To be precise, we deal with nonunital Frobenius structures, but in finite dimension there automatically exists a uniquely determined unit after all [1, Prop. 7].) In particular, because  $A$  is finite-dimensional, the basis vectors determine a state  $\sum_{i=1}^n |i\rangle$  that is in *uniform superposition*. For the computational basis for qubits, this state is also denoted  $|+\rangle = \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle)$ . Similarly, we shorthand  $|-\rangle = \frac{1}{\sqrt{2}}(|0\rangle - |1\rangle)$ . Now  $\{|+\rangle, |-\rangle\}$  forms an orthogonal basis for the qubit  $\mathbb{C}^2$ , called the  $X$ -basis, that is different from the  $Z$ -basis.

As far as picking a basis to treat as ‘the’ computational basis is concerned, all bases are created equal. But once that arbitrary choice is fixed, some other bases are more equal than others. The  $Z$ -basis and the  $X$ -basis are *mutually unbiased*, meaning that a state of the one basis and an effect of the other basis always give the same inner product:  $\langle 0|+\rangle = \langle 1|+\rangle = \langle 0|-\rangle = \langle 1|-\rangle$ . That is, measuring in one basis a state prepared in the other gives no information at all. This can also be expressed by an equation between the associated Frobenius structures  $\delta_1, \delta_2: A \rightarrow A \otimes A$  (see [16] or [28, Chapter 6]):

$$(\delta_1^\dagger \otimes \text{id}_A) \circ (\text{id}_A \otimes \delta_2) \circ (\text{id}_A \otimes \delta_2^\dagger) \circ (\delta_1 \otimes \text{id}_A) = \text{id}_{A \otimes A} \qquad (3)$$

(To be precise, we adopt a simplified version using [28, Prop. 6.7], and the fact that in finite dimension any injective morphism  $A \rightarrow A$  is an isomorphism.)

Two complementary classical structures  $A \rightarrow A \otimes A$  determine a unitary gate  $A \rightarrow A$ , corresponding to the linear map that turns the basis corresponding to one classical structure into the basis corresponding to the other. In the case of the  $Z$  and  $X$  bases, this is the Hadamard gate. Notice that the Hadamard gate is involutive:  $H \circ H = \text{id}$ . It is well-known that there are three mutually unbiased bases for qubits  $\mathbb{C}^2$ —namely the  $Z$  and  $X$  bases together with another basis  $Y$  we haven’t discussed here—and there cannot be four. Out of these three, only  $Z$  and  $X$  induce a unitary gate that is involutive.

### 3.5 Computational Universality

The inner product of a Hilbert space  $A$  lets us measure how close two vectors  $|x\rangle, |y\rangle \in A$  are by looking at the norm of their difference  $\|x - y\|^2 = \langle x - y | x - y \rangle$ . This leads to the dagger rig category **Contraction**

$b ::= 0 \mid 1 \mid b + b \mid b \times b$	(value types)
$t ::= b \leftrightarrow b$	(combinator types)
$i ::= id \mid swap^+ \mid assocr^+ \mid assocl^+ \mid unite^+l \mid uniti^+l$	(isomorphisms)
$\mid swap^\times \mid assocr^\times \mid assocl^\times \mid unite^\times l \mid uniti^\times l$	
$\mid dist \mid factor \mid absorbl \mid factorzr$	
$c ::= i \mid c \circ c \mid c + c \mid c \times c \mid inv\ c$	(combinators)

Figure 3:  $\Pi$  syntax

of finite-dimensional Hilbert spaces and contractions: linear maps  $f: A \rightarrow B$  satisfying  $\|f(a)\| \leq \|a\|$  for all  $a \in A$ . In **Contraction**, the notion of state is relaxed from a vector of unit length to a vector of *at most* unit length (these are sometimes called *subnormalised states* or simply *substates*). This categorical model adds to pure state quantum computation the ability to terminate without a useful outcome, where the norm  $\|x\|$  of a state  $x$  signifies the probability of a nondegenerate outcome when measured; interpreting a state of norm 0 as complete failure, **Contraction** models pure state quantum computing where computations may not terminate.

A finite set of unitary gates  $\{U_1, \dots, U_k\}$  on qubits is *strictly universal* when for any unitary  $U$  and any  $\varepsilon > 0$  there is a sequence of gates  $U_{i_1} \circ \dots \circ U_{i_p}$  with distance at most  $\varepsilon$  to  $U$ . This means that any computation whatsoever can be approximated by a circuit from the given set of gates up to arbitrary accuracy. The set is *computationally universal* when it can be used to simulate, possibly using ancillas and/or encoding, to accuracy within  $\varepsilon > 0$  any quantum circuit on  $n$  qubits and  $t$  gates from a strictly universal set with only polylogarithmic overhead in  $n$ ,  $t$ , and  $\frac{1}{\varepsilon}$ . This means that the gate set can perform general quantum computation without too much overhead.

**Theorem 2.** [3, 54] *The Toffoli and Hadamard gate set is computationally universal.*

Notice that this theorem only needs sequential composition  $\circ$  and parallel composition  $\otimes$ , and not sum types  $\oplus$ . Correspondingly, it only applies to Hilbert spaces of dimension  $2^n$ .

## 4 The Classical Core: $\Pi$

Our eventual goal is to define a computationally universal quantum programming language from two copies of a classical reversible language. In this section, we review the syntax and semantics of  $\Pi$  [jamessabry:infeff], a language that is universal for reversible computing over finite types and whose semantics is expressed in the rig groupoid of finite sets and bijections.

### 4.1 Syntax and Types

In reversible boolean circuits, the number of input bits matches the number of output bits. Thus, a key insight for a programming language of reversible circuits is to ensure that each primitive operation preserves the number of bits, which is just a natural number. The algebraic structure of natural numbers as the free commutative semiring (or, commutative rig), with  $(0, +)$  for addition, and  $(1, \times)$  for multiplication then provides sequential, vertical, and horizontal circuit composition. Generalizing these ideas, a typed programming language for reversible computing should ensure that every primitive expresses an isomorphism of finite types, *i.e.*, a permutation. The syntax of the language  $\Pi$  in Fig. 3 captures this concept. Type expressions  $b$  are built from the empty type  $(0)$ , the unit type  $(1)$ , the sum type  $(+)$ , and the product type  $(\times)$ . A type isomorphism  $c: b_1 \leftrightarrow b_2$  models a reversible circuit that permutes the values in  $b_1$  and  $b_2$ . These type isomorphisms are built from the primitive identities  $i$  and their compositions. These



$$\begin{array}{lcl}
id & : & b \leftrightarrow b & : & id \\
swap^+ & : & b_1 + b_2 \leftrightarrow b_2 + b_1 & : & swap^+ \\
assoc^+ & : & (b_1 + b_2) + b_3 \leftrightarrow b_1 + (b_2 + b_3) & : & assoc^+ \\
unite^{+l} & : & 0 + b \leftrightarrow b & : & unite^{+l} \\
swap^\times & : & b_1 \times b_2 \leftrightarrow b_2 \times b_1 & : & swap^\times \\
assoc^\times & : & (b_1 \times b_2) \times b_3 \leftrightarrow b_1 \times (b_2 \times b_3) & : & assoc^\times \\
unite^{\times l} & : & 1 \times b \leftrightarrow b & : & unite^{\times l} \\
dist & : & (b_1 + b_2) \times b_3 \leftrightarrow (b_1 \times b_3) + (b_2 \times b_3) & : & factor \\
absorbl & : & b \times 0 \leftrightarrow 0 & : & factorzr
\end{array}$$

$$\frac{c_1 : b_1 \leftrightarrow b_2 \quad c_2 : b_2 \leftrightarrow b_3}{c_1 \circ c_2 : b_1 \leftrightarrow b_3} \qquad \frac{c : b_1 \leftrightarrow b_2}{inv \ c : b_2 \leftrightarrow b_1}$$

$$\frac{c_1 : b_1 \leftrightarrow b_3 \quad c_2 : b_2 \leftrightarrow b_4}{c_1 + c_2 : b_1 + b_2 \leftrightarrow b_3 + b_4} \qquad \frac{c_1 : b_1 \leftrightarrow b_3 \quad c_2 : b_2 \leftrightarrow b_4}{c_1 \times c_2 : b_1 \times b_2 \leftrightarrow b_3 \times b_4}$$

Figure 4: Types for  $\Pi$  combinators

$$\begin{aligned}
CTRL \ c &= dist \circ id + (id \times c) \circ factor \\
X &= swap^+ \\
CX &= CTRL \ swap^+ \\
CCX &= CTRL \ CX
\end{aligned}$$

Figure 5: Derived  $\Pi$  constructs.

isomorphisms are not ad hoc: they correspond exactly to the laws of a *rig* operationalised into invertible transformations [13, 11] which have the types in Fig. 4. Each line in the top part of the figure has the pattern  $c_1 : b_1 \leftrightarrow b_2 : c_2$  where  $c_1$  and  $c_2$  are self-duals;  $c_1$  has type  $b_1 \leftrightarrow b_2$  and  $c_2$  has type  $b_2 \leftrightarrow b_1$ .

To see how this language expresses reversible circuits, we first define types that describe sequences of booleans ( $\mathbb{F}^n$ ). We use the type  $\mathbb{F} = 1 + 1$  to represent booleans with the left injection representing false and the right injection representing true. Boolean negation (the x-gate) is straightforward to define using the primitive combinator  $swap^+$ . We can represent  $n$ -bit words using an  $n$ -ary product of boolean values. To express the CX- and CCX-gates we need to encode a notion of conditional expression. Such conditionals turn out to be expressible using the distributivity and factoring identities of rigs as shown in Fig. 5. An input value of type  $\mathbb{F} \times b$  is processed by the  $dist$  operator, which converts it into a value of type  $(1 \times b) + (1 \times b)$ . Only in the right branch, which corresponds to the case when the boolean is true, is the combinator  $c$  applied to the value of type  $b$ . The inverse of  $dist$ , namely  $factor$  is applied to get the final result. Using this conditional, CX is defined as CTRL X and the Toffoli CCX is defined as CTRL CX. Because  $\Pi$  can express the Toffoli gate and can generate ancilla values of type 1 as needed, it is universal for classical reversible circuits using the original construction of [56].

**Theorem 3** ( $\Pi$  Expressivity).  *$\Pi$  is universal for classical reversible circuits, i.e., boolean bijections  $\mathbb{F}^n \rightarrow \mathbb{F}^n$  (for any natural number  $n$ ).*

## 4.2 Semantics

By design,  $\Pi$  has a natural model in *rig groupoids* [13, 15]. Indeed, every atomic isomorphism of  $\Pi$  corresponds to a coherence isomorphism in a rig category, while sequencing corresponds to composition, and the two

<b>Types</b>		
$\llbracket 0 \rrbracket = O$		$\llbracket 1 \rrbracket = I$
$\llbracket b_1 + b_2 \rrbracket = \llbracket b_1 \rrbracket \oplus \llbracket b_2 \rrbracket$		$\llbracket b_1 \times b_2 \rrbracket = \llbracket b_1 \rrbracket \otimes \llbracket b_2 \rrbracket$
<b>Terms</b>		
$\llbracket id \rrbracket = \text{id}$	$\llbracket inv\ c \rrbracket = \llbracket c \rrbracket^\dagger$	
$\llbracket swap^+ \rrbracket = \sigma_\oplus$	$\llbracket assocr^+ \rrbracket = \alpha_\oplus$	$\llbracket assocl^+ \rrbracket = \alpha_\oplus^{-1}$
$\llbracket uniti^+l \rrbracket = \rho_\otimes$	$\llbracket unite^+l \rrbracket = \lambda_\oplus$	
$\llbracket swap^\times \rrbracket = \sigma_\otimes$	$\llbracket assocr^\times \rrbracket = \alpha_\otimes$	$\llbracket assocl^\times \rrbracket = \alpha_\otimes^{-1}$
$\llbracket uniti^\times l \rrbracket = \lambda_\otimes^{-1}$	$\llbracket unite^\times l \rrbracket = \lambda_\otimes$	
$\llbracket dist \rrbracket = \delta_R$	$\llbracket factor \rrbracket = \delta_R^{-1}$	
$\llbracket absorbl \rrbracket = \delta_0$	$\llbracket factorzr \rrbracket = \delta_0^{-1}$	
$\llbracket c_1 + c_2 \rrbracket = \llbracket c_1 \rrbracket \oplus \llbracket c_2 \rrbracket$	$\llbracket c_1 \circ c_2 \rrbracket = \llbracket c_2 \rrbracket \circ \llbracket c_1 \rrbracket$	$\llbracket c_1 \times c_2 \rrbracket = \llbracket c_1 \rrbracket \otimes \llbracket c_2 \rrbracket$

Figure 6: The semantics of  $\Pi$  in rig groupoids with monoidal structures  $(O, \oplus)$  and  $(I, \otimes)$ .

parallel compositions are handled by the two monoidal structures. Inversion corresponds to the canonical dagger structure of groupoids. This interpretation is summarised in Fig. 6.

## 5 Models of $\Pi$ from Automorphisms

When  $\Pi$  is used as a stand-alone classical language, the rig groupoid of finite sets and bijections is the canonical choice for the semantics. In our case, as we aim to recover quantum computation from two copies of  $\Pi$ , the canonical choices need more structure individually and, more importantly, must eventually be related to each other in a particular way to express complementarity. We begin by explaining the categorical construction needed to embed a rig groupoid in the category  $\text{Aut}_a(\mathbf{Unitary})$  parameterised by a family of automorphisms  $a$ . We then use this construction to give two models for  $\Pi$  embedded in two instances of  $\text{Aut}_a(\mathbf{Unitary})$ .

### 5.1 $\text{Aut}_a(\mathbf{Unitary})$

The semantics of the two copies of  $\Pi$  (which we call  $\Pi_Z$  and  $\Pi_\phi$ ) will use a generalisation of the category  $\mathbf{Unitary}$  to a family of categories parameterised by automorphisms that are pre- and post-composed with every morphism.

**Definition 4.** Let  $\mathbf{C}$  be a category, and for each object  $C$  let  $a_C : C \rightarrow C$  be an automorphism (that is not necessarily natural in any sense). Form a new category  $\text{Aut}_a(\mathbf{C})$  with:

- **Objects:** objects of  $\mathbf{C}$ .
- **Morphisms:** morphisms are those of the form  $a_B^{-1} \circ f \circ a_A$  for every  $f : A \rightarrow B$  of  $\mathbf{C}$ .
- **Composition:** as in  $\mathbf{C}$ .

**Proposition 5.** *When  $\mathbf{C}$  is a rig groupoid, so is  $\text{Aut}_a(\mathbf{C})$ .*

*Proof.* To see that  $\text{Aut}_a(\mathbf{C})$  is a category, observe that, since  $\text{Aut}_a(\mathbf{C})$  inherits composition from  $\mathbf{C}$ , identities are just those from  $\mathbf{C}$  since  $a_A^{-1} \circ \text{id}_A \circ a_A = a_A^{-1} \circ a_A = \text{id}_A$ , and composition is simply conjugated composition of morphisms from  $\mathbf{C}$  since  $a_C^{-1} \circ g \circ a_B \circ a_B^{-1} \circ f \circ a_A = a_C^{-1} \circ g \circ f \circ a_A$ . Associativity and unitality of composition in  $\text{Aut}_a(\mathbf{C})$  follows directly. That  $\text{Aut}_a(\mathbf{C})$  is a groupoid when  $\mathbf{C}$  is follows since for every isomorphism  $f$ :

$$a_B^{-1} \circ f \circ a_A \circ a_A^{-1} \circ f^{-1} \circ a_B = a_B^{-1} \circ f \circ f^{-1} \circ a_B = a_B^{-1} \circ a_B = \text{id}_B$$

and analogously  $a_A^{-1} \circ f^{-1} \circ a_B \circ a_B^{-1} \circ f \circ a_A = \text{id}_A$ .

Supposing now  $\mathbf{C}$  is symmetric monoidal, define a symmetric monoidal structure on objects as in  $\mathbf{C}$  (with unit  $I$  as in  $\mathbf{C}$ ), and on morphisms  $a_B^{-1} \circ f \circ a_A$  and  $a_B'^{-1} \circ f' \circ a_A'$  by

$$a_{B \otimes B'}^{-1} \circ (a_B \circ (a_B^{-1} \circ f \circ a_A) \circ a_A^{-1}) \otimes (a_B' \circ (a_B'^{-1} \circ f' \circ a_A') \circ a_A'^{-1}) \circ a_{A \otimes A'}$$

in  $\mathbf{C}$ , which simplifies to  $a_{B \otimes B'}^{-1} \circ (f \otimes f') \circ a_{A \otimes A'}$ . In other words, monoidal products of morphisms in  $\text{Aut}_a(\mathbf{C})$  are merely monoidal products of morphisms from  $\mathbf{C}$  conjugated by the appropriate automorphisms. Coherence isomorphisms are those from  $\mathbf{C}$ , but conjugated by the appropriate automorphisms. Bifactoriality then follows because

$$a_{A \otimes B}^{-1} \circ (\text{id}_A \otimes \text{id}_B) \circ a_{A \otimes B} = a_{A \otimes B}^{-1} \circ a_{A \otimes B} = \text{id}_{A \otimes B}$$

and for  $f: B \rightarrow C$  and  $g: C \rightarrow D$

$$\begin{aligned} a_{A \otimes D}^{-1} \circ (\text{id}_A \otimes g) \circ a_{A \otimes C} \circ a_{A \otimes C}^{-1} \circ (\text{id}_A \otimes f) \circ a_{A \otimes B} \\ = a_{A \otimes D}^{-1} \circ (\text{id}_A \otimes g) \circ (\text{id}_A \otimes f) \circ a_{A \otimes B} \\ = a_{A \otimes D}^{-1} \circ (\text{id}_A \otimes (g \circ f)) \circ a_{A \otimes B} \end{aligned}$$

and similarly on the left, and finally for  $f: A \rightarrow B$  and  $g: C \rightarrow D$

$$\begin{aligned} a_{D \otimes B}^{-1} \circ (g \otimes \text{id}_B) \circ a_{C \otimes B} \circ a_{C \otimes B}^{-1} \circ (\text{id}_C \otimes f) \circ a_{C \otimes A} \\ = a_{D \otimes B}^{-1} \circ (g \otimes \text{id}_B) \circ a_{C \otimes B} \circ a_{C \otimes B}^{-1} \circ (\text{id}_C \otimes f) \circ a_{C \otimes A} \\ = a_{D \otimes B}^{-1} \circ (g \otimes \text{id}_B) \circ (\text{id}_C \otimes f) \circ a_{C \otimes A} \\ = a_{D \otimes B}^{-1} \circ (\text{id}_D \otimes f) \circ (g \otimes \text{id}_A) \circ a_{C \otimes A} \\ = a_{D \otimes B}^{-1} \circ (\text{id}_D \otimes f) \circ a_{D \otimes A} \circ a_{D \otimes A}^{-1} \circ (g \otimes \text{id}_A) \circ a_{C \otimes A}. \end{aligned}$$

Naturality of coherence isomorphisms follows likewise since, for example,

$$\begin{aligned} a_{A' \otimes (B' \otimes C')}^{-1} \circ \alpha \circ a_{(A' \otimes B') \otimes C'} \circ a_{(A' \otimes B') \otimes C'}^{-1} \circ (f \otimes g) \otimes h \circ a_{(A \otimes B) \otimes C} \\ = a_{A' \otimes (B' \otimes C')}^{-1} \circ \alpha \circ (f \otimes g) \otimes h \circ a_{(A \otimes B) \otimes C} \\ = a_{A' \otimes (B' \otimes C')}^{-1} \circ f \otimes (g \otimes h) \circ \alpha \circ a_{(A \otimes B) \otimes C} \\ = a_{A' \otimes (B' \otimes C')}^{-1} \circ f \otimes (g \otimes h) \circ a_{A \otimes (B \otimes C)} \circ a_{A \otimes (B \otimes C)}^{-1} \circ \alpha \circ a_{(A \otimes B) \otimes C} \end{aligned}$$

and similarly for the unitors and the symmetry. As for coherence conditions, since these solely involve monoidal products of coherence isomorphisms and identities, they transfer directly from  $\mathbf{C}$  by definition of composition and monoidal products in  $\text{Aut}_a(\mathbf{C})$ . For example, the coherence condition that  $\lambda \circ \sigma = \rho$  follows by

$$a_A^{-1} \circ \lambda \circ a_{I \otimes A} \circ a_{I \otimes A}^{-1} \circ \sigma \circ a_{A \otimes I} = a_A^{-1} \circ \lambda \circ \sigma \circ a_{A \otimes I} = a_A^{-1} \circ \rho \circ a_{A \otimes I}$$

using the fact that the very same coherence condition holds in  $\mathbf{C}$ , and likewise for the other conditions. Thus  $\text{Aut}_a(\mathbf{C})$  is symmetric monoidal when  $\mathbf{C}$  is.

Finally supposing that  $\mathbf{C}$  is a rig category, it is specifically symmetric monoidal in two different ways, and so is  $\text{Aut}_a(\mathbf{C})$  by the argument above. To see that this extends to a rig structure, the remaining coherence isomorphisms  $\delta_L$ ,  $\delta_R$ , and  $\delta_0^L$ , and  $\delta_0^R$  are defined in  $\text{Aut}_a(\mathbf{C})$  by conjugating those from  $\mathbf{C}$  with the appropriate automorphisms. That this satisfies the coherence conditions of rig categories follows exactly as in the symmetric monoidal case.  $\square$

## 5.2 Models of $\Pi_Z$ and $\Pi_\phi$ : Unitary and $\text{Aut}_{R\phi}(\text{Unitary})$

The choice of semantics for  $\Pi_Z$  is easy to justify: it will use the trivial family of identity automorphisms, i.e, it will use the canonical category **Unitary** itself. The semantics for  $\Pi_\phi$  will be “rotated” by some angle with respect to that of  $\Pi_Z$ . By that, we mean that the semantics of  $\Pi_\phi$  will use a family of automorphisms that is parameterised by a rotation matrix  $\mathbf{r}^\phi = \begin{pmatrix} \cos \phi & -\sin \phi \\ \sin \phi & \cos \phi \end{pmatrix}$  for some yet-to-be determined angle  $\phi$ .

**Definition 6.** The canonical model of  $\Pi_Z$  is the rig groupoid **Unitary** of finite-dimensional Hilbert spaces and unitaries.

We recall that as a rig category, **Unitary** is *semi-simple* in the sense that all of its objects are generated by the rig structure (this is a direct consequence of the fact that each finite-dimensional Hilbert space is isometrically isomorphic to  $\mathbb{C}^n$  for some  $n$  [40]). In other words, every object in **Unitary** can be written (up to isomorphism) using the two units  $O$  and  $I$  as well as the monoidal product  $\otimes$  and sum  $\oplus$ . We will use this fact to define a family of automorphisms  $R_A^\phi$  in **Unitary** which will be used to form a model of  $\Pi_\phi$ .

**Definition 7.** Given an angle  $\phi$ , we define a family  $R_A^\phi$  of automorphisms in **Unitary** as follows:

$$\begin{aligned} R_O^\phi &= \text{id}_O & R_I^\phi &= \text{id}_I \\ R_{A \otimes B}^\phi &= R_A^\phi \otimes R_B^\phi \\ R_{A \oplus B}^\phi &= \theta_A^{-1} \oplus \theta_B^{-1} \circ \mathbf{r}^\phi \circ \theta_A \oplus \theta_B & (\text{when } A \simeq I \simeq B) \\ R_{A \oplus B}^\phi &= R_A^\phi \oplus R_B^\phi & (\text{when } A \neq I \text{ or } B \neq I) \end{aligned}$$

The morphisms  $\theta_A$  and  $\theta_B$  in this definition refer to the isomorphisms witnessing  $A \simeq I$  and  $B \simeq I$  respectively. In particular, this definition requires one to decide isomorphism with  $I$ . This sounds potentially difficult, but is fortunately very simple: an object is isomorphic to  $I$  iff it can be turned into  $I$  by eliminating additive units  $O$  and multiplicative units  $I$  using the unitors  $\lambda_\oplus$ ,  $\rho_\oplus$ ,  $\lambda_\otimes$ , and  $\rho_\otimes$  as well as the associators  $\alpha_\oplus$  and  $\alpha_\otimes$  as necessary.

Essentially,  $\text{Aut}_{R^\phi}(\mathbf{Unitary})$  consists of unitaries in which qubit (sub)systems are conjugated by the unitary  $\mathbf{r}^\phi$ . This is significant, because it means that the additive symmetry  $\sigma_\oplus$  on  $I \oplus I$  is no longer  $\begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix}$  as usual, but instead the potentially much more interesting gate:

$$\begin{pmatrix} \cos \phi & \sin \phi \\ -\sin \phi & \cos \phi \end{pmatrix} \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix} \begin{pmatrix} \cos \phi & -\sin \phi \\ \sin \phi & \cos \phi \end{pmatrix} = \begin{pmatrix} \sin 2\phi & \cos 2\phi \\ \cos 2\phi & -\sin 2\phi \end{pmatrix} .$$

This leads us to the family of models of  $\Pi_\phi$ .

**Definition 8.** Given a value for  $\phi$ , a model of  $\Pi_\phi$  is the rig groupoid  $\text{Aut}_{R^\phi}(\mathbf{Unitary})$  of finite-dimensional Hilbert spaces and unitaries of the form  $(R_B^\phi)^{-1} \circ U \circ R_A^\phi$ .

## 6 $\Pi \diamond$ from Amalgamation

The aim of this section is to define the language  $\Pi \diamond$  that combines the separate definitions of  $\Pi_Z$  and  $\Pi_\phi$  into a combined language that interleaves expressions from each. We begin by explaining the amalgamations of categories in Secs. 6.1, 6.2, and 6.3. We use these constructions to define categorical models of  $\Pi \diamond$  in Sec. 6.4. These models justify the definition of  $\Pi \diamond$  as an arrow over the individual sublanguages as shown in Sec. 6.5.

### 6.1 Amalgamation of Categories

Programs in  $\Pi \diamond$  are formal compositions of  $\Pi_Z$  programs and  $\Pi_\phi$  programs, combined in a way that respects product types. To account for this semantically, we need a way to combine *models* of  $\Pi_Z$  and  $\Pi_\phi$  in a way that preserves the monoidal product. This construction is known as the *amalgamation of categories* (see, e.g., [41]). In this section, we recall this construction in the slightly simpler case where the two categories have the same objects, and go on to extend it to the symmetric monoidal case.

**Definition 9.** Given two categories  $\mathbf{C}$  and  $\mathbf{D}$  with the same objects, form a new category  $\text{Amalg}(\mathbf{C}, \mathbf{D})$  as follows:

- **Objects:** Objects of  $\mathbf{C}$  (equivalently  $\mathbf{D}$ ).

- **Morphisms:** Morphisms  $A_1 \rightarrow A_{n+1}$  are equivalence classes of finite lists  $[f_n, \dots, f_1]$  of morphisms  $f_i: A_i \rightarrow A_{i+1}$  of  $\mathbf{C}$  or  $\mathbf{D}$  tagged with their category of origin, under the equivalence  $\sim$  below.
- **Identities:** Empty lists  $[]$ .
- **Composition:** Concatenation of lists,  $[g_n, \dots, g_1] \circ [f_m, \dots, f_1] = [g_n, \dots, g_1, f_m, \dots, f_1]$ .

When the origin category is important we will write, *e.g.*,  $f^{\mathbf{C}}$  to mean that  $f$  is tagged with  $\mathbf{C}$  and so originated from this category. Let  $\sim$  denote the least equivalence satisfying

$$[\text{id}] \sim [] \quad (4) \quad [f^{\mathbf{A}}, g^{\mathbf{A}}] \sim [f^{\mathbf{A}} \circ g^{\mathbf{A}}] \quad (5)$$

as well as the congruence:

$$\frac{[f_n, \dots, f_1] \sim [f'_n, \dots, f'_1] \quad [g_m, \dots, g_1] \sim [g'_m, \dots, g'_1]}{[f_n, \dots, f_1] \circ [g_m, \dots, g_1] \sim [f'_n, \dots, f'_1] \circ [g'_m, \dots, g'_1]} \quad (6)$$

Note that the inner composition in (5) refers to composition in the category  $\mathbf{A}$ , which in turn refers to either  $\mathbf{C}$  or  $\mathbf{D}$ . To verify that this forms a category, we notice that concatenation of lists is straightforwardly associative and has the empty list as unit; however, since these are not lists per se but in fact equivalence classes of lists, we must also check that composition is well-defined. To see this, consider the normalisation procedure that repeats the following two steps until a fixed point is reached:

1. Remove all identities using (4) and (6).
2. Compose all composable adjacent morphisms using (5) and (6).

That a fixed point is always reached follows by the fact that both of these steps are monotonically decreasing in the length of the list, which is always finite.

As we would hope, there are straightforward embeddings  $\mathbf{C} \rightarrow \text{Amalg}(\mathbf{C}, \mathbf{D}) \leftarrow \mathbf{D}$ .

**Proposition 10.** *There are embeddings  $\mathcal{E}_L: \mathbf{C} \rightarrow \text{Amalg}(\mathbf{C}, \mathbf{D})$  and  $\mathcal{E}_R: \mathbf{D} \rightarrow \text{Amalg}(\mathbf{C}, \mathbf{D})$  given on objects by  $X \mapsto X$  and on morphisms by  $f \mapsto [f]$ .*

*Proof.*  $\mathcal{E}_L(\text{id}) = [\text{id}] \sim []$  and  $\mathcal{E}_L(g \circ f) = [g \circ f] \sim [g, f] = \mathcal{E}_L(g) \circ \mathcal{E}_L(f)$ , likewise for  $\mathcal{E}_R$ .  $\square$

Since  $\Pi_{\mathbf{Z}}$  and  $\Pi_{\phi}$  are both reversible, we would also expect  $\Pi_{\diamond}$  to be so, simply by taking inverses pointwise. We can formalise this intuition by showing that the amalgamation of *groupoids* is, again, a groupoid.

**Proposition 11.**  *$\text{Amalg}(\mathbf{C}, \mathbf{D})$  is a groupoid when  $\mathbf{C}$  and  $\mathbf{D}$  are.*

*Proof.* Define  $[f_n, \dots, f_1]^{-1} = [f_1^{-1}, \dots, f_n^{-1}]$  (where  $f_i^{-1}$  is the inverse to  $f_i$  in the origin category), and proceed by induction on  $n$ . When  $n = 0$ ,  $[] \circ []^{-1} = [] \circ [] = []$ . Assuming the inductive hypothesis on all lists of length  $n$  we see on lists of length  $n + 1$  that

$$\begin{aligned} [f_{n+1}, \dots, f_1] \circ [f_{n+1}, \dots, f_1]^{-1} &= [f_{n+1}, \dots, f_1, f_1^{-1}, \dots, f_{n+1}^{-1}] \\ &\sim [f_{n+1}, \dots, f_1 \circ f_1^{-1}, \dots, f_{n+1}^{-1}] \\ &= [f_{n+1}, \dots, f_2, \text{id}, f_2^{-1}, \dots, f_{n+1}^{-1}] \\ &\sim [f_{n+1}, \dots, f_2, f_2^{-1}, \dots, f_{n+1}^{-1}] \\ &= [f_{n+1}, \dots, f_2] \circ [f_2^{-1}, \dots, f_{n+1}^{-1}] \\ &= [f_{n+1}, \dots, f_2] \circ [f_{n+1}, \dots, f_2]^{-1} \\ &= [] \end{aligned}$$

where the last identity follows by the inductive hypothesis.  $\square$

## 6.2 Amalgamation of Symmetric Monoidal Categories

Categorically, the amalgamation of categories (with the same objects) has a universal property as a pushout of (identity-on-objects) embeddings in the category **Cat** of (small) categories and functors between them [41]. While this amalgamation is a good first step towards a model of  $\Pi\lozenge$ , it is not enough. This is because it is only a pushout of mere functors between unstructured categories, so it will not necessarily respect *structure* present in the categories being amalgamated, such as symmetric monoidal structure. In this section, we will extend the amalgamation of categories to one for symmetric monoidal categories. In the next section, we show that this yields an arrow over the symmetric monoidal categories involved.

**Definition 12.** Given two symmetric monoidal categories **C** and **D** with the same objects, such that their symmetric monoidal products agree on objects (specifically, their units are the same), form a new category  $\text{SymMonAmalg}(\mathbf{C}, \mathbf{D})$  as follows:

- **Objects, Morphisms, Identities, and Composition** as in  $\text{Amalg}(\mathbf{C}, \mathbf{D})$  (Def. 9).
- **Monoidal unit:**  $I$ , the monoidal unit of **C** and **D**.
- **Monoidal product:** On objects, define  $A \otimes B$  to be as in **C** and **D**. On morphisms, define  $[f_n, \dots, f_1] \otimes [g_m, \dots, g_1] = [f_n \otimes \text{id}, \dots, f_1 \otimes \text{id}, \text{id} \otimes g_m, \dots, \text{id} \otimes g_1]$  where  $f_i \otimes \text{id}$  and  $\text{id} \otimes g_j$  are formed in the origin category of  $f_i$  and  $g_j$  respectively, up to the extended equivalence below.
- **Coherence isomorphisms:** The coherence isomorphisms  $\alpha, \sigma, \lambda, \rho$ , and their inverses are given by equivalence classes of lifted coherence isomorphisms from **C** and **D** (e.g.,  $[\alpha^{\mathbf{C}}]$ ) up to the extended equivalence below.

The extended equivalence is the least one containing (4), (5), and (6) from Def. 9 as well as

$$[f \otimes \text{id}, \text{id} \otimes g] \sim [\text{id} \otimes g, f \otimes \text{id}] \quad (7)$$

$$[\alpha^{\mathbf{C}}] \sim [\alpha^{\mathbf{D}}] \quad [\sigma^{\mathbf{C}}] \sim [\sigma^{\mathbf{D}}] \quad [\lambda^{\mathbf{C}}] \sim [\lambda^{\mathbf{D}}] \quad [\rho^{\mathbf{C}}] \sim [\rho^{\mathbf{D}}] \quad (8)$$

in addition to the congruence:

$$\frac{[f_n, \dots, f_1] \sim [f'_n, \dots, f'_1] \quad [g_m, \dots, g_1] \sim [g'_m, \dots, g'_1]}{[f_n, \dots, f_1] \otimes [g_m, \dots, g_1] \sim [f'_n, \dots, f'_1] \otimes [g'_m, \dots, g'_1]} \quad (9)$$

Note that (7) above holds even when  $f$  and  $g$  originate from different categories, such that this is not simply a consequence of (5) and bifactoriality in the origin category.

It follows that this defines a category, but it remains to show that this actually defines a symmetric monoidal category.

**Proposition 13.**  $\text{SymMonAmalg}(\mathbf{C}, \mathbf{D})$  is symmetric monoidal.

*Proof.* We must show that the monoidal product is bifunctorial, that coherence isomorphisms are natural, and that coherence conditions are satisfied. For bifunctoriality, we see first that the monoidal product is functorial in each component since  $[\ ] \otimes [\ ] = [\ ]$  and

$$\begin{aligned} ([\ ] \otimes [f_n, \dots, f_1]) \circ ([\ ] \otimes [g_m, \dots, g_1]) &= [\text{id} \otimes f_n, \dots, \text{id} \otimes f_1] \circ [\text{id} \otimes g_m, \dots, \text{id} \otimes g_1] \\ &= [\text{id} \otimes f_n, \dots, \text{id} \otimes f_1, \text{id} \otimes g_m, \dots, \text{id} \otimes g_1] \\ &= [\ ] \otimes [f_n, \dots, f_1, g_m, \dots, g_1] \\ &= [\ ] \otimes ([f_n, \dots, f_1] \circ [g_m, \dots, g_1]) \end{aligned}$$

and similarly with the identity on the right. For bifunctoriality, we expand

$$\begin{aligned} ([f_n, \dots, f_1] \otimes [\ ]) \circ ([\ ] \otimes [g_m, \dots, g_1]) &= [f_n \otimes \text{id}, \dots, f_1 \otimes \text{id}] \circ [\text{id} \otimes g_m, \dots, \text{id} \otimes g_1] \\ &= [f_n \otimes \text{id}, \dots, f_1 \otimes \text{id}, \text{id} \otimes g_m, \dots, \text{id} \otimes g_1] \end{aligned}$$

and inductively applying (7)  $m$  times for each  $f_i$  shows

$$\begin{aligned} ([f_n, \dots, f_1] \otimes []) \circ ([\ ] \otimes [g_m, \dots, g_1]) &= [f_n \otimes \text{id}, \dots, f_1 \otimes \text{id}, \text{id} \otimes g_m, \dots, \text{id} \otimes g_1] \\ &\sim [\text{id} \otimes g_m, \dots, \text{id} \otimes g_1, f_n \otimes \text{id}, \dots, f_1 \otimes \text{id}] \\ &= ([\ ] \otimes [g_m, \dots, g_1]) \circ ([f_n, \dots, f_1] \otimes []) \end{aligned}$$

To see that coherence isomorphisms are natural, we consider the case of the left unitor  $\lambda$ : that this is natural amounts to showing  $[\lambda^{\mathbf{C}}] \circ [I \otimes f_n, \dots, I \otimes f_1] = [f_n, \dots, f_1] \circ [\lambda^{\mathbf{C}}]$  (we could have equivalently used  $[\lambda^{\mathbf{D}}]$ , but it makes no difference by (8)). Assume without loss of generality that  $[f_n, \dots, f_1]$  alternates between morphisms from  $\mathbf{C}$  and morphisms from  $\mathbf{D}$ , i.e.,  $f_n, f_{n-2}, f_{n-4}$ , etc. originate in  $\mathbf{C}$ , while  $f_{n-1}, f_{n-3}, f_{n-5}$ , etc. originate in  $\mathbf{D}$ . Then

$$\begin{aligned} [\lambda^{\mathbf{C}}] \circ [I \otimes f_n, I \otimes f_{n-1}, \dots, I \otimes f_1] &= [\lambda^{\mathbf{C}}, I \otimes f_n, I \otimes f_{n-1}, \dots, I \otimes f_1] \\ &\sim [\lambda^{\mathbf{C}} \circ I \otimes f_n, I \otimes f_{n-1}, \dots, I \otimes f_1] \\ &= [f_n \circ \lambda^{\mathbf{C}}, I \otimes f_{n-1}, \dots, I \otimes f_1] \\ &\sim [f_n, \lambda^{\mathbf{C}}, I \otimes f_{n-1}, \dots, I \otimes f_1] \\ &\sim [f_n, \lambda^{\mathbf{D}}, I \otimes f_{n-1}, \dots, I \otimes f_1] \\ &\sim [f_n, \lambda^{\mathbf{D}} \circ I \otimes f_{n-1}, \dots, I \otimes f_1] \\ &= [f_n, f_{n-1} \circ \lambda^{\mathbf{D}}, \dots, I \otimes f_1] \\ &\sim [f_n, f_{n-1}, \lambda^{\mathbf{D}}, \dots, I \otimes f_1] \end{aligned}$$

and so inductively using (5) to compose the coherence isomorphism with the next morphism in line, naturality of that coherence isomorphism in the origin category, and the ability to swap coherence isomorphisms between the two categories using (8) shows that this is natural. The cases for the remaining coherence isomorphisms are entirely analogous.

For the coherence conditions, the strategy is similar. Since every coherence condition of symmetric monoidal categories concerns compositions of monoidal products of coherence isomorphisms and identities, we can use the equivalences between coherence isomorphisms (8) as well as the two congruences (6) and (9) to bring every morphism involved into the same category, e.g.,  $\mathbf{C}$ . Then, we can inductively use the composition rule (5) to turn the list into a singleton corresponding to the exact same coherence condition, but now phrased in  $\mathbf{C}$ . We can then finally use coherence in  $\mathbf{C}$  to show the desired identity, and then run the entire process in reverse to lift this in  $\text{SymMonAmalg}(\mathbf{C}, \mathbf{D})$ . For example, that the triangle

$$\begin{array}{ccc} (A \otimes I) \otimes B & \xrightarrow{\alpha} & A \otimes (I \otimes B) \\ & \searrow \rho \otimes \text{id} & \swarrow \text{id} \otimes \lambda \\ & A \otimes B & \end{array}$$

commutes (this is one of the coherence conditions) follows by

$$([\ ] \otimes [\lambda^{\mathbf{D}}]) \circ [\alpha^{\mathbf{C}}] \sim ([\ ] \otimes [\lambda^{\mathbf{C}}]) \circ [\alpha^{\mathbf{C}}] = [\text{id} \otimes \lambda^{\mathbf{C}}, \alpha^{\mathbf{C}}] \sim [\text{id} \otimes \lambda^{\mathbf{C}} \circ \alpha^{\mathbf{C}}] = [\rho^{\mathbf{C}} \otimes \text{id}] = [\rho^{\mathbf{C}}] \otimes [\ ] .$$

Again, the choice of  $[\lambda^{\mathbf{D}}]$ ,  $[\alpha^{\mathbf{C}}]$ ,  $[\rho^{\mathbf{C}}]$  is purely for illustration, and we could equivalently have chosen ones from the other category by the coherence equivalences. All other coherence conditions may be shown using the same strategy.  $\square$

As with the amalgamation of mere categories, one can show that this extends to a pushout of monoidal embeddings. Further, the embeddings we presented earlier into the amalgamation of mere categories extends to well-behaved ones in the symmetric monoidal case well:

**Proposition 14.** *There are strict monoidal embeddings  $\mathcal{E}_L : \mathbf{C} \rightarrow \text{SymMonAmalg}(\mathbf{C}, \mathbf{D})$  and  $\mathcal{E}_R : \mathbf{D} \rightarrow \text{SymMonAmalg}(\mathbf{C}, \mathbf{D})$  given by  $X \mapsto X$  on objects and  $f \mapsto [f]$  on morphisms.*

*Proof.* We show the case for  $\mathcal{E}_L$ , as  $\mathcal{E}_R$  is entirely analogous.  $\mathcal{E}_L$  was shown to be functorial in Prop. 10, so suffices to show that it preserves coherence isomorphisms and the monoidal product exactly on objects and morphisms. On objects  $\mathcal{E}_L(A \otimes B) = A \otimes B = \mathcal{E}_L(A) \otimes \mathcal{E}_L(B)$ . On morphisms  $\mathcal{E}_L(f \otimes g) = [f \otimes g] = [f \otimes \text{id} \circ \text{id} \otimes g] \sim [f \otimes \text{id}, \text{id} \otimes g] = [f] \otimes [g] = \mathcal{E}_L(f) \otimes \mathcal{E}_L(g)$ . Finally, on coherence isomorphisms  $\beta$ ,  $\mathcal{E}_L(\beta) = [\beta^{\mathbf{C}}] \sim [\beta^{\mathbf{D}}] = \mathcal{E}_L(\beta)$ , as desired.  $\square$

It follows straightforwardly using the construction of inverses in Prop. 11 that amalgamation preserves symmetric monoidal *groupoids* as well:

**Corollary 15.** *SymMonAmalg( $\mathbf{C}, \mathbf{D}$ ) is a symmetric monoidal groupoid when  $\mathbf{C}$  and  $\mathbf{D}$  are.*

We conclude this section with a lemma stating that whenever a functor *out of* a symmetric monoidal amalgamation is needed, it is sufficient to consider functors out of each of the underlying categories. The lemma will be used to prove the existence of a computationally universal model of  $\Pi \diamond$  in Theorem. 19.

**Lemma 16.** *Let  $\mathbf{C}$  and  $\mathbf{D}$  be symmetric monoidal categories with the same objects such that their monoidal structures agree. For any other symmetric monoidal category  $\mathbf{E}$ , to give a strict monoidal identity-on-objects functor  $\text{SymMonAmalg}(\mathbf{C}, \mathbf{D}) \rightarrow \mathbf{E}$  is to give strict monoidal identity-on-objects functors  $\mathbf{C} \rightarrow \mathbf{E}$  and  $\mathbf{D} \rightarrow \mathbf{E}$ .*

*Proof.* Given a strict monoidal identity-on-objects functor  $F : \text{SymMonAmalg}(\mathbf{C}, \mathbf{D}) \rightarrow \mathbf{E}$ , we compose with the (strict monoidal identity-on-objects) functors  $\mathcal{E}_L$  and  $\mathcal{E}_R$  to obtain the required functors  $F \circ \mathcal{E}_L : \mathbf{C} \rightarrow \mathbf{E}$  and  $F \circ \mathcal{E}_R : \mathbf{D} \rightarrow \mathbf{E}$ .

In the other direction, given strict monoidal identity-on-objects functors  $G : \mathbf{C} \rightarrow \mathbf{E}$  and  $H : \mathbf{D} \rightarrow \mathbf{E}$ , we define a functor  $F_{G,H} : \text{SymMonAmalg}(\mathbf{C}, \mathbf{D}) \rightarrow \mathbf{E}$  on objects by  $F_{G,H}(A) = G(A) = H(A) = A$ . Given some morphism  $[f_n, \dots, f_1]$ , assume without loss of generality that each  $f_i$  originates in  $\mathbf{C}$  for all even  $i$ , and in  $\mathbf{D}$  for all odd  $n$ . We define  $F_{G,H}([\ ]) = \text{id}$  and

$$F_{G,H}([f_n, \dots, f_1]) = G(f_n) \circ H(f_{n-1}) \circ \dots \circ H(f_1)$$

This is immediately functorial. To see that it is strict monoidal,  $F_{G,H}(A \otimes B) = F_{G,H}(A) \otimes F_{G,H}(B)$  follows trivially, while

$$\begin{aligned} F_{G,H}([f_n, \dots, f_1] \otimes [g_m, \dots, g_1]) &= F_{G,H}([f_n \otimes \text{id}, \dots, f_1 \otimes \text{id}, \text{id} \otimes g_m, \dots, \text{id} \otimes g_1]) \\ &= G(f_n \otimes \text{id}) \circ \dots \circ H(f_1 \otimes \text{id}) \circ G(\text{id} \otimes g_m) \circ \dots \circ H(\text{id} \otimes g_1) \\ &= G(f_n) \otimes \text{id} \circ \dots \circ H(f_1) \otimes \text{id} \circ \text{id} \otimes G(g_m) \circ \dots \circ \text{id} \otimes H(g_1) \\ &= (G(f_n) \circ \dots \circ H(f_1)) \otimes \text{id} \circ \text{id} \otimes (G(g_m) \circ \dots \circ H(g_1)) \\ &= (G(f_n) \circ \dots \circ H(f_1)) \otimes (G(g_m) \circ \dots \circ H(g_1)) \\ &= F_{G,H}([f_n, \dots, f_1]) \otimes F_{G,H}([g_m, \dots, g_1]) \end{aligned}$$

That this preserves coherence isomorphisms such as the associator  $[\alpha^{\mathbf{C}}] \sim [\alpha^{\mathbf{D}}]$  follows by  $G(\alpha) = F_{G,H}([\alpha^{\mathbf{C}}]) = F_{G,H}([\alpha^{\mathbf{D}}]) = H(\alpha) = \alpha$ , and similarly for the unitors  $\lambda$ ,  $\rho$  and symmetry  $\sigma$ . Further,  $F_{G,H}$  is clearly uniquely determined by  $G$  and  $H$ , i.e.,  $F_{G,H} \circ \mathcal{E}_L = G$  and  $F_{G,H} \circ \mathcal{E}_R = H$ .  $\square$

### 6.3 The Amalgamation Arrow

Semantically, arrows correspond to (identity-on-objects) strict *premonoidal* functors between *premonoidal* categories [48, 31], a special case of these being the more well-behaved (identity-on-objects) strict *monoidal* functors between *monoidal* categories. In this way, the strict monoidal functors:

$$\mathbf{Unitary} \rightarrow \text{SymMonAmalg}(\mathbf{Unitary}, \text{Aut}_{R^\phi}(\mathbf{Unitary})) \leftarrow \text{Aut}_{R^\phi}(\mathbf{Unitary})$$

of Prop. 14 provide a semantics for the arrow combinators. We summarise this in the following proposition.

**Proposition 17.** *The strict monoidal functors  $\mathcal{E}_L$  and  $\mathcal{E}_R$  are arrows over the categories  $\mathbf{Unitary}$  and  $\text{Aut}_{R^\phi}(\mathbf{Unitary})$ .*



## 6.4 Model of $\Pi\blacklozenge$ : $\text{SymMonAmalg}(\mathbf{Unitary}, \text{Aut}_{R^\phi}(\mathbf{Unitary}))$

Given models of  $\Pi_Z$  (Def. 6) and  $\Pi_\phi$  (Def. 8), using Def. 12 we can give a model of  $\Pi\blacklozenge$ :

**Definition 18.** Given a value for  $\phi$ , a model of  $\Pi\blacklozenge$  is the symmetric monoidal groupoid

$$\text{SymMonAmalg}(\mathbf{Unitary}, \text{Aut}_{R^\phi}(\mathbf{Unitary}))$$

with  $\mathbf{Unitary}$  and  $\text{Aut}_{R^\phi}(\mathbf{Unitary})$  considered as symmetric monoidal groupoids equipped with their monoidal products  $(\otimes, I)$ .

In other words,  $\text{SymMonAmalg}(\mathbf{Unitary}, \text{Aut}_{R^\phi}(\mathbf{Unitary}))$  identifies the monoidal products  $(\otimes, I)$  in  $\mathbf{Unitary}$  and  $\text{Aut}_{R^\phi}(\mathbf{Unitary})$ , but leaves their respective monoidal sums  $(\oplus, O)$  alone. This may seem like a very curious choice—perhaps even a wrong one!—but is done for very deliberate reasons, which we describe here.

First, identifying the two monoidal products is entirely reasonable, since  $R_{A \otimes B}^\phi = R_A^\phi \otimes R_B^\phi$ , so the monoidal product on morphisms in  $\text{Aut}_{R^\phi}(\mathbf{Unitary})$  is really

$$\begin{aligned} (R_{A' \otimes B'}^\phi)^{-1} \circ (f \otimes g) \circ R_{A \otimes B}^\phi &= (R_{A'}^\phi)^{-1} \otimes (R_{B'}^\phi)^{-1} \circ (f \otimes g) \circ R_A^\phi \otimes R_B^\phi \\ &= ((R_{A'}^\phi)^{-1} \circ f \circ R_A^\phi) \otimes ((R_{B'}^\phi)^{-1} \circ g \circ R_B^\phi) \end{aligned}$$

*i.e.*, the monoidal product in  $\mathbf{Unitary}$  of morphisms from  $\text{Aut}_{R^\phi}(\mathbf{Unitary})$  (on objects, the two monoidal products agree on the nose). From this it also follows that the coherence isomorphisms for the monoidal product (*i.e.*, the associator  $\alpha_\otimes$ , unitors  $\lambda_\otimes$  and  $\rho_\otimes$ , and symmetry  $\sigma_\otimes$ ) in  $\text{Aut}_{R^\phi}(\mathbf{Unitary})$  all coincide with those in  $\mathbf{Unitary}$  by naturality, since, *e.g.*

$$\begin{aligned} (R_{X \otimes (B \otimes C)}^\phi)^{-1} \circ \alpha \circ R_{(A \otimes B) \otimes C}^\phi &= (R_A^\phi)^{-1} \otimes ((R_B^\phi)^{-1} \otimes (R_C^\phi)^{-1}) \circ \alpha \circ (R_A^\phi \otimes R_B^\phi) \otimes R_C^\phi \\ &= (R_A^\phi)^{-1} \otimes ((R_B^\phi)^{-1} \otimes (R_C^\phi)^{-1}) \circ R_A^\phi \otimes (R_B^\phi \otimes R_C^\phi) \circ \alpha \\ &= \alpha \end{aligned}$$

and likewise for the unitors and symmetry. As such, all of the morphisms that are identified by the symmetric monoidal amalgamation  $\text{SymMonAmalg}(\mathbf{Unitary}, \text{Aut}_{R^\phi}(\mathbf{Unitary}))$  are ones which were equal to begin with.

Second, one may wonder why we do not go further and identify the monoidal *sums* in  $\mathbf{Unitary}$  and  $\text{Aut}_{R^\phi}(\mathbf{Unitary})$  as well. In short, this is because it would confine  $\Pi\blacklozenge$  to being a classical language! We saw in Sec. 5.2 that the symmetry of the monoidal sum  $\sigma_\oplus$  in  $\text{Aut}_{R^\phi}(\mathbf{Unitary})$  was  $\begin{pmatrix} \sin 2\phi & \cos 2\phi \\ \cos 2\phi & -\sin 2\phi \end{pmatrix}$  whereas in  $\mathbf{Unitary}$  it is the usual swap  $\begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix}$ , and, indeed, the fact that we have both of these is central to our approach. However, identifying the monoidal sums would force us to identify these as well, destroying any hope of  $\Pi\blacklozenge$  being more expressive than  $\Pi_Z$  or  $\Pi_\phi$  on their own. One cannot even hope to identify the monoidal sums as mere monoidal structures (as opposed to as *symmetric* monoidal structures), since the bifunctionality clause of the equivalence (*i.e.*, clause (7) of Def. 12) fails for  $\mathbf{Unitary}$  and  $\text{Aut}_{R^\phi}(\mathbf{Unitary})$  on  $I \oplus I$  in all nontrivial cases.

## 6.5 $\Pi\blacklozenge$ : Syntax, Arrow Combinators, and Computational Universality

As the two languages  $\Pi_Z$  and  $\Pi_\phi$  share the same syntax, their syntactic amalgamation in Fig. 7 is rather straightforward. We simply build sequences of expressions coming from either language. To disambiguate amalgamations, we will annotate terms from  $\Pi_Z$  and  $\Pi_\phi$  by their language of origin and write, *e.g.*,  $X_\phi$  for the  $X$  isomorphism from  $\Pi_\phi$ . Further, we will consider the cons operator  $::$  to be right associative, and use list notation such as  $[\text{swap}_\phi^+, \text{swap}_Z^+]$  as syntactic sugar for the amalgamation  $\text{swap}_\phi^+ :: \text{swap}_Z^+ :: []$ .

For convenience, we introduce the meta-operation  $\cdot @ \cdot$  that takes two amalgamations and forms the amalgamation given by their concatenation, *e.g.*,  $[c_1, c_2] @ [c_3, c_4] = [c_1, c_2, c_3, c_4]$ . As such, any amalgamation can be uniquely described as a finite heterogeneous list of terms from  $\Pi_\phi$  and  $\Pi_Z$ . But there is no need to reason about raw lists since  $\Pi\blacklozenge$  is an *arrow* over both  $\Pi_Z$  and  $\Pi_\phi$  that lifts the underlying multiplicative

$$\begin{array}{ll}
b ::= 0 \mid 1 \mid b + b \mid b \times b & \text{(value types)} \\
t ::= b \leftrightarrow_{Z\phi} b & \text{(combinator types)} \\
m ::= [] \mid c_Z :: m \mid c_\phi :: m & \text{(amalgamations)} \\
\hline
[] : b \leftrightarrow_{Z\phi} b & \frac{c : b_1 \leftrightarrow_Z b_2 \quad cs : b_2 \leftrightarrow_{Z\phi} b_3}{c :: cs : b_1 \leftrightarrow_{Z\phi} b_3} \quad \frac{c : b_1 \leftrightarrow_\phi b_2 \quad cs : b_2 \leftrightarrow_{Z\phi} b_3}{c :: cs : b_1 \leftrightarrow_{Z\phi} b_3}
\end{array}$$

Figure 7: Syntax and type rules of  $\Pi\Diamond$ . The combinators  $c_Z$  and  $c_\phi$  are  $\Pi$  combinators (Fig. 3) tagged with their sublanguage of origin.

$$\begin{array}{ll}
m ::= \dots \mid m @ m & \text{(derived amalgamations)} \\
d ::= m \mid arr_Z c_Z \mid arr_\phi c_\phi \mid d \ggg d & \text{(derived combinators)} \\
\mid id \mid swap^\times \mid assocr^\times \mid assocl^\times \mid unite^\times \mid uniti^\times \\
\mid first d \mid second d \mid d *** d \mid inv d
\end{array}$$

Figure 8: Derived  $\Pi\Diamond$  constructs.

structure to the combined language (see Fig. 8 for the derived arrow constructs). We recall that the construction only involves lifting *products* (via the arrow combinators *first*, *second*, and *\*\*\**) and not also *sums*; in other words, we merely define an *arrow* and not an *arrow with choice* [30]. The reason is that doing so in any meaningful way would require semantically identifying the sum structures of  $\Pi_Z$  and  $\Pi_\phi$ , and that this, in turn, would prevent quantum behaviours from emerging from the construction.

The semantics of  $\Pi\Diamond$  is given in Fig. 9. First the lifting of combinators builds singleton lists:

$$arr_Z(c_Z) = [c_Z] \quad \text{and} \quad arr_\phi(c_\phi) = [c_\phi]$$

and composition of amalgamations is given by their concatenation:

$$cs_1 \ggg cs_2 = cs_1 @ cs_2$$

To define *first* we need to make use of meta-level recursion in order to traverse amalgamations. To do this, we notice that both  $\Pi_Z$  and  $\Pi_\phi$  are trivially arrows, with arrow lifting given by the identity, arrow composition given by composition, and *first*  $c$  given by *first*  $c = c \times id$ . As such, *first* can be defined in  $\Pi\Diamond$  by simply

### Semantics of new constructs

$$\llbracket [c_1, \dots, c_n] \rrbracket = \llbracket [c_1], \dots, [c_n] \rrbracket$$

### Derived identities

$$\begin{array}{lll}
\llbracket arr_Z c \rrbracket = \mathcal{E}_L(\llbracket c \rrbracket) & \llbracket arr_\phi c \rrbracket = \mathcal{E}_R(\llbracket c \rrbracket) & \llbracket d_1 \ggg d_2 \rrbracket = \llbracket d_2 \rrbracket \circ \llbracket d_1 \rrbracket \\
\llbracket id \rrbracket = [] & \llbracket swap^\times \rrbracket = [\sigma_\otimes] & \\
\llbracket assocr^\times \rrbracket = [\alpha_\otimes] & \llbracket assocl^\times \rrbracket = [\alpha_\otimes^{-1}] & \\
\llbracket unite^\times \rrbracket = [\rho_\otimes] & \llbracket uniti^\times \rrbracket = [\rho_\otimes^{-1}] & \\
\llbracket d_1 *** d_2 \rrbracket = \llbracket d_1 \rrbracket \otimes \llbracket d_2 \rrbracket & \llbracket inv d \rrbracket = \llbracket d \rrbracket^\dagger & \\
\llbracket first d \rrbracket = \llbracket d \rrbracket \otimes id & \llbracket second d \rrbracket = id \otimes \llbracket d \rrbracket &
\end{array}$$

Figure 9: The arrow semantics of  $\Pi\Diamond$ .

mapping this underlying combinator over the list, *i.e.*,

$$\text{first } xs = \text{map first } xs$$

To derive *second*, we note that we can define all of the combinators relating to  $\times$  (precisely:  $\text{swap}^\times$ ,  $\text{assocr}^\times$ ,  $\text{assocl}^\times$ ,  $\text{unite}^\times$ , and  $\text{uniti}^\times$ ) by lifting them from either  $\Pi_Z$  or  $\Pi_\phi$ . It turns out not to matter which we choose, as they are equivalent. Arbitrarily, we define their liftings in  $\Pi\blacklozenge$  to be those from  $\Pi_Z$ , *e.g.*,

$$\text{swap}^\times = \text{arr}_Z(\text{swap}_Z^\times)$$

and so on for the remaining ones. We can then derive *second* and  $\text{***}$  in the usual way as:

$$\text{second} = \text{swap}^\times \ggg \text{first} \ggg \text{swap}^\times \quad \text{and} \quad xs \text{ *** } ys = \text{first } xs \ggg \text{second } ys$$

We conclude this section by showing that there exists a particular model in which  $\Pi\blacklozenge$  is computationally universal for quantum circuits.

**Theorem 19.** *If  $\phi$  is chosen to be  $\pi/8$ , the model of  $\Pi\blacklozenge$  is computationally universal for quantum circuits, *i.e.*, unitaries on Hilbert spaces of dimension  $2^n$  (for any natural number  $n$ ).*

*Proof.* Define a functor  $\text{Aut}_{R^{\pi/8}}(\mathbf{Unitary}) \rightarrow \mathbf{Unitary}$  given simply by  $A \mapsto A$  and  $(R_B^{\pi/8})^{-1} \circ f \circ R_A^{\pi/8} \mapsto (R_B^{\pi/8})^{-1} \circ f \circ R_A^{\pi/8}$ ; this is strict monoidal and identity-on-objects. By Lem. 16, this functor, along with the identity  $\mathbf{Unitary} \rightarrow \mathbf{Unitary}$  uniquely define a (strict monoidal identity-on-objects) functor  $\llbracket \cdot \rrbracket : \text{SymMonAmalg}(\mathbf{Unitary}, \text{Aut}_{R^{\pi/8}}(\mathbf{Unitary})) \rightarrow \mathbf{Unitary}$  sending  $\Pi_Z$  programs to their usual interpretation lifted into unitaries, and  $\Pi_\phi$  programs to the meaning of the corresponding  $\Pi_Z$  program conjugated by appropriate  $R_A^{\pi/8}$ 's. Under this interpretation,  $\llbracket \text{arr}_Z \text{ CCX} \rrbracket$  is the Toffoli gate, and  $\llbracket \text{arr}_\phi \times \rrbracket$  is the Hadamard gate, while at the same time  $\llbracket c_1 \text{ *** } c_2 \rrbracket = \llbracket c_1 \rrbracket \otimes \llbracket c_2 \rrbracket$  and  $\llbracket c_1 \ggg c_2 \rrbracket = \llbracket c_2 \rrbracket \circ \llbracket c_1 \rrbracket$ , allowing parallel and sequential composition of gates. But then it follows by Thm. 2 that  $\Pi\blacklozenge$  is computationally universal.  $\square$

## 7 $\langle \Pi\blacklozenge \rangle$ from States and Effects

The previous language  $\Pi\blacklozenge$  is not expressive enough to define state preparations (and dually effect preparations). More generally, the language imposes a rigid constraint on quantum circuits: the number of wires must remain constant throughout the entire circuit: it is not possible to temporarily allocate an ancilla, use it during a subexpression, and discard it after. More importantly, the implicit structures for cloning and joining classical states embedded in  $\Pi\blacklozenge$  are not visible: making these explicit is necessary for us to state constraints on their interaction from which quantum properties will emerge. After a short exposition on cloning in quantum computing, we develop the categorical construction to define classical structures and ancillae and then use it to generalise  $\Pi\blacklozenge$  with the notions of states  $|\cdot\rangle$  and effects  $\langle \cdot |$  yielding the language  $\langle \Pi\blacklozenge \rangle$ .

### 7.1 Classical Structures

There is some subtlety about copying in quantum computing. The no-cloning theorem states that it is not possible to clone an arbitrary quantum state. However, it is possible (and quite common) to clone the subset of quantum states that are ‘‘classical.’’ For example, the following maps are definable:

$$\begin{aligned} |0\rangle &\mapsto |00\rangle \\ |1\rangle &\mapsto |11\rangle \\ 1/\sqrt{2} (|0\rangle + |1\rangle) &\mapsto 1/\sqrt{2} (|00\rangle + |11\rangle) \end{aligned}$$

If partial operations are allowed, then these maps are reversible: that is to say, the classical clone maps are injective but not surjective, so their inverses are only *partial* injective functions.

An important property of these classical clone maps is that their behaviour is *basis dependent*. In particular, the above maps assume the clone operation is defined in the computational  $Z$ -basis. If we instead use the  $X$ -basis =  $\{|+\rangle, |-\rangle\}$ , we get that cloning  $|+\rangle = 1/\sqrt{2}(|0\rangle+|1\rangle)$  produces  $|++\rangle = 1/2(|00\rangle+|01\rangle+|10\rangle+|11\rangle)$  which is quite different from cloning the same state in the  $Z$ -basis.

As we will establish, the cloning operations in  $\Pi_Z$  and  $\Pi_\phi$  each satisfy the properties of classical structures necessary for quantum behaviour to emerge in the next section.

## 7.2 Monoidal Indeterminates

At a categorical level, the only missing ingredient is to allow for morphisms to manipulate ancilla systems  $\mathcal{F}_N(U)$  generated by a single object  $N$ . The first step in this construction is, given a symmetric monoidal category  $\mathbf{C}$ , to define the monoidal subcategory generated by taking arbitrary monoidal products of a single generating object  $N$  with itself, with only monoidal coherence isomorphisms between them.

**Definition 20.** Given a symmetric monoidal category  $\mathbf{C}$  with a distinguished object  $N$ , define the symmetric monoidal category  $\text{Gen}_N(\mathbf{C})$  as follows.

- **Objects:** All finite monoidal products of objects generated by  $I$  and  $N$ , *e.g.*,  $I, N \otimes I, N \otimes (I \otimes N)$ , etc.
- **Morphisms:** All finite monoidal products of morphisms generated by identities as well as the monoidal coherence isomorphisms  $\lambda_\otimes, \rho_\otimes, \sigma_\otimes, \alpha_\otimes$  and their inverses.
- **Composition and identities:** As in  $\mathbf{C}$ .
- **Monoidal structure:** As in  $\mathbf{C}$ .

This is clearly a symmetric monoidal subcategory of  $\mathbf{C}$  with a strict monoidal embedding  $\mathcal{F}_N : \text{Gen}_N(\mathbf{C}) \rightarrow \mathbf{C}$  given by the identity on objects and morphisms. Putting this together:

**Definition 21.** Define a symmetric monoidal category  $\mathbf{C}_N$  as follows:

- **Objects:** As in  $\mathbf{C}$ .
- **Morphisms:** Morphisms  $A \rightarrow B$  are equivalence classes of triples  $[U, f, V]$  consisting of two objects  $U$  and  $V$  of  $\text{Gen}_N(\mathbf{C})$  and a morphism  $A \otimes \mathcal{F}_N(U) \rightarrow B \otimes \mathcal{F}_N(V)$  under the equivalence  $\sim$  below.
- **Identities:** The identity  $A \rightarrow A$  is the equivalence class of  $\text{id}_{A \otimes I}$  (since  $\mathcal{F}_N(I) = I$ ).
- **Composition:** The composition of  $[U, f, V]$  and  $[W, g, X]$  with  $f: A \otimes \mathcal{F}_N(U) \rightarrow B \otimes \mathcal{F}_N(V)$  and  $g: B \otimes \mathcal{F}_N(W) \rightarrow C \otimes \mathcal{F}_N(X)$  is the equivalence class of the representative  $A \otimes \mathcal{F}_N(U \otimes W) \rightarrow C \otimes \mathcal{F}_N(V \otimes X)$  in  $\mathbf{C}$  given by

$$[U \otimes W, \alpha_\otimes \circ g \otimes \text{id}_{\mathcal{F}_N(V)} \circ \alpha_\otimes^{-1} \circ \text{id}_B \otimes \sigma_\otimes \circ \alpha_\otimes \circ f \otimes \text{id}_{\mathcal{F}_N(W)} \circ \alpha_\otimes^{-1}, X \otimes V].$$

- **Monoidal structure:** On objects as in  $\mathbf{C}$ . On morphisms, the monoidal product of  $[U, f, V]$  and  $[W, g, X]$  with  $f: A \otimes \mathcal{F}_N(U) \rightarrow B \otimes \mathcal{F}_N(V)$  and  $g: C \otimes \mathcal{F}_N(W) \rightarrow D \otimes \mathcal{F}_N(X)$  is  $[U \otimes W, \vartheta^{-1} \circ f \otimes g \circ \vartheta, V \otimes X]$ , where  $\vartheta: (A \otimes C) \otimes (B \otimes D) \rightarrow (A \otimes B) \otimes (C \otimes D)$  is the evident isomorphism. Coherence isomorphisms  $\beta$  are given by  $[I, \beta \otimes \text{id}_I, I]$ .

Define the equivalence relation  $\sim$  as the least such satisfying (for all  $U$  and  $V$ )

$$f \otimes \mathcal{F}_N(\text{id}_U) \sim f \otimes \mathcal{F}_N(\text{id}_V) \tag{10}$$

and  $f \sim g$  if there exist mediators  $m: U \rightarrow U'$  and  $n: V \rightarrow V'$  in  $\text{Gen}_N(\mathbf{C})$  making the square below commute.

$$\begin{array}{ccc} A \otimes \mathcal{F}_N(U) & \xrightarrow{f} & B \otimes \mathcal{F}_N(V) \\ \text{id} \otimes \mathcal{F}_N(m) \downarrow & & \downarrow \text{id} \otimes \mathcal{F}_N(n) \\ A \otimes \mathcal{F}_N(U') & \xrightarrow{g} & B \otimes \mathcal{F}_N(V') \end{array} \tag{11}$$

This describes a symmetric monoidal category [23]. Note that the two clauses in the equivalence relation are necessary precisely to ensure uniqueness of identities and associativity of composition. For a given morphism  $[X, f, Y]$ , we will collectively denote the objects  $X$  and  $Y$  as the *ancilla system* of  $[X, f, Y]$ .

Importantly, this also defines an arrow over  $\mathbf{C}$  in the form of a strict monoidal functor:

**Proposition 22.** *There is a strict monoidal functor  $\mathcal{F}_N : \mathbf{C} \rightarrow \mathbf{C}_N$  (for any choice of  $N$ ) given by  $A \mapsto A$  on objects and  $f \mapsto [I, f \otimes \text{id}_I, I]$  on morphisms.*

*Proof.* [23] show that this functor is strong monoidal; it follows readily that it is strict monoidal when the functor  $\text{Gen}_N(\mathbf{C}) \rightarrow \mathbf{C}$  is.  $\square$

The category  $\mathbf{C}_N$  contains all morphisms  $f$  of  $\mathbf{C}$  by lifting them into the trivial ancilla system  $[I, f \otimes \text{id}_I, I]$ . However, it also adds a state  $I \rightarrow N$  (as the equivalence class of  $\sigma_\otimes : I \otimes N \rightarrow N \otimes I$ , i.e.,  $[N, \sigma_\otimes, I]$ ) and an effect  $N \rightarrow I$  (as the equivalence class of  $\sigma_\otimes : N \otimes I \rightarrow I \otimes N$ , i.e.,  $[I, \sigma_\otimes, N]$ ).

One may reasonably wonder whether this construction adds more than this unique state and effect; after all, there are many more ancilla systems than just  $I$  and  $N$ . The answer, informally, is no. The trivial ancilla system (e.g.,  $[I, f, I]$ ) is needed to account for morphisms that do not use states or effects at all, but multiple occurrences of  $I$  in an ancilla system (e.g.,  $I \otimes I$  or  $(I \oplus I) \otimes I$ ) are vacuous, as we are able to remove them by mediating with the left or right unitor using the equivalence relation. This leaves only ancilla systems of the form  $(I \oplus I)^{\otimes n}$ , where precise bracketing does not matter as we are able to mediate by arbitrary combinations of associators. These ancilla systems represent multiple uses of the unique state or effect. **JC: Above, I think  $I \oplus I$  should be  $N$ ?**

The more formal answer to this question is that the functor  $\mathcal{F}_N$  is universal with this property:

**Proposition 23.** *Given any symmetric monoidal category  $\mathbf{D}$  outfitted with distinguished morphisms  $I \rightarrow N$  and  $N \rightarrow I$ , and strict monoidal functor  $F : \mathbf{C} \rightarrow \mathbf{D}$ , there is a unique strict monoidal functor  $\widehat{F} : \mathbf{C}_N \rightarrow \mathbf{D}$  making the triangle below commute.*

$$\begin{array}{ccc} \mathbf{C} & \xrightarrow{\mathcal{F}_N} & \mathbf{C}_N \\ & \searrow F & \downarrow \widehat{F} \\ & & \mathbf{D} \end{array}$$

*Proof.* The construction is a dual pair of *monoidal indeterminates* constructions of [23] (using the simplified form for the equivalence due to [5, Def. 8]), so the theorem follows from Thm 2.9 of [23], noting that this straightforwardly extends from strong monoidal functors to strict monoidal ones when the inclusion  $\mathbf{C}_N \rightarrow \mathbf{C}$  is strict monoidal.  $\square$

Note that the morphisms  $I \rightarrow N$  and  $N \rightarrow I$  are considered part of the *structure* of  $\mathbf{D}$  in the above. As such, in as far as  $\mathbf{D}$  has other choices of morphisms  $I \rightarrow N$  and  $N \rightarrow I$ , the theorem states that for any such choice of morphisms and strict monoidal functor  $\mathbf{C} \rightarrow \mathbf{D}$ , there is a unique strict monoidal functor  $\mathbf{C}_N \rightarrow \mathbf{D}$ .

Observe further that  $\mathbf{C}_N$  is a dagger category when  $\mathbf{C}$  is, with  $[X, f, Y]^\dagger = [Y, f^\dagger, X]$ . With this dagger structure, the adjoint of the state  $I \rightarrow N$  is the effect  $N \rightarrow I$  and vice versa.

### 7.3 Models of $\langle \Pi \diamond \rangle$ : $\text{SymMonAmalg}(\mathbf{Unitary}, \text{Aut}_{R\phi}(\mathbf{Unitary}))_{I \oplus I}$ and Contraction

As explained in the previous section, given a model  $\mathbf{C}$  of  $\Pi \diamond$ , we can define the category  $\mathbf{C}_N$  which extends  $\mathbf{C}$  to model a language equipped with a state  $I \rightarrow N$  and an effect  $N \rightarrow I$ . In order to model quantum computation, we specialize this free model by fixing the semantics of the state and effect to correspond to the traditional basis vector  $|0\rangle$  and dual vector  $\langle 0|$ . This is achieved by choosing  $N = I \oplus I$  making  $\text{SymMonAmalg}(\mathbf{Unitary}, \text{Aut}_{R\phi}(\mathbf{Unitary}))_{I \oplus I}$  a model of  $\langle \Pi \diamond \rangle$ . This model embeds in **Contraction**, the universal dagger rig category containing all unitaries, states, and effects [5] as follows.

Recall how we gave  $\Pi \diamond$  unitary semantics via a (identity-on-objects) strict monoidal functor  $\llbracket - \rrbracket : \text{SymMonAmalg}(\mathbf{Unitary}, \text{Aut}_{R\phi}(\mathbf{Unitary})) \rightarrow \mathbf{Contraction}$ . Recall further that the category **Contraction** of finite-dimensional Hilbert spaces and contractions contains all states as morphisms  $I \rightarrow A$  (as these are isometries), all effects as

$b ::= 0 \mid 1 \mid b + b \mid b \times b$	(value types)
$n ::= 1 \mid 1 + 1 \mid n \times n$	(ancilla types)
$t ::= b \leftrightarrow b$	(combinator types)
$p ::= \text{lift } m$	(primitives)

$$\frac{xs : b_1 \times n_1 \leftrightarrow_{Z\phi} b_2 \times n_2}{\text{lift } xs : b_1 \leftrightarrow b_2}$$

Figure 10:  $\langle \Pi \diamond \rangle$  syntax and type rules. Amalgamations  $m$  are defined in Figs. 7 and 8.

$d ::= p \mid \text{arr } m \mid d \ggg d \mid \text{first } d \mid \text{second } d \mid d *** d$	(derived combinators)
$\mid \text{id} \mid \text{swap}^\times \mid \text{assocr}^\times \mid \text{assocl}^\times \mid \text{unite}^\times \mid \text{uniti}^\times$	
$\mid \text{inv } d \mid \text{zero} \mid \text{assertZero}$	

Figure 11: Derived  $\langle \Pi \diamond \rangle$  constructs.

morphisms  $A \rightarrow I$  (as these are coisometries). Since all unitaries are contractions we get an inclusion functor  $\mathbf{Unitary} \rightarrow \mathbf{Contraction}$  (which is easily seen to be a strict monoidal dagger functor), and precomposing with the strict monoidal functor  $\llbracket - \rrbracket : \text{SymMonAmalg}(\mathbf{Unitary}, \text{Aut}_{R\phi}(\mathbf{Unitary})) \rightarrow \mathbf{Unitary}$  yields a functor:

$$\text{SymMonAmalg}(\mathbf{Unitary}, \text{Aut}_{R\phi}(\mathbf{Unitary})) \rightarrow \mathbf{Contraction}$$

Now, choosing  $|0\rangle$  as the distinguished state  $I \rightarrow I \oplus I$ , and  $\langle 0|$  as the distinguished effect  $I \oplus I \rightarrow I$ , by Prop. 23 we get a unique extended functor

$$\llbracket - \rrbracket : \text{SymMonAmalg}(\mathbf{Unitary}, \text{Aut}_{R\phi}(\mathbf{Unitary}))_{I \oplus I} \rightarrow \mathbf{Contraction}$$

which assigns semantics to  $\langle \Pi \diamond \rangle$  in  $\mathbf{Contraction}$ .

## 7.4 Syntax, States, and Effects

In  $\langle \Pi \diamond \rangle$ , we allow the creation and discarding of a restricted set of values of ancilla types. As given in Fig. 10, the ancilla types are restricted to be collections of bits. The construct  $\text{lift}$  allows the discarding of

### Semantics of new constructs

$$\llbracket \text{lift } xs \rrbracket = [\llbracket n_1 \rrbracket, \llbracket xs \rrbracket, \llbracket n_2 \rrbracket]$$

### Derived identities

$\llbracket \text{arr } m \rrbracket = \mathcal{F}_{I \oplus I}(\llbracket m \rrbracket)$	$\llbracket d_1 \ggg d_2 \rrbracket = \llbracket d_2 \rrbracket \circ \llbracket d_1 \rrbracket$	
$\llbracket \text{id} \rrbracket = [I, \text{id}, I]$	$\llbracket \text{swap}^\times \rrbracket = [I, \sigma_\otimes \otimes \text{id}, I]$	
$\llbracket \text{assocr}^\times \rrbracket = [I, \alpha_\otimes \otimes \text{id}, I]$	$\llbracket \text{assocl}^\times \rrbracket = [I, \alpha_\otimes^{-1} \otimes \text{id}, I]$	
$\llbracket \text{unite}^\times \rrbracket = [I, \rho_\otimes \otimes \text{id}, I]$	$\llbracket \text{uniti}^\times \rrbracket = [I, \rho_\otimes^{-1} \otimes \text{id}, I]$	
$\llbracket \text{first } d \rrbracket = \llbracket d \rrbracket \otimes \text{id}$	$\llbracket \text{second } d \rrbracket = \text{id} \otimes \llbracket d \rrbracket$	$\llbracket d_1 *** d_2 \rrbracket = \llbracket d_1 \rrbracket \otimes \llbracket d_2 \rrbracket$
$\llbracket \text{inv } d \rrbracket = \llbracket d \rrbracket^\dagger$	$\llbracket \text{zero} \rrbracket = [I \oplus I, \sigma_\otimes, I]$	$\llbracket \text{assertZero} \rrbracket = [I, \sigma_\otimes, I \oplus I]$

Figure 12: The arrow semantics of  $\langle \Pi \diamond \rangle$ .

some ancilla  $n_1$  and the creation of some ancilla  $n_2$ . Like in the previous section, the new language defines an arrow over  $\Pi\Diamond$  with the derived combinators in Fig. 11. Most notably, the language includes two new derived constructs  $zero$  and  $assertZero$  whose semantics are  $|0\rangle$  and  $\langle 0|$  respectively.

We summarise the arrow semantics of  $\langle \Pi\Diamond \rangle$  in Figure 12. To see that this is an arrow, we must define  $arr$ ,  $\ggg$ , and  $first$ . Bringing combinators from  $\Pi\Diamond$  into  $\langle \Pi\Diamond \rangle$  is straightforwardly done by adding the trivial ancilla 1 to both the input and output,

$$arr\ m = lift(unite^x \ggg m \ggg uniti^x) .$$

This allows us to lift the isomorphisms  $id$ ,  $swap^x$ ,  $assocr^x$ ,  $assocl^x$ ,  $unite^x$ , and  $uniti^x$  of  $\Pi\Diamond$  simply by applying  $arr$  to them. To compose lifted  $\Pi\Diamond$  terms  $m : b_1 \times n_1 \leftrightarrow_{Z\phi} b_2 \times n_2$  and  $p : b_2 \times n_3 \leftrightarrow_{Z\phi} b_3 \times n_4$ , since ancillae are closed under products, we can form this as the lifting of a term of type  $b_1 \times (n_1 \times n_3) \leftrightarrow_{Z\phi} b_3 \times (n_4 \times n_2)$ , namely

$$(lift\ m) \ggg (lift\ p) = lift(assocl^x \ggg first\ m \ggg assocr^x \ggg second\ swap^x \ggg assocl^x \ggg first\ p \ggg assocr^x) .$$

Then,  $first$  can be defined using  $first$  in  $\Pi\Diamond$ , since this allows us to extend a lifted term of type  $b_1 \times n_1 \leftrightarrow_{Z\phi} b_2 \times n_2$  to one of type  $(b_1 \times n_1) \times b_3 \leftrightarrow_{Z\phi} (b_2 \times n_2) \times b_3$ , so we need only swap the ancillae back into the rightmost position from there, *i.e.*,

$$first(lift\ m) = lift(assocr^x \ggg second\ swap^x \ggg assocl^x \ggg first\ m \ggg assocr^x \ggg second\ swap^x \ggg assocr^x) .$$

In turn,  $second$  and  $***$  are derived exactly as in  $\Pi\Diamond$ . Inversion is simple since lifted terms are symmetric in having an ancilla type on both their input and output, so we have

$$inv(lift\ m) = lift(inv\ m) .$$

Finally, the state  $zero$  and effect  $assertZero$  exist as the lifting of  $swap^x : 1 \times (1 + 1) \leftrightarrow_{Z\phi} (1 + 1) \times 1$  and  $swap^x : (1 + 1) \times 1 \leftrightarrow_{Z\phi} 1 \times (1 + 1)$ , *i.e.*,

$$zero = lift(swap^x) : 1 \leftrightarrow 1 + 1 \quad \text{and} \quad assertZero = lift(swap^x) : 1 + 1 \leftrightarrow 1 ,$$

bringing the state into and out of focus respectively. A pleasant consequence of these definitions is that  $inv(zero) = assertZero$  and vice versa. More generally, states and effects in  $\langle \Pi\Diamond \rangle$  satisfy the following properties.

**Proposition 24** (Classical Structures for  $\Pi_Z$  and  $\Pi_\phi$  and their execution laws). *To avoid clutter, we will implicitly lift  $\Pi_Z$  and  $\Pi_\phi$  gates to  $\langle \Pi\Diamond \rangle$ , writing  $c_Z$  for  $arr(arr_Z\ c)$  and  $c_\phi$  for  $arr(arr_\phi\ c)$ . Introduce the following abbreviations:*

$$\begin{aligned} copy_Z &= uniti^x \ggg id\ ***\ zero \ggg CX_Z & copy_X &= X_\phi \ggg copy_Z \ggg X_\phi\ ***\ X_\phi \\ one &= zero \ggg X_Z & assertOne &= X_Z \ggg assertZero \end{aligned}$$

The following equations are satisfied in  $\langle \Pi \diamond \rangle$ :

$$\begin{aligned}
\text{copy}_Z \ggg (\text{id} \*** \text{copy}_Z) &= \text{copy}_Z \ggg (\text{copy}_Z \*** \text{id}) \ggg \text{assoc}^\times \\
\text{copy}_Z \ggg \text{swap}^\times &= \text{copy}_Z \\
\text{copy}_Z \ggg (\text{inv } \text{copy}_Z) &= \text{id} \\
(\text{copy}_Z \*** \text{id}) \ggg (\text{id} \*** \text{copy}_Z) &= (\text{id} \*** \text{copy}_Z) \ggg (\text{copy}_Z \*** \text{id}) \\
\\
\text{copy}_X \ggg (\text{id} \*** \text{copy}_X) &= \text{copy}_X \ggg (\text{copy}_X \*** \text{id}) \ggg \text{assoc}^\times \\
\text{copy}_X \ggg \text{swap}^\times &= \text{copy}_X \\
\text{copy}_X \ggg (\text{inv } \text{copy}_X) &= \text{id} \\
(\text{copy}_X \*** \text{id}) \ggg (\text{id} \*** \text{copy}_X) &= (\text{id} \*** \text{copy}_X) \ggg (\text{copy}_X \*** \text{id}) \\
\\
\text{zero} \ggg \text{assertZero} &= \text{id} \\
\text{zero} \*** \text{id} \ggg \text{CTRL } c &= \text{zero} \*** \text{id} \\
\text{one} \*** \text{id} \ggg \text{CTRL } c &= \text{one} \*** c
\end{aligned}$$

*Proof.* The first two groups state that  $\text{copy}_Z$  and  $\text{copy}_X$  are each a classical cloning map for the relevant basis: the Z-basis in the case of  $\text{copy}_Z$  and some rotated basis depending on  $\phi$  for  $\text{copy}_X$ . Because we fixed the semantics of  $\Pi_Z$  to be the standard semantics in **Unitary** without any rotation, the action of  $\text{copy}_Z$  on input  $v$  is to produce the pair  $(v, v)$ . The rotated version  $\text{copy}_X$  has the same semantics but in another basis. The last group of equations are the *execution equations*, which are so named as they describe how the states (and, by duality, effects) interact with program execution. The first simply shows that preparing the zero state and then asserting it does nothing at all. The remaining equations define how states (and, by dualising the equations, effects) must interact with control: the second equation shows that passing  $|0\rangle$  to a control line prevents the controlled program from being executed, while the third shows that passing  $|1\rangle$  on a control line executes the controlled program.  $\square$

## 7.5 Computational Universality

Like in the previous section, we can conclude that there exists a particular model in which  $\langle \Pi \diamond \rangle$  is computationally universal for quantum circuits equipped with arbitrary states and effects.

**Theorem 25** (Expressivity). *If  $\phi$  is chosen to be  $\pi/8$ , the model of  $\langle \Pi \diamond \rangle$  is computationally universal for quantum circuits equipped with arbitrary states and effects.*

The more technical presentation of this theorem is the following. Say that a *preparation of states* on a  $2^n$ -dimensional Hilbert space is a tensor product  $s_1 \otimes \cdots \otimes s_n$ , where each  $s_i$  is either a state or an identity. Dually, a *preparation of effects* is the adjoint  $s_1^\dagger \otimes \cdots \otimes s_n^\dagger$  to a preparation of states  $s_1 \otimes \cdots \otimes s_n$ . The theorem then states that  $\langle \Pi \diamond \rangle$  is approximately universal for contractions  $A \rightarrow B$  between Hilbert spaces  $A$  (of dimension  $2^n$ ) and  $B$  (of dimension  $2^m$ ) of the form  $S\mathcal{U}E$ , where  $S$  is a preparation of states,  $\mathcal{U}$  is unitary, and  $E$  is a preparation of effects.

*Proof.* Let  $s_1 \otimes \cdots \otimes s_n$  be some state preparation,  $\mathcal{U}$  be some unitary, and  $t_1^\dagger \otimes \cdots \otimes t_n^\dagger$  be some effect preparation. In the state preparation  $s_1 \otimes \cdots \otimes s_n$ , for each non-identity  $s_i$ , choose some unitary  $S_i$  mapping  $|0\rangle$  to  $s_i$ . Likewise, in the effect preparation  $t_1^\dagger \otimes \cdots \otimes t_n^\dagger$ , choose for each non-identity  $t_i^\dagger$  a unitary  $T_i^\dagger$  mapping  $\langle 0|$  to  $t_i^\dagger$ . Produce now a state preparation  $s'_i = s'_1 \otimes \cdots \otimes s'_n$  where  $s'_i = |0\rangle$  if  $s_i$  is a state, and  $s'_i = \text{id}$  if  $s_i$  is an identity. Produce an effect preparation  $t'_1 \otimes \cdots \otimes t'_n$  similarly. Notice that  $(S_1 \otimes \cdots \otimes S_n)(s'_1 \otimes \cdots \otimes s'_n) = s_1 \otimes \cdots \otimes s_n$  and  $(T_1 \otimes \cdots \otimes T_n)(t'_1 \otimes \cdots \otimes t'_n) = t_1 \otimes \cdots \otimes t_n$ . However, the state preparation  $s'_1 \otimes \cdots \otimes s'_n$  involves only identities and  $|0\rangle$ , and so has a direct representation in  $\Pi \diamond$  as a product of a number of  $\text{id}$  and  $\text{zero}$  terms—call the resulting term  $p$ . Likewise,  $t'_1 \otimes \cdots \otimes t'_n$  has a direct representation in  $\Pi \diamond$  as a product of



a number of  $id$  and  $assertZero$  terms—call the resulting term  $q$ . Finally, by Thm. 19 we can approximate the unitary  $(S_1 \otimes \cdots \otimes S_n)\mathcal{U}(T_1^\dagger \otimes \cdots \otimes T_n^\dagger)$  by some  $\Pi \diamond$  term  $u$ . But then  $p \ggg u \ggg q$  approximates  $(s_1 \otimes \cdots \otimes s_n)\mathcal{U}(t_1^\dagger \otimes \cdots \otimes t_n^\dagger)$ .  $\square$

Though the proof above may at first glance appear to be non-constructive (as it involves choice among unitaries), we note that a unitary in finite dimension mapping  $|0\rangle$  to some  $|v\rangle$  (of norm 1) can be constructed using the Gram-Schmidt process.

## 8 Canonicity and Quantum Computational Universality

The section proves the main result of the paper.

So far, we have built a particular model of  $\langle \Pi \diamond \rangle$  in **Contraction** and proved that by imposing  $\phi = \pi/8$ , we get a computationally universal quantum programming language. In fact, it turns out that we have a much stronger result. *Any model of  $\langle \Pi \diamond \rangle$  in **Contraction** satisfying the equations for classical structures and their execution laws defined in Prop. 24 as well as the complementarity equation in Def. 26 is computationally universal!*

**Definition 26** (Complementarity). To avoid clutter, we will implicitly lift  $\Pi_Z$  and  $\Pi_\phi$  gates to  $\langle \Pi \diamond \rangle$ , writing  $c_Z$  for  $arr(arr_Z c)$  and  $c_\phi$  for  $arr(arr_\phi c)$ . The complementarity law requires the following identity:

$$(copy_Z *** id) \ggg assocr^x \ggg (id *** (inv copy_X)) \ggg (id *** copy_X) \ggg assocl^x \ggg ((inv copy_Z) *** id) = id$$

**Theorem 27** (Canonicity). *If a categorical semantics  $\llbracket - \rrbracket$  for  $\langle \Pi \diamond \rangle$  in **Contraction** satisfies the classical structure laws and the execution laws (defined in Prop. 24) and the complementarity law (Def. 26), then it must be the semantics of Sec. 7.3 with the semantics of  $x_\phi$  being the Hadamard gate and:*

$$\begin{aligned} \llbracket copy_Z \rrbracket : |i\rangle &\mapsto |ii\rangle & \llbracket zero \rrbracket &= |0\rangle \\ \llbracket copy_X \rrbracket : |\pm\rangle &\mapsto |\pm\pm\rangle & \llbracket assertZero \rrbracket &= \langle 0| \end{aligned}$$

up to a global unitary.

*Proof.* Observe that  $\llbracket I + I \rrbracket = \mathbb{C}^2$  must be the qubit. Without loss of generality, we may assume that  $\Pi_Z$  has the usual semantics in the computational (Z) basis—this is the freedom that the global unitary affords. Define:

$$Z = X_\phi \ggg X_Z \ggg X_\phi \qquad plus = zero \ggg X_\phi \qquad minus = plus \ggg Z$$

The execution equations ensure that  $\{\llbracket zero \rrbracket, \llbracket one \rrbracket\}$  and  $\{\llbracket plus \rrbracket, \llbracket minus \rrbracket\}$  are copyable by  $\llbracket copy_Z \rrbracket$  and  $\llbracket copy_X \rrbracket$  respectively, while the complementarity equations further ensure that the two bases  $\{\llbracket zero \rrbracket, \llbracket one \rrbracket\}$  and  $\{\llbracket plus \rrbracket, \llbracket minus \rrbracket\}$  are complementary for  $\mathbb{C}^2$ . By assumption  $\llbracket zero \rrbracket$  and  $\llbracket one \rrbracket$  form the Z basis, so the only possibilities for  $\llbracket plus \rrbracket$  and  $\llbracket minus \rrbracket$  are either the X basis or the Y basis. Thus the unitary  $\llbracket X_\phi \rrbracket$  that turns the former basis into the latter must be Hadamard  $H$  or Hadamard composed with the  $S$  gate  $\begin{pmatrix} 1 & 0 \\ 0 & i \end{pmatrix}$ . However,  $SH$  is not involutive, whereas  $\llbracket X_\phi \rrbracket$  must be, as it is (the lifting of) a symmetry in the symmetric monoidal (in fact rig) category  $\text{Aut}_{R^\phi}(\mathbf{Unitary})$ . We conclude that  $\{\llbracket plus \rrbracket, \llbracket minus \rrbracket\} = \{|+\rangle, |-\rangle\}$ , and as a consequence that  $\llbracket X_\phi \rrbracket$  is the Hadamard gate.  $\square$

Observe that the Hadamard gate could already be expressed in  $\Pi \diamond$  with the appropriate choice of  $\phi$ , without states and effects. The latter were only needed to impose equations on  $\Pi \diamond$  which essentially forces  $\phi$  to be  $\pi/8$ .

## 9 QuantumΠ: Examples and Reasoning

Having shown that quantum behaviour emerges from two copies of a classical reversible programming language mediated by the complementarity equation, we now illustrate that developing quantum programs similarly only needs classical principles augmented with the complementarity equation, and some forms of reasoning can similarly be reduced. Before we proceed however, we present a sanitised version of  $\langle \Pi \diamond \rangle$  that fixes  $\phi = \pi/8$ , that hides some of the constructs that were only needed for the intermediate steps, and that uses Agda syntax for ease of experimentation and for providing machine-checked proofs of equivalences. The code shown here is not self-contained, and the previously mentioned repository should be consulted for the details. Nevertheless this paper is “literate Agda” in the sense that we extract the Agda code (using the L<sup>A</sup>T<sub>E</sub>X package `minted`) directly from the sources.

### 9.1 QuantumΠ: Syntax and Terms

The public interface of QuantumΠ consists of two layers: the core reversible classical language Π (of Fig. 3) and the arrow layer (presented in Sec. 2). We reproduce these below using the notation in our Agda specification.

The QuantumΠ types are directly collected in an Agda datatype:

```
data U : Set where
  0      : U
  I      : U
  _+_   : U → U → U
  _*_   : U → U → U
```

Since commutative monoids are used multiple times, their definition is abstracted in a structure `CMon` that is instantiated twice:

```
CM× CM+ : CMStructure
CM× = CMon U I _*_
CM+ = CMon U 0 _+_

module M× = Build CM×
module M+ = Build CM+
```

The Π-combinators are encoded in a type family:

```
data _↔_ : U → U → Set where
  id↔      : t ↔ t
  add      : t₁ M+.↔ t₂ → t₁ ↔ t₂
  mult     : t₁ M×.↔ t₂ → t₁ ↔ t₂
  dist     : (t₁ +_ t₂) *_ t₃ ↔ (t₁ *_ t₃) +_ (t₂ *_ t₃)
  factor   : {t₁ t₂ t₃ : U} → (t₁ *_ t₃) +_ (t₂ *_ t₃) ↔ (t₁ +_ t₂) *_ t₃
  absorbl  : t *_ 0 ↔ 0
  factorzr : 0 ↔ t *_ 0
  _ḡ_     : (t₁ ↔ t₂) → (t₂ ↔ t₃) → (t₁ ↔ t₃)
  _⊕_     : (t₁ ↔ t₃) → (t₂ ↔ t₄) → (t₁ +_ t₂ ↔ t₃ +_ t₄)
  _⊗_     : (t₁ ↔ t₃) → (t₂ ↔ t₄) → (t₁ *_ t₂ ↔ t₃ *_ t₄)
```

Finally, the syntax and types of the QuantumΠ combinators are encoded in another type family that uses another instance of our commutative monoid `CMon`:

```
CM = CMon U I _*_

module M = Build CM

data _↔_ : U → U → Set where
  arrZ      : (t₁ ↔ t₂) → (t₁ ↔ t₂)
  arrφ     : (t₁ ↔ t₂) → (t₁ ↔ t₂)
  mult     : t₁ M.↔ t₂ → t₁ ↔ t₂
```

```

id⇔      : t ⇔ t
_>>>_    : (t1 ⇔ t2) → (t2 ⇔ t3) → (t1 ⇔ t3)
_***_    : (t1 ⇔ t3) → (t2 ⇔ t4) → (t1 xu t2 ⇔ t3 xu t4)
zero     : I ⇔  $\mathbb{F}$ 
assertZero :  $\mathbb{F}$  ⇔ I

```

```
pattern unite★l = mult M.unite★
```

In the following, we will refer to common gates and states which we collect here. The definitions are a straightforward transcription into Agda of the ones in previous sections. Below  $\Pi$  refers to the module that (abstractly) defines  $\Pi$ -combinators.

```

X H Z :  $\mathbb{F}$  ⇔  $\mathbb{F}$ 
X = arrZ  $\Pi$ .swap+
H = arr $\phi$   $\Pi$ .swap+
Z = H >>> X >>> H

ctrlZ : (t ⇔ t) →  $\mathbb{F}$  xu t ⇔  $\mathbb{F}$  xu t
ctrlZ c = arrZ ( $\Pi$ T.ctrl c)

cx cz :  $\mathbb{F}$  xu  $\mathbb{F}$  ⇔  $\mathbb{F}$  xu  $\mathbb{F}$ 
cx = ctrlZ  $\Pi$ .swap+
cz = id⇔ *** H >>> cx >>> id⇔ *** H

ccx :  $\mathbb{F}$  xu  $\mathbb{F}$  xu  $\mathbb{F}$  ⇔  $\mathbb{F}$  xu  $\mathbb{F}$  xu  $\mathbb{F}$ 
ccx = arrZ  $\Pi$ T.ccx

one plus minus : I ⇔  $\mathbb{F}$ 
one = zero >>> X
plus = zero >>> H
minus = plus >>> Z

```

And so, as expected, the X gate and the H gate are both lifted versions of  $swap^+$  from the underlying definition of  $\Pi$ . The classical gates of  $\Pi$  and their controlled versions are lifted using  $arrZ$ .

## 9.2 Proving Simple Equivalences

The laws of classical structures, the execution equations, and the complementarity law, combined with the conventional laws for arrows and monoidal and rig categories, allow us to reason about Quantum $\Pi$  programs at an abstract extensional level that eschews complex numbers, vectors, and matrices.

As a first demonstration, we can prove that the X and H gates are both involutive:

```

xInv : (X >>> X) ≡ id⇔
xInv = begin
  X >>> X                ≡⟨ arrZR ⟩
  arrZ ( $\Pi$ .swap+ ;  $\Pi$ .swap+) ≡⟨ classicalZ linv $\dagger$ l ⟩
  arrZ id⇔              ≡⟨ arrZidL ⟩
  id⇔                    ■

hadInv : (H >>> H) ≡ id⇔
hadInv = arr $\phi$ R  $\odot$  classical $\phi$  linv $\dagger$ l  $\odot$  arr $\phi$ idL

```

The first proof uses Agda’s equational style where each step is justified by one of the Quantum $\Pi$  equivalences. The proof starts by moving “under the arrow” exposing the underlying  $swap^+$  gate, using the fact that  $swap^+$  is an involution, and then lifting the equivalence back through the arrow. The proof for H, presented as a sequence of equivalences, applies the same strategy to the other arrow. In later examples, we also use some additional reasoning combinators that help manage congruences, associativity and sequencing.

For a more interesting example, we prove that the Z gate sends  $\llbracket minus \rrbracket$  to  $\llbracket plus \rrbracket$ :

```

minusZ≡plus : (minus >>> Z) ≡ plus
minusZ≡plus = begin
  (minus >>> Z)
  ≡⟨ id≡ ⟩
  ((plus >>> H >>> X >>> H) >>> H >>> X >>> H)
  ≡⟨ ((assoc>>>1) ∘ assoc>>>1) %⟨id⟩ ∘ pullr assoc>>>1 ⟩
  (((plus >>> H) >>> X) >>> (H >>> H) >>> X >>> H)
  ≡⟨ id⟩%⟨ ((hadInv %⟨id⟩) ∘ idl>>>1) ⟩
  (((plus >>> H) >>> X) >>> X >>> H)
  ≡⟨ pullr assoc>>>1 ⟩
  ((plus >>> H) >>> (X >>> X) >>> H)
  ≡⟨ id⟩%⟨ (xInv %⟨id⟩ ∘ idl>>>1) ⟩
  ((plus >>> H) >>> H)
  ≡⟨ cancelr hadInv ⟩
  plus ■

```


The execution equations allow us to extend this reasoning to programs involving control, *e.g.*:

```

oneMinusPlus : ((one *** minus) >>> cz) ≡ (one *** plus)
oneMinusPlus = begin
  (one *** minus) >>> (id⇔ *** H) >>> cx >>> (id⇔ *** H)
  ≡⟨ assoc>>>1 ∘ (homL*** %⟨id⟩) ⟩
  ((one >>> id⇔) *** (minus >>> H)) >>> cx >>> (id⇔ *** H)
  ≡⟨ idr>>>1 %⟨id⟩%⟨id⟩ ⟩
  (one *** (minus >>> H)) >>> cx >>> (id⇔ *** H)
  ≡⟨ idl>>>r %⟨ idr>>>r ⟩%⟨id⟩ ⟩
  ((id⇔ >>> one) *** ((minus >>> H) >>> id⇔)) >>> cx >>> (id⇔ *** H)
  ≡⟨ homR*** %⟨id⟩ ∘ assoc>>>r ⟩
  (id⇔ *** (minus >>> H)) >>> (one *** id⇔) >>> cx >>> (id⇔ *** H)
  ≡⟨ id⟩%⟨ (assoc>>>1 ∘ e3L) %⟨id⟩ ⟩
  (id⇔ *** (minus >>> H)) >>> (one *** X) >>> (id⇔ *** H)
  ≡⟨ id⟩%⟨ (homL*** ∘ (idr>>>1) %⟨id⟩) ⟩
  (id⇔ *** (minus >>> H)) >>> (one *** (X >>> H))
  ≡⟨ homL*** ∘ (idl>>>1) %⟨ assoc>>>r ⟩ ⟩
  one *** (minus >>> H >>> X >>> H)
  ≡⟨ id⟩%⟨ minusZ≡plus ⟩
  (one *** plus) ■

```

We can string together more involved proofs to establish identities such as the following (where the classical proof of  $xcx$  is elided):



```

xcxA : id⇔ *** X >>> cx ≡ cx >>> id⇔ *** X
xcxA = begin
  id⇔ *** X >>> cx ≡⟨ arrZidR %⟨id⟩%⟨id⟩ ∘ class*>R ⟩
  arrZ ((id⇔ Π. ∘ Π.swap+) Π. %⟨ΠT.cx⟩) ≡⟨ classicalZ xcx ⟩
  arrZ (ΠT.cx Π. %⟨id⇔ Π. ∘ Π.swap+⟩) ≡⟨ class*L ∘ id⟩%⟨ arrZidL %⟨id⟩ ⟩
  cx >>> id⇔ *** X
  ■

```

```

zhcx : (id⇔ *** Z) >>> (id⇔ *** H) >>> cx ≡ cz >>> (id⇔ *** H) >>> (id⇔ *** X)
zhcx = begin
  (id⇔ *** Z) >>> (id⇔ *** H) >>> cx
  ≡⟨ id≡ ⟩
  (id⇔ *** (H >>> X >>> H)) >>> (id⇔ *** H) >>> cx
  ≡⟨ assoc>>>1 ∘ (homL*** ∘ (idl>>>1) %⟨id⟩) %⟨id⟩ ⟩
  (id⇔ *** ((H >>> X >>> H) >>> H)) >>> cx
  ≡⟨ id⟩%⟨ pullr (cancelr hadInv) %⟨id⟩ ⟩
  id⇔ *** (H >>> X) >>> cx
  ≡⟨ (idl>>>r) %⟨id⟩ ∘ homR*** %⟨id⟩ ∘ assoc>>>r ⟩
  (id⇔ *** H) >>> (id⇔ *** X) >>> cx

```

```

≡⟨ id ⟩§⟨ xcxA ⟩
(id⇔ *** H) >>> cx >>> (id⇔ *** X)
≡⟨ id ⟩§⟨ id ⟩§⟨ insertl 1*HInv ⟩
(id⇔ *** H) >>> cx >>> (id⇔ *** H) >>> (id⇔ *** H) >>> (id⇔ *** X)
≡⟨ assoc>>>l ⊙ assoc>>>l ⊙ assoc>>>r ⟩§⟨ id ⟩
(id⇔ *** H >>> cx >>> id⇔ *** H) >>> (id⇔ *** H) >>> (id⇔ *** X)
≡⟨ id= ⟩
cz >>> (id⇔ *** H) >>> (id⇔ *** X) ■

```

### 9.3 Modeling Complex Numbers

The  $S$  gate is expressed in the computational basis using the matrix  $\begin{pmatrix} 1 & 0 \\ 0 & i \end{pmatrix}$ . Although Quantum $\Pi$  lacks explicit complex numbers, the language, being computationally universal, can express them by encoding  $a + ib$  as  $\begin{pmatrix} a & -b \\ b & a \end{pmatrix}$  [3, 54]. Under this encoding, we can even express the controlled- $S$  gate:

```

ctrlS : ≠ xu ≠ xu ≠ ⇔ ≠ xu ≠ xu ≠
ctrlS = (id⇔ *** id⇔ *** H) >>>
        ccx >>>
        (id⇔ *** id⇔ *** H) >>>
        ccx

```

The encoding uses an extra qubit to distinguish the real part from the imaginary part.

### 9.4 Postulating Measurement

[25] derive quantum measurement as a computational effect layered on top of a language of unitaries, by extending the language with effects for *classical cloning* and *hiding*. Since Quantum $\Pi$  already has a notion of classical cloning (two distinct such, in fact) given by the  $copy_Z$  and  $copy_X$  combinators, we only need to extend it with hiding to obtain measurement of qubit systems.

We can extend Quantum $\Pi$  with hiding using the exact same arrow construction as the one used to introduce hiding in  $\mathcal{U}\Pi_a^X$  by [25], with two subtle differences. The first difference is that, since the model of Quantum $\Pi$  is a (dagger) symmetric monoidal category and not a rig category, this will yield a mere *arrow* over Quantum $\Pi$ , and not an *arrow with choice*:

$$\frac{c : b_1 \leftrightarrow b_2 \times b_3 \quad b_3 \text{ inhabited}}{\text{lift } c : b_1 \rightsquigarrow b_2}$$

All available arrow combinators, including the crucial  $discard : b \rightsquigarrow 1$  and the derived projections  $fst : b_1 \times b_2 \rightsquigarrow b_1$  and  $snd : b_1 \times b_2 \rightsquigarrow b_2$ , are defined precisely as [25] define them. The second difference concerns partiality of the model. Since the model of Quantum $\Pi$  is one of *partial* maps (whereas the model of  $\mathcal{U}\Pi_a$  is one of *total* maps), we need to accommodate for this in the categorical model. This is precisely what is done by the  $L'_\otimes$ -construction of [5]. In short, the resulting model will not satisfy  $\llbracket c \gg\gg discard \rrbracket = \llbracket discard \rrbracket$  for *all* programs  $c$ , though it will satisfy it those  $c$  for which  $\llbracket c \gg\gg inv\ c \rrbracket = \llbracket id \rrbracket$ .

With this notion of hiding, we can derive measurement in the two bases as

$$measure_Z = copy_Z \gg\gg fst \quad \text{and} \quad measure_\phi = copy_X \gg\gg fst \tag{12}$$

exactly as done in previous work [18, 25]. Note that, by commutativity of copying, we could equivalently have chosen the second projection  $snd$  instead of  $fst$ . This can all be expressed in the Agda formalisation as follows:

```

postulate
discard : t ⇔ I
discardL : (d : t1 ⇔ t2) → d >>> discard ≡ discard

```

This postulate is *dangerous*, as it does not enforce that it is only applied to total maps (though we are careful to only do so in the examples here). We hope to tighten up this loophole in future work.

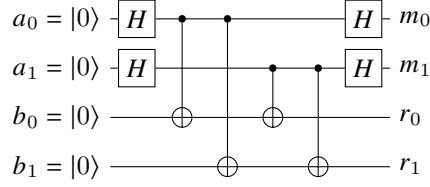


Figure 13: Given a 2-1 function  $f : \mathbb{F}^n \rightarrow \mathbb{F}^n$  with the property that there exists an  $a$  such that  $f(x) = f(x \text{ XOR } a)$  for all  $x$ , Simon's problem is to determine  $a$ . The figure gives the textbook quantum algorithm for instance with  $n = 2$ .

```
fst : (t1 x_u t2) ⇔ t1
fst = (id⇔ *** discard) >>> unite★r
```

```
snd : (t1 x_u t2) ⇔ t2
snd = swap★ >>> fst
```

```
measureZ measureφ : ℱ ⇔ ℱ
measureZ = copyZ >>> fst
measureφ = copyφ >>> fst
```

From just this observation, we can show that measurement in the  $\phi$ -basis is nothing more than measurement in the Z-basis conjugated by H because:

```
measure : measureφ ≡ (H >>> measureZ >>> H)
measure = begin
  measureφ           ≡⟨ id≡ ⟩ -- definition
  copyφ >>> fst      ≡⟨ id≡ ⟩ -- definitions
  (H >>> copyZ >>> (H *** H)) >>> (id⇔ *** discard) >>> unite★r
  ≡⟨ assoc>>>l ⟩ §⟨ id ⊙ assoc>>>r ⊙ id ⟩ §⟨ assoc>>>l ⟩
  (H >>> copyZ) >>> ((H *** H) >>> (id⇔ *** discard)) >>> unite★r
  ≡⟨ id ⟩ §⟨ homL*** ⟩ §⟨ id ⟩
  (H >>> copyZ) >>> ((H >>> id⇔) *** (H >>> discard)) >>> unite★r
  ≡⟨ id ⟩ §⟨ idr>>>l ⟩ ⊗ ⟨ discardL H ⟩ §⟨ id ⟩
  (H >>> copyZ) >>> H *** discard >>> unite★r
  ≡⟨ id ⟩ §⟨ seq21*** ⟩ §⟨ id ⟩
  (H >>> copyZ) >>> (id⇔ *** discard >>> H *** id⇔) >>> unite★r
  ≡⟨ assoc>>>r ⊙ id ⟩ §⟨ (assoc>>>l ⊙ assoc>>>l) ⟩ §⟨ id ⊙ assoc>>>r ⟩
  H >>> (copyZ >>> id⇔ *** discard) >>> (H *** id⇔) >>> unite★r
  ≡⟨ id ⟩ §⟨ id ⟩ §⟨ uniter★≡r ⟩
  H >>> (copyZ >>> id⇔ *** discard) >>> (unite★r >>> H)
  ≡⟨ id ⟩ §⟨ (assoc>>>l ⊙ assoc>>>r) ⟩ §⟨ id ⟩
  H >>> (copyZ >>> id⇔ *** discard >>> unite★r) >>> H
  ≡⟨ id≡ ⟩
  (H >>> measureZ >>> H) ■
```

Following the same principle, we can define measurement in more exotic bases. For example, measurement in the 2-qubit Bell basis can be defined by conjugating a pair of Z-measurements by the unitary  $CX \ggg H *** id$ .


## 9.5 Quantum Algorithms: Simon and Grover

The language QuantumΠ can easily model textbook quantum algorithms. The circuit in Fig. 13 that solves an instance of Simon's problem can be transliterated directly:

```
simon : I x_u I x_u I x_u I ⇔ ℱ x_u ℱ x_u ℱ x_u ℱ
simon = map4*** zero >>>
  H *** H *** id⇔ *** id⇔ >>>
  arrZ cxGroup >>>
  H *** H *** id⇔ *** id⇔
```

The four CX-gates, and more generally an arbitrary quantum oracle consisting of classical gates, can be implemented in the underlying classical language and lifted to QuantumΠ.

Having access to measurement allows us to express end-to-end algorithms as we illustrate with an implementation of a small instance of Grover’s search [22], which, with high probability, is able to find a particular element  $x_0$  in an unstructured data store of size  $n$  by probing it only  $O(\sqrt{n})$  times. The algorithm works by preparing a particular quantum state, and then repeating a subprogram—the *Grover iteration*, consisting of an *oracle* stage and an *amplification* stage—a fixed number of times proportional to  $\sqrt{n}$ , before finally measuring the output. The data store of size  $n$  is implemented as a unitary  $U : [\mathbb{F}^n] \rightarrow [\mathbb{F}^n]$  such that  $U|x\rangle = -|x\rangle$  if  $|x\rangle$  is the element  $|x_0\rangle$  being searched for, and  $U|x\rangle = |x\rangle$  otherwise. Though this uses non-trivial phases, it is still a classical program in disguise, and one could also use a classical function instead (though this presentation is slightly more economical). We assume that this unitary is given to us in the form of a QuantumΠ program. The final part of the algorithm is the amplification stage, which guides the search towards  $|x_0\rangle$ . This part is the same for every oracle, depending only on the number of qubits. On three qubits, the amplifier is given by the circuit



Using the fact that the Z gate is actually negation conjugated by Hadamard, we see that this 3-qubit amplifier is expressible as the QuantumΠ program:

```
amp :  $\mathbb{F}^3 \times_u \mathbb{F}^3 \times_u \mathbb{F}^3 \Leftrightarrow \mathbb{F}^3 \times_u \mathbb{F}^3 \times_u \mathbb{F}^3$ 
amp = map3*** H >>>
      map3*** X >>>
      id $\Leftrightarrow$  *** id $\Leftrightarrow$  *** H >>>
      ccx >>>
      id $\Leftrightarrow$  *** id $\Leftrightarrow$  *** H >>>
      map3*** X >>>
      map3*** H
```

To put this together, we suppose that we are given a unitary of the form  $u : \mathbb{F}^3 \xleftrightarrow{Z\phi} \mathbb{F}^3$  described above. The initial state before iteration should be  $|+++ \rangle$ , and we need to repeat the Grover iteration  $\lceil \frac{\pi}{4} \sqrt{2^3} \rceil = 3$  times before measuring the output in the computational basis. All together, this yields the following QuantumΠ program implementing 3-qubit Grover search:

```
grover3 : I  $\times_u$  I  $\times_u$  I  $\Leftrightarrow \mathbb{F}^3 \times_u \mathbb{F}^3 \times_u \mathbb{F}^3$ 
grover3 = map3*** plus >>>
          repeat 3 (u >>> amp) >>>
          map3*** measureZ
```

## 10 Conclusion

We have shown that a computationally universal quantum programming language arises as a formal combination of two copies of a classical reversible one, exploiting *complementarity* to guarantee expressivity. This construction was given as a series of arrows, providing a positive answer to the existence of a “quantum effect.” Semantically, every step was given as a categorical construction, giving each language along the way a categorical semantics. Additionally, we showed that the language can be extended further with quantum measurements, and that the laws of monoidal categories, extended with the laws of complementarity, can be used to reason about quantum programs. The concrete semantics is fully implemented in an Agda package that was used to run several examples. The Agda type system can be readily used to verify some elementary laws (e.g., `inv zero  $\equiv$  assertZero`).

We envision the following avenues for future research.

**The more  $\Pi$ , the better precision** We have shown that two copies of a classical language, when aligned just right, are sufficient to yield computationally universal quantum computation. However, encoding general rotation gates, such as the ones needed for the quantum Fourier transform, is awkward and inefficient using just Toffoli and Hadamard. Can additional copies of the classical base language, when aligned carefully, significantly improve this—and, if so, by how much?

**Completeness** An equational theory is *sound and complete* for a semantic domain when any two objects in the domain are equal iff they can be proven to be equal using the rules of the equational theory. While it is clear that reasoning in Quantum $\Pi$  is sound, completeness is wholly unclear. At the moment, it is unclear how to even proceed, since already a complete equational theory for the Clifford+T gate set beyond 2 qubits is unknown.

**Formal quantum experiments** In investigations by [2, 44], programming languages have served as tools in providing outcomes to thought experiments about physical theories. We envision using (an extension of) Quantum $\Pi$  for similar purposes—*e.g.* to formulate contextuality scenarios and quantum protocols, and use the reasoning capabilities of Quantum $\Pi$  to answer questions about them.

**Infinite-dimensionality and iteration** [33] consider an extended version of  $\Pi$  called  $\Pi^o$  with isorecursive types and iteration in the form of a *trace operator*. Extending Quantum $\Pi$  to start from this extended language, rather than the finite  $\Pi$ , is of natural interest. However, doing so successfully would require answering fundamental open questions about the nature of infinite-dimensional quantum computation.

**Approximate reasoning** While the categorical semantics of Quantum $\Pi$  give a way to reason about quantum programs, it only allows one to prove that programs are *exactly* equal. However, since approximation plays a large role in quantum computation, reasoning that two programs are equal not on the nose, but up to a given error, seems equally important. How can we extend the model of Quantum $\Pi$  to account for such approximate reasoning?

## References

- [1] S. Abramsky and C. Heunen.  $H^*$ -algebras and nonunital Frobenius algebras: first steps in infinite-dimensional categorical quantum mechanics. In *Clifford Lectures*, volume 71 of *AMS Proceedings of Symposia in Applied Mathematics*, pages 1–24, 2012.
- [2] S. Abramsky and D. Horsman. DEMONIC programming: a computational language for single-particle equilibrium thermodynamics, and its formal semantics. In *Proceedings 12th International Workshop on Quantum Physics and Logic*, number 195 in *Electronic Proceedings in Theoretical Computer Science*, pages 1–16, 2015.
- [3] D. Aharonov. A simple proof that Toffoli and Hadamard are quantum universal. arXiv:quant-ph/0301040, 2003.
- [4] T. Altenkirch and A. Green. *Semantic Techniques in Quantum Computation*, chapter The Quantum IO Monad, pages 173–205. Cambridge University Press, 2009.
- [5] P. Andrés-Martínez, C. Heunen, and R. Kaarsgaard. Universal properties of partial quantum maps. arXiv:2206.04814, 2022.
- [6] M. Backens and A. Kissinger. ZH: A complete graphical calculus for quantum computations involving classical non-linearity. In *Quantum Physics and Logic*, number 287 in *Electronic Proceedings in Theoretical Computer Science*, pages 23–42, 2019.
- [7] J. S. Bell. On the Einstein Podolsky Rosen paradox. *Physics Physique Fizika*, 1:195–200, Nov 1964.



- [8] B. Bichsel, M. Baader, T. Gehr, and M. Vechev. Silq: A High-Level Quantum Language with Safe Uncomputation and Intuitive Semantics. In *Proceedings of the 41st ACM SIGPLAN Conference on Programming Language Design and Implementation*. ACM, June 2020.
- [9] N. Bohr. Causality and complementarity. *Philosophy of Science*, 4(3):289–298, 1937.
- [10] G. A. Briggs, J. N. Butterfield, and A. Zeilinger. The Oxford questions on the foundations of quantum physics. *Proceedings. Mathematical, physical, and engineering sciences*, 469(2157), 2013.
- [11] J. Carette, R. P. James, and A. Sabry. Embracing the laws of physics: Three reversible models of computation. volume 126 of *Advances in Computers*, pages 15–63. Elsevier, 2022.
- [12] J. Carette, O. Kiselyov, and C. c. Shan. Finally tagless, partially evaluated. In Z. Shao, editor, *Programming Languages and Systems*, pages 222–238, Berlin, Heidelberg, 2007. Springer Berlin Heidelberg.
- [13] J. Carette and A. Sabry. Computing with semirings and weak rig groupoids. In P. Thiemann, editor, *Programming Languages and Systems*, pages 123–148, Berlin, Heidelberg, 2016. Springer Berlin Heidelberg.
- [14] K. Cho and A. Westerbaan. Von Neumann algebras form a model for the quantum lambda calculus. 2016.
- [15] V. Choudhury, J. Karwowski, and A. Sabry. Symmetries in reversible programming: From symmetric rig groupoids to reversible programming languages. *Proc. ACM Program. Lang.*, 6(POPL), jan 2022.
- [16] B. Coecke and R. Duncan. Interacting quantum observables: categorical algebra and diagrammatics. *New Journal of Physics*, 13:043016, 2011.
- [17] B. Coecke, R. Duncan, A. Kissinger, and Q. Wang. Strong complementarity and non-locality in categorical quantum mechanics. In *Logic in Computer Science*. IEEE, 2012.
- [18] B. Coecke and S. Perdrix. Environment and classical channels in categorical quantum mechanics. *Logical Methods in Computer Science*, 8:1–24, 2012.
- [19] C. Comfort. Circuit relations for real stabilizers: towards TOF+H. arXiv:1904.10614, 2019.
- [20] R. Glück, R. Kaarsgaard, and T. Yokoyama. Reversible programs have reversible semantics. In *Formal Methods. FM 2019 International Workshops*, volume 12232 of *Lecture Notes in Computer Science*, pages 413–427. Springer, 2019.
- [21] A. Green, P. LeFanu Lumsdaine, N. J. Ross, P. Selinger, and B. Valiron. Quipper: a scalable quantum programming language. In *Proceedings of the 34th Annual ACM SIGPLAN Conference on Programming Language Design and Implementation, PLDI 2013, Seattle*, volume 48(6) of *ACM SIGPLAN Notices*, pages 333–342, June 2013.
- [22] L. K. Grover. A fast quantum mechanical algorithm for database search. In *Proceedings of the Twenty-Eighth annual ACM Symposium on Theory of Computing (STOC '96)*, pages 212–219. ACM, 1996.
- [23] C. Hermida and R. D. Tennent. Monoidal indeterminates and categories of possible worlds. *Theoretical Computer Science*, 430:3–22, 2012.
- [24] C. Heunen. On the functor  $\ell^2$ . In *Computation, Logic, Games, and Quantum Foundations*, pages 107–121. Springer, 2013.
- [25] C. Heunen and R. Kaarsgaard. Quantum information effects. *Proceedings of the ACM on Programming Languages*, 6(POPL):1–27, 2022.

- [26] C. Heunen, R. Kaarsgaard, and M. Karvonen. Reversible effects as inverse arrows. In *Proceedings of the Thirty-Fourth Conference on the Mathematical Foundations of Programming Semantics (MFPS XXXIV)*, volume 341 of *Electronic Notes in Theoretical Computer Science*, pages 179–199. Elsevier, 2018.
- [27] C. Heunen and M. Karvonen. Monads on dagger categories. *Theory and Applications of Categories*, 31:1016–1043, 2016.
- [28] C. Heunen and J. Vicary. *Categories for quantum theory*. Oxford University Press, 2019.
- [29] H.-J. Hoehnke, editor. *Algebraische Modelle, Kategorien und Gruppoide*, volume 7 of *Studien zur Algebra und ihre Anwendungen*. Akademie-Verlag Berlin, 1979.
- [30] J. Hughes. Programming with Arrows. In *Advanced Functional Programming*, volume 3622 of *Lecture Notes in Computer Science*, pages 73–129. Springer, 2005.
- [31] B. Jacobs, C. Heunen, and I. Hasuo. Categorical semantics for Arrows. *Journal of Functional Programming*, 19(3–4):403–438, 2009.
- [32] P. A. H. Jacobsen, R. Kaarsgaard, and M. K. Thomsen. CoreFun: A typed functional reversible core language. In *International Conference on Reversible Computation (RC 2018)*, pages 304–321. Springer, 2018.
- [33] R. P. James and A. Sabry. Information effects. In *POPL '12: Proceedings of the 39th Annual ACM SIGPLAN-SIGACT Symposium on Principles of programming languages*, pages 73–84. ACM, 2012.
- [34] X. Jia, A. Kornell, B. Lindenhovius, M. Mislove, and V. Zamdzhiev. Semantics for variational quantum programming. *Proc. ACM Program. Lang.*, 6(POPL), 2022.
- [35] R. Kaarsgaard and R. Glück. A categorical foundation for structured reversible flowchart languages: Soundness and adequacy. *Logical Methods in Computer Science*, 14(3), 2018.
- [36] J. Kastl. *Algebraische Modelle, Kategorien und Gruppoide*, chapter Inverse categories, pages 51–60. Volume 7 of Hoehnke [29], 1979.
- [37] S. Kochen and E. Specker. The problem of hidden variables in quantum mechanics. *Indiana Univ. Math. J.*, 17:59–87, 1968.
- [38] M. L. Laplaza. Coherence for distributivity. In *Coherence in categories*, number 281 in *Lecture Notes in Mathematics*, pages 29–65. Springer, 1972.
- [39] T. Leinster. *Basic category theory*. Cambridge University Press, 2014.
- [40] M. Loaiza. A short introduction to hilbert space theory. In *Journal of Physics: Conference Series*, volume 839, page 012002. IOP Publishing, 2017.
- [41] J. MacDonald and L. Scull. Amalgamations of categories. *Canadian Mathematical Bulletin*, 52(2):273–284, 2009.
- [42] A. Montanaro and R. de Wolf. A survey of quantum property testing. *Theory of Computing Graduate Surveys*, 7, 2016.
- [43] M. A. Nielsen and I. Chuang. *Quantum Computation and Quantum Information*. Cambridge University Press, 2002.
- [44] N. Nurgalieva, S. Mathis, L. Del Rio, and R. Renner. Quanundrum – a platform to simulate thought experiments with quantum agents, 2022. Software package, <https://github.com/jangnur/Quanundrum>.

- [45] R. O’Donnell. *Analysis of Boolean functions*. Cambridge University Press, 2014.
- [46] J. Paykin, R. Rand, and S. Zdancewic. Qwire: A core language for quantum circuits. pages 846–858. ACM, 2017.
- [47] R. Péchoux, S. Perdrix, M. Rennela, and V. Zamdzhiev. Quantum programming with inductive datatypes: Causality and affine type theory. In *Foundations of Software Science and Computation Structures (FOSSACS 2020)*, volume 12077 of *Lecture Notes in Computer Science*, pages 562–581, 2020.
- [48] J. Power and E. Robinson. Premonoidal categories and notions of computation. *Mathematical Structures in Computer Science*, 7(5), 1997.
- [49] M. Rennela and S. Staton. Classical control, quantum circuits and linear logic in enriched category theory. *Logical Methods in Computer Science*, 16:6192, 2020.
- [50] A. Sabry, B. Valiron, and J. K. Vizzotto. From symmetric pattern-matching to quantum control. In *International Conference on Foundations of Software Science and Computation Structures (FOSSACS 2018)*, pages 348–364. Springer, 2018.
- [51] P. Selinger. Towards a quantum programming language. *Mathematical Structures in Computer Science*, 14(4):527–586, 2004.
- [52] P. Selinger and B. Valiron. A lambda calculus for quantum computation with classical control. In *Proceedings of the 7th International Conference on Typed Lambda Calculi and Applications, TLCA 2005, Nara, Japan*, volume 3461 of *Lecture Notes in Computer Science*, pages 354–368. Springer, 2005.
- [53] P. Selinger and B. Valiron. Quantum lambda calculus. In S. Gay and I. Mackie, editors, *Semantic Techniques in Quantum Computation*, chapter 4, pages 135–172. Cambridge University Press, 2009.
- [54] Yaoyun Shi. Both toffoli and controlled-not need little help to do universal quantum computing. *Quantum Info. Comput.*, 3(1):84–92, jan 2003.
- [55] D. R. Simon. On the power of quantum computation. In *Proceedings 35th Annual Symposium on Foundations of Computer Science*, pages 116–123, 1994.
- [56] T. Toffoli. Reversible computing. In J. de Bakker and J. van Leeuwen, editors, *Automata, Languages and Programming*, pages 632–644, Berlin, Heidelberg, 1980. Springer Berlin Heidelberg.
- [57] F. Voichick, R. Rand, and M. Hicks. Qunity: A unified language for quantum and classical computing, 2022.
- [58] A. Westerbaan. Quantum programs as Kleisli maps. In *Proceedings 13th International Conference on Quantum Physics and Logic (QPL 2016)*, volume 236 of *Electronic Proceedings in Theoretical Computer Science*, pages 215–228, 2017.
- [59] N. Yanofsky and M. A. Mannucci. *Quantum Computing for Computer Scientists*. Cambridge University Press, 2008.
- [60] T. Yokoyama, H. B. Axelsen, and R. Glück. Towards a reversible functional language. In *International Workshop on Reversible Computation*, pages 14–29. Springer, 2011.
- [61] T. Yokoyama and R. Glück. A reversible programming language and its invertible self-interpreter. In *Proceedings of the 2007 ACM SIGPLAN Symposium on Partial Evaluation and Semantics-Based Program Manipulation*, pages 144–153, 2007.