

# One-shot Empirical Privacy Estimation for Federated Learning

Galen Andrew\*<sup>§</sup>      Peter Kairouz\*      Sewoong Oh\*  
 Alina Oprea<sup>†</sup>    H. Brendan McMahan\*    Vinith M. Suriyakumar<sup>‡</sup>

February 9, 2023

## Abstract

Privacy auditing techniques for differentially private (DP) algorithms are useful for estimating the privacy loss to compare against analytical bounds, or empirically measure privacy in settings where known analytical bounds on the DP loss are not tight. However, existing privacy auditing techniques usually make strong assumptions on the adversary (e.g., knowledge of intermediate model iterates or the training data distribution), are tailored to specific tasks and model architectures, and require retraining the model many times (typically on the order of thousands). These shortcomings make deploying such techniques at scale difficult in practice, especially in federated settings where model training can take days or weeks. In this work, we present a novel “one-shot” approach that can systematically address these challenges, allowing efficient auditing or estimation of the privacy loss of a model during the same, single training run used to fit model parameters. Our privacy auditing method for federated learning does not require *a priori* knowledge about the model architecture or task. We show that our method provides provably correct estimates for privacy loss under the Gaussian mechanism, and we demonstrate its performance on a well-established FL benchmark dataset under several adversarial models.

## 1 Introduction

Federated learning (FL) [McMahan et al., 2017; Kairouz et al., 2021c] is a paradigm for training machine learning models on decentralized data. At each round, selected clients contribute model updates to be aggregated by a central server, without ever communicating their raw data. FL incorporates *data minimization* principles to reduce the risk of compromising anyone’s data: each user’s data never leaves their device, the update that is transmitted contains only information necessary to update the model, the update is encrypted in transit, and the update exists only ephemerally before being combined with other clients’ updates and then incorporated into the model [Bonawitz et al., 2022]. Technologies such as secure aggregation [Bonawitz et al., 2017; Bell et al., 2020] can be applied to ensure that even the central server cannot inspect individual updates, but only their aggregate.

However, these data minimization approaches cannot rule out the possibility that an attacker might learn some private information from the training data by directly interrogating the final model [Carlini et al., 2021; Balle et al., 2022; Haim et al., 2022]. To protect against this, *data anonymization* for the model is required. FL can be augmented to satisfy user-level differential privacy [Dwork and Roth, 2014; Abadi et al., 2016; McMahan et al., 2018], the gold-standard for data anonymization. DP can guarantee each user that a powerful attacker – one who knows all other users’ data, all details about the algorithm (other than the values of the noise added for DP), and

---

\*Google

†Northeastern University

‡MIT

§Corresponding author: galenandrew@google.com

every intermediate model update – still cannot confidently infer the presence of that user in the population, or anything about their data. This guarantee is typically quantified by the parameter  $\epsilon$ , with lower values corresponding to higher privacy (less confidence for the attacker).

DP is often complemented by *empirical privacy estimation* (EPE) techniques, such as membership inference attacks [Shokri et al., 2017; Yeom et al., 2018; Carlini et al., 2022], which measure the success of an adversary at distinguishing whether a particular record was part of training or not.<sup>1</sup> Such methods have been used to audit the implementations of DP mechanisms or claims about models trained with DP [Jagielski et al., 2020; Nasr et al., 2021; Zanella-Béguelin et al., 2022; Lu et al., 2022]. They are also useful for estimating the privacy loss in cases where a tight analytical upper bound on  $\epsilon$  is unknown, for example when clients are constrained to participate in at most some number of rounds, or when the adversary does not see the full trace of model iterates. However, existing privacy auditing techniques suffer from several major shortcomings. First, they require retraining the model many times (typically in the thousands) to provide reliable estimates of DP’s  $\epsilon$  [Jagielski et al., 2020; Nasr et al., 2021]. Second, they often rely on knowledge of the model architecture and/or the underlying dataset (or at least a similar, proxy dataset) for mounting the attack. For example, a common approach is to craft a “canary” training example on which the membership is being tested, which typically requires an adversary to have access to the underlying dataset and knowledge of the domain and model architecture. Finally, such techniques typically grant the adversary unrealistic power, for example (and in particular) the ability to inspect all model iterates during training [Maddock et al., 2022], something which may or may not be reasonable depending on the system release model.

Such assumptions are particularly difficult to satisfy in the FL setting due to the following considerations:

- **Minimal access to the dataset, or even to proxy data.** A primary motivating feature of FL is that it can make use of on-device data without (any) centralized data collection. In many tasks, on-device data is more representative of real-world user behavior than any available proxy data.
- **Infeasibility of training many times, or even more than one time.** FL training can take days or weeks, and expends resources on client devices. To minimize auditing time and client resource usage, an ideal auditing technique should produce an estimate of privacy during the same, single training run used to optimize model parameters.
- **Lack of task, domain, and model architecture knowledge.** A scalable production FL platform is expected to cater to the needs of many diverse ML applications, from speech to image to language modeling tasks. Therefore, using techniques that require specific knowledge of the task and/or model architecture makes it hard to deploy those techniques at scale in production settings.

In this paper, we design an auditing technique tailored for FL usage with those considerations in mind. We empirically estimate  $\epsilon$  efficiently in user-level DP federated learning by measuring the training algorithm’s tendency to memorize arbitrary clients’ updates. Our main insight is to insert multiple, independent random canary clients in the federated learning protocol, and design a test statistic based on cosine angles of each canary update with the final model to test participation of a certain user in the protocol. The intuition behind the approach comes from the elementary result that in a high-dimensional space, isotropically sampled vectors are nearly orthogonal with high probability. So we can think of each canary as estimating the algorithm’s tendency to memorize along a dimension of variance that is independent of the other canaries, and of the true model updates.

---

<sup>1</sup>Some prior work only applies to example-level DP, in which *records* correspond to examples, as opposed to user-level, in which *records* are users. We will describe our approach in terms of user-level DP, but it can be trivially modified to provide example-level DP.

Our method has several favorable properties. It can be applied during the same, single training run which is used to train the federated model parameters, and therefore does not incur additional performance overhead. Although it does inject some extra noise into the training process, the effect on model quality is negligible, provided model dimensionality and number of clients are reasonably sized. We show that in the tractable case of a single application of the Gaussian mechanism, our method exactly recovers the true, analytical  $\epsilon$  in the limit of high dimensionality. We evaluate privacy loss for several adversarial models of interest, for which existing analytical bounds are not tight. In the case when all intermediate updates are observed, our method produces high values of  $\epsilon$ , indicating that an attacker could perform membership inference and determine if a canary user was part of training. However, in the common and important case that only the final trained model is released, our  $\epsilon$  estimate is far lower, demonstrating stronger privacy guarantees for realistic adversaries. When clients’ participation is limited in the federated training protocol, our estimate is lower still, which suggests a higher level of privacy. The method we propose is model and dataset agnostic, so it can be easily applied without change to any federated learning task.

## 2 Background and related work

**Differential Privacy.** Differential privacy (DP) [Dwork et al., 2006; Dwork and Roth, 2014] is a rigorous notion of privacy that an algorithm can satisfy. DP algorithms for training ML models include DP-SGD [Abadi et al., 2016], DP-FTRL [Kairouz et al., 2021a], and DP matrix factorization [Denissoff et al., 2022; Choquette-Choo et al., 2022]. Informally, DP guarantees that a powerful attacker observing the output of the algorithm  $A$  trained on one of two *adjacent* datasets (differing by addition or removal of one record),  $D$  or  $D'$ , cannot confidently distinguish the two cases, which is quantified by the privacy parameter  $\epsilon$ . As  $\epsilon$  decreases, the adversary has more difficulty distinguishing whether  $A$  was trained on  $D$  versus  $D'$ , and thus the level of privacy increases.

**Definition 2.1. User-Level Differential Privacy.** The training algorithm  $A : \mathcal{D} \rightarrow \mathcal{R}$  is user-level  $(\epsilon, \delta)$  differentially private if for all pairs of datasets  $D$  and  $D'$  from  $\mathcal{D}$  that differ only by addition or removal of the data of one user and all output regions  $R \subseteq \mathcal{R}$ :

$$\Pr[A(D) \in R] \leq e^\epsilon \Pr[A(D') \in R] + \delta.$$

DP can be interpreted as a hypothesis test with the null hypothesis that  $A$  was trained on  $D$  and the alternative hypothesis that  $A$  was trained on  $D'$ . False positives (type-I errors) occur when the null hypothesis is true, but is rejected, while false negatives (type-II errors) occur when the alternative hypothesis is true, but is rejected. Kairouz et al. [2015] characterized  $(\epsilon, \delta)$ -DP in terms of the false positive rate (FPR) and false negative rate (FNR) achievable by an acceptance region. This characterization enables estimating the privacy parameter as:

$$\hat{\epsilon} = \max\left\{\log \frac{1 - \delta - \text{FPR}}{\text{FNR}}, \log \frac{1 - \delta - \text{FNR}}{\text{FPR}}\right\}.$$

**Private Federated Learning.** DP Federated Averaging (DP-FedAvg) [McMahan et al., 2018] is a user-level DP version of the well-known Federated Averaging (FedAvg) algorithm [McMahan et al., 2017] for training ML models in a distributed fashion. In FedAvg, a central server interacts with a set of clients to train a global model iteratively over multiple rounds. In each round, the server sends the current global model to a subset of clients, who train local models using their training data, and send the model updates back to the server. The server aggregates the model updates via the Gaussian mechanism, in which each update is clipped to bound its  $\ell_2$  norm before averaging and adding Gaussian noise proportional to the clipping norm sufficient to mask the influence of individual users, and incorporates the aggregate update into the global model. DP-FedAvg can rely on privacy amplification from the sampling of clients at each round, but more sophisticated methods can handle arbitrary participation patterns [Kairouz et al., 2021b; Choquette-Choo et al., 2022].

**Privacy auditing.** Privacy auditing, introduced by Jagielski et al. [2020], provides techniques for empirically auditing the privacy leakage of an algorithm and estimating the  $\epsilon$  privacy parameter. The main technique used for privacy auditing is performing a membership inference attack [Shokri et al., 2017; Yeom et al., 2018; Carlini et al., 2022], which measures the success of the adversary at distinguishing whether a particular example was part of training or not, and translate that into an  $\epsilon$  estimate using the DP definition directly. Using membership inference on a randomly chosen training example provides fairly low estimates of  $\epsilon$  [Jayaraman and Evans, 2019], but selecting worst-case examples induces stronger estimates [Zanella-Béguelin et al., 2022].

Several papers showed that data poisoning attacks, in which adversaries create worst-case examples to maximize their membership inference success, result in even better estimates of  $\epsilon$  [Jagielski et al., 2020; Nasr et al., 2021; Lu et al., 2022]. These papers differ in the specifics of the data poisoning attack designed for auditing. Jagielski et al. [2020] craft clipping-aware data poisoning samples in the lowest SVD direction of the training data, under the assumption that the adversary has full knowledge of the training set. Nasr et al. [2021] create adversarial points using adversarial examples in a static data poisoning scenario, but they also consider adversaries that craft poisoning samples adaptively and adversaries that poison gradients during training.

Privacy auditing methods from the literature most often train a large number of ML models, on the order of thousands [Jagielski et al., 2020; Nasr et al., 2021] or even hundred of thousands [Tramer et al., 2022a], to obtain independent estimates of (FPR, FNR) pairs. Once the (FPR, FNR) are collected, various statistical methods are used to estimate the privacy parameter  $\epsilon$ . The initial privacy auditing papers [Jagielski et al., 2020; Nasr et al., 2021] used Clopper-Pearson intervals to bound FPR/FNR, while more recently Jeffrey intervals [Zanella-Béguelin et al., 2022] and Katz-log intervals [Lu et al., 2022] have been shown to reduce variance. Tighter estimates have been designed based on integrating directly over the privacy region [Zanella-Béguelin et al., 2022]. They also introduce the heuristic to reduce the number of training runs by performing membership inference on multiple samples in each run. In our work, we address the challenge of designing efficient privacy auditing for federated learning while training a single model, which does not incur additional performance overhead.

Most privacy auditing techniques [Jagielski et al., 2020; Nasr et al., 2021; Lu et al., 2022; Zanella-Béguelin et al., 2022] have been designed for centralized settings, with the exception of CANIFE [Maddock et al., 2022], suitable for privacy auditing of federated learning deployments. CANIFE operates under a strong adversarial model, assuming knowledge of all intermediary model updates, as well as local model updates sent by a subset of clients in each round of training. CANIFE crafts data poisoning canaries adaptively, with the goal of generating model updates orthogonal to updates sent by other clients in each round. In contrast, we design privacy auditing methods for federated learning with minimal assumptions on adversarial knowledge of the data of other users. Our methods can be applied when adversaries have access to intermediary model updates or only the final model, a common practical setting.

### 3 One-shot privacy estimation for the Gaussian mechanism

First we consider the problem of estimating the privacy of a single application of the Gaussian mechanism, the fundamental building block of DP-SGD and DP-FedAvg. Suppose we are given an implementation of the mechanism that is assumed to be correct, but the value of  $\sigma$  is unknown to us. We could in principle run the mechanism many times to estimate  $\sigma$ , but our goal is to run the implementation *once as a black box*, and use the output to estimate  $\sigma$ , from which the standard bound on  $\epsilon$  can be computed.

The method we will use is as follows. We draw  $k$  canary vectors  $c_j \in \mathbb{R}^d$  sampled i.i.d. uniformly from the unit sphere. We feed the mechanism all canary vectors  $\{c_j\}$ , and it returns  $R = C + Z$  where  $C = \sum_j c_j$  and  $Z \sim \mathcal{N}(0, \sigma^2 I)$ . Then we form the set of cosines between the canary vectors and the mechanism result:  $g_j = \langle c_j, R \rangle / \|R\|$ . We set  $\hat{\sigma} = \frac{1}{\hat{\mu}\sqrt{d}}$  where  $\hat{\mu}$  is the mean of the  $g_j$  values.

$\sigma$	analytical $\varepsilon$	$\varepsilon_{\text{est}}$
4.22	1.0	$0.972 \pm 0.148$
1.54	3.0	$3.04 \pm 0.137$
0.541	10.0	$9.98 \pm 0.190$

Table 1: One-shot auditing of the Gaussian mechanism with  $d = 10^6$ ,  $k = 10^3$ , and  $\delta = 10^{-6}$ . For each value of  $\varepsilon$ , we set  $\sigma$  using the optimal calibration of Balle and Wang [2018], and then use the random canary method to output the estimate  $\varepsilon_{\text{est}}$ . Shown is the mean and std  $\varepsilon_{\text{est}}$  over 50 simulations.

Finally, we invert the optimal calibration method of Balle and Wang [2018] to determine the value of  $\varepsilon_{\text{est}}$  that is guaranteed by  $\hat{\sigma}$ .

In the limit as  $d$  and  $k$  both become large (for example if  $d \rightarrow \infty$  and  $k = \sqrt{d}$ ),  $\varepsilon_{\text{est}}$  converges to the true, analytical  $\varepsilon$ , as seen by the following argument. First note that for large  $d$  the canary distribution over the unit sphere approaches  $\mathcal{N}(0, \frac{1}{d}I)$  in distribution. Now consider the terms in the dot product  $\langle c_j, R \rangle$ :

$$\langle c_j, C \rangle \sim \mathcal{N}(1, \frac{k-1}{d}) \quad \langle c_j, Z \rangle \sim \mathcal{N}(0, \sigma^2)$$

As  $d$  grows, the dot product converges in distribution to  $\mathcal{N}(1, \sigma^2)$ . With increasing  $d$ ,  $\|Z\|$  is concentrated around  $\sigma\sqrt{d}$ , while  $\|C\|$  concentrates around  $\sqrt{k}$ . In the limit of high  $d$ , therefore,  $R$  is dominated by  $Z$ , so the norm of  $R$  is also concentrated around  $\sigma\sqrt{d}$ . So we see that the  $g_j$  converge in distribution to  $\mathcal{N}(\frac{1}{\sigma\sqrt{d}}, \frac{1}{d})$ . Although the  $g_j$  are not independent due to the  $\langle c_j, c_{j'} \rangle$  terms, again as  $d$  grows, their mutual information approaches zero, so the empirical mean  $\hat{\mu}$  of the canary cosines approaches  $\frac{1}{\sigma\sqrt{d}}$ , and  $\frac{1}{\hat{\mu}\sqrt{d}}$  approaches  $\sigma$ , as needed.<sup>2</sup>

While this result is asymptotic, running the algorithm with moderate values of  $d$  and  $k$  already yields a close approximation. We simulated the case where  $d = 10^6$ ,  $k = 10^3$ , and the results are shown in Table 1. The estimated  $\varepsilon_{\text{est}}$  is very close to the true value of  $\varepsilon$ , with small standard deviation, which demonstrates that the random canary method provides tight estimates for the Gaussian mechanism.

## 4 Privacy estimation for FL with random canaries

We now extend this idea to DP Federated Averaging to estimate the privacy loss in one shot, during model training. First, consider the common case where the adversary only has access to the final model. We propose adding  $k$  random canary clients to the training population. Each canary client generates a random model update sampled from an isotropic Gaussian, which it returns at every round in which it participates. The update is scaled to have maximal norm (equal to the clipping norm for the round). At the end of training, we measure how much influence each client has on the final model by examining the empirical distribution of the cosines of the angles between the canary updates and the final model. Our design is motivated by the tendency of models to partially overfit to their training data, and therefore we expect that the final model will be better aligned with canary updates that have been observed during training.

Asymptotically, this choice of generating the canary model updates is in some sense the worst case. If we fix the number of canary clients and the number of iterations and allow the size of the model to grow, the canary updates are asymptotically orthogonal to all the true client updates and also to each other: the expected squared cosine between an isotropically sampled vector and an arbitrary fixed vector is  $1/d$ . A canary update that was *not observed* in training will have vanishing

<sup>2</sup>We could actually have dispensed with the canaries and simply estimated  $\hat{\sigma}$  as  $\|R\|/\sqrt{d}$ , but the method with random canaries will generalize to more complex mechanisms.

cosine with the final model, while the cosine with one that *was observed* will be positive. Prior work has attempted to craft a canary example/update by finding an example/vector that is orthogonal to the clean data update [Maddock et al., 2022; Nasr et al., 2021]. Such approaches require knowledge of the model gradients, but we argue this is unnecessary for high dimensional models, because all vectors are nearly orthogonal to each other with high probability. Sampling canaries randomly lets us simultaneously determine  $k$  canaries without worrying about dependence among them. This approach requires no additional knowledge for the adversary and operates under minimal assumptions.

Note that in general there will not be any set of model parameters for the round and client dataset that can actually give rise to an arbitrary random update. In this sense, the attack may be overly strong. But the intention is to provide evidence that the attacker will not be able to infer the presence of any user, no matter how unusual.

To estimate  $\varepsilon$ , we also need the distribution of cosines between a hypothetical canary from the same distribution and the final trained model where that hypothetical canary was not included in the training. This is where our choice of (i) independent isotropically distributed canaries and (ii) cosine angles as our test statistic are particularly useful. The distribution of the cosine of the angle between an isotropically sampled canary and the model (or any fixed vector) can be described in a closed form; there is no need to train models and get samples from this distribution. The pdf of the angle cosine is  $f(\alpha) \propto (1 - \alpha^2)^{\frac{d-3}{2}}$ . The indefinite integral of  $f$  can be expressed via the hypergeometric function, but the computation becomes unstable in the regime of interest ( $d$  above 500 or so). Fortunately, it is easily seen that the distribution is asymptotically Gaussian with mean zero and variance  $1/d$ .<sup>3</sup> For  $d > 1000$  or so the discrepancy is extremely small: we simulated 1M samples from the correct cosine distribution with  $d = 1000$ , and the strong Anderson-Darling test failed to reject the null hypothesis of Gaussianity at even the low significance level of 0.15.

The task of the adversary, as described in Algorithm 1, is to distinguish between models trained with and without a given canary based on the observation of the cosine of the angle between the canary and the final model. They select a threshold  $a$  and predict that canary  $j$  was observed if the cosine  $g_j \geq a$ . Each threshold will determine a false positive/negative rate (FPR/FNR) that the adversary can achieve. To determine the threshold and estimate  $\varepsilon$ , we collect the  $k$  cosine samples  $\{g_j\}$ , and approximate the distribution with a Gaussian with the same empirical mean  $\mu$  and variance  $\sigma^2$ . Then we report  $\varepsilon_{\text{est}} = \max_a \varepsilon(\mathcal{N}(0, 1/d) \parallel \mathcal{N}(\mu, \sigma^2); \delta, a)$ , where  $\varepsilon(\mathcal{X}_0 \parallel \mathcal{X}_1; \delta, a)$  is the lower bound on  $\varepsilon$  achieved by the attack that thresholds at  $a$  when  $\mathcal{X}_0$  is the distribution of outcomes given  $D$  and  $\mathcal{X}_1$  is the distribution given  $D'$ . Specifically, if  $F_0$  and  $F_1$  are the CDFs of the two distributions,

$$\varepsilon(\mathcal{X}_0 \parallel \mathcal{X}_1; \delta, a) = \max \left( \log \frac{F_0(a) - \delta}{F_1(a)}, \log \frac{1 - \delta - F_1(a)}{1 - F_0(a)} \right).$$

Although we are comparing two Gaussian-distributed values, we cannot apply the same analysis of the Gaussian mechanism used in section 3 because the variance  $\sigma^2$  will not in general match the variance of the null hypothesis distribution  $1/d$ . Instead we numerically maximize  $\varepsilon$  over possible choices of threshold. Also, note that we give the adversary the small advantage of being able to observe  $\mu$  and  $\sigma$  before choosing  $a$ . This will lead to slightly higher estimates of  $\varepsilon$ , but for the practical purpose of determining whether a model is safe to release, it is better to err on the side of overestimating  $\varepsilon$ .

Another important design consideration is how to model the participation pattern of the canary clients. Here there are two reasonable strategies: the canaries could participate exactly as the real clients do, or could be sampled according to a worst-case participation pattern. Both strategies are useful. Suppose clients are sampled uniformly with replacement at each round. We might add canary

<sup>3</sup>To see this, note: if we draw  $Y \sim \mathcal{N}(0, I)$ , then  $\|Y\|$  is Chi-distributed with mean  $\sqrt{d}$  and variance  $1/2$ . Thus  $\|Y/\sqrt{d}\|$  has mean 1 and variance  $1/(2d)$ , meaning  $Y/\sqrt{d}$  is essentially sampled from the unit sphere for high  $d$ . Its first coordinate,  $Y_1/\sqrt{d}$  is distributed like  $\mathcal{N}(0, 1/d)$ , and is equal to the dot product (hence cosine) of  $Y/\sqrt{d}$  with the first standard basis vector.

---

**Algorithm 1** Privacy estimation via random canaries

---

```
1: Input: Client selection function clients, client training functions  $\tau_i$ , canary selection function
canaries, set of canary updates  $c_j$ , number of rounds  $T$ , initial parameters  $\theta_0$ , noise generator
 $Z$ ,  $\ell_2$  clip norm function  $S$ , privacy parameter  $\delta$ , server learning rate  $\eta$ 
2: for  $t = 1, \dots, T$  do
3:    $\rho = \vec{0}$ 
4:   for  $i \in \mathbf{clients}(t)$  do
5:      $\rho \leftarrow \rho + \text{CLIP}(\tau_i(\theta_{t-1}); S(t))$ 
6:   for  $j \in \mathbf{canaries}(t)$  do
7:      $\rho \leftarrow \rho + \text{PROJ}(c_j; S(t))$ 
8:    $m = |\mathbf{clients}(t)| + |\mathbf{canaries}(t)|$ 
9:    $\theta_t \leftarrow \theta_{t-1} + \eta(\rho + Z(t))/m$ 
10: for all canaries  $j$  do
11:    $g_j \leftarrow \langle c_j, \theta_T \rangle / (\|c_j\| \cdot \|\theta_T\|)$ 
12:  $\mu, \sigma \leftarrow \mathbf{mean}(\{g_j\}), \mathbf{std}(\{g_j\})$ 
13:  $\varepsilon \leftarrow \max_a \varepsilon(\mathcal{N}(0, 1/d) \parallel \mathcal{N}(\mu, \sigma^2); \delta, a)$ 
14: function  $\text{CLIP}(x; \kappa)$ 
15:   return  $x \cdot \min(1, \kappa/\|x\|)$ 
16: function  $\text{PROJ}(x; \kappa)$ 
17:   return  $x \cdot \kappa/\|x\|$ 
```

---

clients to the pool of real clients and sample them the same way, providing a *typical* estimate of privacy. Alternatively, we could draw the number of canary samples from a Poisson distribution and place them all in the last few rounds of training, where they are expected to have more of an influence on the final model. If the system supports sampling without replacement for each “epoch”, so that no client can participate more than once in each epoch, a reasonable worst-case canary distribution would be to include all canaries once in each epoch. This highlights the flexibility of our empirical approach, allowing us to measure and compare  $\varepsilon$  values across a range of different threat scenarios.

## 4.1 Using intermediate updates

Existing analytical bounds on  $\varepsilon$  for DP-SGD assume that all intermediate model updates can be observed by the adversary [Abadi et al., 2016]. This may or may not be a reasonable assumption, depending on the release model of the system, but one would expect that an adversary that can see all intermediate updates could be much more successful at guessing whether some client was present in the population (and our experiments support this intuition). A simple way to extend our approach to the case where all model deltas are observed is to use as the test statistic the *maximum over rounds* of the angle between the canary and the model delta at that round: a sudden increase of the angle cosine at a particular round is good evidence that the canary was present in that round. However in this case we can no longer express in closed form the distribution of max-over-rounds cosine of an *unseen* canary, because it depends on the trajectory of partially trained models, which is task and model specific. Our solution is to sample a set of “negative” canaries that are never included in model updates, but we still keep track of their cosines with each model delta and finally take the max. The pseudocode for this modified procedure is provided in Algorithm 2.

We stress that our empirical  $\varepsilon$  estimate should not be construed as a formal bound on the worst-case privacy leakage. Rather, a low value of  $\varepsilon$  can be taken as evidence that an adversary implementing this particular, powerful attack will have a hard time inferring the presence of any given user. To the extent that we believe the attack is strong, we can be confident that *any* attacker

---

**Algorithm 2** Privacy estimation via random canaries using all iterates

---

```
1: Input: As in Algorithm 1, but with unobserved canary updates  $c_j^0$  and observed canary updates  $c_j^1$ .
2: for  $t = 1, \dots, T$  do
3:    $\rho = \vec{0}$ 
4:   for  $i \in \text{clients}(t)$  do
5:      $\rho \leftarrow \rho + \text{CLIP}(\tau_i(\theta_{t-1}); S(t))$ 
6:   for  $j \in \text{canaries}(t)$  do
7:      $\rho \leftarrow \rho + \text{PROJ}(c_j^1; S(t))$ 
8:    $m = |\text{clients}(t)| + |\text{canaries}(t)|$ 
9:    $\bar{\rho} \leftarrow (\rho + Z(t))/m$ 
10:  for all canaries  $j$  do
11:     $g_{t,j}^0 = \langle c_j^0, \bar{\rho} \rangle / (\|c_j^0\| \cdot \|\bar{\rho}\|)$ 
12:     $g_{t,j}^1 = \langle c_j^1, \bar{\rho} \rangle / (\|c_j^1\| \cdot \|\bar{\rho}\|)$ 
13:   $\theta_t \leftarrow \theta_{t-1} + \eta \bar{\rho}$ 
14: for all canaries  $j$  do
15:   $g_j^0 \leftarrow \max_t g_{t,j}^0$ 
16:   $g_j^1 \leftarrow \max_t g_{t,j}^1$ 
17:  $\mu_0, \sigma_0 \leftarrow \text{mean}(\{g_j^0\}), \text{std}(\{g_j^0\})$ 
18:  $\mu_1, \sigma_1 \leftarrow \text{mean}(\{g_j^1\}), \text{std}(\{g_j^1\})$ 
19:  $\varepsilon \leftarrow \max_a \varepsilon(\mathcal{N}(\mu_0, \sigma_0^2) \parallel \mathcal{N}(\mu_1, \sigma_1^2); \delta, a)$ 
```

---

will not be able to perform MI successfully, and therefore our  $\varepsilon$  is a justifiable metric of the true privacy afforded by the training algorithm. By controlling which information the adversary has access to (e.g., final model vs. all iterates) and the participation pattern of canaries, we can modulate the power of the adversary in ways that might vary in a real production system and observe how the privacy estimate changes.

## 5 Experiments

In this section we present the results of experiments estimating the privacy leakage while training a federated model on a large-scale, public federated learning dataset: the stack overflow word prediction data/model of Reddi et al. [2020]. The model is a word-based LSTM with 4.1M parameters. We train the model for 2048 rounds with 167 clients per round, where each of the 341k clients participates in

noise multiplier	$\varepsilon$ RDP	baseline accuracy	accuracy 1k canaries added
0	$\infty$	25.3%	25.3%
0.0644	100k	24.0%	23.9%
0.1023	1000	23.1%	23.1%
0.1836	100	21.5%	21.5%
0.2344	50	20.6%	20.5%

Table 2: Comparison of accuracy of word prediction models trained with and without the presence of 1k random canary clients. Inserting 1k random clients among the 341k real clients in the Stackoverflow word prediction task has an almost negligible effect on model performance.



Noise	$\varepsilon$ RDP	$\varepsilon_{\text{lo}}\text{-all}$	$\varepsilon_{\text{est}}\text{-all}$	$\varepsilon_{\text{lo}}\text{-final}$	$\varepsilon_{\text{est}}\text{-final}$
0	$\infty$	6.24	51300	3.91	5.49
0.0644	100k	6.17	425	1.26	1.74
0.102	1000	4.67	243	1.01	1.22
0.1836	100	2.44	92.0	0.802	0.865
0.2344	50	0.177	78.9	0.478	0.675

Table 3: Comparing  $\varepsilon$  estimates using all model deltas vs. using the final model only.  $\varepsilon_{\text{lo}}$  is the empirical 95% lower bound from our modified Jagielski et al. [2020] method. The high values of  $\varepsilon_{\text{est}}\text{-all}$  indicate that membership inference is easy when the attacker has access to all iterates. On the other hand when only the final model is observed,  $\varepsilon_{\text{est}}\text{-final}$  is far lower.

exactly one round, amounting to a single epoch over the data. First we investigate the case where the canary participation is the same as that for real clients – we relax that assumption in section 5.3. We use the adaptive clipping method of Andrew et al. [2021]. With preliminary manual tuning, we selected a client learning rate of 1.0 and server learning rate of 0.56 for all experiments because the choice gives good performance over a range of levels of DP noise. We always use 1k canaries for each set of cosines; experiments with intermediate iterates use 1k observed and 1k unobserved canaries. We fix  $\delta = 341000^{-1.1} \approx 8.20 \times 10^{-7}$ . We can approximate the worst-case privacy leakage associated with these hyperparameter choices by considering what  $\varepsilon$  would be under Bernoulli sampling at a rate of  $q = 167/2048 \approx 0.081$  for the same number of rounds, and applying Rényi DP [Mironov, 2017]. We consider noise multipliers<sup>4</sup> in the range 0.0644 to 0.2344, corresponding to analytical  $\varepsilon$  estimates from 100k down to 50. We also include experiments with clipping only (noise multiplier is 0). Table 2 shows that across the range of noise multipliers, the participation of 1k canaries had no significant impact on model accuracy.

We also report a high-probability lower bound on  $\varepsilon$  that comes from applying a modified version of the method of Jagielski et al. [2020] to the set of cosines. That work uses Clopper-Pearson upper bounds on the achievable FPR and FNR of a thresholding classifier to derive a bound on  $\varepsilon$ . We make two changes: following Zanella-Béguelin et al. [2022], we use the tighter and more centered Jeffreys confidence interval for the upper bound on FNR at some threshold  $a$ , and we use the exact CDF of the null distribution for the FPR as described in Section 4. We refer to this lower bound as  $\varepsilon_{\text{lo}}$ . We set  $\alpha = 0.05$  to get a 95%-confidence bound.<sup>5</sup>

## 5.1 Using intermediate iterates

We first consider the case where the intermediate updates are released as described in Algorithm 2. The middle columns of Table 3 shows the results of these experiments over a range of noise multipliers. Our method easily separates the cosines of observed vs. unobserved canaries, producing very high estimates  $\varepsilon_{\text{est}}$ , which are much higher than lower bounds  $\varepsilon_{\text{lo}}$  estimated by previous work. This confirms our intuition that intermediate model updates give the adversary significant power to detect the presence of individuals in the data. It also provides evidence that the canary cosine attack is strong, increasing our confidence that when in subsequent experiments with a weakened adversary the estimated  $\varepsilon_{\text{est}}$  is smaller, it is not because the attack is insufficiently powerful.

<sup>4</sup>The noise multiplier is the ratio of the noise to the sensitivity which determines the privacy of the Gaussian mechanism or DP Fed Avg. When adaptive clipping is used, the clip norm varies across rounds, and the noise scales proportionally.

<sup>5</sup>A technical point is in order. To ensure the produced  $\varepsilon_{\text{lo}}$  is a valid high-probability lower bound, the threshold determining FPR and FNR must be chosen independently from the set of statistics used to report FPR and FNR. Tramer et al. [2022b] explicitly call this out, while other works do not state how the threshold is chosen [Nasr et al., 2021]. We *do not* choose the threshold independently, which makes our  $\varepsilon_{\text{lo}}$  values somewhat higher than they otherwise would be.

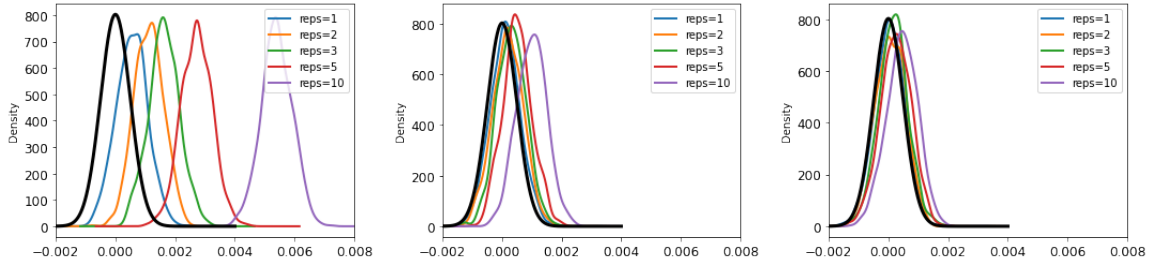


Figure 1: Density plots of cosine values with three values of noise (0, 0.102, and 0.234) and five values of canary repetitions. The black curve is the pdf of the null distribution  $\mathcal{N}(0, 1/d)$ . With no noise, the distributions are easily separable, with increasing separation for more canary repetitions. At higher levels of noise, distributions are less separable, even with several repetitions.

Noise	1 rep	2 reps	3 reps	5 reps	10 reps
0	0.464	<b>0.590</b>	0.396	0.407	0.196
0.102	<b>0.976</b>	0.422	0.340	0.432	0.116
0.234	0.326	0.157	0.347	<b>0.951</b>	0.401

Table 4: Anderson statistics for each set of canary-cosine samples whose densities are shown in Figure 1. The Anderson test rejects at a 1% significance level if the statistic is greater than 1.088, and rejects at 15% significance if the statistic is greater than 0.574. Having three of the 15 values over 0.574 should not be surprising even if the data is in fact Gaussian.

## 5.2 Using final model only, one canary presentation

The rightmost columns of Table 3 show the results of restricting the adversary to observe only the final model, as described in Algorithm 1. Now  $\varepsilon_{\text{est}}$  is significantly smaller than when the adversary has access to all intermediary updates. With clipping only, our estimate is 5.49, which (as we will discuss in Section 6) is still essentially vacuous. But with even a small amount of noise, we approach the high-privacy regime, confirming observations of practitioners that a small amount of noise is sufficient to prevent most memorization and increase privacy.

## 5.3 Using multiple canary presentations

In experiments described so far, each canary, like each real client, was presented exactly once. Now we consider presenting each canary a fixed multiple number of times, corresponding to a worst-case participation pattern. Concretely, the 2048 training rounds are divided into  $n$  epochs and each canary appears once in each epoch, modeling the scenario in which clients are only allowed to check in for training every so often. (Each real client is still included in a single round across the entire training run, as in prior experiments.) In Figure 1 we show kernel density estimation plots of the canary cosine sets. As the number of presentations increases in each plot, the distributions become more and more clearly separated. On the other hand as the amount of noise increases across the three plots, they converge to the null distribution.

Also visible on this figure is that the distributions are roughly Gaussian-shaped. To make this more precise, we apply the Anderson test to each set in Table 4. While it is impossible to prove that a finite set of samples comes from a given distribution, these values show that for most of the sets of canary cosines (consisting of 1000 samples) the strong Anderson test cannot reject the null hypothesis of Gaussianity with even weak confidence.

Finally we compare  $\varepsilon_{10}$  to our  $\varepsilon_{\text{est}}$  with multiple canary presentations in Figure 2. For each noise

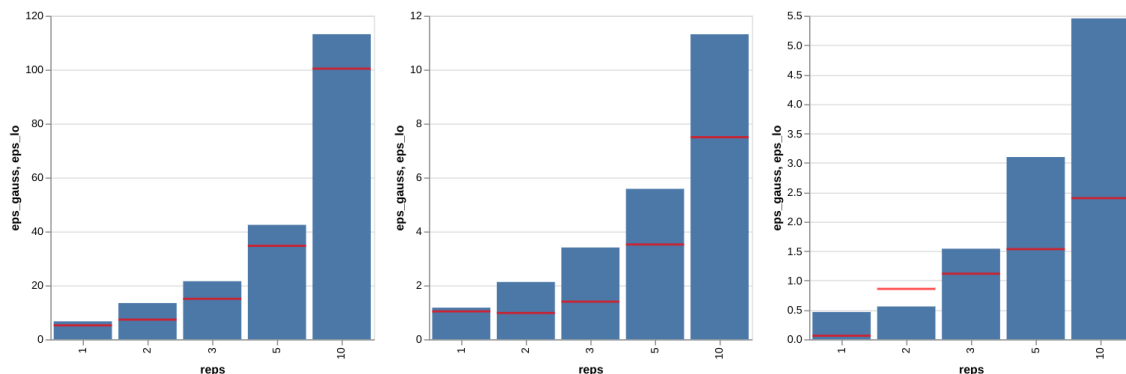


Figure 2: Blue bars are our  $\epsilon_{\text{est}}$  and red ticks are the  $\epsilon_{\text{lo}}$  95%-confidence lower bound for three noise multipliers (0, 0.102, 0.234) and five numbers of canary repetitions. Note the difference of y-axis scales. In one case the lower bound exceeds the Gaussian estimate. This could be because the lower bound is a 95% probability lower bound and we are plotting 15 values, as well as variance in both values.

level,  $\epsilon_{\text{est}}$  increases dramatically with increasing presentations, confirming our intuition that seeing examples multiple times dramatically reduces privacy.

## 6 Discussion

Differential privacy provides strong guarantees for privacy of a training algorithm, but in many deployments there remains a significant gap between the formal guarantees and real-world expectations. The privacy parameters are often chosen according to worst-case analytical bounds, which need to ensure that the definition of DP is guaranteed for any dataset, any output regions of the algorithm, and adversaries of infinite abilities. Existing approaches have serious difficulties balancing provable robustness to such extreme worst-case scenarios and model utility. To obtain models that even weakly rival non-private models in accuracy, it is common to add so little noise that the empirical privacy guarantee is essentially vacuous. Many published works [Li et al., 2021; Anil et al., 2021; Kairouz et al., 2021b] report  $\epsilon$  values in the range 5–20, and the U.S. Census 2020 dataset was released with  $\epsilon = 19.6$ . Even the low end of this range,  $\epsilon = 5$ , means that with non-negligible probability (at least  $\delta$ ), an attacker could observe an output that lets them conclude with confidence at least  $\frac{e^5}{1+e^5} \approx 99.3\%$ , the targeted user was present in the training population. On the other hand, there is a line of research providing evidence that even a small amount of noise is sufficient to significantly obscure the influence of individual users preventing reconstruction attacks [Balle et al., 2022; Guo et al., 2022a,b; Bhowmick et al., 2018; Stock et al., 2022]. This naturally raises the question: how much are we losing in our DP analysis by allowing such an unbounded attacker? Would our  $\epsilon$  values be significantly smaller if we could restrict the adversary to a more realistic class?

Only a handful of training algorithms have been proved to satisfy DP, e.g., [Abadi et al., 2016; Kairouz et al., 2021a; Choquette-Choo et al., 2022]. Slight variations on those algorithms that might reasonably be expected to improve privacy properties have no known analysis. For example, it is possible in a production system to limit the participation of each user by allowing them to participate at most a certain number of times, or dividing the training into “epochs” during which each user can participate at most once. Such policies should, if anything, improve privacy. But so far we don’t know how to take advantage of these restrictions to give lower  $\epsilon$  values. This motivates the need for methods to empirically estimate privacy that can apply in broader situations for which we have no existing analysis.

Of particular interest is the case that only the final model is released. Intuitively, seeing only the final model should significantly weaken the attacker relative to seeing all model deltas, and this is indeed known to be the case for DP-SGD when the objective is convex [Feldman et al., 2018]. In centralized applications of user-level DP, only the final model (or predictions of the final model) are likely to be released. In cross-device FL, an attacker with a fleet of compromised devices could potentially access some number of intermediate updates. To successfully mount such an attack, a significant fraction of devices would have to be compromised, which becomes very difficult in production-scale FL tasks with  $10^5$ – $10^8$  users. The danger of this attack could also be mitigated by the use of Trusted Execution Environments on clients and on the server, allowing devices to prove that they are running local training as intended and cannot access any part of program state, in particular, the parameters for the round [Mo et al., 2021; Mondal et al., 2021]. Our experimental results confirm that the privacy loss is much lower when adversaries obtain access only to the final model compared to all intermediary updates. We also demonstrate that restricted participation of clients in the federated learning training protocol has a positive impact on privacy.

In contrast to most existing work on privacy auditing [Jagielski et al., 2020; Nasr et al., 2021; Zanella-Béguelin et al., 2022; Lu et al., 2022], our empirical auditing method reduces the number of required training runs to just one by using all canaries during regular model training, obtaining multiple, independent measurements of canary cosines with no significant performance overhead. This enables us to design an efficient privacy auditing method for federated learning. The closest related work is CANIFE [Maddock et al., 2022], whose goal is also to perform privacy auditing of federated learning models. Compared to CANIFE, our technique requires minimal assumptions on adversarial knowledge (as the adversary crafts random canaries for poisoning model updates), and are effective for a range of adversarial models, including realistic adversaries with access only to the final model.

## 7 Conclusion

In this work we have introduced a novel method for empirically estimating the privacy loss during training of a model with DP-FedAvg. For natural production-sized problems (millions of parameters, hundreds of thousands of clients), it produces reasonable privacy estimates during the same single training run used to estimate model parameters, without significantly degrading the utility of the model. Our method does not require any prior knowledge of the task, data or model. It can produce flexible estimates of the privacy for arbitrary client-participation patterns or other variations of DP-FedAvg for which no method for producing an improved analytical estimate of  $\epsilon$  is known. The resulting  $\epsilon_{\text{est}}$  can be interpreted as bounding the degree of confidence a strong but bounded adversary could have in performing membership inference and provides an indication of the actual privacy loss incurred in practice.

## References

- M. Abadi, A. Chu, I. Goodfellow, H. B. McMahan, I. Mironov, K. Talwar, and L. Zhang. Deep learning with differential privacy. In *Proceedings of the 2016 ACM SIGSAC conference on computer and communications security*, pages 308–318, 2016.
- G. Andrew, O. Thakkar, B. McMahan, and S. Ramaswamy. Differentially private learning with adaptive clipping. *Advances in Neural Information Processing Systems*, 34:17455–17466, 2021.
- R. Anil, B. Ghazi, V. Gupta, R. Kumar, and P. Manurangsi. Large-scale differentially private bert. *arXiv preprint arXiv:2108.01624*, 2021.

- B. Balle and Y.-X. Wang. Improving the gaussian mechanism for differential privacy: Analytical calibration and optimal denoising. In *International Conference on Machine Learning*, pages 394–403. PMLR, 2018.
- B. Balle, G. Cherubin, and J. Hayes. Reconstructing training data with informed adversaries. In *2022 IEEE Symposium on Security and Privacy (SP)*, pages 1138–1156. IEEE, 2022.
- J. H. Bell, K. A. Bonawitz, A. Gascón, T. Lepoint, and M. Raykova. Secure single-server aggregation with (poly) logarithmic overhead. In *Proceedings of the 2020 ACM SIGSAC Conference on Computer and Communications Security*, pages 1253–1269, 2020.
- A. Bhowmick, J. Duchi, J. Freudiger, G. Kapoor, and R. Rogers. Protection against reconstruction and its applications in private federated learning. *arXiv preprint arXiv:1812.00984*, 2018.
- K. Bonawitz, V. Ivanov, B. Kreuter, A. Marcedone, H. B. McMahan, S. Patel, D. Ramage, A. Segal, and K. Seth. Practical secure aggregation for privacy-preserving machine learning. In *proceedings of the 2017 ACM SIGSAC Conference on Computer and Communications Security*, pages 1175–1191, 2017.
- K. Bonawitz, P. Kairouz, B. McMahan, and D. Ramage. Federated learning and privacy. *Commun. ACM*, 65(4):90–97, mar 2022. ISSN 0001-0782. doi: 10.1145/3500240. URL <https://doi.org/10.1145/3500240>.
- N. Carlini, F. Tramèr, E. Wallace, M. Jagielski, A. Herbert-Voss, K. Lee, A. Roberts, T. Brown, D. Song, U. Erlingsson, A. Oprea, and C. Raffel. Extracting training data from large language models. In *30th USENIX Security Symposium (USENIX Security 2021)*, 2021.
- N. Carlini, S. Chien, M. Nasr, S. Song, A. Terzis, and F. Tramèr. Membership inference attacks from first principles. In *IEEE Symposium on Security and Privacy (SP)*, pages 1519–1519, Los Alamitos, CA, USA, May 2022. IEEE Computer Society. doi: 10.1109/SP46214.2022.00090. URL <https://doi.ieeecomputersociety.org/10.1109/SP46214.2022.00090>.
- C. A. Choquette-Choo, H. B. McMahan, K. Rush, and A. Thakurta. Multi-epoch matrix factorization mechanisms for private machine learning. *arXiv preprint arXiv:2211.06530*, 2022.
- S. Denissov, H. B. McMahan, J. K. Rush, A. Smith, and A. G. Thakurta. Improved differential privacy for SGD via optimal private linear operators on adaptive streams. In A. H. Oh, A. Agarwal, D. Belgrave, and K. Cho, editors, *Advances in Neural Information Processing Systems*, 2022. URL <https://openreview.net/forum?id=i9XrHJoyLqJ>.
- C. Dwork and A. Roth. The algorithmic foundations of differential privacy. *Foundations and Trends® in Theoretical Computer Science*, 9(3–4):211–407, 2014. ISSN 1551-305X. doi: 10.1561/04000000042. URL <http://dx.doi.org/10.1561/04000000042>.
- C. Dwork, F. McSherry, K. Nissim, and A. Smith. Calibrating noise to sensitivity in private data analysis. In *Conference on Theory of Cryptography, TCC '06*, pages 265–284, New York, NY, USA, 2006.
- V. Feldman, I. Mironov, K. Talwar, and A. Thakurta. Privacy amplification by iteration. In *2018 IEEE 59th Annual Symposium on Foundations of Computer Science (FOCS)*, pages 521–532. IEEE, 2018.
- C. Guo, B. Karrer, K. Chaudhuri, and L. van der Maaten. Bounding training data reconstruction in private (deep) learning. In *International Conference on Machine Learning*, pages 8056–8071. PMLR, 2022a.

- C. Guo, A. Sablayrolles, and M. Sanjabi. Analyzing privacy leakage in machine learning via multiple hypothesis testing: A lesson from fano. *arXiv preprint arXiv:2210.13662*, 2022b.
- N. Haim, G. Vardi, G. Yehudai, michal Irani, and O. Shamir. Reconstructing training data from trained neural networks. In A. H. Oh, A. Agarwal, D. Belgrave, and K. Cho, editors, *Advances in Neural Information Processing Systems*, 2022. URL <https://openreview.net/forum?id=Sxk8Bse3RK0>.
- M. Jagielski, J. Ullman, and A. Oprea. Auditing differentially private machine learning: How private is private sgd? In *Proceedings of the 34th International Conference on Neural Information Processing Systems*, NIPS’20, Red Hook, NY, USA, 2020. Curran Associates Inc. ISBN 9781713829546.
- B. Jayaraman and D. Evans. Evaluating differentially private machine learning in practice. In *Proceedings of the 28th USENIX Conference on Security Symposium*, SEC’19, page 1895–1912, USA, 2019. USENIX Association. ISBN 9781939133069.
- P. Kairouz, S. Oh, and P. Viswanath. The composition theorem for differential privacy. In F. Bach and D. Blei, editors, *Proceedings of the 32nd International Conference on Machine Learning*, volume 37 of *Proceedings of Machine Learning Research*, pages 1376–1385, Lille, France, 07–09 Jul 2015. PMLR. URL <https://proceedings.mlr.press/v37/kairouz15.html>.
- P. Kairouz, B. McMahan, S. Song, O. Thakkar, A. Thakurta, and Z. Xu. Practical and private (deep) learning without sampling or shuffling. In M. Meila and T. Zhang, editors, *Proceedings of the 38th International Conference on Machine Learning*, volume 139 of *Proceedings of Machine Learning Research*, pages 5213–5225. PMLR, 18–24 Jul 2021a. URL <https://proceedings.mlr.press/v139/kairouz21b.html>.
- P. Kairouz, B. McMahan, S. Song, O. Thakkar, A. Thakurta, and Z. Xu. Practical and private (deep) learning without sampling or shuffling. In *International Conference on Machine Learning*, pages 5213–5225. PMLR, 2021b.
- P. Kairouz, H. B. McMahan, B. Avent, A. Bellet, M. Bennis, A. N. Bhagoji, K. Bonawitz, Z. Charles, G. Cormode, R. Cummings, et al. Advances and open problems in federated learning. *Foundations and Trends® in Machine Learning*, 14(1–2):1–210, 2021c.
- X. Li, F. Tramer, P. Liang, and T. Hashimoto. Large language models can be strong differentially private learners. *arXiv preprint arXiv:2110.05679*, 2021.
- F. Lu, J. Munoz, M. Fuchs, T. LeBlond, E. V. Zaresky-Williams, E. Raff, F. Ferraro, and B. Testa. A general framework for auditing differentially private machine learning. In A. H. Oh, A. Agarwal, D. Belgrave, and K. Cho, editors, *Advances in Neural Information Processing Systems*, 2022. URL <https://openreview.net/forum?id=AKM3C3tsSx3>.
- S. Maddock, A. Sablayrolles, and P. Stock. Canife: Crafting canaries for empirical privacy measurement in federated learning, 2022. URL <https://arxiv.org/abs/2210.02912>.
- B. McMahan, E. Moore, D. Ramage, S. Hampson, and B. A. y. Arcas. Communication-Efficient Learning of Deep Networks from Decentralized Data. In A. Singh and J. Zhu, editors, *Proceedings of the 20th International Conference on Artificial Intelligence and Statistics*, volume 54 of *Proceedings of Machine Learning Research*, pages 1273–1282. PMLR, 20–22 Apr 2017. URL <https://proceedings.mlr.press/v54/mcmahan17a.html>.
- H. B. McMahan, D. Ramage, K. Talwar, and L. Zhang. Learning differentially private recurrent language models. In *International Conference on Learning Representations*, 2018.
- I. Mironov. Rényi differential privacy. In *2017 IEEE 30th computer security foundations symposium (CSF)*, pages 263–275. IEEE, 2017.

- F. Mo, H. Haddadi, K. Katevas, E. Marin, D. Perino, and N. Kourtellis. Ppfl: privacy-preserving federated learning with trusted execution environments. In *Proceedings of the 19th annual international conference on mobile systems, applications, and services*, pages 94–108, 2021.
- A. Mondal, Y. More, R. H. Rooparaghunath, and D. Gupta. Poster: Flatee: Federated learning across trusted execution environments. In *2021 IEEE European Symposium on Security and Privacy (EuroS&P)*, pages 707–709. IEEE, 2021.
- M. Nasr, S. Songi, A. Thakurta, N. Papemoti, and N. Carlin. Adversary instantiation: Lower bounds for differentially private machine learning. In *2021 IEEE Symposium on Security and Privacy (SP)*, pages 866–882. IEEE, 2021.
- S. Reddi, Z. Charles, M. Zaheer, Z. Garrett, K. Rush, J. Konečný, S. Kumar, and H. B. McMahan. Adaptive federated optimization. *arXiv preprint arXiv:2003.00295*, 2020.
- R. Shokri, M. Stronati, C. Song, and V. Shmatikov. Membership inference attacks against machine learning models. In *2017 IEEE Symposium on Security and Privacy (SP)*, pages 3–18. IEEE, 2017.
- P. Stock, I. Shilov, I. Mironov, and A. Sablayrolles. Defending against reconstruction attacks with r\`enyi differential privacy. *arXiv preprint arXiv:2202.07623*, 2022.
- F. Tramer, A. Terzis, T. Steinke, S. Song, M. Jagielski, and N. Carlini. Debugging differential privacy: A case study for privacy auditing, 2022a. URL <https://arxiv.org/abs/2202.12219>.
- F. Tramer, A. Terzis, T. Steinke, S. Song, M. Jagielski, and N. Carlini. Debugging differential privacy: A case study for privacy auditing. *arXiv preprint arXiv:2202.12219*, 2022b.
- S. Yeom, I. Giacomelli, M. Fredrikson, and S. Jha. Privacy risk in machine learning: Analyzing the connection to overfitting. In *2018 IEEE 31st Computer Security Foundations Symposium (CSF)*, pages 268–282. IEEE, 2018.
- S. Zanella-Béguelin, L. Wutschitz, S. Tople, A. Salem, V. Rühle, A. Paverd, M. Naseri, B. Köpf, and D. Jones. Bayesian estimation of differential privacy, 2022. URL <https://arxiv.org/abs/2206.05199>.