

SAT Requires Exhaustive Search

Ke Xu¹, Guangyan Zhou²

¹State Key Lab of Software Development Environment, Beihang University, Beijing, 100083, China

kexu@buaa.edu.cn

²Department of Mathematics and Statistics, Beijing Technology and Business University, Beijing, 100048, China

zhouguangyan@btbu.edu.cn

Abstract

In this paper, by constructing extremely hard examples of CSP (with large domains) and SAT (with long clauses), we prove that such examples cannot be solved without exhaustive search, which implies a weaker conclusion $P \neq NP$. This constructive approach for proving impossibility results is very different (and missing) from those currently used in computational complexity theory, but is similar to that used by Kurt Gödel in proving his famous logical impossibility results. Just as shown by Gödel's results that proving formal unprovability is feasible in mathematics, the results of this paper show that proving computational hardness is not hard in mathematics. Specifically, proving lower bounds for many problems, such as 3-SAT, can be challenging because these problems have various effective strategies available for avoiding exhaustive search. However, in cases of extremely hard examples, exhaustive search may be the only viable option, and proving its necessity becomes more straightforward. Consequently, it makes the separation between SAT (with long clauses) and 3-SAT much easier than that between 3-SAT and 2-SAT. Finally, the main results of this paper demonstrate that the fundamental difference between the syntax and the semantics revealed by Gödel's results also exists in CSP and SAT.

1 Introduction

Model RB is a random constraint satisfaction problem (CSP) model that was proposed by Xu and Li [1] in 2000, which could also be encoded to well-known NP-complete problems like SAT and CLIQUE. The purpose of this model was to address the issue of trivial unsatisfiability that was prevalent in previous random CSP models. One of the key features of Model RB is that its domain size d grows with the number of variables n . Additionally, Model RB has been proved to exhibit exact phase transitions from satisfiability to unsatisfiability, making it a useful tool for analyzing and evaluating the performance of algorithms. Over the last two

decades, Model RB has been extensively researched from multiple perspectives, as evidenced by various studies (e.g., [2–21]). Moreover, this model has gained significant popularity and widespread use in renowned international algorithm competitions. A random instance of Model RB with a planted solution named frb100-40, where $n = 100$ and $d = 40$, has remained elusive since it was made available online in 2005 as a 20-year challenge for algorithms¹. Despite numerous attempts, no one has been able to solve it thus far. In summary, the results suggest that Model RB possesses nice mathematical properties that can be easily derived. In contrast to its mathematical tractability, the random instances of this model, particularly those generated in the phase transition region, present a significant challenge for various algorithms, proving to be extremely difficult to solve.

As shown in the proof of Gödel’s well-known incompleteness theorem [22], the constructive approach plays an indispensable role in revealing the fundamental limitations of finite formal systems. An algorithm can be regarded as a finite formal system to deduce conclusions step by step. In this paper, we will study the limitations of algorithms based on the constructive approach. Specifically, we will investigate whether it is always possible to develop an algorithm that can replace the naive exponential exhaustive search. The Strong Exponential Time Hypothesis [23] conjectures that no such algorithm exists for SAT. This problem is similar to that proposed by David Hilbert in the early period of 20th century if it is always possible to construct a finite formal system that can replace an area of mathematics (arithmetic for example) containing infinitely many true mathematical statements. These two problems ask essentially the same philosophical question: *whether the part can always replace the whole within the limits of reasoning*. We think that it is more fundamental and has a higher priority than whether an efficient (polynomial-time) algorithm exists.

The advantages of Model RB enable us to choose specific threshold points at which instances with a symmetry requirement are on the edge of being satisfiable and unsatisfiable. In fact, we will show that there exist instances at exactly the same point which are either satisfiable with exactly one solution or unsatisfiable but only fail on one constraint. The satisfiability of such instances can be flipped under a special symmetry mapping, thus the set of these instances form a fixed point under the symmetry mapping and this enables us to construct the most indistinguishable examples that can be understood as the source of computational hardness. Based on the symmetry mapping and driven by the famous method of diagonalization and self-reference, we show that unless exhaustive search is executed, the satisfiability of a certain constraint (thus the whole instance) is possible to be changed, while the subproblems of the whole instance remain unchanged. Therefore, whether the original problem is satisfiable or unsatisfiable cannot be distinguished without exhaustive search. In summary, if we can construct the most indistinguishable examples with exactly the same method and the same parameter values (which is very special and not an easy task), then it is not hard to understand and prove why they are extremely hard to solve.

¹See <https://tinyurl.com/2p53xbd7>

2 Model RB

A random instance I of Model RB consists of the following:

- A set of variables $\mathcal{X} = \{x_1, \dots, x_n\}$: Each variable x_i takes values from its domain D_i , and the domain size is $|D_i| = d$, where $d = n^\alpha$ for $i = 1, \dots, n$, and $\alpha > 0$ is a constant.
- A set of constraints $\mathcal{C} = \{C_1, \dots, C_m\}$ ($m = rn \ln d$, where $r > 0$ is a constant): for each $i = 1, \dots, m$, constraint $C_i = (X_i, R_i)$. $X_i = (x_{i_1}, x_{i_2}, \dots, x_{i_k})$ ($k \geq 2$ is a constant) is a sequence of k distinct variables chosen uniformly at random without repetition from \mathcal{X} . R_i is the permitted set of tuples of values which are selected uniformly without repetition from the subsets of $D_{i_1} \times D_{i_2} \times \dots \times D_{i_k}$, and $|R_i| = (1-p)d^k$ where $0 < p < 1$ is a constant.

In this paper, we have a symmetry requirement of the permitted set of each constraint, and the m permitted sets will be generated in the following way. Initially, we generate a symmetry set R which contains $(1-p)d^k$ tuples of values, then generate each permitted set R_i of the constraint C_i ($i = 1, 2, \dots, m$) by running random permutations of domains of $k-1$ variables in X_i based on R . For example, if $k = 2$ and the domains are $D_1 = D_2 = \{1, 2, 3, 4\}$, then $R = \{(1, 1), (1, 2), (2, 1), (2, 2), (3, 3), (3, 4), (4, 3), (4, 4)\}$ is a symmetry set. If we run a random permutation of D_1 , e.g., $f(1) = 3, f(2) = 1, f(3) = 4, f(4) = 2$, then we get a permitted set $\{(3, 1), (3, 2), (1, 1), (1, 2), (4, 3), (4, 4), (2, 3), (2, 4)\}$. Through this method all R_i ($i = 1, \dots, m$) are isomorphic and every domain value of the variables share the same properties.

A constraint $C_i = (X_i, R_i)$ is said to be satisfied by an assignment $\sigma \in D_1 \times D_2 \times \dots \times D_n$ if the values assigned to X_i are in the set R_i . An assignment σ is called a solution if it satisfies all the constraints. I is called satisfiable if there exists a solution, and called unsatisfiable if there is no solution. It has been proved that Model RB not only avoids the trivial asymptotic behavior but also has exact phase transitions from satisfiability to unsatisfiability. Indeed, denote $\Pr[I \text{ is SAT}]$ the probability that a random instance I of Model RB is satisfiable, then

Theorem 2.1 ([1]). *Let $r_{cr} = \frac{1}{-\ln(1-p)}$. If $\alpha > 1/k$, $0 < p < 1$ are two constants and k, p satisfy the inequality $k \geq 1/(1-p)$, then*

$$\begin{aligned} \lim_{n \rightarrow \infty} \Pr[I \text{ is SAT}] &= 1 \text{ if } r < r_{cr}, \\ \lim_{n \rightarrow \infty} \Pr[I \text{ is SAT}] &= 0 \text{ if } r > r_{cr}. \end{aligned}$$

In the following we will present some properties of Model RB which are important to prove our main theorems in the next section. From here on we tacitly take $r = r_{cr} + \frac{\delta}{n \ln d}$, where $\delta = \frac{\ln 2}{-\ln(1-p)}$, and take

$$\alpha > \max \left\{ 1, \inf \{ \alpha : \omega < 0 \}, -2 \left(\frac{100}{99} \right)^2 \frac{\ln(1-p)}{k}, \frac{100 \ln(1-p)}{k \ln(1-\frac{p}{3})} \right\}, \quad (2.1)$$

where $\omega = 1 + \alpha(1 - r_{cr}pk)$. In fact note that $\omega = 1 + \alpha \left(1 + \frac{pk}{\ln(1-p)}\right)$, and a simple calculation yields that $pk + \ln(1-p) > 0$ for all $p \in (0, 1)$ under the condition that $k \geq \frac{1}{1-p}$. Thus it is possible to take $\alpha > 0$ large enough such that $\omega < 0$.

First, we bound the probability that a random RB instance is satisfiable.

Lemma 2.2. *Let I be a random CSP instance of Model RB with n variables and $rn \ln d$ constraints. Then*

$$\frac{1}{3} \leq \Pr(I \text{ is SAT}) \leq \frac{1}{2}.$$

Proof. Let X be the number of solutions of I , then

$$\Pr(X > 0) \leq \mathbf{E}[X] = d^n (1-p)^{rn \ln d} = \frac{1}{2}. \quad (2.2)$$

As shown in [1],

$$\begin{aligned} \mathbf{E}[X^2] &= \sum_{S=0}^n d^n \binom{n}{S} (d-1)^{n-S} \left((1-p) \frac{\binom{S}{k}}{\binom{n}{k}} + (1-p)^2 \left(1 - \frac{\binom{S}{k}}{\binom{n}{k}}\right) \right)^{rn \ln d} \\ &= \mathbf{E}[X]^2 \left(1 + O\left(\frac{1}{n}\right)\right) \sum_{S=0}^n F(S), \end{aligned} \quad (2.3)$$

where $F(S) = \binom{n}{S} (1 - \frac{1}{d})^{n-S} (\frac{1}{d})^S \left[1 + \frac{p}{1-p} s^k\right]^{rn \ln d}$, and $S = ns$ is the number of variables for which an assignment pair take the same values. Note that $\alpha > 1$, using an argument similar to that in [1, 7], we obtain that only the terms near $S = 0$ and $S = n$ are not negligible, and

$$\frac{\mathbf{E}[X^2]}{\mathbf{E}[X]^2} \leq 1 + \frac{1}{\mathbf{E}[X]} + o(1) = 3 + o(1). \quad (2.4)$$

Indeed, asymptotic calculations show that

$$\begin{aligned} F(0) &= 1 - o(1), F(i) = (1 + o(1))n^{i(1-\alpha)}, \dots, \\ F(n-i) &= (1 + o(1)) \exp\{i(\ln n + \ln d - pkr \ln d)\} / \mathbf{E}[X], F(n) = 1 / \mathbf{E}[X], \end{aligned}$$

where $i = 1, 2, \dots$ is an integer. Note that $\exp\{i(\ln n + \ln d - pkr \ln d)\} = n^{i\omega + o(1)}$ and $\alpha > 1, \omega < 0$ are constants, thus the upper bound of (2.4) comes from $F(0)$ and $F(n)$.

Using the Cauchy inequality, we get $\Pr(X > 0) \geq \mathbf{E}[X]^2 / \mathbf{E}[X^2] \geq \frac{1}{3}$. \square

As an immediate consequence of Lemma 2.2 we obtain a lower bound of the probability that I has exactly one solution.

Corollary 2.3. *Let I be a random CSP instance of Model RB with n variables and $rn \ln d$ constraints. Then the probability that I has exactly one solution is at least $1/6$.*

Proof. Let ρ_1 be the probability that I has exactly one solution, and $\rho_{\geq 2}$ be the probability that I has at least two solutions. Then from Lemma 2.2, we have

$$\begin{aligned}\mathbf{E}[X] &= \frac{1}{2} \geq \rho_1 + 2\rho_{\geq 2}, \\ \Pr(X > 0) &= \rho_1 + \rho_{\geq 2} \geq \frac{1}{3}.\end{aligned}$$

Therefore $\rho_1 \geq 1/6$. □

Next we show that if a random instance is unsatisfiable, then w.h.p.² it fails at only one constraint. We introduce the following definitions.

Definition 2.1. *Let I be a random CSP instance of Model RB. A constraint C is called a self-unsatisfiable constraint if there exists an assignment under which C is the only unsatisfied constraint in I . If variable x is contained in C , then x is called a self-unsatisfiable variable. If I is unsatisfiable and every variable is a self-unsatisfiable variable, then I is called a self-unsatisfiable formula.*

Lemma 2.4. *Let I be a random CSP instance of Model RB with n variables and $rn \ln d$ constraints. If I is unsatisfiable, then w.h.p. I is a self-unsatisfiable formula.*

Proof. First we show that for any constraint C of I , with positive probability there exists an assignment which satisfies all constraints except C . In fact let N be the number of such assignments, then

$$\mathbf{E}[N] = d^n (1-p)^{rn \ln d - 1} p. \quad (2.5)$$

Using a similar argument as in [1], we have

$$\begin{aligned}\mathbf{E}[N^2] &= \sum_{S=0}^n d^n \binom{n}{S} (d-1)^{n-S} \left((1-p) \frac{\binom{S}{k}}{\binom{n}{k}} + (1-p)^2 \left(1 - \frac{\binom{S}{k}}{\binom{n}{k}}\right) \right)^{rn \ln d - 1} \\ &\quad \left(p \frac{\binom{S}{k}}{\binom{n}{k}} + p^2 \left(1 - \frac{\binom{S}{k}}{\binom{n}{k}}\right) \right).\end{aligned}$$

Hence, (2.3), (2.4) and (2.5) ensure that

$$\frac{\mathbf{E}[N^2]}{\mathbf{E}[N]^2} = \frac{\mathbf{E}[X^2]}{\mathbf{E}[X]^2} \cdot \frac{1 + \frac{1-p}{p} s^k}{1 + \frac{p}{1-p} s^k} \leq \frac{1}{p} \frac{\mathbf{E}[X^2]}{\mathbf{E}[X]^2} \leq \frac{3}{p}.$$

Then $\Pr(N > 0) \geq \frac{\mathbf{E}[N]^2}{\mathbf{E}[N^2]} \geq \frac{p}{3}$. Therefore the probability that C is a self-unsatisfiable constraint is at least $\frac{p}{3}$.

²We say a property holds w.h.p. (with high probability) if this property holds with probability tending to 1 as the number of variables approaches infinity.

Next, since the number of constraints is $rn \ln d$, the average degree of each variable $x \in \mathcal{X}$ is $rk \ln d$. By the Chebyshev's inequality,

$$\Pr \left[\text{Deg}(x) \leq \frac{1}{100} rk \ln d \right] \leq e^{-(99/100)^2 rk \ln d / 2} = n^{-(99/100)^2 rk \alpha / 2},$$

where $\text{Deg}(x)$ denotes the degree of variable x . From the requirement (2.1) we know that $1 - (99/100)^2 rk \alpha / 2 < 0$, thus

$$n \Pr \left[\text{Deg}(x) \leq \frac{1}{100} rk \ln d \right] \leq o(1). \quad (2.6)$$

Therefore, almost surely all variables have degree at least $\frac{1}{100} rk \ln d$.

Furthermore, note that each variable appears in at least $\frac{1}{100} rk \ln d$ constraints and the probability that each constraint appears to be a self-unsatisfiable constraint is at least $\frac{p}{3}$, thus the probability that x is not a self-unsatisfiable variable is at most $\left(1 - \frac{p}{3}\right)^{\frac{1}{100} rk \ln d}$.

Note that (2.1) entails that $1 + \frac{1}{100} rk \alpha \ln(1 - p/3) < 0$, therefore the probability that there exists a variable which is not self-unsatisfiable is at most

$$n \left(1 - \frac{p}{3}\right)^{\frac{1}{100} rk \ln d} = n^{1 + \frac{1}{100} rk \alpha \ln(1 - p/3)} = o(1). \quad (2.7)$$

Thus w.h.p. all variables are self-unsatisfiable variables. \square

Remark 2.1. We claim that Lemmas 2.2 and 2.4 hold for any domain size greater than polynomial. Take exponential domain size $d = \beta^n$ (where $\beta > 1$ is a constant) for example, similarly, the dominant contributions of $\mathbf{E}[X^2]/\mathbf{E}[X]^2$ come from $F(0) = 1 - o(1)$ and $F(n) = 1/\mathbf{E}[X]$, and asymptotic calculations show that $F(i) = \Theta\left(\left(\frac{n}{d}\right)^i\right)$ and

$$F(n - i) = (1 + o(1)) \frac{1}{\mathbf{E}[X]} \exp \left\{ i \ln n + i \left(1 + \frac{pk}{\ln(1 - p)}\right) \ln d \right\}$$

are negligible for small integer i , since $1 + \frac{pk}{\ln(1 - p)} < 0$. Moreover, probability analysis holds more easily in the proof of Lemma 2.4 if $d = \beta^n$ ((2.6) and (2.7)).

Next we define a *symmetry mapping* of a constraint which changes its permitted set slightly.

Definition 2.2. Consider a random instance I of Model RB with $k = 2$. Assume that $C = (X, R)$ is a constraint of I and $X = (x_1, x_2)$, then a symmetry mapping of C is to change R by choosing $u_1, u_2 \in D_1$ ($u_1 \neq u_2$), $v_1, v_2 \in D_2$ ($v_1 \neq v_2$), where $(u_1, v_1), (u_2, v_2) \in R$ and $(u_1, v_2), (u_2, v_1) \notin R$, and then exchanging u_1 with u_2 (see Figure 1).

With the above properties of Model RB, we obtain the following interesting results.

Theorem 2.5. There exists an infinite set of satisfiable and unsatisfiable instances of Model RB such that this set is a fixed point under the symmetry mapping of changing satisfiability.

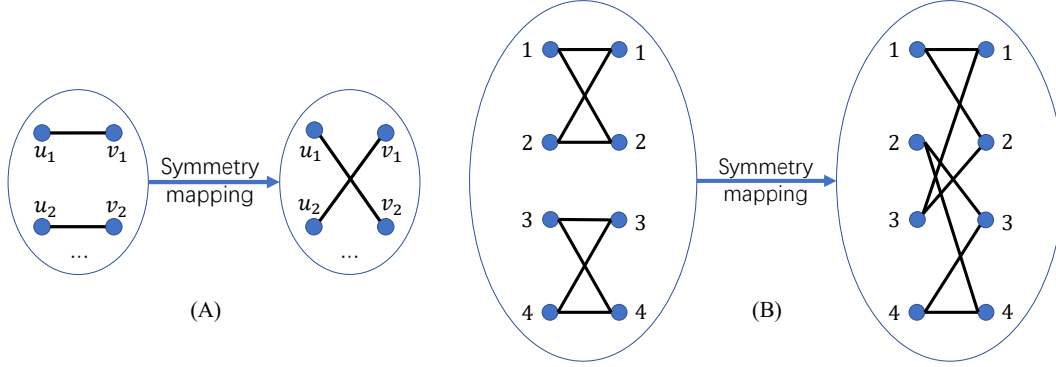


Figure 1: (A) shows a symmetry mapping of the constraint C by exchanging u_1 with u_2 . (B) shows an example of a symmetry mapping by exchanging the domain value 2 with 3 in D_1 , where we set $D_1 = D_2 = \{1, 2, 3, 4\}$ and the original permitted set $R = \{(1, 1), (1, 2), (2, 1), (2, 2), (3, 3), (3, 4), (4, 3), (4, 4)\}$. R becomes $\{(1, 1), (1, 2), (2, 3), (2, 4), (3, 1), (3, 2), (4, 3), (4, 4)\}$ after such a symmetry mapping. Thus for an assignment σ , if $\sigma(x_1) = 2, \sigma(x_2) = 2$, then C changes from satisfiable to unsatisfiable under σ , since $(2, 2)$ does not belong to the permitted set R any more; for an assignment τ , if $\tau(x_1) = 2, \tau(x_2) = 3$, then C changes from unsatisfiable to satisfiable under τ , since $(2, 3)$ belongs to the permitted set R after this symmetry mapping.

Proof. Let \mathcal{I} be the set of RB instances with n variables and $rn \ln d$ constraints, where each instance either has a unique solution or has no solution.

Assume that $I \in \mathcal{I}$ has exactly one solution σ , which happens with probability at least $1/6$ from Corollary 2.3. For an arbitrary constraint C' , assume without loss that $C' = (X', R')$, $X' = (x, x_1)$, $\sigma(x) = u, \sigma(x_1) = v$, and D, D_1 are the domains of x and x_1 , respectively. By the symmetry requirement, there exist $u' \in D, v' \in D_1$ such that $(u', v') \in R', (u, v') \notin R', (u', v) \notin R'$, then we will exchange u with u' . It is easy to see that this symmetry mapping will convert (u, v) into an unpermitted tuple and convert $(u, v'), (u', v)$ into permitted tuples, thus σ is no longer a solution. However, it is possible that at most $2(1-p)d$ pairs $(u, *), (u', *) \in R$ can be expanded to new solutions (this is because by the symmetry requirement, the degree of each domain value of each variable is $(1-p)d$). Specifically, the probability that (u, v') can be expanded to a new solution is at most $d^{n-2}(1-p)^{rn \ln d-1} = \frac{1}{(1-p)d^2}$, thus a simple calculation yields that the probability that I is still satisfiable after the symmetry mapping is at most $O(\frac{1}{d}) = o(1)$.

Assume that $I \in \mathcal{I}$ is an unsatisfiable instance, then w.h.p. all variables in I are self-unsatisfiable variables from Lemma 2.4. This implies that there exist a constraint $C'' \in \mathcal{C}_x$ and an assignment τ such that C'' is the only unsatisfied one under τ . Assume without loss that $C'' = (X'', R'')$, $X'' = (x, x_2)$, $\tau(x) = u, \tau(x_2) = w$, and D, D_2 are the domains of x and x_2 , respectively. It is apparent that $(u, w) \notin R''$. By our symmetry requirement, there exist $u' \in D, w' \in D_2$, where $(u, w'), (u', w) \in R''$ and $(u', w') \notin R''$, such that a symmetry mapping of exchanging u with u' will convert (u, w) into a permitted tuple, thus C'' becomes satisfiable under τ . Moreover, using a similar argument as above, we can see that the probability that the new pairs $(u, *), (u', *) \in R$ could expand to solutions is at most $O(\frac{1}{d}) = o(1)$. Thus w.h.p. I

has only one solution after this symmetry mapping.

From the above two cases we can see that for any $I \in \mathcal{I}$, the symmetry mapping changes its satisfiability, however, I still belongs to \mathcal{I} after the mapping, thus \mathcal{I} can be considered as a fixed point under the symmetry mapping. \square

In this section, it has been shown that we can construct satisfiable and unsatisfiable instances using exactly the same method and the same parameter values. Moreover, these satisfiable and unsatisfiable instances can be transformed into each other by performing the same mapping. This property is very similar to that of the self-referential proposition introduced by Kurt Gödel [22] in order to prove that such a proposition can be neither proved nor disproved (i.e. whether this proposition is true or false cannot be distinguished in finite formal systems). Gödel's results reveal the fundamental difference between the syntax defined by rules and the semantics defined by models. An algorithm is a finite sequence of rules, which can also be viewed as a finite formal system. On the other hand, the exhaustive search method is used to determine, based on the semantic definition of a property, whether this property is satisfied by a model (an assignment). Inspired by Gödel's idea, we call these satisfiable and unsatisfiable instances the most indistinguishable examples because the self-referential property makes such examples syntactically hard to be distinguished from each other.

3 Main Results

Lemma 3.1. *If a CSP problem with n variables and domain size d can be solved in $T(n) = O(d^{cn})$ time ($0 < c < 1$ is a constant), then at most $O(d^c)$ subproblems with $n - 1$ variables are needed to solve the original problem.*

Proof. It is easy to see that d subproblems with $n - 1$ variables are sufficient to solve the original problem. By condition, a CSP problem with $n - 1$ variables can be solved in $T(n - 1)$ time. Since

$$T(n) = O(d^{cn}) = O(d^c d^{c(n-1)}) = O(d^c)T(n - 1),$$

thus at most $O(d^c)$ subproblems with $n - 1$ variables are needed to solve the original problem. \square

The above lemma is a key to proving the main results of this paper. For a better understanding, we take the classical sorting problem as an example. Assume that our goal is to prove that sorting n elements cannot be done in $T(n) = O(n)$ time. By condition, we have $T(n) = O(n - 1) + O(1) = T(n - 1) + O(1)$. This means that we need a subproblem of $n - 1$ elements with additional $O(1)$ operations to solve the original problem. We can show by contradiction that this is impossible and so finish the proof.

Theorem 3.2. *Model RB cannot be solved in $O(d^{cn})$ time for any constant $0 < c < 1$.*

Proof. For the sake of simplicity, we will prove that Theorem 3.2 holds for Model RB with $k = 2$ by contradiction. Let I be a RB instance with n variables and $rn \ln d$ constraints. Suppose there exists some constant $0 < c < 1$ such that I can be solved in $O(d^{cn})$ time, then Lemma 3.1 implies that I can also be solved by assigning at most $O(d^c)$ values to an arbitrary variable, say x , and then solving the resulting subproblems (with $n - 1$ variables) which require $O(d^{c(n-1)})$ time. We will show that there exist instances where the $O(d^c)$ subproblems produced by assigning $O(d^c)$ values to x are impossible to determine its satisfiability. For convenience, let D be the domain of x , \tilde{D} be the set of $O(d^c)$ values which have been assigned to x ($|\tilde{D}| = O(d^c)$), and \mathcal{C}_x be the set of constraints containing x .

Follow the strategy of the proof of Theorem 2.5, if I is an instance having exactly one solution σ , then the constraint C' will be arbitrarily selected from \mathcal{C}_x . Since $O(d^c)$ is $o(1)$ compared with the domain size d , thus the probability that u belongs to \tilde{D} is $o(1)$. Therefore the symmetry mapping in Theorem 2.5 will be performed by exchanging u with u' , where u' is chosen from $D \setminus \tilde{D}$, then I becomes unsatisfiable. Similarly, if I is an unsatisfiable instance, then the symmetry mapping of exchanging u with u' , where u' is chosen from $D \setminus \tilde{D}$, will convert (u, w) into a permitted tuple, thus I becomes satisfiable.

Note that in either of the above cases, the $O(d^c)$ subproblems with $n - 1$ variables remain unchanged, while the satisfiability of the original problem with n variables has been changed after performing the symmetry mapping. We can conclude that the $O(d^c)$ subproblems are insufficient thus impossible to determine if I is satisfiable or unsatisfiable. This completes the proof of Theorem 3.2. \square

As mentioned before, an algorithm is essentially a finite sequence of syntactic rules. The above theorem indicates that it is impossible to find an algorithm for solving Model RB that is substantially better than (and thus can replace) the exhaustive search method based on the semantic definition of satisfiability. More interestingly, the above proof follows the same method (i.e. diagonalization and self-reference) used by Kurt Gödel [22] and Alan Turing [24], respectively, in their epoch-making papers of proving logical and computational impossibility results. This method is very simple, elegant and powerful. On the other hand, the nice mathematical properties and the extreme hardness of Model RB are the key to making it feasible and effective for proving algorithmic impossibility results. We hope that the basic idea of this paper (i.e. Constructing the Most Indistinguishable Examples) will open the way for proving complexity lower bounds that has always been a challenging task even for many polynomial-time solvable problems.

It is worth mentioning that Xu and Li [3] established a direct link between proved phase transitions and the abundance with hard examples by proving that Model RB has both of these two properties. They also made a detailed comparison between Model RB and some other well-studied models with phase transitions, and stated that “*such mathematical tractability should be another advantage of RB/RD, making it possible to obtain some interesting results which do*

not hold or cannot be easily obtained for random 3-SAT". This paper shows that as expected, interesting results can be achieved in an uncomplicated manner. More than two thousand years ago, Laozi, a great Chinese thinker and philosopher, once said: "The greatest truths are the simplest". We believe that the truth of computational hardness should also follow this basic and universal principle. So we can say that the results of this paper are surprising, but not hard to understand.

CSP can be encoded into SAT by use of the log-encoding [25] which introduces a new Boolean variable for each bit in the domain value of each CSP variable and thus uses a logarithmic number of Boolean variables to encode domains. It must be emphasized that each clause of these encoded SAT instances could be very long with $\Theta(\log_2 d)$ Boolean variables if the domain size d grows with the number of CSP variables n . This is in sharp contrast to 3-SAT that is very short in clause length and has received the most attention in the past half-century. For encoded SAT instances of Model RB using the log-encoding, we have totally $N = n \log_2 d$ Boolean variables, $O(Nd^k)$ clauses and $O(Nd^k \log_2 d)$ literals. Note that $d^{cn} = 2^{cn \log_2 d} = 2^{cN}$, so it is easy to derive the following corollary from Theorem 3.2.

Corollary 3.3. *SAT with N Boolean variables cannot be solved in $O(2^{cN})$ time for any constant $0 < c < 1$.*

The above corollary holds for SAT with no restriction on the clause length, and so is not directly applicable to k -SAT with constant $k \geq 3$ whose lower bounds can be obtained by reduction from encoded SAT instances of Model RB. Other CSP instances of domain size l can also be encoded from Model RB using $N = n \log_l d$ variables, thus cannot be solved in $O(l^{cN})$ time for any constant $0 < c < 1$.

It is well-known that SAT is NP-complete [26], and so it follows that $P \neq NP$.

References

- [1] K. Xu and W. Li. Exact phase transitions in random constraint satisfaction problems. *Journal of Artificial Intelligence Research*, 12(1): 93-103, 2000.
- [2] K. Xu, F. Boussemart, F. Hemery, C. Lecoutre. A simple model to generate hard satisfiable instances. *Proc. 19th International Joint Conferences on Artificial Intelligence (IJCAI)*, 337-342, 2005.
- [3] K. Xu, W. Li. Many hard examples in exact phase transitions. *Theoretical Computer Science* 355, 291-302, 2006.
- [4] K. Xu, F. Boussemart, F. Hemery, C. Lecoutre. Random constraint satisfaction: Easy generation of hard (satisfiable) instances. *Artificial intelligence*, Vol. 171, 514-534, 2007.

- [5] T. Liu, X. Lin, C. Wang, K. Su, K. Xu. Large Hinge Width on Sparse Random Hypergraphs. *Proc. 22nd International Joint Conferences on Artificial Intelligence (IJCAI)*, 611-616, 2011.
- [6] S. Cai, K. Su, A. Sattar. Local search with edge weighting and configuration checking heuristics for minimum vertex cover. *Artificial Intelligence*, Vol. 175, 1672-1696, 2011.
- [7] C. Zhao and Z. Zheng. Threshold behaviors of a random constraint satisfaction problem with exact phase transitions. *Information Processing Letters*, 111, 985-988, 2011.
- [8] L. Saitta, A. Giordana, and A. Cornuejols. Phase transitions in machine learning. *Cambridge University Press*, 2011.
- [9] C. Zhao, P. Zhang, Z. Zheng, K. Xu. Analytical and belief-propagation studies of random constraint satisfaction problems with growing domains. *Physical Review E* 85, 016106, 2012.
- [10] Y. Fan, J. Shen, K. Xu. A general model and thresholds for random constraint satisfaction problems. *Artificial Intelligence*, Vol. 193, 1-17, 2012.
- [11] C. Lecoutre. *Constraint Networks: Targeting Simplicity for Techniques and Algorithms*. John Wiley & Sons, 2013.
- [12] P. Huang, M. Yin. An upper (lower) bound for Max (Min) CSP. *Science China Information Sciences*, Vol. 57, 1-9, 2014.
- [13] W. Xu, P. Zhang, T. Liu and F. Gong. The solution space structure of random constraint satisfaction problems with growing domains. *Journal of Statistical Mechanics: Theory and Experiment*, P12006, 2015.
- [14] T. Liu, C. Wang, and K. Xu. Large hypertree width for sparse random hypergraphs. *Journal of Combinatorial Optimization*, Vol. 29, 531-540, 2015.
- [15] D.E. Knuth. *The art of computer programming, Volume 4, Fascicle 6: Satisfiability*. Addison-Wesley Professional, 2015.
- [16] W. Xu, F. Gong. Performances of pure random walk algorithms on constraint satisfaction problems with growing domains. *Journal of Combinatorial Optimization*, Vol. 32, 51-66, 2016.
- [17] Z. Fang, C.M. Li, K. Xu. An exact algorithm based on maxsat reasoning for the maximum weight clique problem. *Journal of Artificial Intelligence Research*, Vol. 55, 799-833, 2016.
- [18] X. Wang, D. Xu. Convergence of the belief propagation algorithm for RB model instances. *Ruan Jian Xue Bao/Journal of Software*, Vol. 27, 2712-2724, 2016 (in Chinese).

- [19] C.M. Li, Z. Fang, H. Jiang, K. Xu. Incremental Upper Bound for the Maximum Clique Problem. *INFORMS Journal on Computing*, Vol. 30, 137-153, 2018.
- [20] N. Karalias, A. Loukas. Erdős goes neural: an unsupervised learning framework for combinatorial optimization on graphs. *Advances in Neural Information Processing Systems 33* (2020): 6659-6672.
- [21] G. Zhou, W. Xu. Super solutions of the model RB. *Frontiers of Computer Science*, Vol. 16, Article number: 166406, 2022.
- [22] K. Gödel. Über formal unentscheidbare Sätze der Principia Mathematica und verwandter Systeme I. *Monatshefte für mathematik und physik*, Vol. 38, pp. 173-198, 1931.
- [23] C. Calabro, R. Impagliazzo, and R. Paturi. The complexity of satisfiability of small depth circuits. *International Workshop on Parameterized and Exact Computation*, pp. 75-85, 2009.
- [24] A.M. Turing. On computable numbers, with an application to the Entscheidungsproblem. *Proceedings of the London Mathematical Society*, Vol. 42, pp. 230-265, 1936.
- [25] T. Walsh. SAT v CSP. *International Conference on Principles and Practice of Constraint Programming*, pp. 441-456, 2000.
- [26] S.A. Cook. The complexity of theorem-proving procedures. *Proceedings of the Third Annual ACM Symposium on Theory of Computing*, pp. 151-158, 1971.