

AutoOptLib: A Library of Automatically Designing Metaheuristic Optimization Algorithms in MATLAB

Qi Zhao, Bai Yan, Taiwei Hu, Xianglong Chen, and Yuhui Shi, *Fellow, IEEE*

Abstract—Metaheuristic algorithms are widely-recognized solvers for challenging optimization problems with multi-modality, discretization, large-scale, multi-objectivity, etc. Automatically designing metaheuristic algorithms leverages today’s increasing computing resources to conceive, build up, and verify the design choices of algorithms. It requires much less expertise, labor resources, and time cost than the traditional manual design. Furthermore, by fully exploring the design choices with computing power, automated design is potential to reach or even surpass human-level design, subsequently gaining enhanced performance compared with human problem-solving. These significant advantages have attracted increasing interest and development in the automated design techniques.

Open source software is indispensable in response to the increasing interest and development of the techniques. To this end, we have developed a MATLAB library, AutoOptLib, to automatically design metaheuristic algorithms. AutoOptLib, for the first time, provides throughout support to the whole design process, including: 1) plenty of algorithmic components for continuous, discrete, and permutation problems, 2) flexible algorithm representation for evolving diverse algorithm structures, 3) various design objectives and design techniques for different experimentation and application scenarios, and 4) useful experimental tools and graphic user interface (GUI) for practicability and accessibility. In this paper, we first introduce the key features and architecture of the AutoOptLib library. We then illustrate how to use the library by either command or GUI. We further describe additional uses and experimental tools, including parameter importance analysis and benchmark comparison. Finally, we present academic and piratical applications of AutoOptLib, which verifies its efficiency and practicability.

Index Terms—Metaheuristic, optimization, automated design, automated machine learning, evolutionary algorithm, MATLAB.

I. INTRODUCTION

OPTIMIZATION problems are ubiquitous in academia and practice. Many of them are featured with multi-modality, discretization, large-scale, or multi-objectivity. These features make them tricky to solve by canonical mathematical programming methods. Metaheuristic algorithms, e.g., genetic

algorithm (GA) [1], particle swarm optimization (PSO) [2], ant colony optimization (ACO) [3], simulated annealing (SA) [4], and tabu search [5], are stochastic search approaches that integrate gradient-free local improvement with high-level strategies of escaping from local optima [6]. Because they can search independent of problem structure and problem domain, metaheuristic algorithms have been widely recognized alternatives to mathematical programming for the tricky problems, e.g., distilling natural laws [7], designing neural networks [8], formulating biomolecular models [9], and controlling robot swarms [10].

Since no single metaheuristic algorithm is better than others on all problems [11], carefully tailoring algorithms to the targeted problem is necessary to obtain good enough solutions. The tailoring is often manually made by human experts, which suffers from grave challenges in front of the rapid development of modern science and engineering. First, eligible algorithm experts are not always available, especially in practical scenarios. Second, manual tailoring could be laborious, which may cost the experts days or weeks tailoring the algorithms. Third, manual tailoring may be error-prone due to the high complexity of the targeted problem and the high degree of freedom in tailoring the algorithms.

These challenges motivate automatically designing metaheuristic algorithms with little human intervention. Automated design leverages computing resources to partly replace human experts to conceive, build up, and verify the design choices of algorithms, subsequently producing algorithms that are fit for solving the targeted problem [12], [13]. Human experts can be involved but are not necessary during the design process. Therefore, automated design could make high-performance algorithms accessible to a much broader range of researchers and practitioners. This is promising in response to the lack of labor and time resources to handle tricky problems. Moreover, by leveraging computing power to fully explore the design choices, automated design is potential to reach or even surpass human-level design, thereby gaining enhanced performance compared with human problem-solving.

From the perspective of the design choices, techniques for automatically designing metaheuristic algorithms can be divided into two categories. The first category is designing from scratch. That is, collecting computational primitives (e.g., $+$, $-$, $\sin()$, $\max()$, swap) to construct the design space; then, building the symbolic formulations of algorithmic components by some of the primitives; finally, composing the components as an algorithm and configuring endogenous parameters [14], [15]. The second category is designing from existing algorithmic components. That is, collecting existing algorithmic

This work is supported by the Shenzhen Fundamental Research Program under Grant No. JCYJ20200109141235597, Guangdong Basic and Applied Basic Research Foundation under Grant No. 2021A1515110024, National Natural Science Foundation of China under Grant No. 61761136008, Shenzhen Peacock Plan under Grant No. KQTD2016112514355531, and Program for Guangdong Introducing Innovative and Entrepreneurial Teams under Grant No. 2017ZT07X386. (*Corresponding author: Yuhui Shi*)

Q. Zhao, X. Chen, T. Hu and Y. Shi are with the Department of Computer Science and Engineering, Southern University of Science and Technology, Shenzhen 518055, China (email: zhaq@sustech.edu.cn; xx@mail.sustech.edu.cn; xx@mail.sustech.edu.cn; shiyh@sustech.edu.cn).

B. Yan is with Research Institute of Trustworthy Autonomous Systems, Southern University of Science and Technology, Shenzhen 518055, China (email: yanb@sustech.edu.cn).

components (e.g., single-point crossover [16], tournament selection [16], greedy randomized construction [17], and tabu list mechanism [18]) to construct the design space; then, composing some of the components as an algorithm and configuring endogenous parameters [19], [20], [12], [13], [21], [22]. The second category is more popular in the literature, because the design space with existing algorithmic components is more compact than that with computational primitives, and using this design space allows the design inheriting from prior knowledge and experimentation. Such compact and knowledge-induced space makes the design easier and available with fewer computing resources than designing from scratch.

With the increasing interest and development of automated design, open source software becomes indispensable in benchmark comparisons and promoting the accessibility and practicability of the techniques. Several software have been used to automatically design metaheuristic algorithms from algorithmic components [23], [24], [25], [26], [27], [28], [29], [30], [31], [32]. Representatives include irace [33], Paradiseo [34], [35], ParamILS [36], SMAC [37], [38], and Sparkle [39]. Among them, irace [33] provides an R package that proposes the iterative racing mechanism to identify competitive design choices. Paradiseo [35] offers a C++ interface to irace. ParamILS [36] has a Ruby implementation that uses iterative local search to search over the design space. SMAC [38] was written in Python and leverages Bayesian optimization to search for promising design choices. The intensification and capping strategies are involved in SMAC to save algorithm evaluations. Sparkle [39] is a recently released Python platform that provides easily accessible algorithm configuration by SMAC¹.

It is encouraging to have these software with remarkable performance gains. However, most of them stem from hyperparameter configuration and bear apparent restrictions when using to design metaheuristic algorithms:

- Most of them focus on a single module rather than supporting the whole design process. For example, irace [33] emphasises selecting design choices by iterative racing; ParamILS [36] and SMAC [38] focus on searching design choices and saving algorithm evaluations. Apart from the select and search modules, collecting algorithmic components to construct the design space is critical, since it determines what algorithms can be found in principle. Unfortunately, most of the software left users to collect and construct the design space, which is nontrivial for practitioners and researchers out of the metaheuristic community.
- They provide little support for designing algorithms with diverse structures. These software normally use vectors with categorical identifiers of algorithmic components and numeral algorithmic parameters to represent the algorithm. The represented algorithm should be inserted into a predefined algorithm template for meaningful execution. The template restricts the designed algorithms to have the

same structure, limiting the designed algorithms' novelty and diversity.

- Most of them are stand-alone implementations of a single design technique rather than uniform software with various techniques for benchmark comparisons. For example, racing [33], intensification [36], capping [36], and surrogate [38] are techniques that can save the computational cost of the design process by reducing the number of algorithm evaluations or estimating algorithms without a full evaluation. These techniques are implemented in different software [33], [36], [38], [39]. A uniform software that implements different techniques in the same coding style and programming language is necessary for benchmark comparison among the techniques and accelerating future research. However, such a software is still lacking.

In this paper, we present a MATLAB **Library of Automatically designing metaheuristic Optimization** algorithms, dubbed **AutoOptLib**², to eliminate these restrictions. To the best of our knowledge, AutoOptLib is the first software with throughout support for the whole process of automatically designing metaheuristic algorithms, including plenty of design choices (algorithmic components), various design objectives and techniques, benchmark comparison functionalities, practical usage considerations, and graphical user interface (GUI). AutoOptLib would bring effective use of automated design techniques to a much broader range of researchers and practitioners, make satisfactory approximation solvers accessible and practicable without requiring much expert knowledge, labor resources, and time cost, and accelerate future research of the automated algorithm design and metaheuristic fields. In summary, we provide the following distinctive features and advantages of AutoOptLib:

- *Rich library of design choices.* We provide over 40 representative algorithmic components ranging from neighborhood search, evolutionary search, to swarm optimizer, as well as components for particular problems, e.g., niching for large-scale problems, constraint violation for constrained problems, and multiple sampling for uncertain problems. Users do not need to write additional code but can directly get their design space through these components. The components can be used to design algorithms for various types of problems, including continuous, discrete, and permutation problems with/without constraints and uncertainties.
- *Flexibility to designing diverse algorithms.* We develop a directed cyclic graph to represent the designed algorithm; the graph typology can evolve during the algorithm design process to fit for solving the targeted problem. Therefore, we can design algorithms with diverse structures (e.g., a simple algorithm with tandem components, ensemble algorithm with multiple search pathways, and memetic algorithm with an inner loop of local search) in a single run. Such flexibility greatly boosts the possibility of finding novel and efficient algorithms.

¹Sparkle also supports algorithm selection, which is a different topic from the algorithm design considered in this paper.

²AutoOptLib's source code is publicly available at <https://github.com/qz89/AutoOpt>.

- *Fair benchmark of different design objectives and techniques.* We cover different types of design objectives, e.g., solution quality, runtime, and anytime performance, for various problem-solving scenarios. Furthermore, we offer many representative techniques for searching, evaluating, and identifying algorithms, e.g., iterative racing [33], intensification [36], and surrogate [38]. These options ensure correct benchmark comparison and convenient use for different demands and interests.
- *Good accessibility to both researchers and practitioners.* We fully write AutoOptLib in MATLAB, such that the library can directly interface with abundant MATLAB simulation environments. Therefore, the library is usable to researchers from different communities, e.g., mechanical engineering, electronics, transportation, and industrial engineering. Furthermore, we provide a concise GUI. Users can input their problem, manage the algorithm design process, make experimental comparisons, and visualize results with simple one-clicks on the GUI. We also support automatically tuning hyperparameters of a given algorithm, using and comparing with classic algorithms. All of the above ensures AutoOptLib’s accessibility and practicability.
- *Easy extensibility.* The AutoOptLib library is open source and follows the open-closed principle [40], [41]. Users are convenient to implement their own design choices, objectives, and techniques based on the current sources, and add the implementations to the library by a uniform interface. Such that the library is easy to extend to serve various problem-solving scenarios and update to stay state-of-the-art.

In the rest of the paper, we first present the architecture of AutoOptLib by elaborating on its pipeline, file structure, classes, and operating sequence in Section II. Then, we detail how to use AutoOptLib by commands or GUI in Section III. After that, we introduce some other usages of the library in addition to algorithm design in Section IV. We further demonstrate two real-world applications of the library in Section V. Finally, we conclude the paper and point out future work in Section VI.

II. ARCHITECTURE

In this section, we present the architecture of AutoOptLib by introducing its pipeline, file structure, classes, and operating sequence.

A. Pipeline

We follow a standard automated machine learning pipeline, as shown in Figure 1. According to Figure 1, there are four main modules within the process of automatically designing metaheuristic algorithms for a targeted problem. The first is constructing the design space. In the current version of AutoOptLib, we provide over 40 widely-used algorithmic components for continuous, discrete, and permutation problems. We also support handling constraints, uncertainties, large-scale and sequential problems. More advanced components will be developed in future versions. We default the design

space for each type of problems covering all the involved components for this type. Users can either employ the default space with the furthest potential to discover novelty or define a narrow space according to interest. We develop a directed cyclic graph to represent the designed algorithm. Users do not need to specify the algorithm’s structure (graph typology), but AutoOptLib will evolve the structure during the algorithm design process to fit for solving the targeted problem.

In the second module, AutoOptLib searches over the design space to produce algorithms. We use iterative local search [42] to search the graph representations of algorithmic component compositions and use CMA-ES [43] to optimize continuous endogenous parameters. The reasons are that iterative local search and CMA-ES are well-recognized methods for discrete and continuous search, respectively. Their ability to algorithm configuration and hyperparameter optimization has been demonstrated [36], [44], [45]. Furthermore, they are model-free methods, which are flexible to be integrated with other modules of AutoOptLib. In principle, any other search method could be employed to search over the design space.

The third module is evaluating the algorithms’ performance according to a design objective. We provide three types of design objectives, i.e., solution quality, runtime, and anytime performance, for different problem-solving demands. We also offer four representative evaluation methods, i.e., racing [33], intensification [36], surrogate [38], and exhaustive evaluation on all targeted problem instances.

The fourth module is related to the targeted problem. A problem template *prob_template.m* is given in the library, by which any user familiar with MATLAB programming can easily implement and interface their problems with the library. Details of the algorithmic components, algorithm representation, design objectives, and evaluation methods are given in the documentation of the library [46].

B. File Structure

The file structure of AutoOptLib is given in Figure 2. As shown in Figure 2, source files of the library are organized in a clear and concise structure. One interface function *AutoOpt.m* and three folders are in the root directory. The folder */Utilities* contains public classes and functions. Specifically, the subfolder */@DESIGN* stores the class and functions for designing algorithms for a targeted problem, including functions for initializing, searching, and evaluating algorithms. */@SOLVE* contains the class and functions for solving the targeted problem by the designed algorithms, e.g., functions for inputting algorithms, executing the algorithms, and repairing solutions. */Others* involves miscellaneous functions, e.g., sources of the GUI, functions of experimental tools, etc. The *Space.m* function is for constructing the design space by algorithmic components.

The */Components* folder contains the algorithmic components for constructing the design space. We package each component with ranges of its endogenous parameter values in a single *.m* file. For example, in Figure 2, *choose_tournament.m* and *search_mu_gaussian.m* are the functions of the tournament selection [16] and Gaussian mutation [47], respectively. All

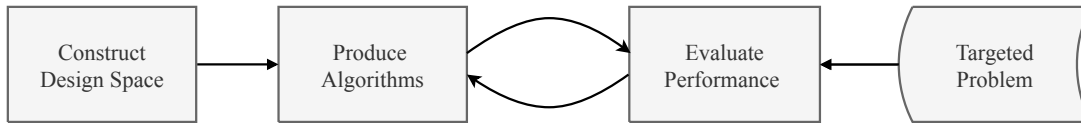


Fig. 1. Pipeline of AutoOptLib.

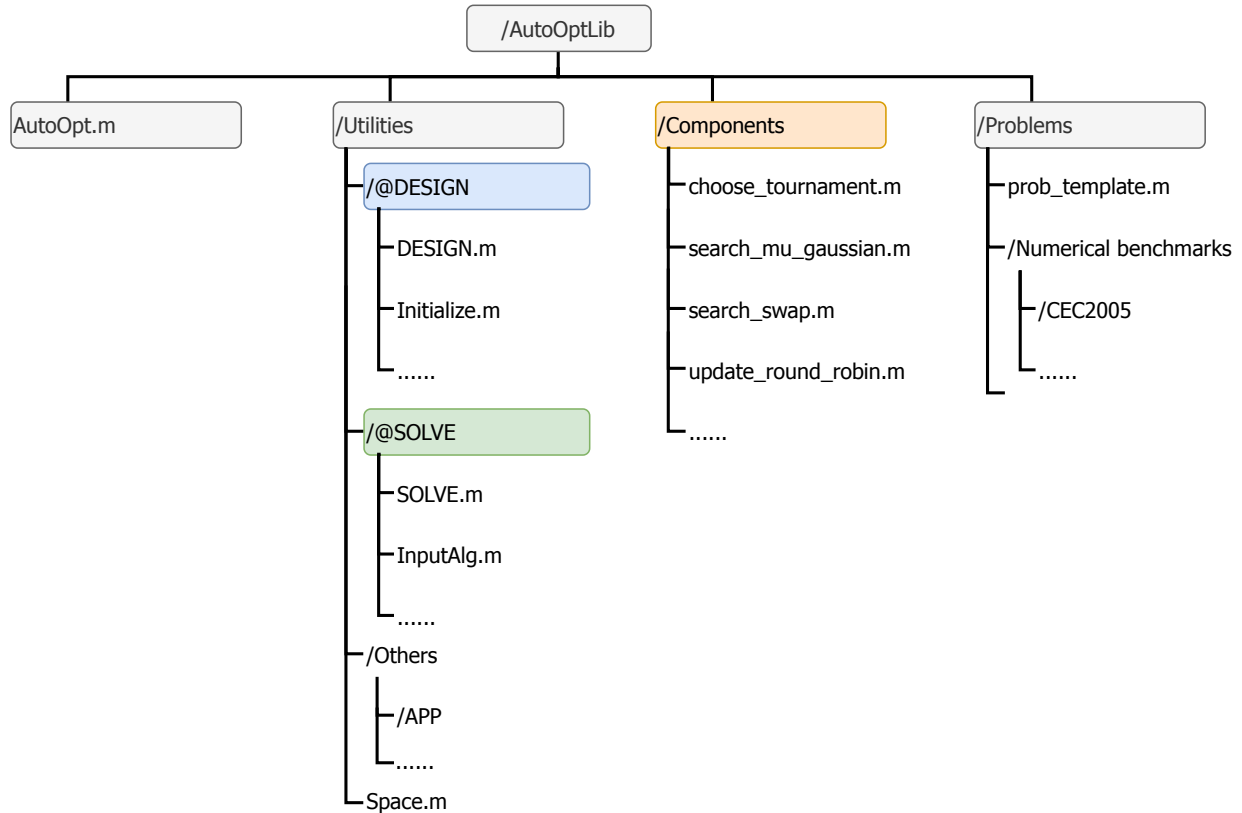


Fig. 2. File structure of AutoOptLib.

the component functions are written in the same structure, so users can easily implement and add new components to the library according to existing ones.

Finally, the */Problems* folder is for the targeted problems. A problem template, i.e., the *prob_template.m* in Figure 2, is given to guide users to easily implement and interface their problems with the library. Some widely-used numerical benchmark problems, e.g., the CEC2005 single-objective real-parameter optimization problems [48], are also provided for toy experimentation.

C. Classes

We involve only two classes in AutoOptLib, namely DESIGN and SOLVE, which manage the process of designing algorithms for a targeted problem and solving the targeted problem by the designed algorithms, respectively. The class diagram is given in Figure 3. An object of the DESIGN class is a designed algorithm with several properties, e.g., operator (components that constitute the algorithm), parameter (endogenous parameters of the algorithm), and performance (performance of the algorithm). The class

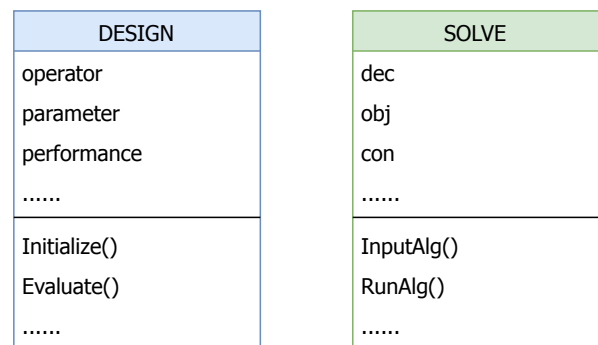


Fig. 3. Class diagram of AutoOptLib.

have some methods to be invoked by the objects. For example, the method `Initialize()` works on initializing the designed algorithms; `Evaluate()` is for evaluating the algorithms' performance according to a design objective.

An object of the SOLVE class is a solution to the targeted problem. It has several properties, including `dec` (decision variables), `obj` (objective value), `con` (constraint violation),

etc. The class has several methods for achieving the solutions, such as `InputAlg()` (preprocessing and inputting the designed algorithm) and `RunAlg()` (running the algorithm on the targeted problem).

D. Operating Sequence

We prompt a clear understanding of the operating scheme of `AutoOptLib` by the sequence diagram in Figure 4. To begin with, the interface function `AutoOpt.m` invokes `DESIGN.m` to instantiate objects (the designed algorithms) of the `DESIGN` class. In detail, firstly, `DESIGN.m` uses the `Initialize()` method to initialize algorithms over the design space. Then, the algorithms' performance on solving the "training" instances³ of the targeted problem is evaluated by the `Evaluate()` method. To get the performance, the `Evaluate()` method invokes the `SOLVE` class, and `SOLVE` further calls functions of the algorithms' components and function of the targeted problem. Finally, the initial algorithms are returned to `AutoOpt.m`.

After initialization, `AutoOptLib` goes into iterative design. In each iteration, firstly, `AutoOpt.m` invokes `DESIGN.m`. Then, `DESIGN.m` instantiate new objects (new algorithms) of the `DESIGN` class based on the current ones by the `Disturb()` method. Next, the new algorithms' performance is evaluated in the same scheme as in the initialization. After that, the new algorithms are returned to `AutoOpt.m`. Finally, the `Select()` method of the `DESIGN` class is invoked to select promising algorithms from the current and new ones.

After the iteration terminates, `AutoOpt.m` invokes the `Evaluate()` method of the `DESIGN` class to test the final algorithms' performance on the test instances of the targeted problem. Then, the final algorithms are returned in `AutoOpt.m`.

The above operating sequence has some significant advantages. Firstly, we keep functions of algorithmic components not interactive with each other but invoked independently by the `SOLVE` class. This independence provides great flexibility in designing various algorithms and extensibility to new components. Furthermore, we package design techniques in different methods (e.g., `Evaluate()`, `Select()`) of the `DESIGN` class. Such packaging brings good understandability and openness to new techniques without modifying the library's architecture. In addition, we enclose the targeted problem separately and do not directly interact it with algorithmic components and design techniques. This separation allows users to easily interface their problems with the library and use the library without much knowledge of metaheuristics and design techniques, thereby ensuring the accessibility of the library to researchers and practitioners from different communities and domains.

III. RUNNING

In this section, we introduce two ways to run `AutoOptLib`. One way is by MATLAB command with input parameters to

invoke `AutoOpt.m`. The other way is by the GUI with simple one-click operations.

A. Running by Command

We define the following MATLAB command to invoke the run: `AutoOpt('name1', value1, 'name2', value2, ...)`, where `name` and `value` refer to the input parameter's name and value, respectively. The main parameters are listed in Table I. Precisely, the `f1` problem (shifted sphere function) of the CEC2005 single-objective real-parameter benchmarks [48] is exemplified; the problem instances differ in the dimension of solution space. Parameters `AlgP` and `AlgQ` control the flexibility of discovering different algorithm structures. `AlgP > 1` realizes designing ensemble algorithms with multiple parallel search operations. `AlgQ > 1` allows serial search operations that each of them can activate conditionally (e.g., variable neighborhood search) or perform inner loop (e.g., a memetic algorithm with an inner loop of local search). Users do not need to specify a particular algorithm structure, but `AutoOptLib` will automatically adapt structures to the targeted problem. Details of algorithm structures are given in the documentation of the library [46].

Parameters `Problem`, `InstanceTrain`, and `InstanceTest` are problem-dependant, while `Mode` determines the running mode. These four parameters are mandatory to input into the command. We provide default values for other parameters. Users can either use default values without input to the command or input by themselves for sophisticated functionality. For example, the command `AutoOpt('Mode', 'design', 'Problem', 'CEC2005_f1', 'InstanceTrain', [1,2], 'InstanceTest', 3, 'Metric', 'quality', 'Evaluate', 'intensification')` is to design algorithms with the best solution quality on the CEC2005_f1 problem; intensification [36] is employed as the performance evaluation method.

There are also conditional parameters when certain options of the main parameters are chosen. For example, setting `Metric` to `runtimeFE` incurs conditional parameter `Thres` to define the algorithm performance threshold for counting the runtime. All conditional parameters have default values and are not necessary to set in the command. Furthermore, we provide plenty of warnings and corresponding solutions for detecting and addressing potential conflicts and errors in the command to keep `AutoOptLib` in correct use. The full list of parameters with all available options is elaborated in the documentation of the library [46].

After starting the run by command, we provide a waitbar in front of the window for users to monitor the running process. The waitbar shows the real-time stage and progress of the run. After the running terminates, we display and save results from different perspectives for different analysis and application purposes. In detail, if running the `design` mode, the designed algorithms' graph representations, phenotypes, parameter values, and performance will be saved as `.mat` table in the root dictionary. Algorithms in the `.mat` table can later be called by the `solve` mode to apply to solve the targeted

³Since the distribution of instances of a real problem is often unknown, one has to sample some of the problem instances and target these instances (training instances) during the algorithm design procedure. To avoid the designed algorithms overfit on the training instances, some other instances (test instances) of the targeted problem are then employed to test the final algorithms after the design procedure terminates.

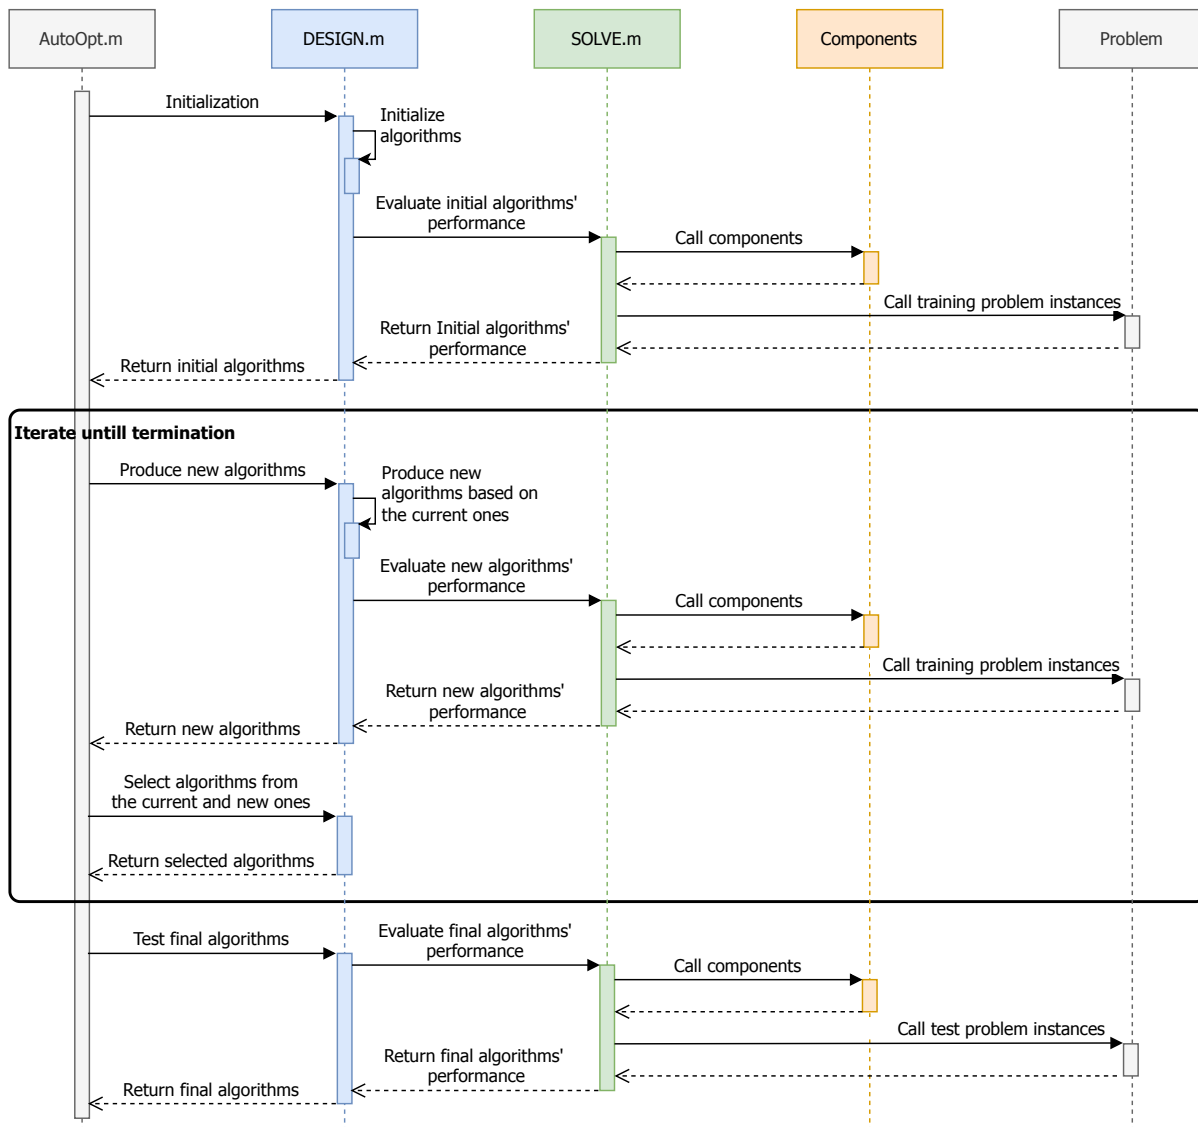


Fig. 4. Sequence diagram of AutoOptLib.

problem or make experimental comparisons with other algorithms. A report of the designed algorithms' pseudocode and performance will be saved as *.xlsx* table. Users are convenient to read, analyze, and compare the algorithms through the report. The convergence curve of the design process (algorithms' performance versus the iteration of design) will be depicted and saved as *.fig* figure. Through the figure, users can visually analyze the design process and compare different design techniques. Similarly, if running the *solve* mode, solutions to the targeted problem will be saved as *.mat* table and *.xlsx* table. Convergence curves of the problem-solving process (solution quality versus algorithm execution) will be plotted in *.fig* figure.

B. Running by GUI

We provide a concise GUI where users can manage the run with simple one-click operations. The GUI can be invoked by the command `AutoOpt()` without inputting parameters.

The GUI is shown in Figure 5. It has three panels, i.e., Design, Solve, and Results. The Design panel is for designing algorithms for a targeted problem. It has two subpanels, i.e., Input Problem and Set Parameters. To begin with, users should load the function of their targeted problem and set the indexes of training and test instances in the Input Problem subpanel. Then, users can set the main and conditional parameters related to the design in the Set Parameters subpanel. We provide all parameters default values for non-expert users' convenience. The objective of design, the method for comparing the designed algorithms, and the method for evaluating the algorithms can be chosen by the pop-up menus of the Metric, Compare, and Evaluate fields, respectively. After setting the problem and parameters, users can start the run by clicking the RUN bottom.

When the running starts, warnings and corresponding solutions to incorrect uses (if any) will be displayed in the text area at the top of the Results panel. The real-time stage and

TABLE I
MAIN PARAMETERS IN THE COMMANDS FOR RUNNING AUTOPTLIB.

Parameter	Type	Default Value	Description
Problem	Character string	'CEC2005_f1'	Function of the targeted problem
InstanceTrain	Positive integer	{1, 2}	Indexes of training instances of the targeted problem
InstanceTest	Positive integer	3	Indexes of test instances of the targeted problem
Mode	Character string	'design'	Run mode. Options: <i>design</i> - design algorithms for the targeted problem, <i>solve</i> - solve the targeted problem by a designed algorithm or an existing algorithm.
AlgP	Positive integer	1	Number of search pathways in a designed algorithm
AlgQ	Positive integer	2	Maximum number of search operators in a search pathway
AlgN	Positive integer	10	Number of algorithms to be designed
AlgFE	Positive integer	5000	Maximum number of algorithm evaluations invoked during the design process (termination condition of the design process)
Metric	Character string	'quality'	Metric for evaluating algorithms' performance (the objective of design). Options: <i>quality</i> , <i>runtimeFE</i> , <i>runtimeSec</i> , <i>auc</i> .
Evaluate	Character string	'exact'	Method for evaluating algorithms' performance. Options: <i>exact</i> , <i>intensification</i> , <i>racing</i> , <i>surrogate</i> .

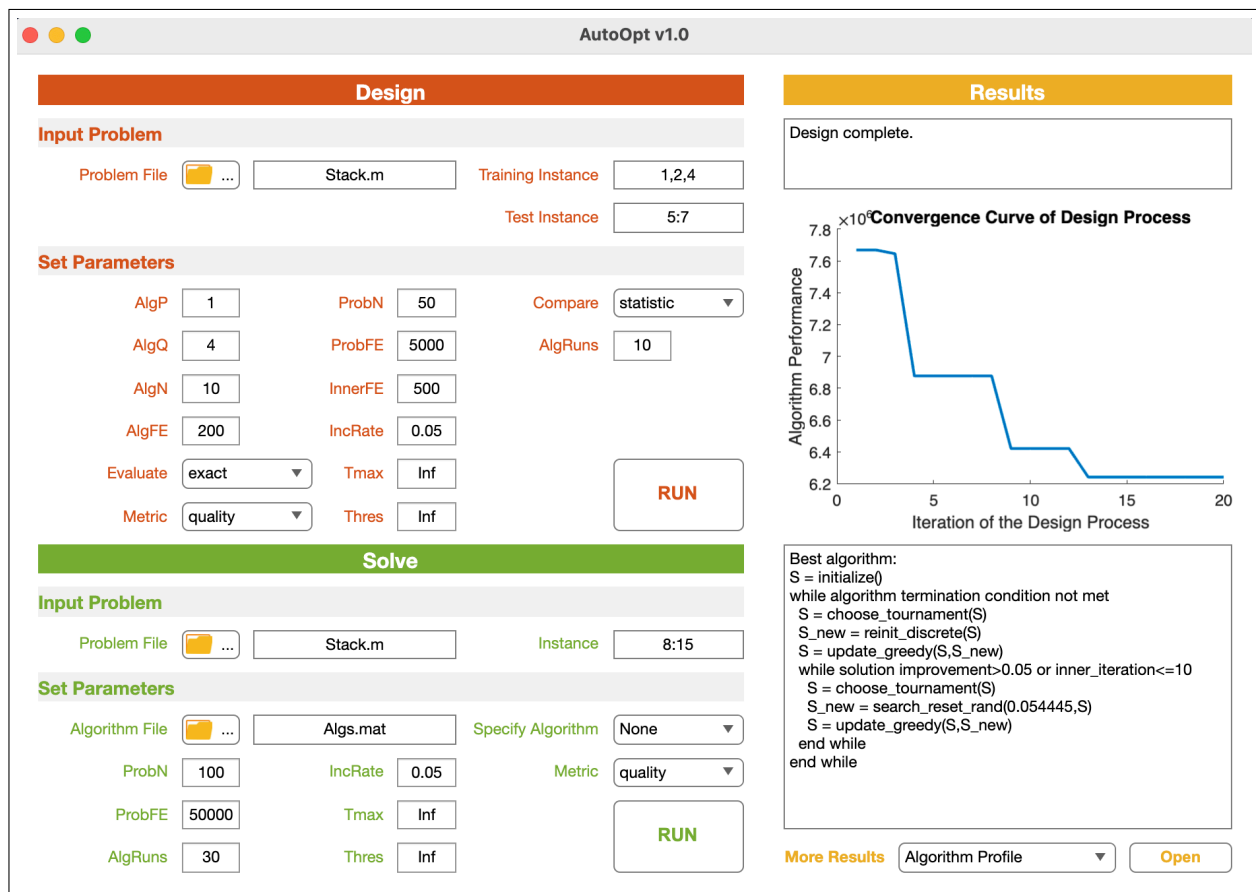


Fig. 5. GUI of AutoOptLib.

progress of the run will also be shown in the area. After the run terminates, results will be saved in the same format as done by running by commands. Moreover, the convergence curve of the design process will be plotted in the axes area of the Results panel; the pseudocode of the best algorithm found during the run will be written in the text area below the axes, as shown in Figure 5. In addition, users can use the pop-up menu at the bottom of the Results panel to export more results, e.g., other algorithms found during the run, and detailed performance of the algorithms on different problem instances.

The Solve panel is for solving the targeted problem by an algorithm. It follows a similar scheme to the Design panel. In particular, users can load an algorithm designed by AutoOptLib in the Algorithm File field to solve the targeted problem. Alternatively, users can choose a classic algorithm as a comparison baseline through the pop-up menu of the Specify Algorithm field. We now provide 17 classic metaheuristic algorithms in the menu, ranging from genetic algorithm, CMA-ES, estimation of distribution to iterative local search, simulated annealing, variable neighborhood search, etc. More algorithms can be added easily by defining the composition of their

components from the variety of components involved in the library. After the problem-solving terminates, the convergence curve and best solutions will be displayed in the axes and table areas of the Results panel, respectively; detailed results can be exported by the pop-up menu at the bottom.

IV. OTHER USES

Beyond the primary use of automatically designing algorithms, we provide a number of other important uses in AutoOptLib. They are introduced in the following.

A. Hyperparameter Configuration and Importance Analysis

In many academic and practical scenarios, users have a preferred algorithm and only need to configure endogenous parameters (hyperparameters). In essence, hyperparameter configuration is equivalent to designing an algorithm with predefined component composition but unknown endogenous parameter values. Thus, it is easy to perform hyperparameter configuration in AutoOptLib by fixing the component composition and leaving the endogenous parameters tunable in the design space. In detail, users need to define the design space within only the components of the preferred algorithm in *Space.m*. The components can be existing ones in the library or user implemented with the same interface as existing ones. With this definition of design space, AutoOptLib will only search for the optimal values of the endogenous parameters. Users can run the library and observe the returned parameter configurations in the same ways as described in Section III.

Users can further conduct parameter importance analysis by leaving only one tunable parameter in the design space. That is, users can define the design space with one tunable parameter and fix the component composition and other parameter values. Then, AutoOptLib runs and returns the algorithms found during the design process. These algorithms only differ in the values of the tunable parameter. The performance of these algorithms on all problem instances is saved in a *.xlsx* table. Users can compare the performance of different parameter values by the table and analyze the impact of parameter changes on the algorithm performance. Furthermore, by leaving different parameters tunable in different AutoOptLib runs, users can collect and compare the trends of each parameter's changes versus algorithm performance, subsequently getting insight into each parameter's importance to the algorithm performance.

B. Benchmark Comparison

Apart from the primary use for a specific experiment or application (i.e., utilizing a specific design objective and technique in the library to design algorithms for a specific problem), AutoOptLib provides benchmark comparisons among different design objectives or techniques. As illustrated in Section II, the variety of design objectives and techniques in AutoOptLib are implemented with the same architecture; more objectives and techniques can be added by the same interface. This ensures fair and reproducible comparisons among the objectives or techniques. Such comparisons are important to

accelerate future research in the automated algorithm design field, especially when involving the runtime objective. The comparison can be conducted by assigning different objectives or techniques to different AutoOptLib runs on the same targeted problem instances.

AutoOptLib can also be used to benchmark comparisons among different algorithms. AutoOptLib can design multiple algorithms with diverse structures in a single run (by setting $\text{AlgN} > 1$ in the running command or GUI). These algorithms are built and evaluated in a uniform manner during the design process. Such uniformity ensures a fair comparison among the algorithms. Users can get these algorithms' performance on all targeted problem instances from a *.xlsx* table and then observe which algorithm works well on which instances. This observation sheds light on the relationship between algorithm behaviors and problem instance features. For scenarios with the demand of algorithm portfolios [49], [50], the relationship can further guide to build the portfolio from the designed algorithms.

V. APPLICATIONS

In this section, we present two applications of AutoOptLib. One is an academic application to the communication community, by which AutoOptLib illustrates its significance to researchers who seek to use heuristics but are struggling to distinguish the suitability among various algorithms. Another one is an industrial application to supply chain management, by which AutoOptLib demonstrates its practicality to decision-makers without expertise of equipping a solver for their problems.

A. Academic Application to Beamforming for RIS Aided Communications

1) *Problem Description:* Reconfigurable intelligent surface (RIS) is an emerging technology to achieve cost-effective communications [51], [52]. It is a planar passive radio structure with a number of reconfigurable passive elements. Each element can independently adjust the phase shift on the incident signal. Consequently, these elements collaboratively yield a directional beam to enhance the quality of the received signal. The active beamforming at the base station (BS) and RIS should be jointly considered to customize the propagation environment.

The targeted problem considers a RIS-aided downlink multi-user multiple-input single-output (MU-MISO) system, in which a BS equipped with multiple antennas transmits signals to K single-antenna users, as shown in Figure 6. Decision variables of the problem are continual active beamforming of BS and discrete phase shifts of RIS. The objective is to maximize the sum rate of all users, subjecting to the transmit

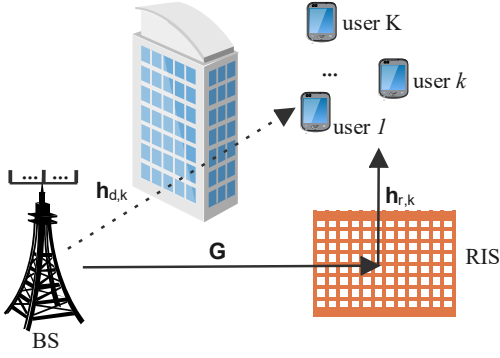


Fig. 6. A downlink MU-MISO system with an RIS.

power constraint. The problem is formulated as [53]:

$$\max_{\mathbf{W}, \Theta} \sum_{k=1}^K \log_2(1 + \gamma_k), \quad (1a)$$

$$s.t. \quad \theta_n = \beta_n e^{j\phi_n}, \quad (1b)$$

$$\phi_n = \frac{\tau_n 2\pi}{2^b}, \tau_n \in \{0, \dots, 2^b - 1\}, \quad (1c)$$

$$\sum_{k=1}^K \|\mathbf{w}_k\|^2 \leq P_T, \quad (1d)$$

where $\mathbf{W} = [\mathbf{w}_1, \dots, \mathbf{w}_K] \in \mathbb{C}^{M \times K}$ is the active beamforming at BS; $\Theta = \text{diag}(\theta_1, \dots, \theta_n, \dots, \theta_N)$ is the diagonal phase-shift matrix of RIS; γ is the signal-to-interference-plus-noise ratio of user k ; β_n and ϕ_n stand for the reflection coefficients and phase shift of element n , respectively; and (1d) indicates that the transmit power is not larger than P_T .

This problem is a non-convex mixed integer problem, which is generally NP-hard. Furthermore, our fitness landscape analysis in [53] revealed that the problem has a severe unstructured and rugged landscape, especially in cases with a large-sized RIS. While water-filling solutions [54] can settle BS beamforming, the discrete phase shifts of RIS are non-trivial because the reconfigurable passive elements couple with each other. Existing solvers that decouple the elements and estimate each phase shift separately have been demonstrated to be ineligible [53]. Metaheuristics' global search ability is promising in handling such unstructured, rugged and highly-coupled problem. AutoOptLib could benefit the problem researchers to quickly get access to an efficient metaheuristic solver from the variety of choices.

2) *Applying AutoOptLib*: We utilized AutoOptLib's default design space to design algorithms for the beamforming problem. Solution quality was set as the design objective. Other settings of AutoOptLib were kept default. We generated 15 problem instances that differ in the number of RIS elements. Five of the instances were randomly chosen as training instances; another five were chosen as test instances; the remaining five were for experimental comparison.

After running the Design mode of AutoOptLib, we got the best algorithm (termed $\text{Alg}_{\text{beamform}}^*$) verified by the test instances. Its pseudocode is shown in Algorithm 1. Interestingly, the niching mechanism `choose_nich` is in-

Algorithm 1 Pseudocode of $\text{Alg}_{\text{beamform}}^*$

```

1:  $S = \text{initialize}()$  // initialize solution set  $S$ 
2: while stopping criterion not met do
3:    $S = \text{choose\_nich}(S)$ 
4:    $S_{\text{new}} = \text{cross\_point\_uniform}(0.1229, S)$ 
5:    $S_{\text{new}} = \text{search\_reset\_one}(S_{\text{new}})$ 
6:    $S = \text{update\_round\_robin}(S, S_{\text{new}})$ 
7: end while

```

involved, which restricts the following uniform crossover (`cross_point_uniform` with crossover rate of 0.1229) to be performed between solutions within a niching area. The reset operation (`search_reset_one` that resets one entity of the solution) further exploits the niching area. Finally, the round-robin selection (`update_round_robin`) maintains diversity by probably selecting inferior solutions. All these designs indicate that maintaining solution diversity may be necessary for escaping local optima and exploring the unstructured and rugged landscape.

To investigate the designed algorithm's efficiency, we compared it with the baseline random beamforming, the representative sequential beamforming [55]⁴, and three classic metaheuristic solvers, i.e., discrete GA, iterative local search (ILS), and simulated annealing (SA)⁵. The algorithms were executed by the Solve mode of AutoOptLib on the five instances for experimental comparison. All the metaheuristic algorithms conducted population-based search with a population size of 50 for a fair comparison. All algorithms terminated after 500000 function evaluations. We summarize the algorithms' performance in Table II. The performance is measured by final solutions' fitness (reciprocal of the quality of service of all users). From Table II, sequential beamforming is inferior to most of the metaheuristic solvers. This result confirms the ineligibility of decoupling RIS elements and the need for global metaheuristic search. Among the metaheuristic solvers, $\text{Alg}_{\text{beamform}}^*$ outperforms others, especially in instances with large numbers of RIS elements (induce high-dimensional rugged landscape). This performance can be attributed to its diversity maintenance ability. All the above demonstrates the efficiency of AutoOptLib's automated design techniques on the problem.

B. Industrial Application to Raw Material Stacking in Supply Chain Management

1) *Problem Description*: The problem comes from the supply chain department of a biomedical electronics company. Raw material stacking is one of the main tasks in the supply chain management of the company. This task refers to 1) shaping the racks in the warehouse to fit for stacking the containers of raw materials, and 2) placing the containers

⁴Sequential beamforming refers to exhaustively enumerating the phase shift of each element one-by-one on the basis of random initial RIS phase shifts.

⁵The discrete GA is consisted by tournament mating selection, uniform crossover, random mutation, and round-robin environmental selection; the crossover and mutation rates are both predefined to 0.2. The ILS and SA perform neighborhood search by randomly resetting one entity of the solution at each iteration.

TABLE II
AVERAGE AND STANDARD DEVIATION OF PERFORMANCE ON THE BEAMFORMING PROBLEM. BEST RESULTS ARE IN BOLD.

Algorithm	Number of RIS elements in the problem instances				
	120	160	280	320	400
$\text{Alg}_{\text{beamform}}^*$	0.0332 \pm 5.05E-04	0.0312 \pm 4.84E-04	0.0281 \pm 1.57E-04	0.0272 \pm 6.76E-04	0.0260 \pm 1.11E-04
Random	0.0442 \pm 7.94E-04	0.0425 \pm 6.56E-04	0.0402 \pm 8.30E-04	0.0390 \pm 6.67E-04	0.0375 \pm 1.88E-04
Sequential	0.0382 \pm 6.19E-04	0.0387 \pm 6.75E-04	0.0374 \pm 4.17E-04	0.0369 \pm 4.38E-04	0.0354 \pm 8.27E-04
GA	0.0369 \pm 3.30E-04	0.0356 \pm 1.00E-04	0.0337 \pm 4.26E-04	0.0333 \pm 1.04E-04	0.0322 \pm 6.96E-04
ILS	0.0333 \pm 3.74E-04	0.0314 \pm 2.49E-04	0.0285 \pm 1.19E-04	0.0279 \pm 1.82E-04	0.0278 \pm 1.15E-04
SA	0.0398 \pm 5.59E-04	0.0388 \pm 7.75E-04	0.0369 \pm 3.27E-04	0.0360 \pm 4.18E-04	0.0355 \pm 9.50E-04

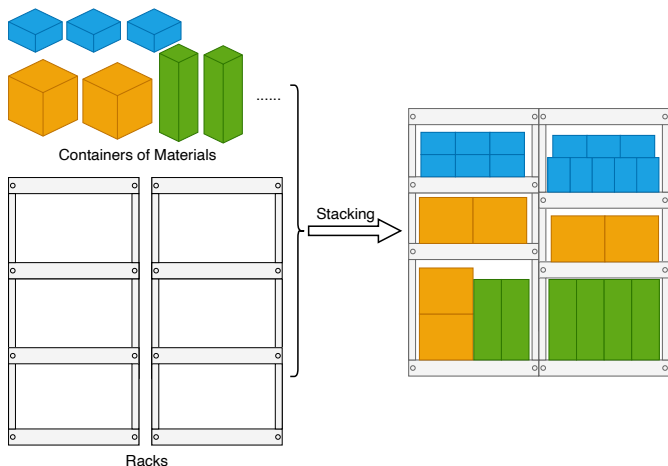


Fig. 7. Graphical illustration of material stacking.

in appropriate locations on the racks. The stacking problem consists these two parts, i.e., shaping racks and placing materials' containers. The stacking should be effective in space consumption and convenient for picking up and sending materials to the downstream manufacturing department. A graphical illustration of the problem is shown in Figure 7.

Specifically, decision variables of the problem are heights of each floor of the racks (racks are with fixed body sizes but discretely adjustable floor heights) and materials' ways of stacking (discrete locations and orientations for placing each material's container on a certain floor of a rack). The objective of the problem is to minimize the space consumption of racks in stacking the materials, and at the same time, to satisfy the following rules: heavy materials stack on lower floors of the racks; materials of the same kind stack together; unique materials for a product stack near each other; common materials that serve multiple products stack at a place near all the served products; and materials with higher picking up frequencies stack closer to the shipping area. The problem has 39 instances that differ in the input data (materials and racks to be considered).

The problem is challenging in the following aspects: 1) the stacking problem has been proven to be NP-hard [56]; 2) materials for the precise biomedical electronic products, i.e., computed tomography scanners and blood detection machines, are large-scale and heterogeneous (up to 4000 kinds of mate-

Algorithm 2 Pseudocode of $\text{Alg}_{\text{stack}}^*$

```

1:  $S = \text{initialize}()$  // initialize solution set  $S$ 
2: while stopping criterion not met do
3:    $S = \text{choose\_roulette\_wheel}(S)$ 
4:    $S_{\text{new}} = \text{cross\_point\_one}(S)$ 
5:    $S_{\text{new}} = \text{search\_reset\_rand}(0.1342, S_{\text{new}})$ 
6:    $S = \text{update\_round\_robin}(S, S_{\text{new}})$ 
7: end while

```

rials with a total amount of over 50000 units in the targeted problem); and 3) the problem is heavily constrained due to the complicated rules to be satisfied. These challenges make mathematical solvers impractical on the problem. Metaheuristic solvers could meet these challenges, but practitioners are short of expertise to manage an efficient use of the solvers. Leveraging automated techniques by AutoOptLib would be desirable in this regard.

2) *Applying AutoOptLib*: We employed AutoOptLib's default design space to design algorithms for the stacking problem. Solution quality was set as the design objective, and racing was used as the algorithm evaluation method. 20 instances were randomly chosen from the total 39 instances; 10 of the chosen instances were employed as training instances, while the other 10 were for test. Other settings of AutoOptLib were kept default.

After running the Design mode of AutoOptLib, we got the best algorithm (termed $\text{Alg}_{\text{stack}}^*$) with pseudocode shown in Algorithm 2. $\text{Alg}_{\text{stack}}^*$ is a "sexual GA"-style algorithm, in which the one-point crossover and random reset are executed sequentially to search solutions, and the reset probability is tuned as 0.1342. This algorithm indicates that for the large-scale highly constrained discrete problem, a large degree of solution recombination (by one-point crossover) and exploration (reset each entity of the solution with a probability of 0.1342) may be fit for keeping feasibility regarding the constraints and ensuring search efficiency over the large-scale solution space.

We further compared $\text{Alg}_{\text{stack}}^*$ with the baseline random search (RS) and three classic metaheuristic solvers, i.e., discrete GA, ILS, and SA. The discrete GA, ILS, and SA are the same as those employed in Section V-A. The algorithms were executed by the Solve mode of AutoOptLib on the remaining 19 problem instances. All runs were with the same settings and termination condition defaulted in AutoOptLib. We report the algorithms' performance over the 19 instances in Table III. The performance is measured by final solutions' fitness. According

TABLE III
AVERAGE AND STANDARD DEVIATION OF PERFORMANCE ON THE
MATERIAL STACKING PROBLEM. BEST RESULTS ARE IN BOLD.

Algorithm	Mean	Std.
Alg* _{stack}	31914538.82	6.88E+05
GA	33024530.26	6.77E+05
ILS	32868538.15	5.65E+05
SA	37233538.82	8.87E+05
RS	44178551.09	4.93E+05

to Table III, Alg*_{stack} obtains much better performance than the compared algorithms, demonstrating AutoOptLib’s efficiency on the problem. Alg*_{stack}’s solutions had been presented to the material stacking practitioners. Solutions to some instances (for certain materials and racks) had been verified in practice and reported to reduce the space waste rate to lower than 20%, which was considered satisfactory.

VI. CONCLUSION AND FUTURE WORK

In this paper, we have presented the AutoOptLib library for automatically designing metaheuristic algorithms in MATLAB. Unlike current software that each provides a stand-alone implementation of a single module for designing metaheuristic algorithms, AutoOptLib offers throughout support to the whole design process, covering: 1) plenty of algorithmic components for constructing the design space, 2) flexible algorithm representation for discovering novel and diverse algorithm structures, 3) various design objectives and techniques for different demands, 4) parameter configuration/analysis and benchmark comparison usages for experimentation purposes, and 5) simple running command and GUI for good accessibility. The library is organized in a clear and concise architecture, which ensures its easy understandability and manipulability by researchers and practitioners from different fields. Furthermore, it follows the open-closed principle [40], [41], offering correct and effective extendibility.

To present the AutoOptLib library, in this paper, we have introduced the architecture of the library in terms of pipeline, file structure, classes, and operating sequence. We have then described two ways of running the library by a single line of command or by one-click on its GUI. We have further shown two important uses of the library besides designing algorithms, i.e., hyperparameter configuration/analysis and benchmark comparison. Finally, we have conducted two real applications of the library, which has demonstrated its efficiency and practicability. With the library, we expect to make the emerging automated algorithm design techniques and satisfactory metaheuristic solvers to a much broader range of researchers and practitioner with much less requirement of expertise, and at the same time, accelerate future research of the automated algorithm design and metaheuristic fields.

We will continually maintain and update AutoOptLib to serve various demands and interests. Some of the future works are listed as follows.

- *Design space.* As with other software, the current version of AutoOptLib designs algorithms from algorithmic components. In the future, we will extend AutoOptLib

to design algorithms from computational primitives [57], which is more generalized and has greater potential to discover innovation than designing from existing components. Accordingly, the algorithm representation and method for searching algorithms over computational primitives will be added.

- *Design methods.* Currently we use iterative local search [42] and CMA-ES [43] to search algorithms over the design space. While search-based methods output one-off algorithms for offline scenarios, employing learning-based methods (e.g., reinforcement learning) can output a “designer” (policy) to produce algorithms for new problems/instances of online scenarios, which will be our future work.
- *Targeted problems.* AutoOptLib has supported to design algorithms for single-objective continuous, discrete, and permutation problems. We will extend the library to multi-objective problems in the future. We will also extend to problems with mixed types of decision variables, e.g., mixed-integer problems.
- *Output and interface.* Practical users may prefer to deploy and utilize the designed algorithm on specific devices. This gives rise to the demand for the algorithm’s source code in other programming languages besides MATLAB. We will extend AutoOptLib to directly output the source code of the designed algorithms by integrating with MATLAB Compiler and Coder. We will also provide AutoOptLib interfaces to Python and other languages to broader its availability to users of other languages.

REFERENCES

- [1] J. H. Holland, “Genetic algorithms and the optimal allocation of trials,” *SIAM Journal on Computing*, vol. 2, no. 2, pp. 88–105, Jun. 1973.
- [2] Y. Shi and R. Eberhart, “A modified particle swarm optimizer,” in *IEEE International Conference on Evolutionary Computation*. Anchorage, AK, USA: IEEE, 1998, pp. 69–73.
- [3] M. Dorigo, M. Birattari, and T. Stützle, “Ant colony optimization,” *IEEE Computational Intelligence Magazine*, vol. 1, no. 4, pp. 28–39, Nov. 2006.
- [4] S. Kirkpatrick, C. D. Gelatt Jr, and M. P. Vecchi, “Optimization by simulated annealing,” *Science*, vol. 220, no. 4598, pp. 671–680, May 1983.
- [5] F. Glover, “Tabu search—part i,” *ORSA Journal on Computing*, vol. 1, no. 3, pp. 190–206, Aug. 1989.
- [6] F. W. Glover and G. A. Kochenberger, *Handbook of metaheuristics*. Springer Science & Business Media, 2006, vol. 57.
- [7] M. Schmidt and H. Lipson, “Distilling free-form natural laws from experimental data,” *Science*, vol. 324, no. 5923, pp. 81–85, 2009.
- [8] K. O. Stanley, J. Clune, J. Lehman, and R. Miikkulainen, “Designing neural networks through neuroevolution,” *Nature Machine Intelligence*, vol. 1, no. 1, pp. 24–35, 2019.
- [9] M. Weiel, M. Götz, A. Klein, D. Coquelin, R. Floca, and A. Schug, “Dynamic particle swarm optimization of biomolecular simulation parameters with flexible objective functions,” *Nature Machine Intelligence*, vol. 3, no. 8, pp. 727–734, 2021.
- [10] M. Birattari, A. Ligot, and K. Hasselmann, “Disentangling automatic and semi-automatic approaches to the optimization-based design of control software for robot swarms,” *Nature Machine Intelligence*, vol. 2, no. 9, pp. 494–499, 2020.
- [11] D. H. Wolpert and W. G. Macready, “No free lunch theorems for optimization,” *IEEE Transactions on Evolutionary Computation*, vol. 1, no. 1, pp. 67–82, Apr. 1997.
- [12] T. Stützle and M. López-Ibáñez, “Automated design of metaheuristic algorithms,” in *Handbook of Metaheuristics*. New York, NY, USA: Springer, 2019, pp. 541–579.

- [13] R. Qu, G. Kendall, and N. Pillay, "The general combinatorial optimization problem: Towards automated algorithm design," *IEEE Computational Intelligence Magazine*, vol. 15, no. 2, pp. 14–23, May 2020.
- [14] S. N. Richter and D. R. Tauritz, "The automated design of probabilistic selection methods for evolutionary algorithms," in *Proceedings of the Genetic and Evolutionary Computation Conference Companion*, Kyoto, Japan, 2018, pp. 1545–1552.
- [15] S. N. Richter, M. G. Schoen, and D. R. Tauritz, "Evolving mean-update selection methods for cma-es," in *Proceedings of the Genetic and Evolutionary Computation Conference Companion*, Prague, Czech Republic, 2019, pp. 1513–1517.
- [16] A. E. Eiben, J. E. Smith *et al.*, *Introduction to evolutionary computing*. New York, NY, USA: Springer, 2003, vol. 53.
- [17] T. A. Feo and M. G. Resende, "Greedy randomized adaptive search procedures," *Journal of Global Optimization*, vol. 6, no. 2, pp. 109–133, Mar. 1995.
- [18] F. Glover, "Future paths for integer programming and links to artificial intelligence," *Computers & Operations Research*, vol. 13, no. 5, pp. 533–549, 1986.
- [19] R. RIVERS and D. R. Tauritz, "Evolving black-box search algorithms employing genetic programming," in *Proceedings of the 15th Annual Conference Companion on Genetic and Evolutionary Computation*, Amsterdam, The Netherlands, 2013, pp. 1497–1504.
- [20] P. Rysler-Welch, J. F. Miller, J. Swan, and M. A. Trefzer, "Iterative cartesian genetic programming: Creating general algorithms for solving travelling salesman problems," in *European Conference on Genetic Programming*. Porto, Portugal: Springer, 2016, pp. 294–310.
- [21] B. Tisdale, D. Seals, A. S. Pope, and D. R. Tauritz, "Directing evolution: The automated design of evolutionary pathways using directed graphs," in *Proceedings of the Genetic and Evolutionary Computation Conference*, Lille, France, 2021, pp. 732–740.
- [22] W. Yi, R. Qu, L. Jiao, and B. Niu, "Automated design of metaheuristics using reinforcement learning within a novel general search framework," *IEEE Transactions on Evolutionary Computation*, vol. to be published, DOI: 10.1109/TEVC.2022.3197298, 2022.
- [23] D. Aydın, G. Yavuz, and T. Stützle, "Abc-x: A generalized, automatically configurable artificial bee colony framework," *Swarm Intelligence*, vol. 11, no. 1, pp. 1–38, Feb. 2017.
- [24] A. Franzin and T. Stützle, "Revisiting simulated annealing: A component-based analysis," *Computers & Operations Research*, vol. 104, pp. 191–206, Apr. 2019.
- [25] C. C. Villalón, M. Dorigo, and T. Stützle, "Pso-x: A component-based framework for the automatic design of particle swarm optimization algorithms," *IEEE Transactions on Evolutionary Computation*, vol. 26, no. 2, pp. 402–416, Jun. 2022.
- [26] L. C. Bezerra, M. López-Ibáñez, and T. Stützle, "Automatic component-wise design of multiobjective evolutionary algorithms," *IEEE Transactions on Evolutionary Computation*, vol. 20, no. 3, pp. 403–417, Jun. 2016.
- [27] F. Pagnozzi and T. Stützle, "Automatic design of hybrid stochastic local search algorithms for permutation flowshop problems," *European Journal of Operational Research*, vol. 276, no. 2, pp. 409–421, Jul. 2019.
- [28] P. Alfaro-Fernández, R. Ruiz, F. Pagnozzi, and T. Stützle, "Automatic algorithm design for hybrid flowshop scheduling problems," *European Journal of Operational Research*, vol. 282, no. 3, pp. 835–845, May 2020.
- [29] L. C. Bezerra, L. Manuel *et al.*, "Automatically designing state-of-the-art multi-and many-objective evolutionary algorithms," *Evolutionary Computation*, vol. 28, no. 2, pp. 195–226, Jun. 2020.
- [30] J. E. Diaz and M. López-Ibáñez, "Incorporating decision-maker's preferences into the automatic configuration of bi-objective optimisation algorithms," *European Journal of Operational Research*, vol. 289, no. 3, pp. 1209–1222, Mar. 2021.
- [31] A. Brum, R. Ruiz, and M. Ritt, "Automatic generation of iterated greedy algorithms for the non-permutation flow shop scheduling problem with total completion time minimization," *Computers & Industrial Engineering*, vol. 163, p. 107843, Jan. 2022.
- [32] K. Tang, S. Liu, P. Yang, and X. Yao, "Few-shots parallel algorithm portfolio construction via co-evolution," *IEEE Transactions on Evolutionary Computation*, vol. 25, no. 3, pp. 595–607, Jun. 2021.
- [33] M. López-Ibáñez, J. Dubois-Lacoste, L. P. Cáceres, M. Birattari, and T. Stützle, "The irace package: Iterated racing for automatic algorithm configuration," *Operations Research Perspectives*, vol. 3, pp. 43–58, Sept. 2016.
- [34] S. Cahon, N. Melab, and E.-G. Talbi, "Paradiseo: A framework for the reusable design of parallel and distributed metaheuristics," *Journal of heuristics*, vol. 10, no. 3, pp. 357–380, 2004.
- [35] J. Dreó, A. Liefvooghe, S. Verel, M. Schoenauer, J. J. Merelo, A. Quemy, B. Bouvier, and J. Gmys, "Paradiseo: from a modular framework for evolutionary computation to the automated design of metaheuristics: 22 years of paradiseo," in *Proceedings of the Genetic and Evolutionary Computation Conference Companion*, Lille, France, 2021, pp. 1522–1530.
- [36] F. Hutter, H. H. Hoos, K. Leyton-Brown, and T. Stützle, "Paramils: An automatic algorithm configuration framework," *Journal of Artificial Intelligence Research*, vol. 36, pp. 267–306, Oct. 2009.
- [37] F. Hutter, H. H. Hoos, and K. Leyton-Brown, "Sequential model-based optimization for general algorithm configuration," in *International Conference on Learning and Intelligent Optimization*. Rome, Italy: Springer, 2011, pp. 507–523.
- [38] M. Lindauer, K. Eggensperger, M. Feurer, A. Biedenkapp, D. Deng, C. Benjamins, T. Ruhkopf, R. Sass, and F. Hutter, "Smac3: A versatile bayesian optimization package for hyperparameter optimization," *Journal of Machine Learning Research*, vol. 23, no. 54, pp. 1–9, Feb. 2022.
- [39] K. van der Blom, H. H. Hoos, C. Luo, and J. G. Rook, "Sparkle: Towards accessible meta-algorithmics for improving the state of the art in solving challenging problems," *IEEE Transactions on Evolutionary Computation*, vol. to be published, DOI: 10.1109/TEVC.2022.3215013, 2022.
- [40] B. Meyer, *Object-oriented software construction*. Prentice hall Englewood Cliffs, 1997, vol. 2.
- [41] C. Larman, "Protected variation: The importance of being closed," *IEEE Software*, vol. 18, no. 3, pp. 89–91, 2001.
- [42] H. R. Lourenço, O. C. Martin, and T. Stützle, "Iterated local search," in *Handbook of Metaheuristics*. New York, NY, USA: Springer, 2003, pp. 320–353.
- [43] D. Wierstra, T. Schaul, T. Glasmachers, Y. Sun, J. Peters, and J. Schmidhuber, "Natural evolution strategies," *The Journal of Machine Learning Research*, vol. 15, no. 1, pp. 949–980, 2014.
- [44] F. Hutter, L. Kotthoff, and J. Vanschoren, *Automated machine learning: Methods, systems, challenges*. New York, NY, USA: Springer Nature, 2019.
- [45] Y. Pushak and H. Hoos, "Automl loss landscapes," *ACM Transactions on Evolutionary Learning*, vol. 2, no. 3, pp. 1–30, 2022.
- [46] Q. Zhao, B. Yan, T. Hu, X. Chen, and Y. Shi. Documentation for the AutoOpt platform. [Online]. Available: <https://github.com/qz89/AutoOpt>
- [47] D. B. Fogel, *Artificial intelligence through simulated evolution*. Wiley-IEEE Press, 1998.
- [48] P. N. Suganthan, N. Hansen, J. J. Liang, K. Deb, Y.-P. Chen, A. Auger, and S. Tiwari, "Problem definitions and evaluation criteria for the cec 2005 special session on real-parameter optimization," *KanGAL Report*, vol. 2005005, no. 2005, p. 2005, 2005.
- [49] B. A. Huberman, R. M. Lukose, and T. Hogg, "An economics approach to hard computational problems," *Science*, vol. 275, no. 5296, pp. 51–54, 1997.
- [50] C. P. Gomes and B. Selman, "Algorithm portfolios," *Artificial Intelligence*, vol. 126, no. 1-2, pp. 43–62, 2001.
- [51] D. Mishra and H. Johansson, "Channel estimation and low-complexity beamforming design for passive intelligent surface assisted miso wireless energy transfer," in *ICASSP 2019-2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2019, pp. 4659–4663.
- [52] J. Yuan, Y.-C. Liang, J. Joung, G. Feng, and E. G. Larsson, "Intelligent reflecting surface-assisted cognitive radio system," *IEEE Transactions on Communications*, vol. 69, no. 1, pp. 675–687, 2020.
- [53] B. Yan, Q. Zhao, M. Li, J. Zhang, J. A. Zhang, and X. Yao, "Fitness landscape analysis and niching genetic approach for hybrid beamforming in ris-aided communications," *Applied Soft Computing*, vol. 131, p. 109725, 2022.
- [54] W. Yu, W. Rhee, S. Boyd, and J. M. Cioffi, "Iterative water-filling for gaussian vector multiple-access channels," *IEEE Transactions on Information Theory*, vol. 50, no. 1, pp. 145–152, 2004.
- [55] B. Di, H. Zhang, L. Song, Y. Li, Z. Han, and H. V. Poor, "Hybrid beamforming for reconfigurable intelligent surface based multi-user communications: Achievable rates with limited discrete phase shifts," *IEEE Journal on Selected Areas in Communications*, vol. 38, no. 8, pp. 1809–1822, 2020.
- [56] W. Liu, T. Deng, and J. Li, "Product packing and stacking under uncertainty: A robust approach," *European Journal of Operational Research*, vol. 277, no. 3, pp. 903–917, 2019.

- [57] X. Chen, C. Liang, D. Huang, E. Real, K. Wang, Y. Liu, H. Pham, X. Dong, T. Luong, C.-J. Hsieh *et al.*, “Symbolic discovery of optimization algorithms,” *arXiv preprint arXiv:2302.06675*, 2023.