

Pressure and convection robust bounds for continuous interior penalty divergence-free finite element methods for the incompressible Navier-Stokes equations

Bosco García-Archilla* Julia Novo[†]

March 23, 2023

Abstract

In this paper we analyze a pressure-robust method based on divergence-free mixed finite element methods with continuous interior penalty stabilization. The main goal is to prove an $O(h^{k+1/2})$ error estimate for the L^2 norm of the velocity in the convection dominated regime. This bound is pressure robust (the error bound of the velocity does not depend on the pressure) and also convection robust (the constants in the error bounds are independent of the Reynolds number).

AMS subject classifications. 65M12, 65M15, 65M60.

Keywords. Incompressible Navier–Stokes equations, divergence-free mixed finite element methods, continuous interior penalty, pressure-robustness

1 Introduction

We consider finite element approximations to the incompressible Navier-Stokes equations. Our aim is to propose a method that is able to get both pressure-robust error bounds and convection robust error bounds. Pressure-robust error bounds are those for which the error bounds of the velocity are independent on Sobolev norms of the true pressure. Convection robust error bounds are those in which the constants in the error bounds are independent of the Reynolds number (see e.g., [12] for the practical implications of this property). For the first property, we need to use divergence free pairs of finite elements spaces. Using these pairs there is an exact conservation of mass and the numerical solution satisfies a so-called fundamental invariance property: gradient forces on the right-hand side possess an impact only on the discrete pressure. We refer to [14] for a comprehensive discussion of these kind of methods. In the recent

*Departamento de Matemática Aplicada II, Universidad de Sevilla, Sevilla, Spain. Research is supported by Spanish MCINYU under grants PGC2018-096265-B-I00 and PID2019-104141GB-I00 (bosco@esi.us.es)

[†]Departamento de Matemáticas, Universidad Autónoma de Madrid, Spain. Research is supported by Spanish MINECO under grants PID2019-104141GB-I00 and VA169P20 (julia.novo@uam.es)

review [12], there is a deep study about finite element methods for the Navier-Stokes equations having the convection robust property. In [12] those methods are classified in three sets depending on the rate of convergence achieved for the L^2 norm of the velocity: $O(h^{k-1})$, $O(h^k)$ and $O(h^{k+1/2})$ for methods based on piecewise polynomials for the velocity of degree k . As explained in [12], the exact conservation of mass has an influence also in the convection robustness of the bounds. More precisely, the plain Galerkin method, without any kind of stabilization, with divergence-free finite elements possesses pressure-robust and convection robust bounds of order $O(h^k)$, whereas no such bounds seem to be possible for non divergence-free elements. The question about the possibility of getting order $O(h^{k+1/2})$ for these divergence-free methods adding some kind of stabilization has been open for a while.

Recently, the authors of [2] propose a continuous interior penalty stabilization for divergence-free methods that is able to give a method of order $k + 1/2$ and pressure robust bounds when applied to a steady Oseen equation. The stabilization in [2] is inspired in the stabilization proposed in [1]. The authors in [1] proposed and analyzed a method for the steady Oseen equations for which pressure and convection robust bounds of order $k + 1/2$ are proved. For the method in [1] the authors use divergence-free elements and add a bulk term in the form of a residual-based least squares stabilization of the vorticity equation plus a continuous interior penalty stabilization term. The main idea in [2] is to replace the bulk term by two more continuous penalty stabilization terms based on higher order derivatives.

In the present paper, we follow the ideas of [2] to extend the method to the incompressible Navier-Stokes equations. To this end, the convective field in the stabilization terms in [2] is replaced by the velocity approximation. To prove the rate of convergence $k + 1/2$ for $k \geq 4$ we need some a priori bounds for the velocity approximation and the velocity error. For this reason, in the error analysis of the present paper that works for any value of k , we first prove a rate of convergence of order k for the method without any a priori bound and then used the previous proved bounds to achieved the optimal rate of convergence $k + 1/2$.

While writing this paper we found a related work, see [3], in which the authors obtain pressure and convection robust bounds of order $k + 1/2$ for the incompressible Navier-Stokes equations in 2 space dimensions. In [3] a divergence-free pair of mixed finite elements is applied with a discontinuous Galerkin in time approximation of order one. The authors in [3] add a SUPG-curl stabilization that is also inspired in the method proposed in [1] for the steady Oseen problem. As the authors state, they need a discontinuous method in time to be able to prove error bounds with the SUPG-curl residual method. There are again different stabilization terms in the method proposed in [3], one of them involves the jumps of the gradients along the faces, and is then analogous to the first continuous interior penalty stabilization term in [1], [2] and the present paper. The other stabilization is a residual SUPG-curl stabilization. Comparing with [3], we propose a simpler method that can be accompanied by any time integrator. Also, as stated in [3], the error analysis of a continuous interior penalty method reflecting pressure robustness for the incompressible Navier-Stokes equations is a major challenge that did not exist in the literature. This is exactly the question we try to solve with the error analysis of the present

paper.

2 Preliminaries and notation

Along the paper we follow the notation in [2].

This paper studies incompressible flow problems that are modeled by the incompressible Navier–Stokes equations

$$\begin{aligned} \partial_t \mathbf{u} - \nu \Delta \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u} + \nabla p &= \mathbf{f} & \text{in } (0, T] \times \Omega, \\ \nabla \cdot \mathbf{u} &= 0 & \text{in } (0, T] \times \Omega, \end{aligned} \quad (1)$$

in a bounded domain $\Omega \subset \mathbb{R}^d$, $d \in \{2, 3\}$. The boundary of Ω is assumed to be polyhedral and Lipschitz. In (1), \mathbf{u} denotes the velocity field, p the kinematic pressure, $\nu > 0$ the kinematic viscosity coefficient, and \mathbf{f} represents the accelerations due to external body forces acting on the fluid. The Navier–Stokes equations (1) have to be complemented with an initial condition $\mathbf{u}(0) = \mathbf{u}^0$ and with boundary conditions. For simplicity, we only consider the case of homogeneous Dirichlet boundary conditions $\mathbf{u} = \mathbf{0}$ on $[0, T] \times \partial\Omega$.

We define the space

$$\mathbf{V} = \left\{ \mathbf{v} \in H_0^1(\Omega)^d : \operatorname{div} \mathbf{v} = 0 \right\}.$$

It is known that a potential can be associated to every divergence-free function in Ω . The space that captures the kernel of the divergence operator is [6]

$$\mathbf{Z} = \left\{ \mathbf{z} : \text{components of } \mathbf{z} \text{ in } H^1(\Omega), \operatorname{curl} \mathbf{z} \in H_0^1(\Omega)^d \right\}.$$

If $\mathbf{u} \in H^r(\Omega)^d \cap \mathbf{V}$ then there exists $\mathbf{z} \in \mathbf{Z}$ with components in $H^{r+1}(\Omega)$ such that

$$\operatorname{curl} \mathbf{z} = \mathbf{u}, \quad \|\mathbf{z}\|_{H^{r+1}(\Omega)} \leq C \|\mathbf{u}\|_{H^r(\Omega)^d}.$$

Although \mathbf{z} is a scalar for $d = 2$ we keep the bold notation for both dimensions. Observe that for $d = 3$ the above norm of \mathbf{z} should be $\|\mathbf{z}\|_{H^{r+1}(\Omega)^d}$. For simplicity, in the sequel we will denote this norm both for scalar or vectorial functions as:

$$\|\mathbf{z}\|_{k+1} := \|\mathbf{z}\|_{H^{r+1}(\Omega)^d},$$

and we will use the notation

$$\|\mathbf{z}\|_{k+1, K} := \|\mathbf{z}\|_{H^{r+1}(K)^d}, \quad K \subset \Omega.$$

Let us denote by $\{\mathcal{T}_h\} = \{(K_j, \phi_j^h)_{j \in J_h}\}$, $h > 0$, a family of partitions of $\bar{\Omega}$, where h is the maximum diameter of the mesh cells $K_j \in \mathcal{T}_h$ and ϕ_j^h are the mappings from the reference simplex K_0 onto K_j . We assume that the family of partitions is shape-regular and quasi-uniform. For $K \in \mathcal{T}_h$ we denote by \mathcal{F}_K the set of its faces. The collection of faces from the triangulation is denoted by \mathcal{F} and the collection of interior faces by \mathcal{F}^i . For $F \in \mathcal{F}$ we denote by $h_F = \operatorname{diam}(F)$ and by $|F|$ the measure of F . For a vector valued function \mathbf{v} we define the tangential jumps across $F = K_1 \cap K_2$, $K_1, K_2 \in \mathcal{T}_h$ as

$$[[\mathbf{v} \times \mathbf{n}]] := \mathbf{v}_1 \times \mathbf{n}_1 + \mathbf{v}_2 \times \mathbf{n}_2$$

where $\mathbf{v}_i = \mathbf{v}|_{K_i}$ and \mathbf{n}_i is the unit normal pointing outwards K_i . If F is a boundary face we define

$$\llbracket \mathbf{v} \times \mathbf{n} \rrbracket := \mathbf{v} \times \mathbf{n}.$$

We define the following broken inner products

$$(\mathbf{v}, \mathbf{w})_h := \sum_{K \in \mathcal{T}_h} (\mathbf{v}, \mathbf{w})_K, \quad \langle \mathbf{v}, \mathbf{w} \rangle_{\mathcal{F}} := \sum_{F \in \mathcal{F}} \langle \mathbf{v}, \mathbf{w} \rangle_F, \quad (2)$$

with associated norms $\|\cdot\|_h, \|\cdot\|_{\mathcal{F}}$. Let us observe that the second norm can also be defined over \mathcal{F}^i . We also consider the semi-norms

$$|\mathbf{u}|_{k,h} := \sum_{|\alpha|=k} \|D^\alpha \mathbf{u}\|_h.$$

On \mathcal{T}_h , the following finite element spaces are defined. For $l \geq 1$ the standard piecewise continuous space

$$\mathbf{W}_h^l = \left\{ \mathbf{w}_h \in H_0^1(\Omega)^d \mid \mathbf{w}_h|_K \in \mathbb{P}_l(K), \forall K \in \mathcal{T}_h \right\},$$

and for $l \geq 0$ the discontinuous spaces

$$\begin{aligned} D_h^l &= \left\{ \mathbf{w}_h \in L^2(\Omega)^d \mid \mathbf{w}_h|_K \in \mathbb{P}_l(K)^3, \forall K \in \mathcal{T}_h \right\} \\ D_h^l &= \left\{ \mathbf{w}_h \in L^2(\Omega) \mid \mathbf{w}_h|_K \in \mathbb{P}_l(K), \forall K \in \mathcal{T}_h \right\}. \end{aligned}$$

For $k \geq 2$ we assume there exists finite element spaces $\mathbf{V}_h \subset H_0^1(\Omega)^d$, $Q_h \subset L_0^2(\Omega)$ and

$$\mathbf{V}_h = \{ \mathbf{v}_h \in \mathbf{V}_h \mid \operatorname{div}(\mathbf{v}_h) = 0 \text{ in } \Omega \}.$$

The inverse inequality

$$|v_h|_{W^{m,p}(K)} \leq c_{\text{inv}} h_K^{n-m-d(\frac{1}{q}-\frac{1}{p})} |v_h|_{W^{n,q}(K)} \quad \forall v_h \in D_h^l, \quad (3)$$

holds, with $0 \leq n \leq m \leq 1$, $1 \leq q \leq p \leq \infty$, and h_K being the diameter of $K \in \mathcal{T}_h$, because the family of partitions is quasi-uniform, e.g., see [5, Theorem 3.2.6].

As in [2] we assume

1. $\operatorname{div}(\mathbf{V}_h) \subset Q_h$.
2. The pair (\mathbf{V}_h, Q_h) is inf-sup stable.
3. $\mathbf{W}_h^k \subset \mathbf{V}_h \subset \mathbf{W}_h^r$, for some $k, r \geq 2$.
4. There exists a finite element space $\mathbf{Z}_h \subset \mathbf{Z}$ such that $\operatorname{curl}(\mathbf{Z}_h) = \mathbf{V}_h$.
5. For P_h the orthogonal projection onto \mathbf{Z}_h the following error estimate holds for $\mathbf{z} \in \mathbf{Z}$ with components in $H^{k+2}(\Omega)$ and $|\alpha| \leq k+1$

$$\|h^{|\alpha|} \partial^\alpha (\mathbf{z} - P_h \mathbf{z})\|_h \leq Ch^{k+2} \|\mathbf{z}\|_{k+2}. \quad (4)$$

As shown in [2] the Scott-Vogelius finite element spaces on barycenter-refined triangulations verify the above assumptions with velocity and pressure spaces, $k \geq 2$

$$\mathbf{V}_h = \mathbf{W}_h^k \quad Q_h = D_h^{k-1} \cap L_0^2(\Omega).$$

The potential space is given by

$$\mathbf{Z}_h^{k+1} = \left\{ \mathbf{z}_h \in C^1(\Omega), \mathbf{z}_h|_K \in \mathbb{P}_{k+1}(K), K \in \mathcal{T}_h \right\}.$$

In the rest of the paper we will consider these finite element spaces. For these spaces apart from the above assumptions the following Lemma can be found in [2, Lemma 4.1].

Lemma 2.1 *Let $m \geq 3$. There exists $C > 0$, independent of h , such that for all $\mathbf{w}_h \in \mathbf{D}_h^m$ it holds*

$$\inf_{\mathbf{m}_h \in \mathbf{Z}_h^m} \|h^{3/2}(\mathbf{w}_h - \mathbf{m}_h)\|_h \leq C_{2.1} \left(\|h^2 \llbracket \mathbf{w}_h \rrbracket \llbracket \mathcal{F}^i \right\| + \|h^3 \llbracket \nabla \mathbf{w}_h \rrbracket \llbracket \mathcal{F}^i \right\| \right).$$

We remark that the above result is proved in [2] only for $d = 2$, although the authors indicate that the proof can be extended to the case $d = 3$ arguing as in [?].

Let \mathbf{s}_h be the modified Stokes projection defined by

$$(\nabla \mathbf{s}_h, \nabla \varphi_h) = (\nabla \mathbf{u}, \nabla \varphi_h), \quad \varphi_h \in \mathbf{V}_h,$$

for which the following bound holds [7, (22)]

$$\|\mathbf{s}_h - \mathbf{u}\|_0 + h \|\nabla(\mathbf{s}_h - \mathbf{u})\|_0 \leq C_s \|\mathbf{u}\|_{k+1} h^{k+1}. \quad (5)$$

Following [4] one can also prove

$$\|\mathbf{s}_h\|_\infty \leq C_s \|\mathbf{u}\|_\infty, \quad \|\nabla \mathbf{s}_h\|_\infty \leq C_s \|\nabla \mathbf{u}\|_\infty. \quad (6)$$

For the velocity \mathbf{u} in (1) we denote by \mathbf{z} its corresponding potential. Then, we define $\psi_h = P_h \mathbf{z}$ and $\mathbf{w}_h = \text{curl} \psi_h$. Adding and subtracting \mathbf{s}_h and applying (6), (3), (4) and (5) it follows that

$$\|\nabla \mathbf{w}_h\|_\infty \leq C_s \|\nabla \mathbf{u}\|_\infty + Ch^{k-d/2} \|\mathbf{z}\|_{k+2}. \quad (7)$$

Arguing similarly,

$$\|\mathbf{w}_h\|_\infty \leq C_s \|\mathbf{u}\|_\infty + Ch^{k+1-d/2} \|\mathbf{z}\|_{k+2}. \quad (8)$$

Thus, in the sequel we denote

$$C_{1, \mathbf{w}_h} = \max_{0 \leq t \leq T} \|\nabla \mathbf{w}_h(t)\|_\infty, \quad (9)$$

$$C_{\mathbf{w}_h} = \max_{0 \leq t \leq T} \|\mathbf{w}_h(t)\|_\infty. \quad (10)$$

3 Error analysis

The stabilized finite element approximation is defined as follows.

Find: $(\mathbf{u}_h(t), p_h(t)) \in (\mathbf{V}_h, Q_h)$, $t \in (0, T]$ such that for all $(\mathbf{v}_h, q_h) \in (\mathbf{V}_h, Q_h)$ it holds

$$\begin{aligned} (\mathbf{u}_{h,t}, \mathbf{v}_h) + \nu(\nabla \mathbf{u}_h, \nabla \mathbf{v}_h) + (\mathbf{u}_h \cdot \nabla \mathbf{u}_h, \mathbf{v}_h) + S(\mathbf{u}_h, \mathbf{v}_h) - (p_h, \nabla \cdot \mathbf{v}_h) \\ = (\mathbf{f}, \mathbf{v}_h), \quad (11) \\ (\nabla \cdot \mathbf{u}_h, q_h) = 0, \end{aligned}$$

where, following [2] the stabilized term is defined as

$$S(\mathbf{u}_h, \mathbf{v}_h) = \|\mathbf{u}_h\|_{0,\infty}^{-1} \sum_{j=1}^3 \delta_j S_j(\mathbf{u}_h, \mathbf{v}_h),$$

where

$$S_1(\mathbf{u}_h, \mathbf{v}_h) = \langle h^2 \llbracket (\mathbf{u}_h \cdot \nabla) \mathbf{u}_h \times \mathbf{n} \rrbracket, \llbracket (\mathbf{u}_h \cdot \nabla) \mathbf{v}_h \times \mathbf{n} \rrbracket \rangle_{\mathcal{F}^i} \quad (12)$$

$$S_2(\mathbf{u}_h, \mathbf{v}_h) = \langle h^4 \llbracket \mathcal{B} \mathbf{u}_h \rrbracket, \llbracket \mathcal{B} \mathbf{v}_h \rrbracket \rangle_{\mathcal{F}^i} \quad (13)$$

$$S_3(\mathbf{u}_h, \mathbf{v}_h) = \langle h^6 \llbracket \nabla \mathcal{B} \mathbf{u}_h \rrbracket, \llbracket \nabla \mathcal{B} \mathbf{v}_h \rrbracket \rangle_{\mathcal{F}^i}, \quad (14)$$

where

$$(\mathcal{B} \mathbf{w})|_K = \text{curl}((\mathbf{u}_h \cdot \nabla) \mathbf{w})|_K,$$

and δ_j , $j = 1, 2, 3$ are non-dimensional stabilization parameters.

We introduce two constants, a characteristic length l_0 (which, for the purpose of simplicity, we may choose as the diameter of Ω or $|\Omega|^{1/d}$) and a characteristic time τ_0 (which for the purpose of simplicity we may choose as $\tau_0 = T$) with which we define the constant

$$v_0 = \frac{l_0}{\tau_0}. \quad (15)$$

We define the following norm for a regular enough function

$$\|\mathbf{z}\|_*^2 = (\nu + v_0 h) \sum_{j=0}^{\min(5, k+2)} h^{2j-4} \|D^j \mathbf{z}\|_h^2. \quad (16)$$

We recall the following local trace inequality: there exist a positive constant C_{tr} such that for any $K \in \mathcal{T}_h$ and $F \in \mathcal{F}_K$ and any $v \in H^1(K)$, it holds

$$\|v\|_{0,F} \leq C_{\text{tr}} \left(h_K^{-1/2} \|v\|_{0,K} + h_K^{1/2} |v|_{1,K} \right). \quad (17)$$

We denote by

$$\delta_{\min} = \min\{\delta_1, \delta_2, \delta_3\}, \quad \delta_{\max} = \max\{\delta_1, \delta_2, \delta_3\}.$$

Following [2], for the velocity \mathbf{u} in (1), we denote by \mathbf{z} its corresponding potential. Then, we define $\boldsymbol{\psi}_h = P_h \mathbf{z}$ and $\mathbf{w}_h = \text{curl} \boldsymbol{\psi}_h$. Finally we denote by

$$\mathbf{e}_h = \mathbf{u}_h - \mathbf{w}_h, \quad \boldsymbol{\eta}_h = \mathbf{u} - \mathbf{w}_h.$$

We first observe that using the above definitions and (1) we get for any $\mathbf{v}_h \in \mathcal{V}_h$

$$\begin{aligned} & (\mathbf{w}_{h,t}, \mathbf{v}_h) + \nu(\nabla \mathbf{w}_h, \nabla \mathbf{v}_h) + (\mathbf{u} \cdot \nabla \mathbf{u}, \mathbf{v}_h) + S(\mathbf{w}_h, \mathbf{v}_h) \\ &= S(\mathbf{w}_h, \mathbf{v}_h) - (\boldsymbol{\eta}_t, \mathbf{v}_h) - \nu(\nabla \boldsymbol{\eta}, \nabla \mathbf{v}_h) + (\mathbf{f}, \mathbf{v}_h). \end{aligned} \quad (18)$$

Subtracting (18) from (11) and taking $\mathbf{v}_h = \mathbf{e}_h$ we get

$$\begin{aligned} \frac{1}{2} \frac{d}{dt} \|\mathbf{e}_h\|_0^2 + \nu \|\nabla \mathbf{e}_h\|_0^2 + S(\mathbf{e}_h, \mathbf{e}_h) &= (\mathbf{u} \cdot \nabla \mathbf{u} - \mathbf{u}_h \cdot \nabla \mathbf{u}_h, \mathbf{e}_h) + S(\mathbf{w}_h, \mathbf{e}_h) \\ &+ (\boldsymbol{\eta}_{h,t}, \mathbf{e}_h) + \nu(\nabla \boldsymbol{\eta}_h, \nabla \mathbf{e}_h). \end{aligned} \quad (19)$$

For the nonlinear term we write

$$(\mathbf{u} \cdot \nabla \mathbf{u} - \mathbf{u}_h \cdot \nabla \mathbf{u}_h, \mathbf{e}_h) = ((\mathbf{u} - \mathbf{u}_h) \cdot \nabla \mathbf{u}, \mathbf{e}_h) + (\mathbf{u}_h \cdot \nabla (\mathbf{u} - \mathbf{u}_h), \mathbf{e}_h).$$

And adding $(\mathbf{u}_h \cdot \nabla \mathbf{e}_h, \mathbf{e}_h) = 0$, we may write

$$\begin{aligned} (\mathbf{u} \cdot \nabla \mathbf{u} - \mathbf{u}_h \cdot \nabla \mathbf{u}_h, \mathbf{e}_h) &= ((\mathbf{u} - \mathbf{u}_h) \cdot \nabla \mathbf{u}, \mathbf{e}_h) + (\mathbf{u}_h \cdot \nabla \boldsymbol{\eta}_h, \mathbf{e}_h) = \\ &(\boldsymbol{\eta}_h \cdot \nabla \mathbf{u}, \mathbf{e}_h) - (\mathbf{e}_h \cdot \nabla \mathbf{u}, \mathbf{e}_h) + (\mathbf{u}_h \cdot \nabla \boldsymbol{\eta}_h, \mathbf{e}_h). \end{aligned}$$

Inserting the above equality into (19) we finally obtain

$$\begin{aligned} \frac{1}{2} \frac{d}{dt} \|\mathbf{e}_h\|_0^2 + \nu \|\nabla \mathbf{e}_h\|_0^2 + S(\mathbf{e}_h, \mathbf{e}_h) &= (\boldsymbol{\eta}_h \cdot \nabla \mathbf{u}, \mathbf{e}_h) - (\mathbf{e}_h \cdot \nabla \mathbf{u}, \mathbf{e}_h) \\ &+ (\mathbf{u}_h \cdot \nabla \boldsymbol{\eta}_h, \mathbf{e}_h) + S(\mathbf{w}_h, \mathbf{e}_h) + (\boldsymbol{\eta}_{h,t}, \mathbf{e}_h) + \nu(\nabla \boldsymbol{\eta}_h, \nabla \mathbf{e}_h). \end{aligned} \quad (20)$$

Now, for the first and second terms on the right-hand side of (20) we get

$$|(\boldsymbol{\eta}_h \cdot \nabla \mathbf{u}, \mathbf{e}_h)| + |(\mathbf{e}_h \cdot \nabla \mathbf{u}, \mathbf{e}_h)| \leq \frac{3}{2} \|\nabla \mathbf{u}\|_\infty \|\mathbf{e}_h\|_0^2 + \frac{1}{2} \|\nabla \mathbf{u}\|_\infty \|\boldsymbol{\eta}_h\|_0^2.$$

And since $\boldsymbol{\eta}_h = \text{curl}(\mathbf{z} - \boldsymbol{\psi}_h)$, assuming $\nabla \mathbf{u} \in L^\infty(\Omega)^d$ and using definition (16) we can write

$$|(\boldsymbol{\eta}_h \cdot \nabla \mathbf{u}, \mathbf{e}_h)| + |(\mathbf{e}_h \cdot \nabla \mathbf{u}, \mathbf{e}_h)| \leq \frac{3}{2} \|\nabla \mathbf{u}\|_\infty \|\mathbf{e}_h\|_0^2 + \frac{h}{2v_0} \|\nabla \mathbf{u}\|_\infty \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2. \quad (21)$$

For the last two terms on the right-hand side of (20) we obtain

$$|(\boldsymbol{\eta}_{h,t}, \mathbf{e}_h)| + \nu |(\nabla \boldsymbol{\eta}_h, \nabla \mathbf{e}_h)| \leq \frac{T}{2} \|\boldsymbol{\eta}_{h,t}\|_0^2 + \frac{\nu}{2} \|\nabla \boldsymbol{\eta}_h\|_0^2 + \frac{1}{2T} \|\mathbf{e}_h\|_0^2 + \frac{\nu}{2} \|\nabla \mathbf{e}_h\|_0^2.$$

Using again definition (16) and applying (4) to \mathbf{z}_t we get

$$\begin{aligned} |(\boldsymbol{\eta}_{h,t}, \mathbf{e}_h)| + \nu |(\nabla \boldsymbol{\eta}_h, \nabla \mathbf{e}_h)| &\leq CTh^{2k+2} \|\mathbf{u}_t\|_{k+1} + C \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2 \\ &+ \frac{1}{2T} \|\mathbf{e}_h\|_0^2 + \frac{\nu}{2} \|\nabla \mathbf{e}_h\|_0^2. \end{aligned} \quad (22)$$

Inserting (21) and (22) into (20) we reach

$$\begin{aligned} \frac{d}{dt} \|\mathbf{e}_h\|_0^2 + \nu \|\nabla \mathbf{e}_h\|_0^2 + S(\mathbf{e}_h, \mathbf{e}_h) &\leq \left(3 \|\nabla \mathbf{u}\|_\infty + \frac{1}{T} \right) \|\mathbf{e}_h\|_0^2 + 2(\mathbf{u}_h \cdot \nabla \boldsymbol{\eta}_h, \mathbf{e}_h) \\ &+ S(\mathbf{w}_h, \mathbf{w}_h) + CTh^{2k+2} \|\mathbf{u}_t\|_{k+1} + C \left(\frac{h}{v_0} \|\nabla \mathbf{u}\|_\infty + 1 \right) \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2. \end{aligned} \quad (23)$$

To finish the error bound we need to bound the second and third terms on the right-hand side above. To this end we will apply some lemmas.

We will need estimations of $\mathbf{u}_h - \mathbf{u}$ and its first and second derivatives in different norms that we obtain next.

Lemma 3.1 *The following bounds hold for any multi-index α with $|\alpha| \leq 2$,*

$$\left\| h^{|\alpha|+1/2} \partial^\alpha (\mathbf{u}_h - \mathbf{u}) \right\|_h \leq c_{\text{inv}} h^{1/2} \|\mathbf{e}_h\|_0 + h^{|\alpha|+1/2} \left\| D^{|\alpha|+1} (\mathbf{z} - \boldsymbol{\psi}_h) \right\|_h, \quad (24)$$

$$\left\| h^{|\alpha|+3/2} \nabla \partial^\alpha (\mathbf{u}_h - \mathbf{u}) \right\|_h \leq c_{\text{inv}} h^{1/2} \|\mathbf{e}_h\|_0 + h^{|\alpha|+3/2} \left\| D^{|\alpha|+2} (\mathbf{z} - \boldsymbol{\psi}_h) \right\|_h. \quad (25)$$

Proof: We prove (24–25) for $(\mathbf{u}_h - \mathbf{u})_{xy}$ since the rest of the second and first order derivatives are dealt with similarly. By writing

$$(\mathbf{u} - \mathbf{u}_h)_{yx} = (\mathbf{e}_h)_{yx} + (\boldsymbol{\eta}_h)_{yx},$$

and applying the inverse inequality (3) we have,

$$\left\| h^{5/2} (\mathbf{u}_h - \mathbf{u})_{yx} \right\|_h \leq c_{\text{inv}} h^{1/2} \|\mathbf{e}_h\|_0 + h^{5/2} \left\| D^3 (\mathbf{z} - \boldsymbol{\psi}_h) \right\|_h, \quad (26)$$

$$\left\| h^{7/2} \nabla (\mathbf{u}_h - \mathbf{u})_{yx} \right\|_h \leq c_{\text{inv}} h^{1/2} \|\mathbf{e}_h\|_0 + h^{7/2} \left\| D^4 (\mathbf{z} - \boldsymbol{\psi}_h) \right\|_h. \quad (27)$$

□

Lemma 3.2 (*Consistency of the stabilization term*). *Assume that $\mathbf{u} \in H^{\min(4, k+1)}(\Omega)$. Then, the following bound holds*

$$\begin{aligned} S(\mathbf{w}_h, \mathbf{w}_h) \leq & C \frac{\delta_{\text{max}}}{\|\mathbf{u}_h\|_\infty} \left(\|\nabla \mathbf{w}_h\|_\infty^2 h \|\mathbf{e}_h\|_0^2 \right. \\ & \left. + (\|\mathbf{u}\|_\infty + h (\|\nabla \mathbf{u}\|_\infty + \|\nabla \mathbf{w}_h\|_\infty))^2 \frac{1}{v_0} \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2 \right), \end{aligned} \quad (28)$$

where the constant C depends on C_{tr} , c_{inv} and the dimension d .

Proof: For the purpose of the present proof, for $\mathbf{w} = \mathbf{u}$ or $\mathbf{w} = \mathbf{u}_h - \mathbf{u}$, we denote by

$$\mathcal{B}_\mathbf{w} \mathbf{v} = \text{curl}((\mathbf{w} \cdot \nabla) \mathbf{v}),$$

and

$$\begin{aligned} S_\mathbf{w}(\mathbf{v}, \mathbf{v}) = & \frac{1}{\|\mathbf{u}_h\|_\infty} \left(\delta_1 \|h[(\mathbf{w} \cdot \nabla) \mathbf{v} \times \mathbf{n}]\|_{\mathcal{F}_i}^2 + \delta_2 \left\| h^2 [\mathcal{B}_\mathbf{w} \mathbf{v}] \right\|_{\mathcal{F}_i}^2 \right. \\ & \left. + \delta_3 \left\| h^3 [\nabla \mathcal{B}_\mathbf{w} \mathbf{v}] \right\|_{\mathcal{F}_i}^2 \right). \end{aligned}$$

We write

$$\begin{aligned} S(\mathbf{w}_h, \mathbf{w}_h) &= (S(\mathbf{w}_h, \mathbf{w}_h) - S_\mathbf{u}(\mathbf{w}_h, \mathbf{w}_h)) + S_\mathbf{u}(\mathbf{w}_h, \mathbf{w}_h) \\ &= S_\mathbf{e}(\mathbf{w}_h, \mathbf{w}_h) + S_\mathbf{u}(\mathbf{w}_h, \mathbf{w}_h). \end{aligned} \quad (29)$$

where

$$\mathbf{e} = \mathbf{u}_h - \mathbf{u}. \quad (30)$$

Applying the trace inequality (17) we can write

$$\|h[(\mathbf{e} \cdot \nabla) \mathbf{w}_h \times \mathbf{n}]\|_{\mathcal{F}_i} \leq C_{\text{tr}} \left(\left\| h^{1/2} (\mathbf{e} \cdot \nabla) \mathbf{w}_h \right\|_h + \left\| h^{3/2} \nabla (\mathbf{e} \cdot \nabla) \mathbf{w}_h \right\|_h \right)$$

$$\begin{aligned} &\leq C_{tr} \left(\left\| h^{1/2} (\mathbf{e} \cdot \nabla) \mathbf{w}_h \right\|_h + \left\| h^{3/2} \nabla \mathbf{e} \cdot \nabla \mathbf{w}_h \right\|_h \right. \\ &\quad \left. + \left\| h^{3/2} \mathbf{e} \cdot \text{Hess}(\mathbf{w}_h) \right\|_h \right), \end{aligned} \quad (31)$$

where, by $\mathbf{e} \cdot \text{Hess}(\mathbf{w}_h)$ we denote a matrix whose columns are the inner product of \mathbf{e} with the Hessian of each of the components of \mathbf{w}_h . For the last term on the right-hand side above we apply the inverse inequality (3) to the second derivatives of \mathbf{w}_h to get

$$\begin{aligned} \left\| h^{3/2} \mathbf{e} \cdot \text{Hess}(\mathbf{w}_h) \right\|_h &\leq h^{1/2} \|\mathbf{e}\|_0 c_{\text{inv}} \|\nabla \mathbf{w}_h\|_\infty \\ &\leq \left(c_{\text{inv}} h^{1/2} \|\mathbf{e}_h\|_0 + c_{\text{inv}} \frac{h}{v_0^{1/2}} \|\mathbf{z} - \psi_h\|_* \right) \|\nabla \mathbf{w}_h\|_\infty, \end{aligned}$$

for the second term of the right-hand side of (31) we apply (25) to $\nabla \mathbf{e}_h$ to get

$$\left\| h^{3/2} \nabla \mathbf{e} \cdot \nabla \mathbf{w}_h \right\|_h \leq \left(c_{\text{inv}} h^{1/2} \|\mathbf{e}_h\|_0 + \frac{h}{v_0^{1/2}} \|\mathbf{z} - \psi_h\|_* \right) \|\nabla \mathbf{w}_h\|_\infty.$$

Arguing similiary for the first term on the right-hand side of (31) we obtain

$$\begin{aligned} &\|h[(\mathbf{e} \cdot \nabla) \mathbf{w}_h \times \mathbf{n}]\|_{\mathcal{F}_i} \\ &\leq C_{\text{tr}} \|\nabla \mathbf{w}_h\|_\infty (2 + 2c_{\text{inv}}) \left(h^{1/2} \|\mathbf{e}_h\|_0 + \frac{h}{v_0^{1/2}} \|\mathbf{z} - \psi_h\|_* \right). \end{aligned}$$

Applying the trace inequality (17) again we may write

$$\left\| h^2 [\mathcal{B}_e \mathbf{w}_h] \right\|_{\mathcal{F}_i} \leq C_{\text{tr}} (I_{11} + I_{12}),$$

where I_{11} and I_{12} can be expressed as a sum of terms of the form

$$\kappa_\beta h^{|\alpha|+|\beta|+1/2} \left\| \partial^\alpha \mathbf{e} \cdot \partial^\beta \nabla w_h \right\|_h$$

where w_h represents any of the components of \mathbf{w}_h , $|\alpha| + |\beta| = 1$ in the case of I_{11} and $|\alpha| + |\beta| = 2$ in the case of I_{12} and

$$\kappa_\beta = \begin{cases} 1 & \text{if } |\beta| + 1 \leq k, \\ 0 & \text{otherwise.} \end{cases} \quad (32)$$

Notice that the presence of κ_β reflects the fact that, being \mathbf{w}_h piecewise polynomial of degree k , their derivatives of order $k + 1$ are 0.

Applying the inverse inequality,

$$\left\| \partial^\beta \nabla w_h \right\|_\infty \leq c_{\text{inv}} h^{-|\beta|} \|\nabla \mathbf{w}_h\|_\infty,$$

so that

$$I_{11} + I_{12} \leq C c_{\text{inv}} \|\nabla \mathbf{w}_h\|_\infty \sum_{|\alpha|=0}^2 h^{|\alpha|+1/2} \|\partial^\alpha \mathbf{e}\|_h. \quad (33)$$

Consequently, applying (24) it follows that

$$\left\| h^2 \llbracket \mathcal{B}_{\mathbf{w}} \mathbf{v} \rrbracket \right\|_{\mathcal{F}_i} \leq CC_{\text{tr}} \|\nabla \mathbf{w}_h\|_{\infty} \left(h^{1/2} \|\mathbf{e}_h\|_0 + \frac{h}{v_0^{1/2}} \|\mathbf{z} - \boldsymbol{\psi}_h\|_* \right). \quad (34)$$

Observe that the constant C in (33) depends on the number of terms in I_{11} and I_{12} , which, in turn, depends on the dimension. Consequently, this is also the case of the constant C in (34), which depends also on c_{inv} .

With respect $\left\| h^3 \llbracket \nabla \mathcal{B}_{\mathbf{w}} \mathbf{v} \rrbracket \right\|_{\mathcal{F}_i}$, the argument is the same as with $\left\| h^2 \llbracket \mathcal{B}_{\mathbf{w}} \mathbf{v} \rrbracket \right\|_{\mathcal{F}_i}$, with the only difference that, now, $|\boldsymbol{\alpha}| + |\boldsymbol{\beta}| = 2, 3$. Thus, we conclude that

$$S_{\mathbf{e}}(\mathbf{w}_h, \mathbf{w}_h) \leq C_2 \|\nabla \mathbf{w}_h\|_{\infty}^2 \frac{\delta}{\|\mathbf{u}_h\|_{\infty}} \left(h^{1/2} \|\mathbf{e}_h\|_0 + \frac{h}{v_0^{1/2}} \|\mathbf{z} - \boldsymbol{\psi}_h\|_* \right)^2. \quad (35)$$

To bound $S_{\mathbf{u}}(\mathbf{w}_h, \mathbf{w}_h)$ we estimate the different terms separately. Since we are assuming that $\mathbf{u} \in H^3(\Omega)^d$, it follows that $(\mathbf{u} \cdot \nabla) \mathbf{u} \in H^2(\Omega)$ and, hence, is continuous, so that

$$\|h \llbracket (\mathbf{u} \cdot \nabla) \mathbf{u} \times \mathbf{n} \rrbracket\|_{\mathcal{F}_i} = 0,$$

and, consequently

$$\begin{aligned} \|h \llbracket (\mathbf{u} \cdot \nabla) \mathbf{w}_h \times \mathbf{n} \rrbracket\|_{\mathcal{F}_i} &= \|h \llbracket (\mathbf{u} \cdot \nabla) \boldsymbol{\eta}_h \times \mathbf{n} \rrbracket\|_{\mathcal{F}_i} \\ &\leq C \|\mathbf{u}\|_{\infty} \|h \llbracket \nabla \boldsymbol{\eta}_h \rrbracket\|_{\mathcal{F}_i}. \end{aligned} \quad (36)$$

Applying the trace inequality (17) we have

$$\begin{aligned} \|h \llbracket \nabla \boldsymbol{\eta}_h \rrbracket\|_{\mathcal{F}_i} &\leq CC_{\text{tr}} \left(h^{1/2} \left\| D^2(\mathbf{z} - \boldsymbol{\psi}_h) \right\|_h + h^{3/2} \left\| D^3(\mathbf{z} - \boldsymbol{\psi}_h) \right\|_h \right) \\ &\leq CC_{\text{tr}} \frac{1}{v_0^{1/2}} \|\mathbf{z} - \boldsymbol{\psi}_h\|_*, \end{aligned} \quad (37)$$

so that from (36), it follows that

$$\|h \llbracket (\mathbf{u} \cdot \nabla) \mathbf{w}_h \times \mathbf{n} \rrbracket\|_{\mathcal{F}_i} \leq CC_{\text{tr}} \|\mathbf{u}\|_{\infty} \frac{1}{v_0^{1/2}} \|\mathbf{z} - \boldsymbol{\psi}_h\|_*, \quad (38)$$

where C depends on the number of elements in $(\mathbf{u} \cdot \nabla) \mathbf{w}_h \times \mathbf{n}$, that is, on the dimension.

Also, since we are assuming that $\mathbf{u} \in H^3(\Omega)^d$, we have that $\mathcal{B}_{\mathbf{u}} \mathbf{u} \in H^1(\Omega)^d$, which implies (see e.g., [11, p. 37])

$$\left\| h^2 \llbracket \mathcal{B}_{\mathbf{u}} \mathbf{u} \rrbracket \right\|_{\mathcal{F}_i} = 0,$$

so that

$$\begin{aligned} \left\| h^2 \llbracket \mathcal{B}_{\mathbf{u}} \mathbf{w}_h \rrbracket \right\|_{\mathcal{F}_i} &= \left\| h^2 \llbracket \mathcal{B}_{\mathbf{u}} \boldsymbol{\eta}_h \rrbracket \right\|_{\mathcal{F}_i} \\ &\leq Ch \|\nabla \mathbf{u}\|_{\infty} \|h \llbracket \nabla \boldsymbol{\eta}_h \rrbracket\|_{\mathcal{F}_i} + \|\mathbf{u}\|_{\infty} \left\| h^2 \llbracket \nabla \text{curl}(\boldsymbol{\eta}_h) \rrbracket \right\|_{\mathcal{F}_i}. \end{aligned} \quad (39)$$

We notice that $\|h\llbracket\nabla\boldsymbol{\eta}_h\rrbracket\|_{\mathcal{F}_i}$ is bounded in (37). Applying the trace inequality (17) we have

$$\begin{aligned}\left\|h^2\llbracket\nabla\text{curl}(\boldsymbol{\eta}_h)\rrbracket\right\|_{\mathcal{F}_i} &\leq CC_{\text{tr}}\left(h^{3/2}\left\|D^3(\mathbf{z}-\boldsymbol{\psi}_h)\right\|_h+h^{5/2}\left\|D^4(\mathbf{z}-\boldsymbol{\psi}_h)\right\|_h\right) \\ &\leq CC_{\text{tr}}\frac{1}{v_0^{1/2}}\|\mathbf{z}-\boldsymbol{\psi}_h\|_*.\end{aligned}$$

Thus, from (39) it follows that

$$\left\|h^2\llbracket\mathcal{B}_u\mathbf{w}_h\rrbracket\right\|_{\mathcal{F}_i}\leq CC_{\text{tr}}(\|\mathbf{u}\|_\infty+h\|\nabla\mathbf{u}\|_\infty)\frac{1}{v_0^{1/2}}\|\mathbf{z}-\boldsymbol{\psi}_h\|_*,\quad (40)$$

where, as before, C depends on the dimension.

Finally, we have that $\left\|h^3\llbracket\nabla\mathcal{B}_u\mathbf{w}_h\rrbracket\right\|_{\mathcal{F}_i}$ can be bounded by a sum of terms of the form

$$\kappa_\beta\left\|h^3\llbracket\partial^\alpha\mathbf{u}\cdot\nabla\partial^\beta\mathbf{w}_h\rrbracket\right\|_{\mathcal{F}_i},\quad (41)$$

where κ_β is defined in (32), and $|\alpha|+|\beta|=2$. We now argue why, for the terms in (41), we have

$$\kappa_\beta\left\|h^3\llbracket\partial^\alpha\mathbf{u}\cdot\nabla\partial^\beta\mathbf{w}_h\rrbracket\right\|_{\mathcal{F}_i}=\kappa_\beta\left\|h^3\llbracket\partial^\alpha\mathbf{u}\cdot\nabla\partial^\beta\boldsymbol{\eta}_h\rrbracket\right\|_{\mathcal{F}_i}.\quad (42)$$

If $k=2$, then $\kappa_\beta=0$ when $\beta=2$, so that in terms with $\kappa_\beta=1$ only up to second order derivatives appear, multiplied by first order derivatives, so that, if $|\beta|\leq 1$ we have $\partial^\alpha\mathbf{u}\cdot\nabla\partial^\beta\mathbf{u}\in H^1(\Omega)^d$; thus (see e.g., [11, p. 37]), (42) holds. If $k\geq 3$, then we are assuming that $\mathbf{u}\in H^4(\Omega)$, and then $\partial^\alpha\mathbf{u}\cdot\nabla\partial^\beta\mathbf{w}_h\in H^1(\Omega)$, so that, again, (42) holds.

Now, arguing as before we have for $|\alpha|\leq 1$

$$\kappa_\beta\left\|h^3\llbracket\partial^\alpha\mathbf{u}\cdot\nabla\partial^\beta\boldsymbol{\eta}_h\rrbracket\right\|_{\mathcal{F}_i}\leq CC_{\text{tr}}(\|\mathbf{u}\|_\infty+h\|\nabla\mathbf{u}\|_\infty)\frac{1}{v_0^{1/2}}\|\mathbf{z}-\boldsymbol{\psi}_h\|_*.$$

We deal differently with the case $|\alpha|=2$. Here we write

$$\left\|h^3\llbracket\partial^\alpha\mathbf{u}\cdot\nabla\boldsymbol{\eta}_h\rrbracket\right\|_{\mathcal{F}_i}\leq\left\|h^3\llbracket\partial^\alpha\boldsymbol{\eta}_h\cdot\nabla\boldsymbol{\eta}_h\rrbracket\right\|_{\mathcal{F}_i}+\left\|h^3\llbracket\partial^\alpha\mathbf{w}_h\cdot\nabla\boldsymbol{\eta}_h\rrbracket\right\|_{\mathcal{F}_i}\quad (43)$$

For the first term on the right-hand side of (43) since $\nabla\mathbf{w}_h$ is a piecewise polynomial and $\nabla\mathbf{u}$ is continuous, we have that $\boldsymbol{\eta}_h$ has only jump discontinuities, so that we can write

$$\begin{aligned}\left\|h^3\llbracket\partial^\alpha\boldsymbol{\eta}_h\cdot\nabla\boldsymbol{\eta}_h\rrbracket\right\|_{\mathcal{F}_i} &\leq h\|\nabla\boldsymbol{\eta}_h\|_\infty\left\|h^2\llbracket\partial^\alpha\boldsymbol{\eta}_h\rrbracket\right\|_{\mathcal{F}_i} \\ &\leq h(\|\nabla\mathbf{u}\|_\infty+\|\nabla\mathbf{w}_h\|_\infty)\left\|h^2\llbracket\partial^\alpha\boldsymbol{\eta}_h\rrbracket\right\|_{\mathcal{F}_i},\end{aligned}$$

so that applying the trace inequality (17) we get

$$\begin{aligned}\left\|h^3\llbracket\partial^\alpha\boldsymbol{\eta}_h\cdot\nabla\boldsymbol{\eta}_h\rrbracket\right\|_{\mathcal{F}_i} &\leq CC_{\text{tr}}h(\|\nabla\mathbf{u}\|_\infty+\|\nabla\mathbf{w}_h\|_\infty)\left(h^{3/2}\left\|D^2\boldsymbol{\eta}_h\right\|_h+h^{5/2}\left\|D^3\boldsymbol{\eta}_h\right\|_h\right) \\ &\leq CC_{\text{tr}}h(\|\nabla\mathbf{u}\|_\infty+\|\nabla\mathbf{w}_h\|_\infty)\frac{1}{v_0^{1/2}}\|\mathbf{z}-\boldsymbol{\psi}_h\|_*.\quad (44)\end{aligned}$$

For the second term on the righ-hand side of (43) we write

$$\begin{aligned} \left\| h^3 [\partial^\alpha \mathbf{w}_h \cdot \nabla \boldsymbol{\eta}_h] \right\|_{\mathcal{F}_i} &\leq Ch^2 \|\partial^\alpha \mathbf{w}_h\|_\infty \|h \nabla \boldsymbol{\eta}_h\|_{\mathcal{F}_i} \\ &\leq C c_{\text{inv}} h \|\nabla \mathbf{w}_h\|_\infty \|h \nabla \boldsymbol{\eta}_h\|_{\mathcal{F}_i}. \end{aligned}$$

Thus applying again the trace inequality (17)

$$\begin{aligned} \left\| h^3 [\partial^\alpha \mathbf{w}_h \cdot \nabla \boldsymbol{\eta}_h] \right\|_{\mathcal{F}_i} &\leq C c_{\text{inv}} h \|\nabla \mathbf{w}_h\|_\infty C_{\text{tr}} \left(h^{1/2} \left\| D^1 \boldsymbol{\eta}_h \right\|_h + h^{3/2} \left\| D^2 \boldsymbol{\eta}_h \right\|_h \right) \\ &\leq C c_{\text{inv}} h \|\nabla \mathbf{w}_h\|_\infty C_{\text{tr}} \frac{1}{v_0^{1/2}} \|\mathbf{z} - \boldsymbol{\psi}_h\|_*. \end{aligned} \quad (45)$$

This, together with (43), implies that

$$\left\| h^3 [\nabla \mathcal{B}_u \mathbf{w}_h] \right\|_{\mathcal{F}_i} \leq CC_{\text{tr}} (\|\mathbf{u}\|_\infty + h (\|\nabla \mathbf{u}\|_\infty + \|\nabla \mathbf{w}_h\|_\infty)) \frac{1}{v_0^{1/2}} \|\mathbf{z} - \boldsymbol{\psi}_h\|_*, \quad (46)$$

where, as before, C depends on the dimension and c_{inv} . Consequently, from (38), (40), and (46) it follows that

$$S_{\mathbf{u}}(w_h, w_h) \leq C \frac{\delta_{\text{max}}}{\|\mathbf{u}_h\|_\infty} (\|\mathbf{u}\|_\infty + h (\|\nabla \mathbf{u}\|_\infty + \|\nabla \mathbf{w}_h\|_\infty))^2 \frac{1}{v_0} \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2, \quad (47)$$

which, together with (29) and (35) finishes the proof. \square

As we stated in the introduction, it is well known that the standard Galerkin method based on Scott-Vogelius elements has a rate of convergence of order k with constants that do not depend neither on the Reynolds number neither on the pressure. Thanks to the previous consistency lemma for the added stabilization term the same result holds for the stabilized method. In the next proposition, as a first step to achieve the full order convergence of rate $k + 1/2$ we prove that the stabilized Scott-Vogelius method has at least rate of convergence k . This result will be used to obtained some a priori bounds for the error that will be used in the proof of the main theorem.

Proposition 3.3 *Assume that*

$$\|\mathbf{u}_h(t)\|_\infty \geq u_0 > 0, \quad 0 \leq t \leq T, \quad (48)$$

and that

$$\|\mathbf{e}_h(0)\|_0 \leq c_0 h^k, \quad (49)$$

for some constant c_0 . Then, there exist a constant C_0 such that the following inequality holds for $t \in [0, T]$

$$\|\mathbf{e}_h(t)\|_0^2 \leq C_0 h^{2k} \quad (50)$$

Proof: Starting with the error equation (19)

$$\begin{aligned} \frac{1}{2} \frac{d}{dt} \|\mathbf{e}_h\|_0^2 + \nu \|\nabla \mathbf{e}_h\|_0^2 + S(\mathbf{e}_h, \mathbf{e}_h) &= (\mathbf{u} \cdot \nabla \mathbf{u} - \mathbf{u}_h \cdot \nabla \mathbf{u}_h, \mathbf{e}_h) + S(\mathbf{w}_h, \mathbf{e}_h) \\ &\quad + (\boldsymbol{\eta}_{h,t}, \mathbf{e}_h) + \nu (\nabla \boldsymbol{\eta}_h, \nabla \mathbf{e}_h), \end{aligned}$$

we bound the nonlinear term in a different way as before. We first observe that using the skew-symmetric property of the bilinear term we get

$$(\mathbf{u} \cdot \nabla \mathbf{u} - \mathbf{u}_h \cdot \nabla \mathbf{u}_h, \mathbf{e}_h) = (\boldsymbol{\eta}_h \cdot \nabla \mathbf{u}, \mathbf{e}_h) + (\mathbf{w}_h \cdot \nabla \boldsymbol{\eta}_h, \mathbf{e}_h) - (\mathbf{e}_h \cdot \nabla \mathbf{w}_h, \mathbf{e}_h)$$

And then

$$\begin{aligned} |(\mathbf{u} \cdot \nabla \mathbf{u} - \mathbf{u}_h \cdot \nabla \mathbf{u}_h, \mathbf{e}_h)| &\leq \|\boldsymbol{\eta}_h\|_0 \|\nabla \mathbf{u}\|_\infty \|\mathbf{e}_h\|_0 + \|\mathbf{w}_h\|_\infty \|\nabla \boldsymbol{\eta}_h\|_0 \|\mathbf{e}_h\|_0 \\ &\quad + \|\mathbf{e}_h\|_0^2 \|\nabla \mathbf{w}_h\|_\infty \\ &\leq \left(\frac{\|\nabla \mathbf{u}\|_\infty}{2} + \|\nabla \mathbf{w}_h\|_\infty + \frac{1}{2T} \right) \|\mathbf{e}_h\|_0^2 \\ &\quad + \frac{\|\nabla \mathbf{u}\|_\infty}{2} \|\boldsymbol{\eta}_h\|_0^2 + \frac{T \|\mathbf{w}_h\|_\infty^2}{2} \|\nabla \boldsymbol{\eta}_h\|_0^2. \end{aligned}$$

Arguing as in (23) we get

$$\begin{aligned} \frac{d}{dt} \|\mathbf{e}_h\|_0^2 + \nu \|\nabla \mathbf{e}_h\|_0^2 + S(\mathbf{e}_h, \mathbf{e}_h) &\leq \left(\|\nabla \mathbf{u}\|_\infty + 2\|\nabla \mathbf{w}_h\|_\infty + \frac{1}{T} \right) \|\mathbf{e}_h\|_0^2 \\ &\quad + S(\mathbf{w}_h, \mathbf{w}_h) + CT h^{2k+2} \|\mathbf{u}_t\|_{k+1} + C \left(\frac{h}{v_0} \|\nabla \mathbf{u}\|_\infty + 1 \right) \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2 \\ &\quad + CT \|\mathbf{w}_h\|_\infty^2 \|\nabla \boldsymbol{\eta}_h\|_0^2. \end{aligned}$$

Applying now Lemma 3.2 we can bound

$$S(\mathbf{w}_h, \mathbf{w}_h) \leq \left(C \frac{\delta_{\max}}{u_0} \|\nabla \mathbf{w}_h\|_\infty^2 h \right) \|\mathbf{e}_h\|_0^2 + \frac{C_{\mathbf{u}, \mathbf{w}_h}}{v_0} \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2, \quad (51)$$

where

$$C_{\mathbf{u}, \mathbf{w}_h} = \left(\|\mathbf{u}\|_{L^\infty(0, T, L^\infty)} + h \left(\|\nabla \mathbf{u}\|_{L^\infty(0, T, L^\infty)} + C_{1, \mathbf{w}_h} \right) \right)^2. \quad (52)$$

Denoting by

$$\begin{aligned} \tilde{L}_h &= \left(\|\nabla \mathbf{u}\|_\infty + 2\|\nabla \mathbf{w}_h\|_\infty + \frac{1}{T} \right) + \left(C \frac{\delta_{\max}}{u_0} \|\nabla \mathbf{w}_h\|_\infty^2 h \right) \\ &\leq \hat{L}_h := \left(\|\nabla \mathbf{u}\|_{L^\infty(0, T, L^\infty)} + 2C_{1, \mathbf{w}_h} + \frac{1}{T} \right) + \left(C \frac{\delta_{\max}}{u_0} C_{1, \mathbf{w}_h}^2 h \right) \end{aligned}$$

we reach

$$\begin{aligned} \frac{d}{dt} \|\mathbf{e}_h\|_0^2 + \nu \|\nabla \mathbf{e}_h\|_0^2 + S(\mathbf{e}_h, \mathbf{e}_h) &\leq \hat{L}_h \|\mathbf{e}_h\|_0^2 \\ &\quad + CT h^{2k+2} \|\mathbf{u}_t\|_{k+1} + C_{\mathbf{u}, \mathbf{w}_h}^1 \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2 + CTC_{\mathbf{w}_h}^2 \|\nabla \boldsymbol{\eta}_h\|_0^2, \end{aligned}$$

where

$$C_{\mathbf{u}, \mathbf{w}_h}^1 = C \left(\frac{h}{v_0} \|\nabla \mathbf{u}\|_{L^\infty(0, T, L^\infty)} + 1 + \frac{C_{\mathbf{u}, \mathbf{w}_h}}{v_0} \right).$$

Applying Gronwall's Lemma we get

$$\|\mathbf{e}_h(t)\|_0^2 \leq \exp(\hat{L}_h t) \left(\|\mathbf{e}_h(0)\|_0^2 + CT h^{2k+2} \int_0^T \exp(-\hat{L}_h s) \|\mathbf{u}_t\|_{k+1}^2 dt \right)$$

$$+ TC_{\mathbf{u}, \mathbf{w}_h}^1 \max_{0 \leq t \leq T} \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2 + CT^2 C_{\mathbf{w}_h}^2 \|\nabla \boldsymbol{\eta}_h\|_{L^\infty(0, T, L^2)}^2 \Big), \quad (53)$$

so that applying (4) the proof is finished. \square

Remark 3.4 Notice that assumption (48) is not restrictive from the practical point of view. If $\|\mathbf{u}_h\|_\infty$ approaches 0, then the stabilization terms S_1 , S_2 and S_3 can be redefined so that the factor $\|\mathbf{u}_h\|_\infty^{-1}$ is replaced by $\max(u_0, \|\mathbf{u}_h\|_\infty)^{-1}$, for some $u_0 > 0$.

Remark 3.5 Let us observe that the only term of order $2k$ in (53) is the last one that comes from the bound of $(\mathbf{w}_h \cdot \nabla \boldsymbol{\eta}_h, \mathbf{e}_h)$. To improve the rate of convergence we need to apply a different bound for this term or, analogously, for the term $(\mathbf{u}_h \cdot \nabla \boldsymbol{\eta}_h, \mathbf{e}_h)$. This is carried out in next lemma. To be able to improve the rate of convergence the added stabilization terms are essential in the error bound of this term.

Lemma 3.6 (Consistency of the nonlinear term). Let $C_{\mathbf{u}_h} > 0$ and $\Gamma > 0$ be such that

$$\|\mathbf{u}_h\|_\infty \leq C_{\mathbf{u}_h} \quad (54)$$

and

$$\|\mathbf{e}_h\|_0 \leq \Gamma h^2, \quad (55)$$

hold. Then, for any $\varepsilon > 0$, the following bound holds,

$$\begin{aligned} |((\mathbf{u}_h \cdot \nabla) \boldsymbol{\eta}_h, \mathbf{e}_h)| &\leq \frac{C_{\mathbf{u}, h}^2}{v_0} \|\mathbf{e}_h\|_0^2 + \varepsilon S(\mathbf{e}_h, \mathbf{e}_h) \\ &\quad + \left((1 + C_{2.1}^2) \frac{C_{\mathbf{u}_h}}{2\varepsilon \delta_{\min} v_0} + C_1 \right) \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2, \end{aligned} \quad (56)$$

where $C_{2.1}$ is the constant in Lemma 2.1,

$$C_{\mathbf{u}, h} = c_{\text{inv}} h^{(3-d)/2} \left(\Gamma + Ch^{k-1} \|\mathbf{z}\|_{k+2} + C \|\mathbf{u}\|_3 h \right), \quad (57)$$

if $k = 2, 3$, $C_{\mathbf{u}, h} = 0$ and $C_1 = 0$. Otherwise, C_1 is a constant which depends only on the dimension d , c_{inv} , $C_{2.1}$ and the constant C_{tr} in (17).

Proof: As in [2], we write

$$|((\mathbf{u}_h \cdot \nabla) \boldsymbol{\eta}_h, \boldsymbol{\eta}_h)| \leq |\langle [(\mathbf{u}_h \cdot \nabla) \mathbf{e}_h \times \mathbf{n}], \mathbf{z} - \boldsymbol{\psi}_h \rangle_{\mathcal{F}^i}| + |(\mathcal{B} \mathbf{e}_h, \mathbf{z} - \boldsymbol{\psi}_h)_h|. \quad (58)$$

For the first term on the right-hand side above, we have

$$\begin{aligned} |\langle [(\mathbf{u}_h \cdot \nabla) \mathbf{e}_h \times \mathbf{n}], \mathbf{z} - \boldsymbol{\psi}_h \rangle_{\mathcal{F}^i}| &\leq S_1(\mathbf{e}_h, \mathbf{e}_h)^{1/2} \frac{\|\mathbf{u}_h\|_\infty^{1/2}}{h} \|\mathbf{z} - \boldsymbol{\psi}_h\|_{\mathcal{F}^i} \\ &\leq \frac{\varepsilon}{2} S(\mathbf{e}_h, \mathbf{e}_h) + \frac{C_{\mathbf{u}_h}}{2\varepsilon \delta_{\min} h^2} \|\mathbf{z} - \boldsymbol{\psi}_h\|_{\mathcal{F}^i}^2 \\ &\leq \frac{\varepsilon}{2} S(\mathbf{e}_h, \mathbf{e}_h) + \frac{C_{\mathbf{u}_h}}{2\varepsilon \delta_{\min} v_0} \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2, \end{aligned}$$

where, in the last inequality, we have applied the trace inequality (17). For the second term on the right-hand side of (58), we now distinguish two cases.

Case $k = 2, 3$

We notice that, if $k = 2$, $\mathcal{B}e_h \in \mathbf{D}_h^2$ and, if $k = 3$, $\mathcal{B}e_h \in \mathbf{D}_h^4$ so that, for $k = 2, 3$ we have $\mathcal{B}e_h \in \mathbf{D}_h^{r+1}$ and we can argue as in [2]. Being ψ_h the orthogonal projection of \mathbf{z} onto \mathbf{Z}_h we have that $\mathbf{z} - \psi_h$ is orthogonal to any $\mathbf{m}_h \in \mathbf{Z}_h$, so that we can write

$$\begin{aligned} |(\mathcal{B}e_h, \mathbf{z} - \psi_h)_h| &= |(\mathcal{B}e_h - \mathbf{m}_h, \mathbf{z} - \psi_h)_h| \\ &\leq \inf_{\mathbf{m} \in \mathbf{Z}_h} \left\| h^{3/2} (\mathcal{B}e_h - \mathbf{m}_h) \right\|_h \left\| h^{-3/2} (\mathbf{z} - \psi_h) \right\|_h \\ &\leq C_{2.1} \left(\left\| h^2 \llbracket \mathcal{B}e_h \rrbracket \right\|_{\mathcal{F}^i} + \left\| h^3 \llbracket \nabla \mathcal{B}e_h \rrbracket \right\|_{\mathcal{F}^i} \right) \left\| h^{-3/2} (\mathbf{z} - \psi_h) \right\|_h \end{aligned} \quad (59)$$

where, in the last inequality, we have applied Lemma 2.1. Thus, we have

$$\begin{aligned} |(\mathcal{B}e_h, \mathbf{z} - \psi_h)_h| &\leq \frac{\epsilon}{2} S(e_h, e_h) + C_{2.1}^2 \frac{C_{\mathbf{u}_h}}{2\epsilon \delta_{\min} h^3} \|\mathbf{z} - \psi_h\|_h^2 \\ &\leq \frac{\epsilon}{2} S(e_h, e_h) + C_{2.1}^2 \frac{C_{\mathbf{u}_h}}{2\epsilon \delta_{\min} \nu_0} \|\mathbf{z} - \psi_h\|_*^2 \end{aligned} \quad (60)$$

Case $k \geq 4$. We argue as in [2] and we write

$$|(\mathcal{B}e_h, \mathbf{z} - \psi_h)_h| \leq |((\mathcal{B}e_h - \mathcal{B}_h)e_h, \mathbf{z} - \psi_h)_h| + |(\mathcal{B}_h e_h, \mathbf{z} - \psi_h)_h| \quad (61)$$

where

$$\mathcal{B}_h \mathbf{w} |_K \equiv \text{curl}((\mathbf{s}_h \cdot \nabla) \mathbf{w}_K), \quad \forall K \in \mathcal{T}_h,$$

where \mathbf{s}_h is the modified stokes projection onto quadratic finite elements. Observe then that $\mathcal{B}_h w_h \in D_h^{r+1}$. Applying inverse inequality (3) we have

$$\begin{aligned} h^{3/2} \|\mathbf{u}_h - \mathbf{s}_h\|_\infty &\leq c_{\text{inv}} h^{(3-d)/2} \|\mathbf{u}_h - \mathbf{s}_h\|_0 \\ &\leq c_{\text{inv}} h^{(3-d)/2} (\|\mathbf{u}_h - \mathbf{w}_h\|_0 + \|\mathbf{w}_h - \mathbf{u}\|_0 + \|\mathbf{u} - \mathbf{s}_h\|_0) \\ &\leq c_{\text{inv}} h^{(3-d)/2} \left(\Gamma + Ch^{r-1} \|\mathbf{z}\|_{r+2} + C\|\mathbf{u}\|_3 h \right) h^2, \\ &= C_{\mathbf{u},h} h^2, \end{aligned} \quad (62)$$

and

$$\begin{aligned} h^{3/2} \|\nabla(\mathbf{u}_h - \mathbf{s}_h)\|_\infty &\leq c_{\text{inv}} h^{(1-d)/2} \|\mathbf{u}_h - \mathbf{s}_h\|_0 \\ &\leq c_{\text{inv}} h^{(3-d)/2} \left(\Gamma + Ch^{r-1} \|\mathbf{z}\|_{r+2} + C\|\mathbf{u}\|_3 h \right) h \\ &= C_{\mathbf{u},h} h. \end{aligned} \quad (63)$$

For $K \in \mathcal{T}_h$ we also have

$$\begin{aligned} h^{5/2} \|\text{Hess}(\mathbf{u}_h - \mathbf{s}_h)\|_{\infty, K} &\leq c_{\text{inv}} h^{(1-d)/2} \|\mathbf{u}_h - \mathbf{s}_h\|_0 \\ &\leq c_{\text{inv}} h^{(3-d)/2} \left(\Gamma + Ch^{r-1} \|\mathbf{z}\|_{r+1} + C\|\mathbf{u}\|_3 h \right) h \\ &= C_{\mathbf{u},h} h. \end{aligned} \quad (64)$$

Consequently, applying (62), (63) and inverse inequality, for the first term on the right-hand side of (61) we obtain

$$\begin{aligned}
|((\mathcal{B} - \mathcal{B}_h)\mathbf{e}_h, \mathbf{z} - \boldsymbol{\psi}_h)_h| &= \left| \left(h^{3/2}(\mathcal{B} - \mathcal{B}_h)\mathbf{e}_h, h^{-3/2}(\mathbf{z} - \boldsymbol{\psi}_h) \right)_h \right| \\
&\leq C_{\mathcal{B}} C_{\mathbf{u},h} c_{\text{inv}} \|\mathbf{e}_h\|_0 \frac{\|\mathbf{z} - \boldsymbol{\psi}_h\|_*}{v_0^{1/2}} \\
&\leq \frac{C_{\mathbf{u},h}^2}{2v_0} \|\mathbf{e}_h\|^2 + \frac{c_{\text{inv}}^2 C_{\mathcal{B}}^2}{2} \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2. \tag{65}
\end{aligned}$$

(Observe that the constant $C_{\mathcal{B}}$ above depends only on the number of terms in \mathcal{B} , which, in turn, depends on the dimension). Also, for $(\mathcal{B}_h \mathbf{e}_h, \mathbf{z} - \boldsymbol{\psi}_h)_h$ we write

$$\begin{aligned}
|(\mathcal{B}_h \mathbf{e}_h, \mathbf{z} - \boldsymbol{\psi}_h)_h| &= |(\mathcal{B}_h \mathbf{e}_h - \mathbf{m}_h, \mathbf{z} - \boldsymbol{\psi}_h)_h| \tag{66} \\
&\leq \inf_{\mathbf{m} \in \mathcal{Z}_h} \left\| h^{3/2}(\mathcal{B}_h \mathbf{e}_h - \mathbf{m}_h) \right\|_h \left\| h^{-3/2}(\mathbf{z} - \boldsymbol{\psi}_h) \right\|_h \\
&\leq C_{2.1} \left(\left\| h^2 \llbracket \mathcal{B}_h \mathbf{e}_h \rrbracket \right\|_{\mathcal{F}^i} + \left\| h^3 \llbracket \nabla \mathcal{B}_h \mathbf{e}_h \rrbracket \right\|_{\mathcal{F}^i} \right) \left\| h^{-3/2}(\mathbf{z} - \boldsymbol{\psi}_h) \right\|_h,
\end{aligned}$$

where, as before, in the last inequality we have applied Lemma 2.1. Thus, from (61), (65) and (66) and adding and subtracting $\mathcal{B} \mathbf{e}_h$, we may write

$$\begin{aligned}
|(\mathcal{B} \mathbf{e}_h, \mathbf{z} - \boldsymbol{\psi}_h)_h| &\leq \\
&C_{2.1} \left(\left\| h^2 \llbracket (\mathcal{B}_h - \mathcal{B}) \mathbf{e}_h \rrbracket \right\|_{\mathcal{F}^i} + \left\| h^3 \llbracket \nabla (\mathcal{B}_h - \mathcal{B}) \mathbf{e}_h \rrbracket \right\|_{\mathcal{F}^i} \right) \left\| h^{-3/2}(\mathbf{z} - \boldsymbol{\psi}_h) \right\|_h \\
&+ C_{2.1} \left(\left\| h^2 \llbracket \mathcal{B} \mathbf{e}_h \rrbracket \right\|_{\mathcal{F}^i} + \left\| h^3 \llbracket \nabla \mathcal{B} \mathbf{e}_h \rrbracket \right\|_{\mathcal{F}^i} \right) \left\| h^{-3/2}(\mathbf{z} - \boldsymbol{\psi}_h) \right\|_h \\
&+ \frac{C_{\mathbf{u},h}^2}{2v_0} \|\mathbf{e}_h\|^2 + \frac{c_{\text{inv}}^2 C_{\mathcal{B}}^2}{2} \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2. \tag{67}
\end{aligned}$$

In view of (62) and (63) and applying inverse inequality (3) we have

$$\begin{aligned}
\left\| h^2 \llbracket (\mathcal{B}_h - \mathcal{B}) \mathbf{e}_h \rrbracket \right\|_{\mathcal{F}^i} &\leq CC_{\mathbf{u},h} \left\| h^{1/2} \mathbf{e}_h \right\|_{\mathcal{F}^i} \\
&\leq CC_{\mathbf{u},h} (\|\mathbf{e}_h\|_0 + h \|\nabla \mathbf{e}_h\|_0) \\
&CC_{\mathbf{u},h} (1 + c_{\text{inv}}) \|\mathbf{e}_h\|_0. \tag{68}
\end{aligned}$$

Arguing as before and applying (62), (63) and (64) together with inverse inequality (3) we have

$$\begin{aligned}
\left\| h^3 \llbracket \nabla (\mathcal{B}_h - \mathcal{B}) \mathbf{e}_h \rrbracket \right\|_{\mathcal{F}^i} &\leq CC_{\mathbf{u},h} \left\| h^{1/2} \mathbf{e}_h \right\|_{\mathcal{F}^i} \\
&\leq CC_{\mathbf{u},h} (\|\mathbf{e}_h\|_0 + h \|\nabla \mathbf{e}_h\|_0) \\
&CC_{\mathbf{u},h} (1 + c_{\text{inv}}) \|\mathbf{e}_h\|_0. \tag{69}
\end{aligned}$$

Thus, in view of (67), (68) and (69), we conclude

$$\begin{aligned}
|(\mathcal{B} \mathbf{e}_h, \mathbf{z} - \boldsymbol{\psi}_h)_h| &\leq \frac{\varepsilon}{2} S(\mathbf{e}_h, \mathbf{e}_h) + C_{2.1}^2 \frac{C_{\mathbf{u},h}}{2\varepsilon \delta_{\min} d v_0} \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2 \\
&+ \frac{C_{\mathbf{u},h}^2}{v_0} \|\mathbf{e}_h\|^2 + C \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2. \tag{70}
\end{aligned}$$

Observe that the constants C in (68) and (69), depend on the number of terms of \mathcal{B} (hence, on the dimension d), the constant C_{tr} in the trace inequality (17), and the constant c_{inv} in the inverse inequality (3). Since, as mentioned, the constant $C_{\mathcal{B}}$ multiplying $\|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2$ in (67) depends on the number of terms in \mathcal{B} , we conclude that the constant C in (70) depends on the dimension, C_{tr} , c_{inv} and the constant $C_{2,1}$ in Lemma 2.1. \square

In next theorem we prove the main result of the paper.

Theorem 3.7 *Let $k \geq 2$ and assume that $\mathbf{u} \in L^\infty(0, T, H^{k+1})$ and that $u_t \in L^2(0, T, H^{k+1})$. Assume also (48) and that*

$$\|\mathbf{e}_h(0)\|_0 \leq c_1 h^{k+1/2}, \quad (71)$$

for some constant $c_1 > 0$. Then, there exist a positive constant C_3 such that the following bound holds,

$$\begin{aligned} \max_{0 \leq t \leq T} \|\mathbf{e}_h(t)\|_0 + \left(\int_0^T S(\mathbf{e}_h(t), \mathbf{e}_h(t)) dt \right)^{1/2} \leq \\ C_3 \left(\|\mathbf{e}_h(0)\|_0 + h^{k+1} \left(T \int_0^T \|\mathbf{u}_t(t)\|_k^2 dt \right)^{1/2} + T^{1/2} \max_{0 \leq t \leq T} \|\mathbf{z}(t) - \boldsymbol{\psi}_h(t)\|_* \right). \end{aligned}$$

Proof: We first notice that by writing $\mathbf{u}_h = \mathbf{w}_h + (\mathbf{u}_h - \mathbf{w}_h)$, from Proposition 3.3 and the inverse inequality it follows that

$$\|\mathbf{u}_h(t)\|_\infty \leq \|\mathbf{w}_h(t)\|_\infty + c_{\text{inv}} C_0 h^{(2k-d)/2} \leq C_{\mathbf{u}_h} := C_{\mathbf{w}_h} + c_{\text{inv}} C_0 h^{(2k-d)/2}. \quad (72)$$

Starting from (23)

$$\begin{aligned} \frac{d}{dt} \|\mathbf{e}_h\|_0^2 + \nu \|\nabla \mathbf{e}_h\|_0^2 + S(\mathbf{e}_h, \mathbf{e}_h) \leq \left(3\|\nabla \mathbf{u}\|_\infty + \frac{1}{T} \right) \|\mathbf{e}_h\|_0^2 + 2(\mathbf{u}_h \cdot \nabla \boldsymbol{\eta}_h, \mathbf{e}_h) \\ + S(\mathbf{w}_h, \mathbf{w}_h) + CT h^{2k+2} \|\mathbf{u}_t\|_{k+1} + C \left(\frac{h}{v_0} \|\nabla \mathbf{u}\|_\infty + 1 \right) \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2, \quad (73) \end{aligned}$$

we apply Lemmas 3.6 and 3.2 to bound the two remaining terms. To bound the stabilization term in view of (51) we get

$$S(\mathbf{w}_h, \mathbf{w}_h) \leq \left(C \frac{\delta_{\max}}{u_0} \|\nabla \mathbf{w}_h\|_\infty^2 h \right) \|\mathbf{e}_h\|_0^2 + \frac{C_{\mathbf{u}, \mathbf{w}_h}}{v_0} \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2,$$

where $C_{\mathbf{u}, \mathbf{w}_h}$ is the constant in (52). For the nonlinear term we apply Lemma 3.6 with $\varepsilon = 1/4$. Then

$$\begin{aligned} 2|(\mathbf{u}_h \cdot \nabla) \boldsymbol{\eta}_h, \mathbf{e}_h| \leq \frac{2C_{\mathbf{u}, h}^2}{v_0} \|\mathbf{e}_h\|_0^2 + \frac{1}{2} S(\mathbf{e}_h, \mathbf{e}_h) \\ + \left((1 + C_{2,1}^2) \frac{4C_{\mathbf{u}_h}}{\delta_{\min} v_0} + 2C_1 \right) \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2. \end{aligned}$$

Inserting the two bounds above into (73) we get

$$\frac{d}{dt} \|\mathbf{e}_h\|_0^2 + \nu \|\nabla \mathbf{e}_h\|_0^2 + \frac{1}{2} S(\mathbf{e}_h, \mathbf{e}_h) \leq \hat{L}_h \|\mathbf{e}_h\|_0^2 + CT h^{2k+2} \|\mathbf{u}_t\|_{k+1}$$

$$+g_h \|\mathbf{z} - \boldsymbol{\psi}_h\|_*^2,$$

where

$$\begin{aligned} \hat{L}_h &= 3\|\nabla \mathbf{u}\|_{L^\infty(0,T,L^\infty)} + \frac{1}{T} + C \frac{\delta_{\max}}{\mathbf{u}_0} C_{1,\mathbf{w}_h}^2 h + \frac{2}{v_0} \max_{0 \leq t \leq T} C_{\mathbf{u},h}^2, \\ g_h &= C \left(\frac{h}{v_0} \|\nabla \mathbf{u}\|_{L^\infty(0,T,L^\infty)} + 1 \right) + \frac{C_{\mathbf{u},\mathbf{w}_h}}{v_0} + \left((1 + C_{2.1}^2) \frac{4C_{\mathbf{u}_h}}{\delta_{\min} v_0} + 2C_1 \right). \end{aligned}$$

Thus, applying Gronwall's Lemma as in the proof of Proposition 3.3 the proof is finished. \square

Corollary 3.8 *In the conditions of Theorem 3.7 there exist a constant C_4 such that the following bound holds for $h \geq \mu/v_0$ and $t \in [0, T]$:*

$$\|\mathbf{e}_h(t)\|_0 \leq C_4 h^{k+1/2}.$$

Applying triangle inequality together with (4) we conclude

$$\|\mathbf{u}(t) - \mathbf{u}_h(t)\|_0 \leq C_4 h^{k+1/2}.$$

Remark 3.9 *Since we are using inf-sup stable elements the error analysis of the pressure is standard. One can follow the steps of [8, Theorem 2] applying [10, Lemma 1] to bound $\|\mathbf{e}_{h,t}\|_{-1}$ and taking into account that for $\mathbf{v}_h \in \mathbf{V}_h$ it holds $S(\mathbf{v}_h, \mathbf{v}_h) \leq Ch^{1/2} \|\mathbf{v}_h\|_1$. Then, assuming conditions of Theorem 3.7 hold it is not difficult to prove the following bound for the pressure*

$$\|p(t) - p_h(t)\|_0 \leq Ch^k.$$

4 Numerical Experiments

We check the order of convergence shown in Theorem 3.7. For this purpose, we consider the Navier-Stokes equations in the domain $\Omega = [0, 1]^2$ with $T = 4$, and the forcing term \mathbf{f} chosen so that the solution \mathbf{u} and p are given by

$$\mathbf{u}(x, y, t) = \frac{6 + 4 \cos(4t)}{10} \begin{bmatrix} 8 \sin^2(\pi x) 2y(1-y)(1-2y) \\ -8\pi \sin(2\pi x)(y(1-y))^2 \end{bmatrix}, \quad (74)$$

$$p(x, y, t) = \frac{6 + 4 \cos(4t)}{10} \sin(\pi x) \cos(\pi y). \quad (75)$$

The initial condition was set to the Stokes projection of $u(0)$ onto V_h .

We present results for the case $k = 2$ on barycentric-refined grids of regular triangulations with SW-NE diagonals, with $N = 6, 12, 24$ and 48 subdivisions in each coordinate direction. In Fig. 1 we can see the coarsest mesh used. For the CIP stabilized method the parameters were set to $\gamma_1 = 10^{-2}$, $\gamma_2 = 10^{-4}$ and $\gamma_3 = 10^{-3}$. These values were found to produce the best results after a simple and quick search starting from the values used in [2].

The time integrator used was a semi-implicit variable step size variable order code described in [13]. The tolerances for the local errors were chosen sufficiently small so that the dominant errors were those arising from the spatial discretization. We obtained approximations every 0.1 units of time until $T = 4$ and

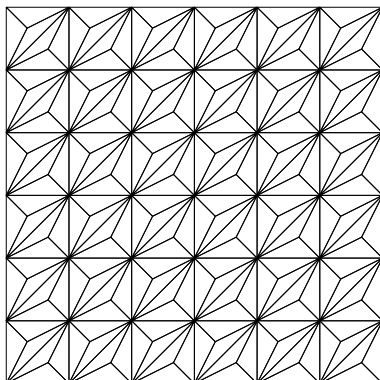


Figure 1: Coarsest mesh used

computed the maximum error in L^2 of these approximation. In Fig. 2 (left plot) we show the errors of the CIP-stabilized Scott-Vogelius approximation for $\nu = 10^{-8}$. We also show the results of the same method without stabilization. It can be seen a dramatic improvement when stabilization is added. Also we show the slopes of a least squares fit to the three smallest errors of each method, which indicate the decay rate with the mesh diameter h . We can see that rate of the stabilized method is 1/2 larger than that of the unstabilized method, as predicted by the theory, and close to the theoretical value of 2.5. On the

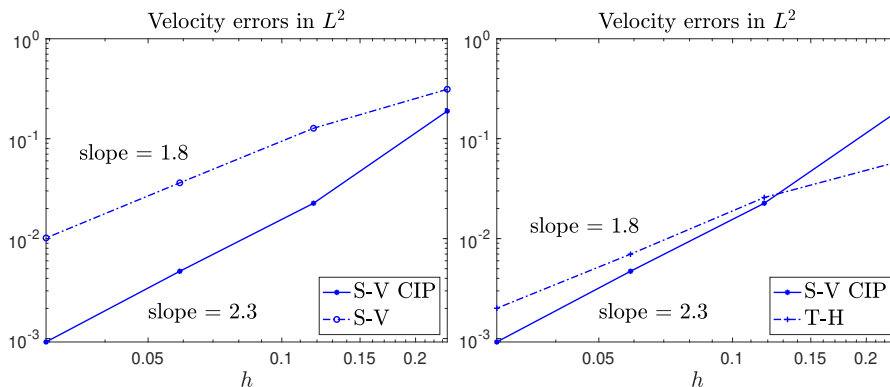


Figure 2: Velocity errors in L^2 . Left: Scott-Vogelius elements with and without CIP-stabilization. Right: CIP-stabilized Scott-Vogelius elements and Taylor-Hood elements with grad-div stabilization.

right-plot we also show the errors of Taylor-Hood elements with grad-div stabilization (the parameter for the grad-div term was set to 0.05, as in [9] and [13]). It is well-known that, due to the larger pressure constraint, Scott-Vogelius elements are usually less accurate than stabilized Taylor-Hood elements, unless in the presence of large pressure gradients. This is indeed the case in the present example, where we can see that the errors of the unstabilized Scott-Vogelius on the left plot are five times larger than those of the stabilized Taylor-Hood

elements on the right-plot. However, thanks to its better convergence rate, the CIP-stabilized Scott-Vogelius method becomes more accurate than the stabilized Taylor-Hood method. For this, the rate of convergence in the present example is 1.8, close to the theoretical value of 2 (see e.g. [12]).

References

- [1] N. Ahmed, G. R. Barrenechea, E. Burman, J. Guzmán, A. Linke, and C. Merdon. A pressure-robust discretization of Oseen’s equation using stabilization in the vorticity equation. *SIAM J. Numer. Anal.*, 59(5):2746–2774, 2021.
- [2] G. R. Barrenechea, E. Burman, E. Cáceres, and J. Guzmán. Continuous interior penalty stabilization for divergence-free finite element methods, 2022.
- [3] L. Beirao da Veiga, F. Dassi, and G. Vacca. Pressure robust supg-stabilized finite elements for the unsteady navier-stokes equation, 2023.
- [4] H. Chen. Pointwise error estimates for finite element solutions of the Stokes problem. *SIAM J. Numer. Anal.*, 44(1):1–28, 2006.
- [5] P. G. Ciarlet. *The finite element method for elliptic problems*, volume 40 of *Classics in Applied Mathematics*. Society for Industrial and Applied Mathematics (SIAM), Philadelphia, PA, 2002. Reprint of the 1978 original [North-Holland, Amsterdam].
- [6] M. Costabel and A. McIntosh. On Bogovskiĭ and regularized Poincaré integral operators for de Rham complexes on Lipschitz domains. *Math. Z.*, 265(2):297–320, 2010.
- [7] J. de Frutos, B. García-Archilla, V. John, and J. Novo. Grad-div stabilization for the evolutionary Oseen problem with inf-sup stable finite elements. *J. Sci. Comput.*, 66(3):991–1024, 2016.
- [8] J. de Frutos, B. García-Archilla, V. John, and J. Novo. Analysis of the grad-div stabilization for the time-dependent Navier-Stokes equations with inf-sup stable finite elements. *Adv. Comput. Math.*, 44(1):195–225, 2018.
- [9] J. de Frutos, B. García-Archilla, V. John, and J. Novo. Error analysis of non inf-sup stable discretizations of the time-dependent Navier-Stokes equations with local projection stabilization. *IMA J. Numer. Anal.*, 39(4):1747–1786, 2019.
- [10] J. de Frutos, B. García-Archilla, and J. Novo. Corrigenda: Fully discrete approximations to the time-dependent Navier-Stokes equations with a projection method in time and grad-div stabilization. *J. Sci. Comput.*, 88(2):Paper No. 40, 3, 2021.
- [11] V. Dolejší and M. Feistauer. *Discontinuous Galerkin method*, volume 48 of *Springer Series in Computational Mathematics*. Springer, Cham, 2015. Analysis and applications to compressible flow.

- [12] B. García-Archilla, V. John, and J. Novo. On the convergence order of the finite element error in the kinetic energy for high Reynolds number incompressible flows. *Comput. Methods Appl. Mech. Engrg.*, 385:Paper No. 114032, 54, 2021.
- [13] B. García-Archilla and J. Novo. Robust error bounds for the Navier-Stokes equations using implicit-explicit second-order BDF method with variable steps. *IMA Journal of Numerical Analysis*, 10 2022. drac058.
- [14] V. John, A. Linke, C. Merdon, M. Neilan, and L. G. Rebholz. On the divergence constraint in mixed finite element methods for incompressible flows. *SIAM Rev.*, 59(3):492–544, 2017.