

Implicit Active Flux methods for linear advection

Wasilij Barsukow¹, Raul Borsche²

Abstract

In this work we develop implicit Active Flux schemes for the scalar advection equation. At every cell interface we approximate the solution by a polynomial in time. This allows to evolve the point values using characteristics and to update the cell averages using fluxes obtained by integrating this polynomial. The resulting schemes have order of convergence up to five, but show almost no oscillations with high frequencies for discontinuous solutions. In numerical experiments we compare the different methods and show an application to network flows.

Keywords: linear advection, implicit methods, Active Flux

1 Introduction

Linear advection is the simplest hyperbolic PDE and is widely used as a starting point for the development of numerical methods for conservation laws. It is the perfect testbed for studying properties of numerical methods, e.g. the analysis of linear (von Neumann) stability or the order of convergence. Apart from being a prototype for nonlinear problems or systems of equations, there are some applications relying directly on the advection equation [20, 15, 6] or the wave equation in 1-d, which can be diagonalized with characteristic variables.

A special class of these problems considers advection phenomena on networks. Scalar equations are used for modeling supply chains [15] or district heating systems [6]. The wave equation on networks is considered e.g. in [28, 11, 5, 3]. All these applications demand highly accurate and efficient numerical methods and there is an overwhelming amount of possible schemes [20, 27]. However, most of these schemes are explicit and have to obey some kind of CFL condition bounding the size of the time step relative to the advection speed. In order to avoid such a restriction the scheme has to be implicit [8, 9, 30, 10, 16].

In this paper we want to extend these ideas from standard finite difference/finite volume methods to the recently developed Active Flux method. Active Flux was elaborated in [13, 14], but it began its existence as a method for linear advection, when it was proposed in [29] as “Scheme V”. It has been extended to numerical methods for other conservation laws, e.g. the Euler equations of ideal hydrodynamics, see [17, 4]. Its main difference compared to classical finite differences or finite volume approaches is that it evolves point values and cell averages simultaneously. Active Flux shall be briefly reviewed next.

Consider a one-dimensional equidistant grid with cells $[x_{i-\frac{1}{2}}, x_{i+\frac{1}{2}}]$, $i \in \mathbb{Z}$ and spacing Δx . The degrees of freedom of Active Flux are cell averages $\{\bar{q}_i\}_{i \in \mathbb{Z}}$ and point values

¹Bordeaux Institute of Mathematics, Bordeaux University and CNRS/UMR5251, Talence, 33405 France, wasilij.barsukow@math.u-bordeaux.fr

²University of Kaiserslautern-Landau, Gottlieb-Daimler-Straße 48, 67663 Kaiserslautern, Germany, borsche@mathematik.uni-kl.de

$\{q_{i+\frac{1}{2}}\}_{i \in \mathbb{Z}}$ located at cell interfaces such that

$$\bar{q}_i(t) \simeq \frac{1}{\Delta x} \int_{x_{i-\frac{1}{2}}}^{x_{i+\frac{1}{2}}} q(t, x) dx, \quad q_{i+\frac{1}{2}}(t) \simeq q(t, x_{i+\frac{1}{2}}).$$

The point values are evolved independently of the averages, contrary to e.g. the parabolic spline method [31], where the point values are computed at each time step from the given averages. The evolution of the cell averages is immediately obvious: Integrating a conservation law $\partial_t q + \partial_x f(q) = 0$ over the cell yields

$$\frac{d}{dt} \bar{q}_i(t) + \frac{f(q_{i+\frac{1}{2}}(t)) - f(q_{i-\frac{1}{2}}(t))}{\Delta x} = 0 \quad (1)$$

The order of accuracy of the update of the average is entirely given by the order of accuracy of the point value update, as equation (1) is exact.

There exist several suggestions for the point value update, all of them being explicit in time:

- (i) In [1, 2] it has been proposed to replace the space derivative by a (suitably upwinded) finite difference that uses the point values and averages, and thus to write down a semidiscretization of the conservation law for the point value. Together with (1), the two equations can then be updated in time using a standard, explicit (e.g. Runge-Kutta) method. Depending on the choice of the finite difference, these methods are stable for CFL numbers well below 1.
- (ii) Initially, it was proposed in [29] to define a parabolic reconstruction in every cell, whose average matches \bar{q}_i and which passes through $q_{i \pm \frac{1}{2}}$ at the endpoints of the cell, and to use it as initial data for a characteristics-based update of the point values. This means that the point value $q_{i+\frac{1}{2}}(t^{n+1})$ at some time t^{n+1} is found at the foot point of the characteristic which passes through $x_{i+\frac{1}{2}}$ at time t^{n+1} . This ensures upwinding and stability. The natural CFL condition prevents the foot point of the characteristic from being further away than in a neighbouring cell. Von Neumann stability results agree with this “physical” stability bound, see [29, 7] for further details.

In deriving implicit methods, we follow both strategies in order to be able to compare the results:

- (i) As in [1, 2] we propose to integrate a semidiscretization of the conservation law for the point value, as well as (1) implicitly in time using standard methods.
- (ii) We propose new implicit one-step Active Flux methods. The derivation of these methods is, on the one hand, based on the usage of characteristics as in (ii) above, on the other hand on the idea of reconstruction in time, that was used for finite difference methods in [12]. We analyze all methods in a certain class and identify those which are stable.

We find that the methods resulting from the latter approach are largely superior, which might be due to the fact that the time and space discretizations are not separated.

Note that the resulting methods have compact stencils due to the additional degrees of freedom of Active Flux. This is particularly advantageous whenever boundary conditions

are imposed. Active Flux offers the other great advantage of having a point value located just at the cell interface, where a Dirichlet boundary condition can be imposed immediately and unambiguously. We believe that this paper is also the starting point for investigations towards implicit Active Flux methods for more complex problems.

The paper is organized as follows. Section 2.1 presents implicit Active Flux methods based on strategy (i), and Section 2.2 presents those obtained through characteristics and reconstruction in time, following (ii). In Section 3 the implementation of Dirichlet boundaries is discussed, which demonstrates the advantages associated to using an Active Flux method. Numerical examples are shown in Section 4.

2 Implicit Active Flux schemes

We aim at solving the scalar advection equation with fixed speed $u \in \mathbb{R}$

$$\partial_t q + u \partial_x q = 0, \quad q: \mathbb{R}_0^+ \times I \rightarrow \mathbb{R}, \quad (2)$$

on a compact domain $I \subset \mathbb{R}$, endowed with either periodic or an inflow Dirichlet boundary condition and an initial condition $q_0: I \rightarrow \mathbb{R}$, $q(0, x) = q_0(x)$.

2.1 Semi-discrete methods integrated implicitly

Semi-discrete Active Flux methods have been first introduced in [1]. The evolution equation of the cell average is trivially given by (1). In order to obtain an evolution equation for the point value, a finite difference approximation to the spatial derivative is used. A third-order approximation is (see [2])

$$\frac{d}{dt} q_{i+\frac{1}{2}}(t) = -u \frac{2q_{i-\frac{1}{2}}(t) - 6\bar{q}_i(t) + 4q_{i+\frac{1}{2}}(t)}{\Delta x}. \quad (3)$$

Note that there is no notion of a conservative update for a point value, and the only condition that needs to be imposed is stability. Equations (1) and (3) are a coupled system of ODEs that can be solved with standard methods. Explicit Runge-Kutta schemes were used in [2]; here the system shall be integrated in time implicitly.

We have studied the following methods:

- backward Euler
- Crank-Nicolson

- Radau IA (3rd order)
$$\begin{array}{c|cc} 0 & 1/4 & -1/4 \\ 2/3 & 1/4 & 5/12 \\ \hline & 1/4 & 3/4 \end{array}$$

- Radau IIA (3rd order)
$$\begin{array}{c|cc} 1/3 & 5/12 & -1/12 \\ 1 & 3/4 & 1/4 \\ \hline & 3/4 & 1/4 \end{array}$$

- DIRK (Crouzeix, 3rd order)
$$\begin{array}{c|cc} 1/2 + \sqrt{3}/6 & 1/2 + \sqrt{3}/6 & 0 \\ 1/2 - \sqrt{3}/6 & -\sqrt{3}/3 & 1/2 + \sqrt{3}/6 \\ \hline & 1/2 & 1/2 \end{array}$$

for (1) and (3), and find all of them to be stable experimentally. Obviously only the latter methods yield the necessary (3rd) order of accuracy that corresponds to that of the spatial discretization. The Radau methods are of true multi-step nature, which entails a significant increase in the linear system that needs to be solved at every time step. Numerical results are shown in Section 4.

2.2 Single-step methods

2.2.1 Derivation

Classical explicit schemes are often based on a polynomial interpolation in space in each cell. These polynomials are used to compute the fluxes at the interfaces, e.g. by solving a Riemann problem, which for linear advection amounts to tracing back the characteristics. This procedure, however, does not pair well with large time steps, as the characteristics will move a distance larger than the size of a single cell. In principle, it is possible to keep track of the correct cell, which leads to large-time-step methods [19].

Here, however, to overcome this restriction we choose an interpolation in time at cell interfaces. The values at different spatial locations are transported by the characteristics to the interface. Note that this can be done at the current time level t^n and also on the next time level t^{n+1} . These values are then interpolated polynomially, and this interpolation in time mixes values from both time levels into one polynomial at the interface.

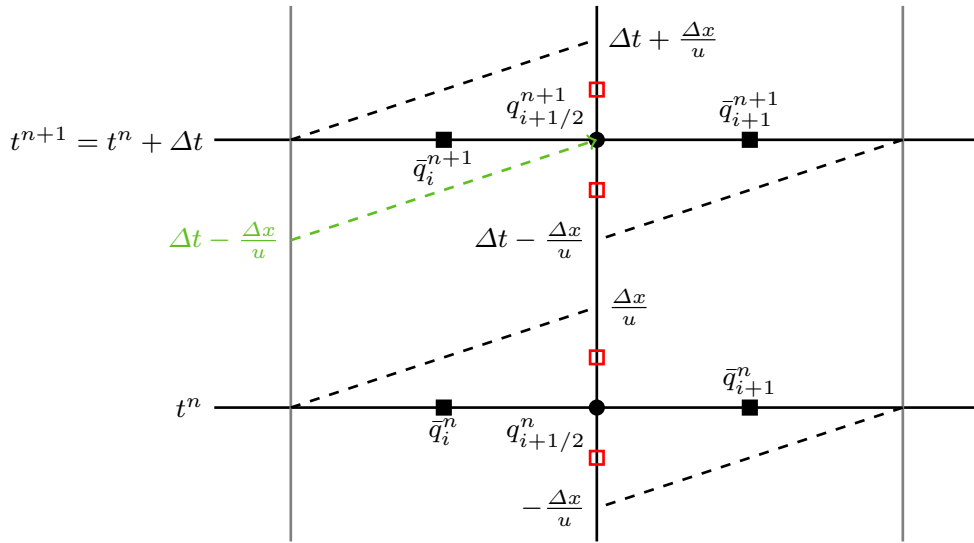


Figure 1: Sketch of the construction of the polynomial at the interface. Characteristics are shown as dashed lines. Therefore, the average \bar{q}_i^n (black square) is equal to the average $\frac{1}{\Delta t} \int_0^{\frac{\Delta x}{u}} q_{i+\frac{1}{2}}^{\text{recon}}(t) dt$ (red square) of the reconstruction in time.

This procedure is illustrated in Figure 1. In the following we give a detailed description of the construction of the methods.

We aim at obtaining an implicit numerical method that has a compact stencil. Thus, for the interpolation at an interface we consider a combination of the values adjacent to

the interface at both times t^n and t^{n+1} . For the interface at $x_{i+\frac{1}{2}}$ these are

$$\bar{q}_i^n, q_{i+\frac{1}{2}}^n, \bar{q}_{i+1}^n, \quad \text{and} \quad \bar{q}_i^{n+1}, q_{i+\frac{1}{2}}^{n+1}, \bar{q}_{i+1}^{n+1}. \quad (4)$$

We therefore can choose among polynomials up to degree 5 and thus construct schemes of at most 6th order of accuracy. Depending on the degree of the polynomial, we can choose among the following equations to find a reconstruction polynomial $q_{i+\frac{1}{2}}^{\text{recon}}$ in time:

$$q_{i+\frac{1}{2}}^{\text{recon}}(t^n) = q_{i+\frac{1}{2}}^n \quad (5)$$

$$q_{i+\frac{1}{2}}^{\text{recon}}(t^{n+1}) = q_{i+\frac{1}{2}}^{n+1} \quad (6)$$

$$\frac{u}{\Delta x} \int_{t^{n+1}}^{t^{n+1} + \frac{\Delta x}{u}} q_{i+\frac{1}{2}}^{\text{recon}}(t) dt = q_i^{n+1}$$

$$\frac{u}{\Delta x} \int_{t^{n+1} - \frac{\Delta x}{u}}^{t^{n+1}} q_{i+\frac{1}{2}}^{\text{recon}}(t) dt = q_{i+1}^{n+1} \quad (7)$$

$$\frac{u}{\Delta x} \int_{t^n}^{t^n + \frac{\Delta x}{u}} q_{i+\frac{1}{2}}^{\text{recon}}(t) dt = q_i^n$$

$$\frac{u}{\Delta x} \int_{t^n - \frac{\Delta x}{u}}^{t^n} q_{i+\frac{1}{2}}^{\text{recon}}(t) dt = q_{i+1}^n. \quad (8)$$

Note that the interpolation can exceed the time interval $[t^n, t^{n+1}]$, as indicated in Figure 1.

Once the polynomial is determined, the update of the cell averages follows the classical update formula

$$\bar{q}_i^{n+1} = \bar{q}_i^n - \Delta t \frac{\hat{f}_{i+\frac{1}{2}}^{n+\frac{1}{2}} - \hat{f}_{i-\frac{1}{2}}^{n+\frac{1}{2}}}{\Delta x} \quad (9)$$

with

$$\hat{f}_{i+\frac{1}{2}}^{n+\frac{1}{2}} := \frac{1}{\Delta t} \int_{t^n}^{t^{n+1}} f\left(q_{i+\frac{1}{2}}^{\text{recon}}(t)\right) dt. \quad (10)$$

The point values can be updated by tracing back the characteristic

$$q_{i+\frac{3}{2}}^{n+1} = q_{i+\frac{1}{2}}^{\text{recon}}\left(t^{n+1} - \frac{\Delta x}{u}\right). \quad (11)$$

Note that the reconstruction generally depends on values at the time level t^{n+1} . Thus, equations (11) with (10) and (9) are implicit formulas, with the unknowns appearing linearly.

The stencil of the method involves at most the following values

$$\begin{array}{lll} \bar{q}_i^n, q_{i+\frac{1}{2}}^n, \bar{q}_{i+1}^n, & \bar{q}_i^{n+1}, q_{i+\frac{1}{2}}^{n+1}, \bar{q}_{i+1}^{n+1}, & \text{to update } q_{i+\frac{3}{2}}^{n+1}, \\ \bar{q}_{i-1}^n, q_{i-\frac{1}{2}}^n, \bar{q}_i^n, q_{i+\frac{1}{2}}^n, \bar{q}_{i+1}^n, & \bar{q}_{i-1}^{n+1}, q_{i-\frac{1}{2}}^{n+1}, \bar{q}_i^{n+1}, q_{i+\frac{1}{2}}^{n+1}, \bar{q}_{i+1}^{n+1}, & \text{to update } \bar{q}_i^{n+1}. \end{array}$$

Thus the update involves only values of neighboring cells.

In order to easily refer to the different methods, we will use a **pictorial representation**. The 6 symbols (boxes/circles) in $\begin{array}{c} \square \text{---} \bigcirc \text{---} \square \\ \square \text{---} \bigcirc \text{---} \square \end{array}$ represent the 6 degrees of freedom possibly involved in the reconstruction in time, as in (4). The point values are represented by circles and the averages by boxes, with the upper row denoting time level t^{n+1} (implicit) and the lower the time level t^n (explicit). Finally, the black symbols are those actually in use for the reconstruction. For simplicity, in Section A, the stable methods are also given a unique **identifier** consisting of their order of accuracy and a capital letter.

Below we illustrate the construction of the schemes on a particular example.

2.2.2 Example

In this example we aim to construct a scheme of order three. Thus the reconstruction polynomial $q_{i+\frac{1}{2}}^{\text{recon}}$ has to be quadratic and we can choose 3 equations out of (5)–(8). For example, one might select (5), (6) and (7), i.e. those involving $q_{i+\frac{1}{2}}^n, q_{i+\frac{1}{2}}^{n+1}, q_{i+1}^{n+1}$. Then, after applying the interpolation described in 2.2.1 and some calculations one finds

$$q_{i+\frac{1}{2}}^{\text{recon}}(t) = q_{i+\frac{1}{2}}^n + (t - t^n) \frac{2u \left(q_{i+\frac{1}{2}}^n - q_{i+\frac{1}{2}}^{n+1} + 3c \left(\bar{q}_{i+1}^{n+1} c - q_{i+\frac{1}{2}}^n + (1 - c) q_{i+\frac{1}{2}}^{n+1} \right) \right)}{c(3c - 2)\Delta x} \\ + (t - t^n)^2 \frac{3u^2 \left(-2\bar{q}_{i+1}^{n+1} c + q_{i+\frac{1}{2}}^n + (-1 + 2c) q_{i+\frac{1}{2}}^{n+1} \right)}{c(3c - 2)\Delta x^2}$$

where $c = \frac{u\Delta t}{\Delta x}$ is the CFL number. From here, (11) gives

$$q_{i+\frac{3}{2}}^{n+1} = \frac{6\bar{q}_{i+1}^{n+1}(c - 1)c + q_{i+\frac{1}{2}}^n - (1 - 4c + 3c^2) q_{i+\frac{1}{2}}^{n+1}}{c(3c - 2)}$$

Moreover, (10) yields the numerical flux

$$\hat{f}_{i+\frac{1}{2}}^{n+\frac{1}{2}} = u \frac{\bar{q}_{i+1}^{n+1} c^2 + (c - 1) \left(q_{i+\frac{1}{2}}^n + q_{i+\frac{1}{2}}^{n+1} - c q_{i+\frac{1}{2}}^{n+1} \right)}{3c - 2}$$

and inserting it into (9) finally gives (having brought all the terms on one side of the equation)

$$0 = \bar{q}_i^n (2 - 3c) + \bar{q}_{i+1}^{n+1} c^3 - \bar{q}_i^{n+1} (2 - 3c + c^3) \\ + (c - 1)c \left(-q_{i-\frac{1}{2}}^n + (c - 1) q_{i-\frac{1}{2}}^{n+1} + q_{i+\frac{1}{2}}^n + q_{i+\frac{1}{2}}^{n+1} - c q_{i+\frac{1}{2}}^{n+1} \right)$$

Following the notation introduced above, this method is denoted by $\begin{array}{c} \square \text{---} \bigcirc \text{---} \square \\ \square \text{---} \bigcirc \text{---} \square \end{array}$. The corresponding identifier from Section A is 3C.

2.2.3 Stability of single-step methods

Von Neumann, or ℓ^2 stability analysis aims at quantifying whether Fourier modes $\exp(ikx)$ of spatial frequency $k \in \mathbb{R}$ are amplified or damped by the numerical method. To this end, the ansatz for the solution at continuous level is taken as

$$q(t, x) = \hat{q}(t) \exp(ikx) \tag{12}$$

and the ansatz for the numerical solution (on equidistant grids) as

$$Q_i^n := \begin{pmatrix} q_{i+\frac{1}{2}}^n \\ \bar{q}_i^n \end{pmatrix} = \underbrace{\begin{pmatrix} \hat{q}^n \\ \hat{\bar{q}}^n \end{pmatrix}}_{=: \hat{Q}^n} \exp(\mathfrak{i}ki\Delta x). \quad (13)$$

Define $\beta := k\Delta x$. Observe that despite dealing with merely a scalar equation, Active Flux has two kinds of degrees of freedom, which are evolved independently. The fact of having two distinct functions is mirrored by having two equations as well. On the one hand, the discrete Fourier transform (13) of the numerical method reduces (9) and (11) to the system

$$\hat{Q}^{n+1} = A^{-1}B\hat{Q}^n, \quad (14)$$

where $A \in \mathcal{M}^{2 \times 2}(\mathbb{C})$ is associated with the implicit part, and $B \in \mathcal{M}^{2 \times 2}(\mathbb{C})$ with the explicit one. The non-singularity of A is a prerequisite of a solvable method, and can be assumed. Note that A and B depend on k . The ansatz $\hat{Q}^n = \hat{Q}^0 z^n$ for some yet to be determined $z \in \mathbb{C}$ yields

$$\hat{Q}^0 z = A^{-1}B\hat{Q}^0$$

i.e. z must be an eigenvalue of $A^{-1}B$ (which depends on k).


On the other hand, considering the ansatz (12) for the advection equation $\partial_t q + u\partial_x q = 0$ implies

$$q(t + \Delta t, x) = \hat{q}(t + \Delta t) \exp(\mathfrak{i}kx) = q(t, x - u\Delta t) = \hat{q}(t) \exp(\mathfrak{i}kx) \exp(-\mathfrak{i}ku\Delta t)$$

Thus, we have

$$\hat{q}(t + \Delta t) = \hat{q}(t) \exp(-\mathfrak{i}ku\Delta t) \quad (15)$$

and consequently $|\hat{q}(t + \Delta t)| = |\hat{q}(t)|$. A natural stability requirement for the numerical methods therefore is $|z| \leq 1$ for both eigenvalues.

We have studied von Neumann stability of all the 20 methods of third, 15 methods of fourth, 6 methods of fifth and the unique method of sixth order that result from the procedure described above (a total of 42 methods). In many cases, the eigenvalues of the complex-valued 2×2 matrix $A^{-1}B$ could be determined analytically³. For example one finds for  (3D) the values $z = 0$ and

$$z = -\frac{2 + \cos \beta - \mathfrak{i}c \sin \beta}{2 - c^2 + \cos \beta + c^2 \cos \beta + 2\mathfrak{i}c \sin \beta}.$$

In the remaining cases, we applied the algorithm of [21] (originally due to Schur [24, 25]), which allows to determine whether the zeros of a polynomial are contained in the unit disc without actually computing them. We applied the algorithm to a sampling of values of β and for $c < 10$.

It is also possible to analyze the stability of the methods by considering a fixed grid size N with periodic boundaries and analyzing the eigenvalues of the $2N \times 2N$ update

³One observes that the computation of the inverse is, in fact, unnecessary, since $0 = \det(A^{-1}B - z\mathbb{1})$ is equivalent to $0 = \det A \det(A^{-1}B - z\mathbb{1}) = \det(B - Az)$.

matrices. We also performed this type of stability analysis for CFL numbers ranging from 1 to 10 on a grid of 100 cells. The two methods of stability analysis gave the same results.

Among the methods studied, i.e. among all the methods of the form (9)–(11), whose reconstruction in time involves at most the degrees of freedom mentioned in (4),

- 1 is marginally stable,
- 14 have some finite CFL number $c_{\min} \geq 0$ above which they are stable.

Among the 14 stable methods, 12 are stable for $c > 2$ or better, and 8 are stable for $c > 1$ or better. One among them is even unconditionally stable. These results are summarized in Tables 1 and 2.

	order 3	order 4	order 5	total
stable $\forall c$		1		1
stable for $c > 1$	4	3	1	8
stable for $c > 2$	6	3	3	12
stable above some c	8	3	3	14

Table 1: Numbers of stable methods by order of accuracy and type of CFL conditions. The divisions are cumulative (and thus not exclusive): for example a method with a minimum CFL number of 1 is also counted in “stable for $c > 2$ ” and “stable above some c ”.

expl. \ impl.							
				×	×	×	×
				×	×	×	×
				×	×	×	×
	×	> 4.55	$> 3.74^*$	×	×	×	×
	$\notin [1, 2]$	> 1	> 1	×	(×)	×	×
	> 2	> 1	> 1	×	×	×	×
	> 1	> 1	> 0	$> 2^*$	> 2	> 1	×

Table 2: CFL conditions for stable schemes (unstable schemes marked with \times). The pictorial notations indicate, which of the values $[\bar{q}_i, q_{i+1/2}, \bar{q}_{i+1}]$ are used (black symbols) in the interpolation at the interface at $x_{i+1/2}$. The columns denote the choice of degrees of freedom at time t^n (explicit), the rows denote the choice of degrees of freedom at time t^{n+1} (implicit). For example, the method (3H) is stable for CFL > 4.55 . The methods marked by an asterisk * additionally are stable for some CFL numbers in a subinterval of $[0, 1]$. The method marked with (×) is marginally stable and found to be rather oscillative in practice. The methods left blank are of an order of accuracy less than 3, and were not studied.

2.2.4 Analysis of numerical diffusion and dispersion

So-called diffusion and dispersion errors of a linear numerical method convey the information how Fourier modes of different spatial frequencies k are amplified/damped and how

far their speed of propagation differs from the analytical value. By comparing (15) with (14) one observes that the eigenvalues z of $A^{-1}B$ (which are functions of $\beta := k\Delta x$ and c) need to be compared to $\exp(-iku\Delta t) = \exp(-i\beta c)$. It thus makes sense to quantify the numerical diffusion by computing $|z|$, and the numerical dispersion by computing $\frac{\arg z}{-\beta c}$, the analytic value being in both cases 1 for all values of β . This analysis is to quantify the behaviour of a numerical method beyond merely requiring stability $|z| \leq 1$.

Typical examples of diffusion and dispersion curves are shown in Figures 2–3. Note that the eigenvalues depend on both β and c ; the Figure shows $|z|$ and $\frac{\arg z}{-\beta c}$ as functions of $\beta \in [0, \pi]$ for $c = 3$. As there are two eigenvalues z , in principle, two curves appear for each method. One eigenvalue converges to the analytic one, whereas the other is spurious; it is sometimes zero, in which case it is not shown.

One observes that generally the error both in the diffusion and the dispersion increases with β . The diffusion is monotone, which is good, because then waves traveling at wrong speeds are damped. The importance of such behaviour has been emphasized in [23] for explicit Active Flux methods and contrasted to that of other methods. The practical importance of damping those waves becomes obvious for the marginally stable method $\begin{smallmatrix} \square & \circ & \square \\ \square & \circ & \square \end{smallmatrix}$, which has $|z| = 1$ for the non-vanishing eigenvalue and therefore does not damp waves which have wrong speeds. The corresponding numerical results (see Figure 4.2.3) show significantly more oscillations than the other stable methods.

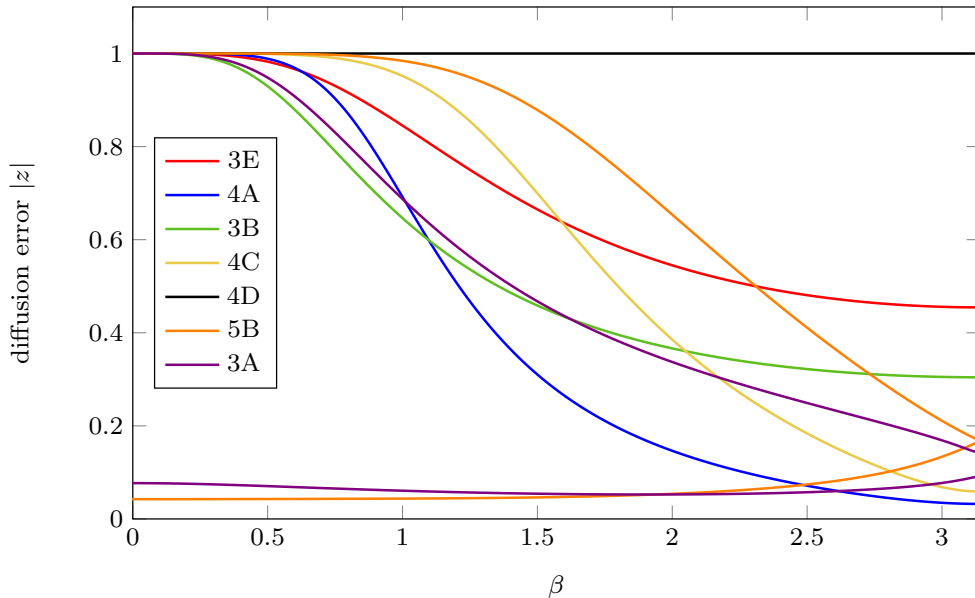


Figure 2: Examples of diffusion curves $|z|$ for $c = 3$, shown as functions of β for different methods, using their identifiers from Section A. In principle, there are two eigenvalues per method, but often one of the eigenvalues is identically 0; it then is not shown here. Stability requires $|z| \leq 1$ for all β ; the method $\begin{smallmatrix} \square & \circ & \square \\ \square & \circ & \square \end{smallmatrix}$ (4D) is marginally stable with the non-zero eigenvalue fulfilling $|z| = 1 \forall \beta$, i.e. equal to the analytical value. This, however, is not good, as this method is not damping waves moving at the wrong speed, i.e. those having large dispersion errors (see Figure 3).

In many cases a fine interplay of diffusion and dispersion is desirable. Generally speaking, methods with less damping resolve sharp features better. Sharp features correspond

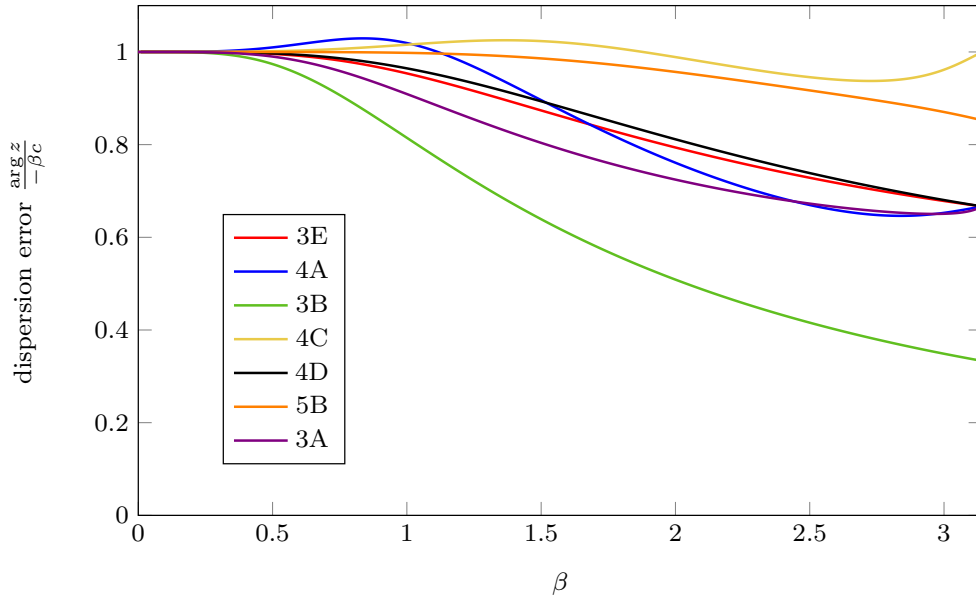


Figure 3: Examples of dispersion curves $\frac{\arg z}{-\beta c}$ for $c = 3$, shown as functions of β for different methods, using their identifiers from Section A. Only the physical eigenvalue is shown.

to high values of β and thus it is of interest to quantify how quickly the diffusion increases towards higher β . Recall that, given c and β , the time evolution of a Fourier mode is $|\hat{Q}^n| = |\hat{Q}^0||z|^n = |\hat{Q}^0||z|^{\frac{T}{\Delta t}}$. For example, consider $u = 1$, $c = 3$, $\Delta x = 1/50$. Then $\Delta t = \frac{3}{50}$, and at $T = 8$ one has $|\hat{Q}^n| = |\hat{Q}^0||z|^n = |\hat{Q}^0||z|^{\frac{400}{3}}$. This is the setup of the numerical test in Section 4.2. The mode has decayed by half if $|z|^{\frac{400}{3}} = \frac{1}{2}$, i.e. $|z| \simeq 0.995$.

It thus makes sense to compute, for a given method, the maximum “frequency” $\beta_{1/2}$ of the Fourier modes that has not yet decayed by half. The wavelength of these modes is $\frac{2\pi\Delta x}{\beta_{1/2}}$. Measuring this frequency corresponds to measuring the half-width⁴ of the diffusion curves (such as the ones shown in Fig. 2) at $|z| = 0.995$. These half-widths are shown in Figure 4 for all the stable methods for $c = 3$. From the plot one can see, for example, that for method $\square\text{-}\bigcirc\text{-}\square$ (3C) features on a length scale $\sim 20 \Delta x$, corresponding to $\beta \simeq 0.31$, will have been diffused away by half by the time $T = 8$. For the method $\square\text{-}\bigcirc\text{-}\square$ (5C) the corresponding β is 0.75 and the length scale $\sim 8\Delta x$. This is in agreement with the numerical results of Section 4.

3 Dirichlet boundary conditions

On a finite interval $I = [x_L, x_R]$, the advection equation (2) with positive velocity $u > 0$ has to be equipped with an initial condition q_0 and boundary data b on the left end of the

⁴The diffusion curves are bell-shaped and symmetric around $\beta = 0$. The half width is thus the distance along the abscissa between $\beta = 0$ and the location where the curve has a value $|z| = 0.995$.

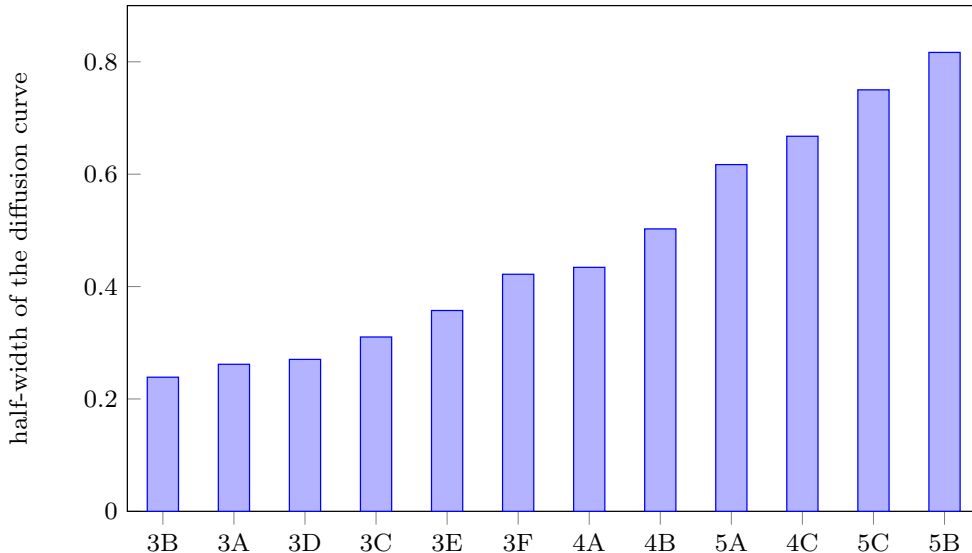


Figure 4: Half-width of the diffusion curves at $|z| = 0.995$ for all the stable methods at $c = 3$, i.e. the plot shows the value of β for which $|z|$ attains the value 0.995. The choice of values is explained in the text, and is made to fit the numerical tests shown in Section 4. Thus, for values of β less than the one shown the Fourier modes have not decayed by half by the time $T = 8$. Identifiers from Section A are used to distinguish the different methods. The methods have been sorted in the order of increasing $\beta_{1/2}$, and thus methods further on the right are able to resolve sharp features better/for longer. Unsurprisingly, there is a correlation with the order of the method; however, for methods of the same order, large differences in this ability can be observed.

domain

$$\begin{aligned} \partial_t q + u \partial_x q &= 0 \\ q(t, x_L) &= b(t) \quad \forall t > 0 \\ q(0, x) &= q_0(x) \quad \forall x \in I. \end{aligned}$$

In the following we will discuss the modifications due to the boundary condition that need to be applied to the first two cells.

The main steps are illustrated in Figure 5. The values $q_{\frac{1}{2}}^{n+1}, q_{\frac{3}{2}}^{n+1}$ of the first two interfaces, as well as the first cell average \bar{q}_1^{n+1} are directly taken from the boundary data. By tracing back the characteristics we find

$$q_{\frac{1}{2}}^{n+1} = b(t^{n+1}), \quad \bar{q}_1^{n+1} = \frac{u}{\Delta x} \int_{t^{n+1} - \frac{\Delta x}{u}}^{t^{n+1}} b(t) dt, \quad q_{\frac{3}{2}}^{n+1} = b\left(t^{n+1} - \frac{\Delta x}{u}\right).$$

Thus, it is easy to obtain the new values in the vicinity of the left (inflow) boundary by tracing the characteristics back to the boundary. The situation is different at the outflow end, where boundary conditions must not be given. Assume that the grid is divided into N cells (see Figure 6). According to (11) the right-most point value $q_{N+\frac{1}{2}}$ is updated as

$$q_{N+\frac{1}{2}}^{n+1} = q_{N-\frac{1}{2}}^{\text{recon}}\left(t^{n+1} - \frac{\Delta x}{u}\right) \quad (16)$$

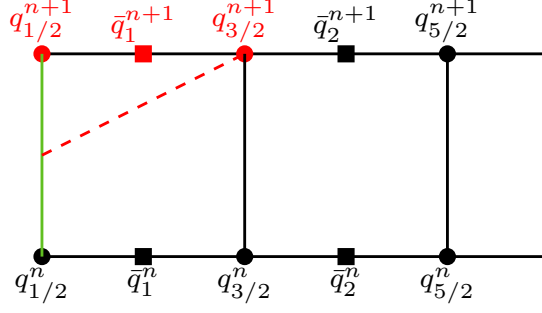


Figure 5: Scheme at the inflow boundary for the Dirichlet problem. The red values in the first cell can be read off directly by tracing back the characteristic (dashed lines) to the given boundary (green) at $x_{\frac{1}{2}}$.

i.e. it only uses upwind information from the left because the reconstruction $q_{N-\frac{1}{2}}^{\text{recon}}$ involves only the values $\bar{q}_{N-1}^{n(+1)}, q_{N-\frac{1}{2}}^{n(+1)}, \bar{q}_N^{n(+1)}$ by definition.

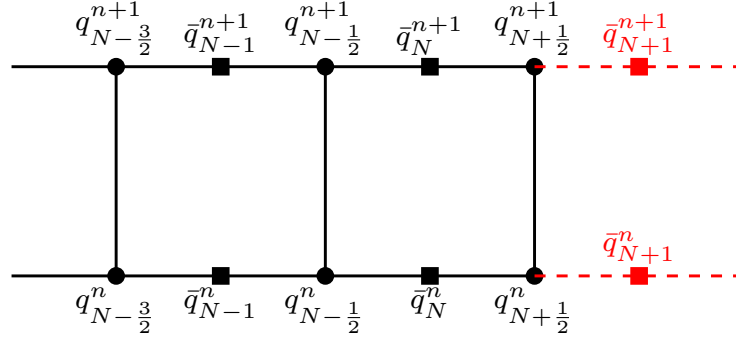


Figure 6: The outflow boundary. The values $\bar{q}_{N+1}^{n(+1)}$ (in red) are not available to define a reconstruction in time at $x_{N+\frac{1}{2}}$. As explained in the text, in most cases it is not necessary to compute this reconstruction.

This is different for the average \bar{q}_N^{n+1} , because according to (9) its update involves the quadrature of the two reconstructions in time $q_{N-\frac{1}{2}}^{\text{recon}}$ and $q_{N+\frac{1}{2}}^{\text{recon}}$. Three cases need to be distinguished:

1. Assume that the reconstruction in time at $x_{i+\frac{1}{2}}$ does not use the downwind cell averages $\bar{q}_{i+1}^{n(+1)}$. Then, the reconstruction in time $q_{N+\frac{1}{2}}^{\text{recon}}$ uses upwind values $\bar{q}_N^{n(+1)}, q_{N+\frac{1}{2}}^{n(+1)}$ only and so does the update of the average \bar{q}_N^{n+1} . Those schemes can be applied directly. Further we note that such schemes can use an iterative procedure, marching the values from the left to the right: We first compute the update for the next point value and thereafter the update for the average. This substitutes solving the linear system for the values at t^{n+1} , since the corresponding matrix is triangular.
2. Assume next that the reconstruction in time at $x_{i+\frac{1}{2}}$ involves the implicit downwind cell average $\bar{q}_{i+1}^{n(+1)}$ (and possibly its explicit counterpart), i.e. at $x_{N+\frac{1}{2}}$ we need the non-available cell average \bar{q}_{N+1}^{n+1} . The update equation for the last cell average according to


(9) reads

$$\bar{q}_N^{n+1} = \bar{q}_N^n - \frac{u}{\Delta x} \int_{t^n}^{t^{n+1}} \left(q_{N+\frac{1}{2}}^{\text{recon}}(t) - q_{N-\frac{1}{2}}^{\text{recon}}(t) \right) dt \quad (17)$$

where the right-hand-side depends, among other values, on q_{N+1}^{n+1} . However, as the entire method is implicit, there is no notion of which equation updates which variable. Equation (17) can equally well be seen as an update equation for q_{N+1}^{n+1} that involves only upwind values. What matters is that as many independent equations are provided as there are variables.

A different view of the same, inspired by the 'triangular'-scheme from the case above, is to say that the update equation for the cell average (9) is not an update of \bar{q}_i^{n+1} using the value \bar{q}_{i+1}^{n+1} , but an update of \bar{q}_{i+1}^{n+1} using \bar{q}_i^{n+1} . Thus the matrix becomes triangular and all values can be computed in an iterative fashion. We thus propose to shift Equation (17), and in fact all the equations for the cell average, by one cell to the left. The index-shifted Equation (17) would be counted as the equation updating q_N^{n+1} , and, in general, Equation (9) would be counted as the update of the cell average q_{i-1}^{n+1} .

The problem thus is shifted to the inflow boundary, where missing values are readily available by the procedure described earlier. For example, one can directly compute the integral of the flux $f_{1/2}^{n+1/2} = \int_{t^n}^{t^{n+1}} b(t)dt$ as indicated in green in Figure 5. Which values are affected by this special treatment depends on the stencil of the reconstruction in time, but any of them can be found in the Dirichlet boundary data upon tracing the characteristics. Also, due to the compact stencil only a few degrees of freedom are updated directly using the boundary.

3. At last we consider schemes using the explicit downwind cell average \bar{q}_{i+1}^n , but not the implicit one. The update equation (17) would involve the unavailable cell average \bar{q}_{N+1}^n , but not \bar{q}_{N+1}^{n+1} . It cannot thus, by shifting the index, be considered an update equation for \bar{q}_N^{n+1} and the trick from above cannot be applied. Fortunately, upon inspection of Table 2, one observes that there is only one stable⁵ method which involves \bar{q}_{i+1}^n , but does not involve \bar{q}_{i+1}^{n+1} in its reconstruction in time at $x_{i+\frac{1}{2}}$: it is  (3G), and we skip searching for a fix.

4 Numerical tests

4.1 Convergence studies

We tested the order of convergence for all stable schemes discussed above. The test with the initial condition $\sin(2\pi x)$ was run with a CFL number of about 3 up to $T = 10$. The grids start with 20 cells and are refined up to 640 cells. The errors on a grid with N cells are computed as

$$L^1 = \Delta x \sum_{i=1}^N \bar{q}_i, \quad \ell^1 = \frac{1}{N} \sum_{i=1}^{N+1} q_{i-\frac{1}{2}}.$$

⁵on domains with periodic boundaries, that is.

The results for some selected schemes are displayed in Figure 7. All schemes show the expected order of convergence and the ℓ^1 - and L^1 -errors are always of similar size.

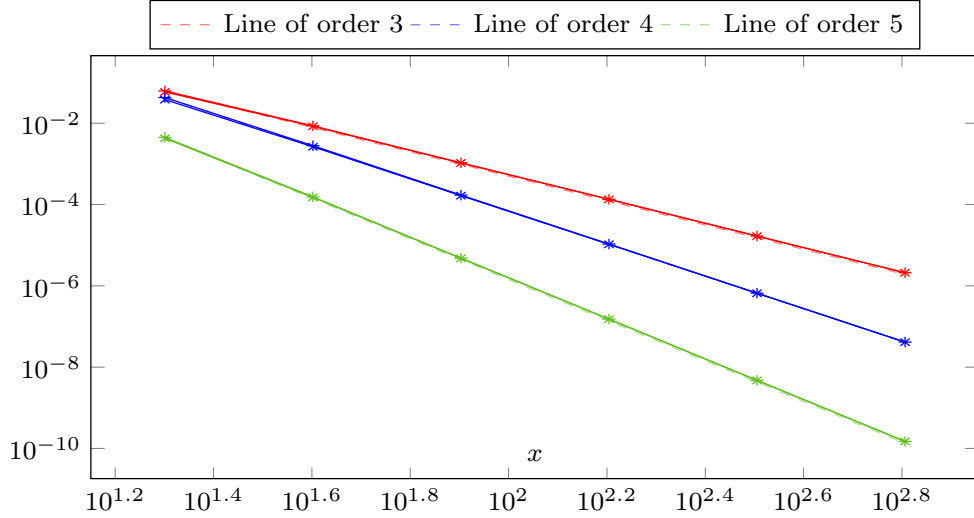


Figure 7: Convergence tests. The ℓ^1 -error of the point values x and the L^1 -error of the averages + coincide optically with the dashed references. Shown are the schemes $\square-\circ-\square$ (3F, \times , 3rd), $\square-\circ-\square$ (4B, \times , 4th) and $\square-\circ-\square$ (5A, \times , 5th).

4.2 Smooth and discontinuous profiles

Next we compare all the proposed methods in the same numerical test proposed in [18], which combines smooth and discontinuous profiles. For the Active Flux schemes we use a discretization with 100 cells for the interval $[0, 2]$ using periodic boundaries and a speed $u = 1$. This coincides with the number of degrees of freedom as proposed for the classical method on 200 cells, which is what was used in [18]. We run all methods with a CFL number of about 3 up to a final time $T = 8$, i.e. 4 grid revolution periods.

For reference we show the exact solution and the Finite Difference schemes of order 3 and 4 described in [12, 26]. Their solutions are computed on a grid with 200 cells with the same time step as the Active Flux scheme (CFL number of about 6), such that the memory and computational time are comparable. The 4th order Finite Difference method is marginally stable, which explains the large amount of oscillations.

4.2.1 Semi-discrete method integrated implicitly

Figure 8 shows results obtained by integrating the semi-discretization from section 2.1 implicitly with standard methods. With the second-order Crank-Nicholson method almost no features of the solution are preserved. As the spatial discretization of the semi-discretization (3) is third-order accurate, only third-order time-integrators are of relevance. The DIRK scheme is more diffusive than the reference third-order finite difference method, although third order itself. Only the RadauIA and RadauIIA, which optically coincide, give results similar to the third order finite difference method.

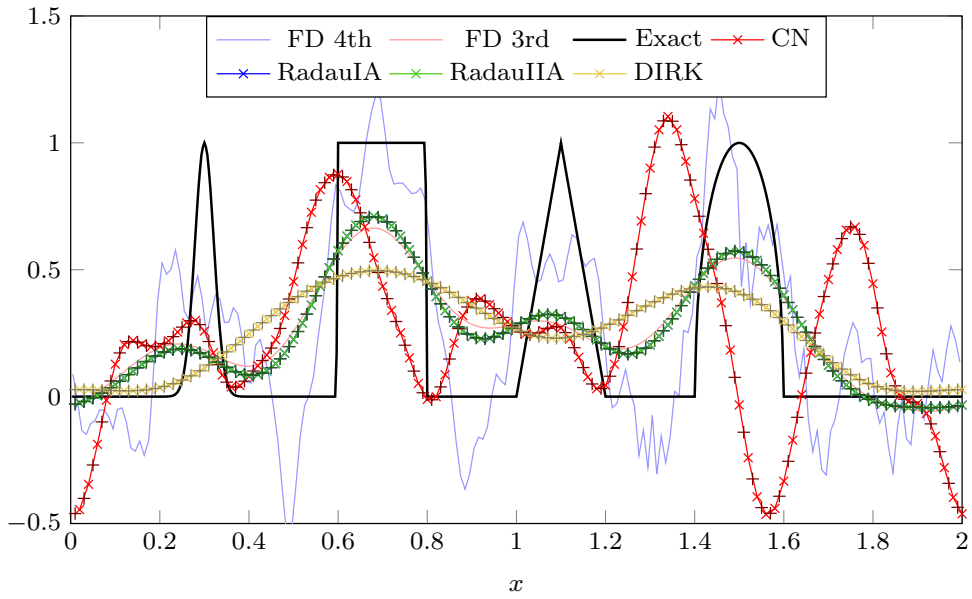


Figure 8: 3rd order semi-discrete scheme integrated with common implicit methods. The curves corresponding to the two Radau methods are on top of each other.

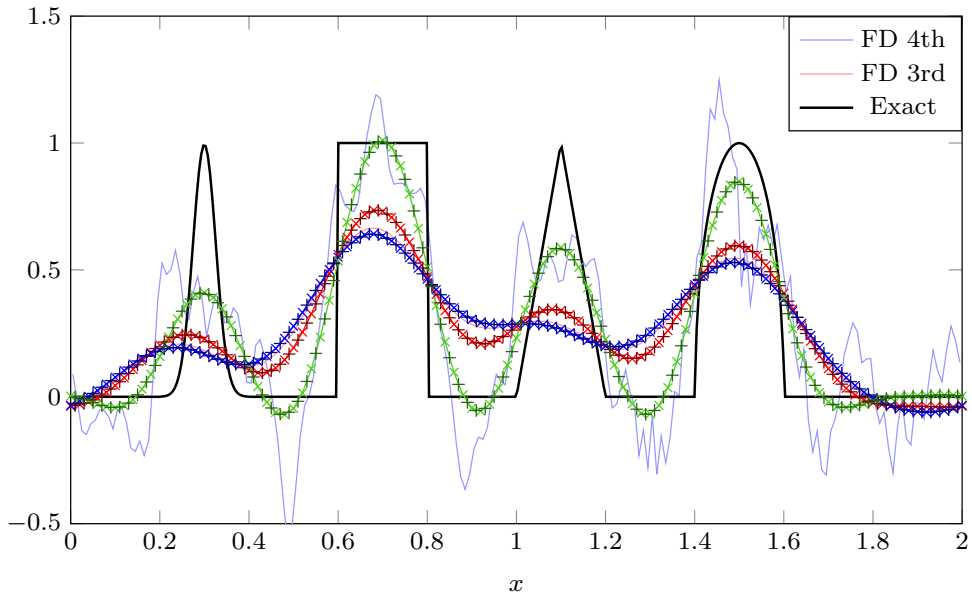


Figure 9: Numerical test of the three third-order schemes (\times point values, $+$ averages) $\square-\circ-\square$ (3D, \times), $\square-\circ-\square$ (3B, \times) and $\square-\circ-\square$ (3F, \times). The third-order finite-difference method yields results very close to 3B.

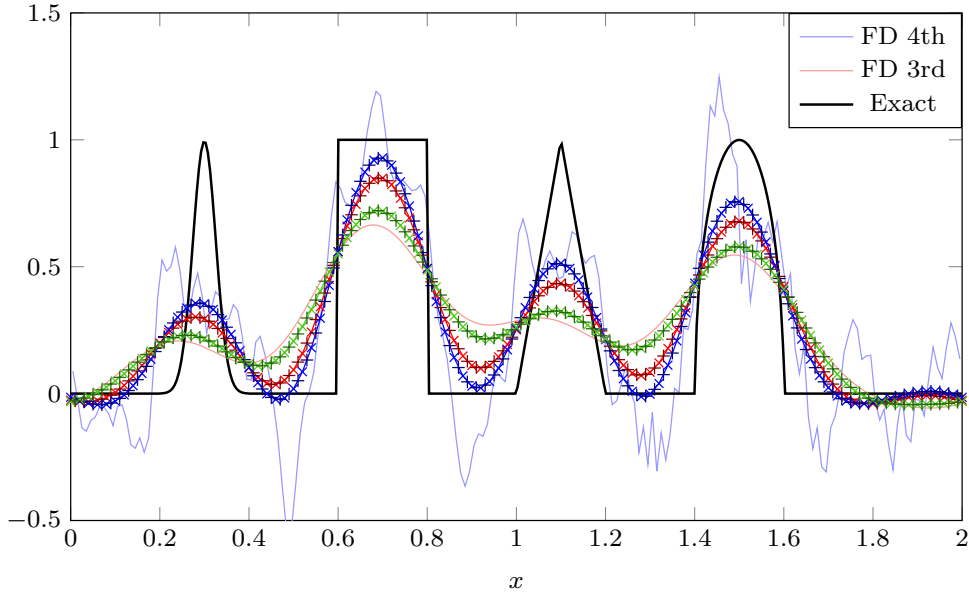


Figure 10: Numerical test of the three third-order schemes (\times point values, $+$ averages) $\square\text{-}\circ\text{-}\square$ (3C, \times), $\square\text{-}\circ\text{-}\square$ (3E, \times) and $\square\text{-}\circ\text{-}\square$ (3A, \times).

4.2.2 Third-order methods

In Figure 9 and 10 we show the schemes which use three values for the approximation at the interface and are thus of order 3. We do not show $\square\text{-}\circ\text{-}\square$ (3G) and $\square\text{-}\circ\text{-}\square$ (3H) (both being unstable for CFL = 3). All schemes perform better or equally well as the third order finite difference method. The scheme $\square\text{-}\circ\text{-}\square$ (3B) almost coincides with this reference. All schemes show significant influence of numerical diffusion, but, mostly, the four solution features can be recognized. Especially the methods with an upwind bias in the explicit part, i.e. $\square\text{-}\circ\text{-}\square$ (3F) and $\square\text{-}\circ\text{-}\square$ (3E), are significantly better compared to the other ones. They also clearly outperform the semi-discrete methods used with standard time-integrators (discussed in Section 4.2.1), especially noticing that two sub-steps of the Radau methods are required compared to a direct update. The differences between the results of the direct methods are less for larger CFL numbers (e.g. CFL = 6).

4.2.3 Fourth-order methods

In Figure 11 four schemes of order 4 are shown. All give more accurate results than third-order methods. Scheme $\square\text{-}\circ\text{-}\square$ (4D) plays a particular role, displaying significantly more oscillations than the other Active Flux methods. As can be seen in Table 2, it is marginally stable (the non-vanishing eigenvalue has norm 1), which might explain the oscillations. Moreover, the stencil of this method is such that the interpolation at the interface uses only average values and thus the update is independent of the point values. It is therefore not surprising that method 4D behaves similarly to the fourth-order reference Finite Difference method. In the solutions of the other three methods the features can be identified much better. Scheme $\square\text{-}\circ\text{-}\square$ (4C), which has an upwind-bias in the explicit stencil seems to have a tendency of overshooting the exact solution.

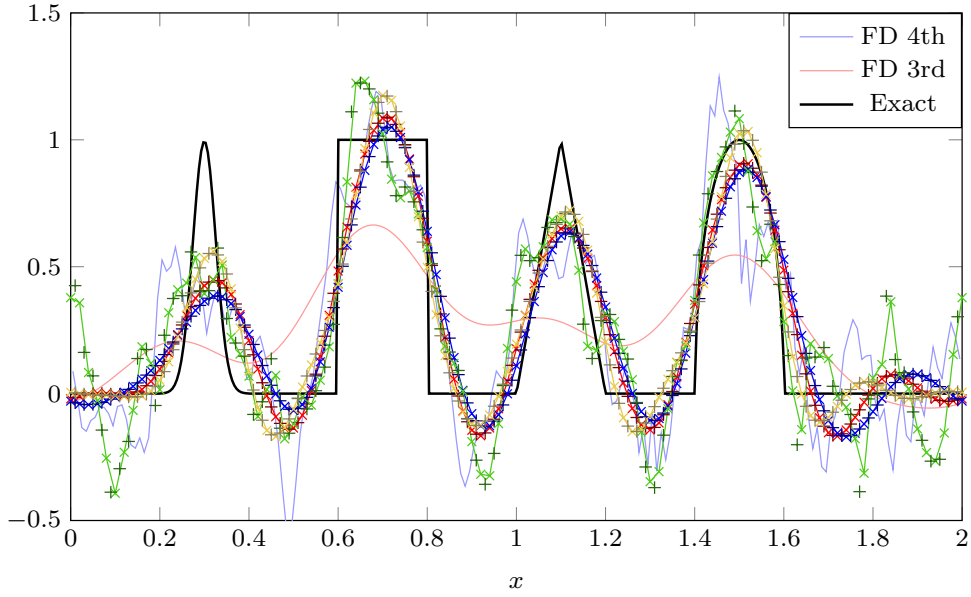


Figure 11: Numerical test of the four fourth-order schemes (\times point values, $+$ averages) $\square-\circ-\square$ (4B, \times), $\square-\circ-\square$ (4A, \times), $\square-\circ-\square$ (4D, \times) and $\square-\circ-\square$ (4C, \times).

4.2.4 Fifth-order methods

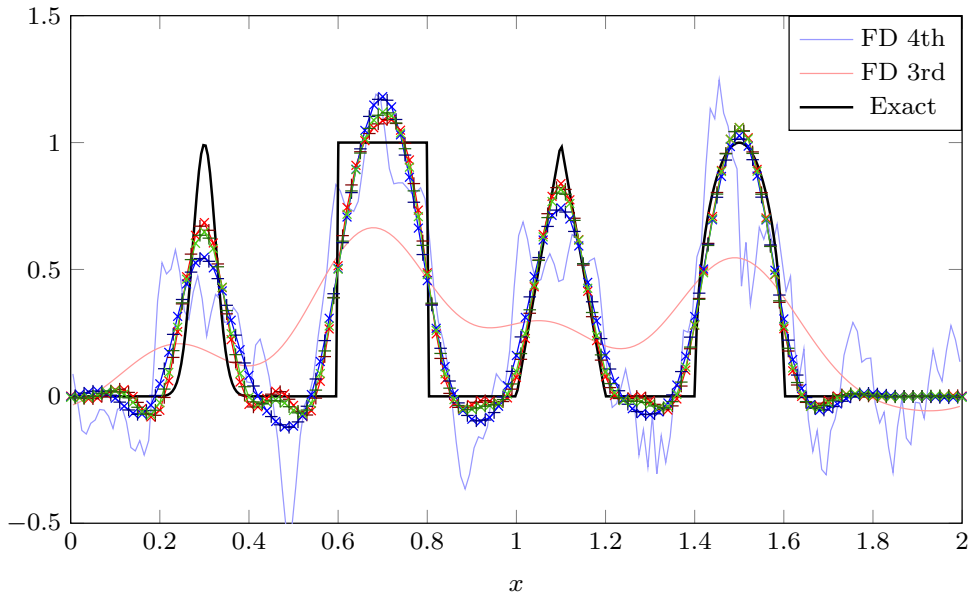


Figure 12: Numerical test of the three fifth-order schemes (\times point values, $+$ averages) $\square-\circ-\square$ (5B, \times), $\square-\circ-\square$ (5A, \times) and $\square-\circ-\square$ (5C, \times).

Finally, schemes of order 5 are shown in Figure 12. One observes again a significant improvement in comparison to the fourth-order schemes. All features of the solution are captured and can be clearly distinguished. The three schemes only differ in the choice of the explicit stencil, and a more upwind-focused stencil in the explicit part seems to improve the result slightly.

4.3 Network

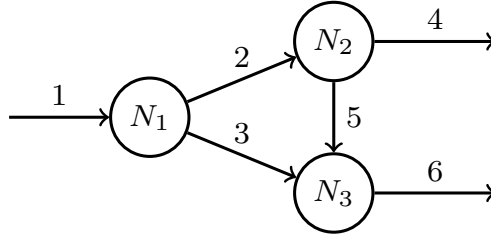


Figure 13: Sketch of the network with three nodes and six edges.

As a final test we consider a network of six edges and four nodes, shown in Figure 13. The lengths of the edges are

$$\ell_1 = 5, \quad \ell_2 = \ell_3 = \ell_5 = 20, \quad \ell_4 = \ell_6 = 30.$$

On each edge we solve the advection equation with the speeds

$$u_1 = u_3 = u_4 = u_6 = 1, \quad u_2 = 2, \quad u_5 = \frac{20}{10 + \pi},$$

oriented according to the direction of the edges.

At the nodes N_1, N_2, N_3 suitable coupling conditions have to be imposed. At the two splitting nodes N_1 and N_2 we distribute the incoming flux according to fixed parameters $\alpha_1 = \frac{3}{4}$ and $\alpha_2 = \frac{2}{3}$ such that

$$\begin{aligned} q_2(t, 0) &= \alpha_1 q_1(t, \ell_1), & q_3(t, 0) &= (1 - \alpha_1) q_1(t, \ell_1), \\ q_4(t, 0) &= \alpha_2 q_2(t, \ell_1), & q_5(t, 0) &= (1 - \alpha_2) q_2(t, \ell_1). \end{aligned}$$

The coupling at node N_3 is immediate by the conservation of mass

$$q_6(t, 0) = q_5(t, \ell_5) + q_3(t, \ell_3).$$

Finally, we impose at the first edge the Dirichlet boundary condition

$$q_1(t, 0) = b(t) = \sin(\Omega t)$$

with $\Omega = \frac{2\pi}{3}$ and an initial condition

$$q_1(0, x) = \exp(-4(x - \ell_1/2)^2) \quad q_e(0, x) = 0 \quad \text{for } e = 2, \dots, 6$$

Note that the configuration is chosen such that a signal starting in edge 1 will be split at node N_1 into two parts. One signal is traveling directly along edge 3 to node N_3 , while the other one takes a detour via N_2 . Apart from losing some of its strength to edge 4, it arrives delayed at node N_3 as compared to the signal from edge 3.

By defining the edge-crossing times $\tau_e := \ell_e/u_e$, $e = 1, \dots, 6$, the exact solution for large times t at the nodes N_2 and N_3 has the form

$$\begin{aligned} q_4(t, 0) &= \alpha_1 \alpha_2 b(t - \tau_1 - \tau_2 - \tau_4), \\ q_6(t, 0) &= \alpha_1 (1 - \alpha_2) b(t - \tau_1 - \tau_2 - \tau_5 - \tau_6) + (1 - \alpha_1) b(t - \tau_1 - \tau_3 - \tau_6). \end{aligned}$$

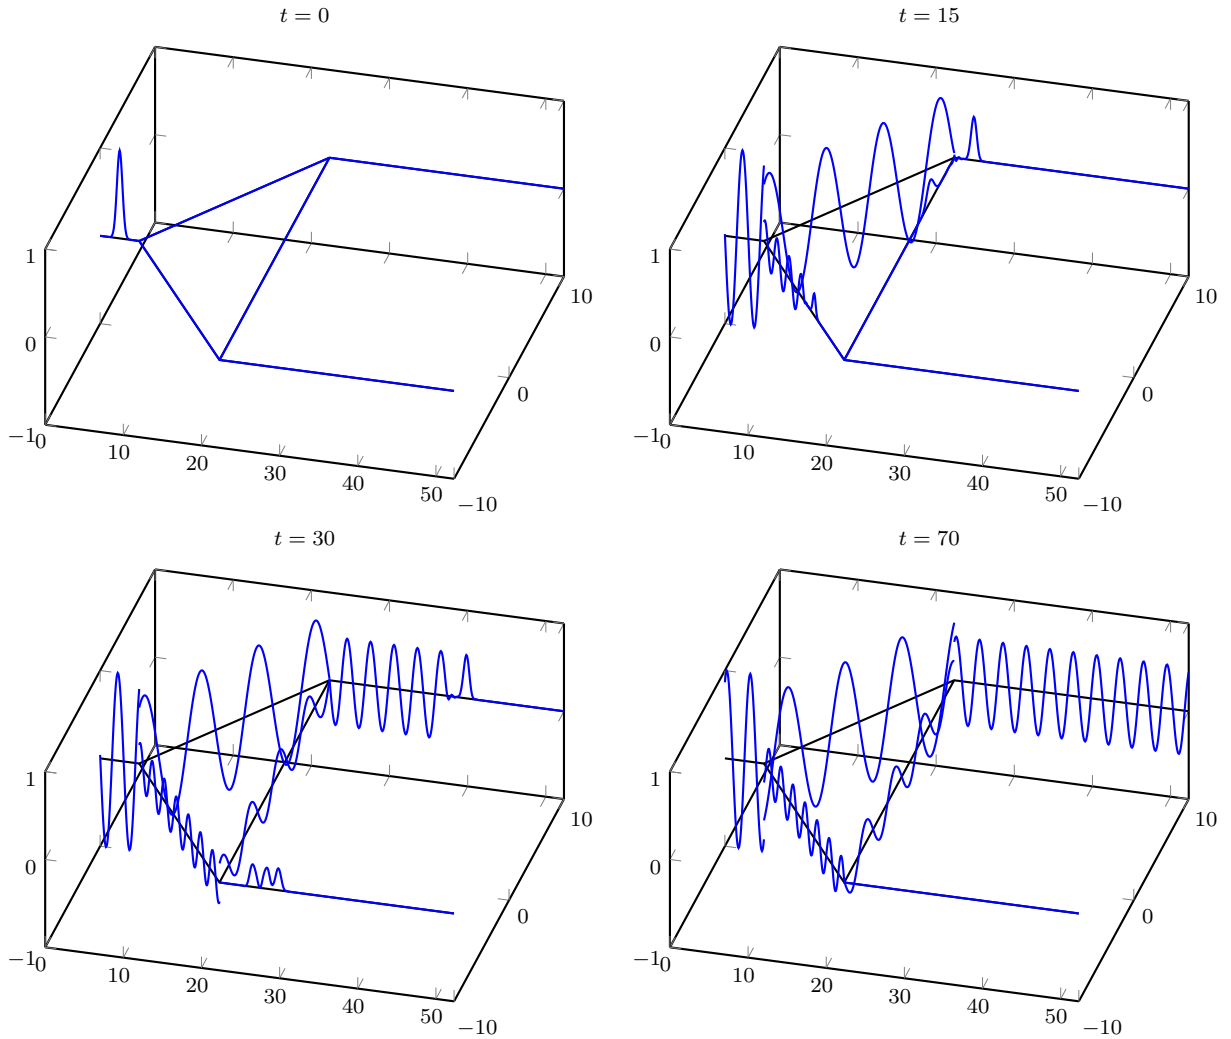



Figure 14: Numerical solution of the flow on the network.

Since the parameters α_1, α_2 and Ω are chosen such that they satisfy

$$\begin{aligned}\alpha_1(1 - \alpha_2) &= 1 - \alpha_1 \\ \Omega(\tau_2 + \tau_5) &= \Omega\tau_3 + \pi\end{aligned}$$

we have a destructive interference at $q_6(t, 0)$. This means that the exact solution on edge 6 is equal to zero once the pulse from the initial condition has passed.

Figure 14 shows the results of a simulation using Method  (4B) with CFL = 3 and $\Delta x = \frac{1}{8}$ on all edges.

After a transitional phase, the steady flow is reached. We observe that indeed, the solution on edge 6 is very small. Figure 15 shows the values on that particular edge for two simulations with $\Delta x = \frac{1}{4}$ and $\Delta x = \frac{1}{8}$. Although inflow at the first edge has amplitude 1, the cancellation is accurate up to 10^{-4} and decreasing with resolution.

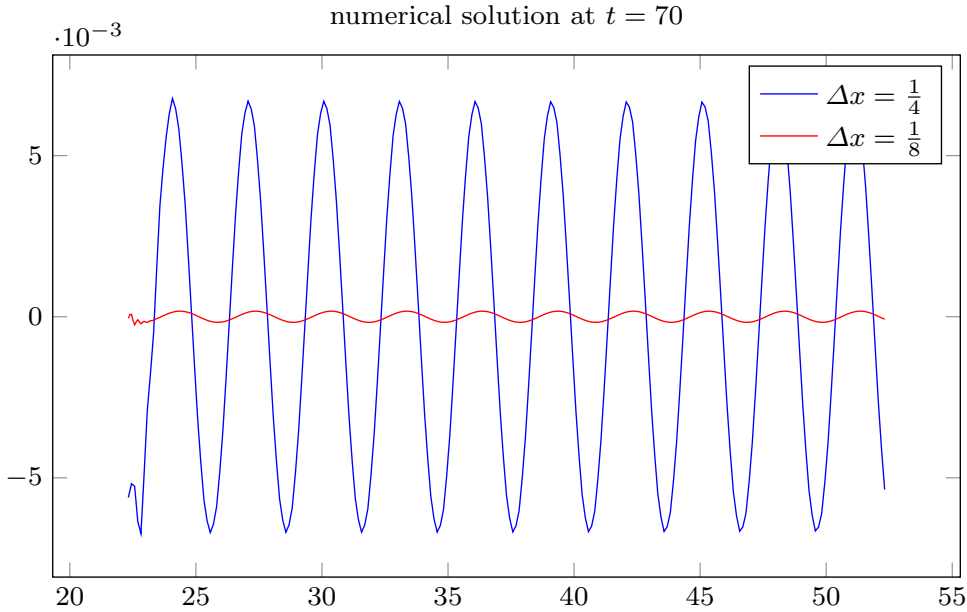


Figure 15: Numerical solution on edge 6 at $t = 70$. The exact solution is vanishing due to destructive interference. One observes the convergence of the numerical solution as Δx is decreased from $\frac{1}{4}$ to $\frac{1}{8}$.

References

- [1] Rémi Abgrall. A combination of residual distribution and the active flux formulations or a new class of schemes that can combine several writings of the same hyperbolic problem: application to the 1d euler equations. *arXiv preprint arXiv:2011.12572*, 2020.
- [2] Remi Abgrall and Wasilij Barsukow. Extensions of active flux to arbitrary order of accuracy. *subm., arXiv:2208.14476*, 2022.
- [3] Sergei Avdonin, Günter Leugering, and Victor Mikhaylov. On an inverse problem for tree-like networks of elastic strings. *ZAMM Z. Angew. Math. Mech.*, 90(2):136–150, 2010.
- [4] Wasilij Barsukow. The active flux scheme for nonlinear problems. *Journal of Scientific Computing*, 86(1):1–34, 2021.
- [5] R. Borsche and A. Klar. Kinetic layers and coupling conditions for macroscopic equations on networks I: The wave equation. *SIAM J. Sci. Comput.*, 40(3):A1784–A1808, 2018.
- [6] Raul Borsche, Matthias Eimer, and Norbert Siedow. A local time stepping method for thermal energy transport in district heating networks. *Appl. Math. Comput.*, 353:215–229, 2019.
- [7] Erik Chudzik, Christiane Helzel, and David Kerkmann. The cartesian grid active flux method: Linear stability and bound preserving limiting. *Applied Mathematics and Computation*, 393:125501, 2021.


- [8] David Coulette, Emmanuel Franck, Philippe Helluy, Michel Mehrenberger, and Laurent Navoret. High-order implicit palindromic discontinuous Galerkin method for kinetic-relaxation approximation. *Comput. & Fluids*, 190:485–502, 2019.
- [9] Ludovica Delpopolo Carciopolo, Luca Bonaventura, Anna Scotti, and Luca Formaggia. A conservative implicit multirate method for hyperbolic problems. *Comput. Geosci.*, 23(4):647–664, 2019.
- [10] Karthikeyan Duraisamy and James D. Baeder. Implicit scheme for hyperbolic conservation laws using nonoscillatory reconstruction in space and time. *SIAM J. Sci. Comput.*, 29(6):2607–2620, 2007.
- [11] H. Egger and T. Kugler. Damped wave systems on networks: exponential stability and uniform approximations. *Numer. Math.*, 138(4):839–867, 2018.
- [12] Matthias Eimer, Raul Borsche, and Norbert Siedow. Implicit finite volume method with a posteriori limiting for transport networks. *Adv. Comput. Math.*, 48(3):Paper No. 21, 21, 2022.
- [13] Timothy A Eymann and Philip L Roe. Active flux schemes for systems. In *20th AIAA computational fluid dynamics conference*, 2011.
- [14] Timothy A Eymann and Philip L Roe. Multidimensional active flux schemes. In *21st AIAA computational fluid dynamics conference*, 2013.
- [15] S. Göttlich, M. Herty, and A. Klar. Network models for supply chains. *Commun. Math. Sci.*, 3(4):545–559, 2005.
- [16] A. Harten and H. Tal-Ezer. On a fourth order accurate implicit finite difference scheme for hyperbolic conservation laws. II. Five-point schemes. *J. Comput. Phys.*, 41(2):329–356, 1981.
- [17] Christiane Helzel, David Kerkmann, and Leonardo Scandurra. A new ADER method inspired by the active flux method. *Journal of Scientific Computing*, 80(3):1463–1497, 2019.
- [18] Guang-Shan Jiang and Chi-Wang Shu. Efficient implementation of weighted ENO schemes. *J. Comput. Phys.*, 126(1):202–228, 1996.
- [19] Randall J LeVeque. A large time step generalization of godunov’s method for systems of conservation laws. *SIAM journal on numerical analysis*, 22(6):1051–1073, 1985.
- [20] Randall J LeVeque. Some traffic flow models illustrating interesting hyperbolic behavior. *Minisymposium on traffic flow*, 2001.
- [21] John JH Miller. On the location of zeros of certain classes of polynomials with applications to numerical analysis. *IMA Journal of Applied Mathematics*, 8(3):397–406, 1971.
- [22] Hiroaki Nishikawa and Philip L Roe. Third-order active-flux scheme for advection diffusion: hyperbolic diffusion, boundary condition, and Newton solver. *Computers & Fluids*, 125:71–81, 2016.

- [23] Philip Roe. Designing cfd methods for bandwidth—a physical approach. *Computers & Fluids*, 214:104774, 2021.
- [24] Issai Schur. Über Potenzreihen, die im Innern des Einheitskreises beschränkt sind. *Journal für die reine und angewandte Mathematik*, 147:205–232, 1917.
- [25] Issai Schur. Über Potenzreihen, die im Innern des Einheitskreises beschränkt sind. part ii. *J. Reine Angew. Math*, 148:122–145, 1918.
- [26] Peter John Steinle. *Finite difference methods for the advection equation*. PhD thesis, 1993.
- [27] Eleuterio F. Toro. *Riemann solvers and numerical methods for fluid dynamics*. Springer-Verlag, Berlin, third edition, 2009. A practical introduction.
- [28] Julie Valein and Enrique Zuazua. Stabilization of the wave equation on 1-D networks. *SIAM J. Control Optim.*, 48(4):2771–2797, 2009.
- [29] Bram van Leer. Towards the ultimate conservative difference scheme. IV. A new approach to numerical convection. *Journal of computational physics*, 23(3):276–299, 1977.
- [30] J. Xin and J. E. Flaherty. Implicit time integration of hyperbolic conservation laws via discontinuous Galerkin methods. *Int. J. Numer. Methods Biomed. Eng.*, 27(5):711–721, 2011.
- [31] M Zerroukat, N Wood, and A Staniforth. The parabolic spline method (PSM) for conservative transport problems. *International journal for numerical methods in fluids*, 51(11):1297–1318, 2006.

A Coefficients of the stable methods


The methods are ordered by the size of their domain of stability.

A.1 3rd order

3A.  CFL > 1

$$\begin{aligned}
0 &= (c - 1)(-1 + 3c)\bar{q}_i^{n+1} + (5 + (4 - 9c)c)\bar{q}_{i+1}^{n+1} \\
&\quad - 4q_{i+\frac{1}{2}}^n + (-2 + 6c^2)q_{i+\frac{3}{2}}^{n+1}
\end{aligned} \tag{18}$$

$$\begin{aligned}
0 &= (c - 1)^2 c^2 \bar{q}_{i-1}^{n+1} + c^2 (1 + c)^2 \bar{q}_{i+1}^{n+1} \\
&\quad + (2 - 6c^2)\bar{q}_i^n - 2(c^2 - 1)(c^2 - 1)\bar{q}_i^{n+1} \\
&\quad - 2c(c^2 - 1)q_{i-\frac{1}{2}}^n + 2c(c^2 - 1)q_{i+\frac{1}{2}}^n
\end{aligned} \tag{19}$$

3B.  CFL > 1


$$\begin{aligned}
0 &= -4\bar{q}_{i+1}^n + c(-1 + 3c)\bar{q}_i^{n+1} \\
&\quad - (1 + c)(-4 + 9c)\bar{q}_{i+1}^{n+1} + 6c(1 + c)q_{i+\frac{3}{2}}^{n+1}
\end{aligned} \tag{20}$$

$$\begin{aligned}
0 &= 2(c - 1)\bar{q}_{i+1}^n + (c - 1)c\bar{q}_{i-1}^{n+1} \\
&\quad - 2(2 + c)\bar{q}_i^n + (1 + c)(2 + c)\bar{q}_{i+1}^{n+1} \\
&\quad + (4 - 2c(1 + c))\bar{q}_i^{n+1}
\end{aligned} \tag{21}$$

3C.  CFL > 1

$$\begin{aligned}
0 &= 6(c - 1)c\bar{q}_{i+1}^{n+1} + q_{i+\frac{1}{2}}^n \\
&\quad + (-1 + (4 - 3c)c)q_{i+\frac{1}{2}}^{n+1} + (2 - 3c)cq_{i+\frac{3}{2}}^{n+1}
\end{aligned} \tag{22}$$

$$\begin{aligned}
0 &= -c^3\bar{q}_{i+1}^{n+1} + (-2 + 3c)\bar{q}_i^n \\
&\quad + (2 - 3c + c^3)\bar{q}_i^{n+1} + (c - 1)cq_{i-\frac{1}{2}}^n \\
&\quad - (c - 1)^2cq_{i-\frac{1}{2}}^{n+1} - (c - 1)cq_{i+\frac{1}{2}}^n \\
&\quad + (c - 1)^2cq_{i+\frac{1}{2}}^{n+1}
\end{aligned} \tag{23}$$

3D.  CFL > 1

$$\begin{aligned}
0 &= \bar{q}_{i+1}^n + (-1 + 6c^2)\bar{q}_{i+1}^{n+1} + (c - 3c^2)q_{i+\frac{1}{2}}^{n+1} \\
&\quad - c(1 + 3c)q_{i+\frac{3}{2}}^{n+1}
\end{aligned} \tag{24}$$

$$\begin{aligned}
0 &= (c - 1)c\bar{q}_{i+1}^n - (1 + c)^2\bar{q}_i^n \\
&\quad + c(1 + c)^2\bar{q}_{i+1}^{n+1} + (1 + 2c - c^2(2 + c))\bar{q}_i^{n+1} \\
&\quad + c(c^2 - 1)q_{i-\frac{1}{2}}^{n+1} + (c - c^3)q_{i+\frac{1}{2}}^{n+1}
\end{aligned} \tag{25}$$

3E.  CFL $\notin [1, 2]$

$$\begin{aligned}
0 &= -4\bar{q}_i^n + (13 - 9c)c\bar{q}_{i+1}^{n+1} + (c - 1)(-4 + 3c)\bar{q}_i^{n+1} \\
&\quad + 6(c - 1)cq_{i+\frac{3}{2}}^{n+1}
\end{aligned} \tag{26}$$

$$\begin{aligned}
0 &= 2(c - 2)\bar{q}_i^n + (c - 2)(c - 1)\bar{q}_{i-1}^{n+1} \\
&\quad - 2(1 + c)\bar{q}_{i-1}^n - 2(c - 2)(1 + c)\bar{q}_i^{n+1} \\
&\quad + c(1 + c)\bar{q}_{i+1}^{n+1}
\end{aligned} \tag{27}$$

3F.  CFL > 2

$$\begin{aligned}
0 &= \bar{q}_i^n + (5 + 6(c-2)c)\bar{q}_{i+1}^{n+1} + (-4 + (7-3c)c)q_{i+\frac{1}{2}}^{n+1} \\
&\quad + (2-3c)(c-1)q_{i+\frac{3}{2}}^{n+1}
\end{aligned} \tag{28}$$

$$\begin{aligned}
0 &= (c-2)(c-1)\bar{q}_i^n - c^2\bar{q}_{i-1}^n \\
&\quad + (c-1)c^2\bar{q}_{i+1}^{n+1} - (c-2)(-1+c+c^2)\bar{q}_i^{n+1} \\
&\quad + (c-2)(c-1)cq_{i-\frac{1}{2}}^{n+1} - (c-2)(c-1)cq_{i+\frac{1}{2}}^{n+1}
\end{aligned} \tag{29}$$

3G.  CFL > 3.7321

$$\begin{aligned}
0 &= -5\bar{q}_{i+1}^n + (-1 + 6c^2)\bar{q}_i^{n+1} \\
&\quad - (1+c)(-4+9c)q_{i+\frac{1}{2}}^{n+1} + (1+c)(2+3c)q_{i+\frac{3}{2}}^{n+1}
\end{aligned} \tag{30}$$

$$\begin{aligned}
0 &= c^2\bar{q}_{i+1}^n + c^2(1+c)\bar{q}_{i-1}^{n+1} \\
&\quad - (1+c)(2+c)\bar{q}_i^n + (2-c(-3+c+c^2))\bar{q}_i^{n+1} \\
&\quad - c(1+c)(2+c)q_{i-\frac{1}{2}}^{n+1} + c(1+c)(2+c)q_{i+\frac{1}{2}}^{n+1}
\end{aligned} \tag{31}$$

3H.  CFL > 4.7

$$\begin{aligned}
0 &= 6(c-1)c\bar{q}_i^{n+1} - 5q_{i+\frac{1}{2}}^n \\
&\quad + (5 + (4-9c)c)q_{i+\frac{1}{2}}^{n+1} + c(2+3c)q_{i+\frac{3}{2}}^{n+1}
\end{aligned} \tag{32}$$

$$\begin{aligned}
0 &= (-2-3c)\bar{q}_i^n + c^3\bar{q}_{i-1}^{n+1} \\
&\quad + (2+3c-c^3)\bar{q}_i^{n+1} - c(1+c)q_{i-\frac{1}{2}}^n \\
&\quad - c(1+c)^2q_{i-\frac{1}{2}}^{n+1} + c(1+c)q_{i+\frac{1}{2}}^n \\
&\quad + c(1+c)^2q_{i+\frac{1}{2}}^{n+1}
\end{aligned} \tag{33}$$

A.2 4th order

4A.  unconditionally stable

$$\begin{aligned}
0 &= -\bar{q}_{i+1}^n - c^3\bar{q}_i^{n+1} \\
&\quad + (1-c^2(6+5c))\bar{q}_{i+1}^{n+1} + c(1+c)(-1+4c)q_{i+\frac{1}{2}}^{n+1} \\
&\quad + c(1+c)(1+2c)q_{i+\frac{3}{2}}^{n+1}
\end{aligned} \tag{34}$$

$$\begin{aligned}
0 &= 2(c-1)c\bar{q}_{i+1}^n - 2(1+c)(2+c)\bar{q}_i^n \\
&\quad + c(1+c)^2(2+c)\bar{q}_{i+1}^{n+1} - 2(c-1)(2+c)(1+2c)\bar{q}_i^{n+1} \\
&\quad + (c^2-c^4)\bar{q}_{i-1}^{n+1} + 2(c-1)c(1+c)(2+c)q_{i-\frac{1}{2}}^{n+1} \\
&\quad - 2(c-1)c(1+c)(2+c)q_{i+\frac{1}{2}}^{n+1}
\end{aligned} \tag{35}$$

4B.  CFL > 1

$$\begin{aligned}
0 &= \bar{q}_i^{n+1}(c-1)c(-1+2c) + \bar{q}_{i+1}^{n+1}(c-1)c(7+10c) \\
&\quad + 2q_{i+\frac{1}{2}}^n - 2(c-1)(-1+c+4c^2)q_{i+\frac{1}{2}}^{n+1} \\
&\quad + c(2-4c^2)q_{i+\frac{3}{2}}^{n+1}
\end{aligned} \tag{36}$$

$$\begin{aligned}
0 &= -(c-1)^2c^3\bar{q}_{i-1}^{n+1} + c^3(1+c)^2\bar{q}_{i+1}^{n+1} \\
&\quad + (4-8c^2)\bar{q}_i^n - 4(c^2-1)(c^2-1)\bar{q}_i^{n+1} \\
&\quad - 2c(c^2-1)q_{i-\frac{1}{2}}^n + 2c(c^2-1)(c^2-1)q_{i-\frac{1}{2}}^{n+1} \\
&\quad + 2c(c^2-1)q_{i+\frac{1}{2}}^n - 2c(c^2-1)(c^2-1)q_{i+\frac{1}{2}}^{n+1}
\end{aligned} \tag{37}$$

4C.  CFL > 1

$$\begin{aligned}
0 &= -\bar{q}_i^n - (c-1)^2(c-1)\bar{q}_i^{n+1} \\
&\quad + c(-3+(9-5c)c)\bar{q}_{i+1}^{n+1} + (c-1)c(-5+4c)q_{i+\frac{1}{2}}^{n+1} \\
&\quad + (c-1)c(-1+2c)q_{i+\frac{3}{2}}^{n+1}
\end{aligned} \tag{38}$$


$$\begin{aligned}
0 &= 2(c-2)(c-1)\bar{q}_i^n - (c-2)(c-1)^2c\bar{q}_{i-1}^{n+1} \\
&\quad - 2c(1+c)\bar{q}_{i-1}^n - 2(c-2)(1+c)(-1+2c)\bar{q}_i^{n+1} \\
&\quad + c^2(c^2-1)\bar{q}_{i+1}^{n+1} + 2(c-2)(c-1)c(1+c)q_{i-\frac{1}{2}}^{n+1} \\
&\quad - 2(c-2)(c-1)c(1+c)q_{i+\frac{1}{2}}^{n+1}
\end{aligned} \tag{39}$$

4D.  marginally stable

$$\begin{aligned}
0 &= (c-1)(-5+4c)\bar{q}_{i+1}^n - (1+c)(-1+4c)\bar{q}_i^n \\
&\quad + (c-1)(1+c(-5+3c))\bar{q}_i^{n+1} - (1+c)(5+c(-17+9c))\bar{q}_{i+1}^{n+1} \\
&\quad + 6c(c^2-1)q_{i+\frac{3}{2}}^{n+1}
\end{aligned} \tag{40}$$

$$\begin{aligned}
0 &= (c-2)(c-1)\bar{q}_{i-1}^{n+1} - (c-2)(c-1)\bar{q}_{i+1}^n \\
&\quad - (1+c)(2+c)\bar{q}_{i-1}^n + (1+c)(2+c)\bar{q}_{i+1}^{n+1} \\
&\quad + (8-2c^2)\bar{q}_i^{n+1} + 2(-4+c^2)\bar{q}_i^n
\end{aligned} \tag{41}$$

A.3 5th order

5A.  CFL > 1


$$\begin{aligned}
0 &= -(c-1)c^2(-1+5c^2)\bar{q}_i^{n+1} + 2(c-1)(-2+c+5c^2)\bar{q}_{i+1}^n \\
&\quad - (c-1)(1+c)^2(-4+5c(2+5c))\bar{q}_{i+1}^{n+1} - 2c(1+c)(1+5c)q_{i+\frac{1}{2}}^n \\
&\quad + 2(c-1)c(1+c)(-3+5c(1+2c))q_{i+\frac{1}{2}}^{n+1} + 2c(1+c)^2(-2+5c^2)q_{i+\frac{3}{2}}^{n+1} \quad (42)
\end{aligned}$$

$$\begin{aligned}
0 &= (c-1)^2c^2\bar{q}_{i+1}^n + \frac{1}{2}(c-1)^2c^3\bar{q}_{i-1}^{n+1} \\
&\quad - \frac{1}{2}c^2(1+c)^2(2+c)\bar{q}_{i+1}^{n+1} + (c-1)^2(2+c)(2+3c)\bar{q}_i^{n+1} \\
&\quad + (-4+c^2(9-(c-2)c))\bar{q}_i^n + (c-1)c(1+c)(2+c)q_{i-\frac{1}{2}}^n \\
&\quad - (c-1)^2c(1+c)(2+c)q_{i-\frac{1}{2}}^{n+1} - (c-1)c(1+c)(2+c)q_{i+\frac{1}{2}}^n \\
&\quad + (c-1)^2c(1+c)(2+c)q_{i+\frac{1}{2}}^{n+1} \quad (43)
\end{aligned}$$

5B.  CFL > 2

$$\begin{aligned}
0 &= -(c-1)^2(4+5(c-2)c)\bar{q}_i^{n+1} - 2(-2+c+5c^2)\bar{q}_i^n \\
&\quad + c(-16+c(9+5(8-5c)c))\bar{q}_{i+1}^{n+1} + 2(c-1)(-4+5c)q_{i+\frac{1}{2}}^n \\
&\quad + 2(c-1)(-1+2c)(-4+5(c-1)c)q_{i+\frac{1}{2}}^{n+1} + 2(c-1)c(-2+5c^2)q_{i+\frac{3}{2}}^{n+1} \quad (44)
\end{aligned}$$

$$\begin{aligned}
0 &= (c-2)(c-1)^2c^2\bar{q}_{i-1}^{n+1} + 2c^2(1+c)^2\bar{q}_{i-1}^n \\
&\quad - c^3(1+c)^2\bar{q}_{i+1}^{n+1} + 2(c-2)(1+c)^2(-2+3c)\bar{q}_i^{n+1} \\
&\quad - 2(4+c^2(-9+c(2+c)))\bar{q}_i^n - 2(c-2)(c-1)c(1+c)q_{i-\frac{1}{2}}^n \\
&\quad - 2(c-2)(c-1)c(1+c)^2q_{i-\frac{1}{2}}^{n+1} + 2(c-2)(c-1)c(1+c)q_{i+\frac{1}{2}}^n \\
&\quad + 2(c-2)(c-1)c(1+c)^2q_{i+\frac{1}{2}}^{n+1} \quad (45)
\end{aligned}$$

5C.  CFL > 2

$$\begin{aligned}
0 &= (c-1)^2(-4+5c)\bar{q}_{i+1}^n - c(1+c)(1+5c)\bar{q}_i^n \\
&\quad - (c-1)^2c(-1+5(c-1)c)\bar{q}_i^{n+1} - (1+c)(-4+c(17+c(-4+5c(-8+5c))))\bar{q}_{i+1}^{n+1} \\
&\quad + 2(c-1)c(1+c)(2+5c(-3+2c))q_{i+\frac{1}{2}}^{n+1} + 2c(2-7c^2+5c^4)q_{i+\frac{3}{2}}^{n+1} \quad (46)
\end{aligned}$$

$$\begin{aligned}
0 &= -(c-2)(c-1)^2c\bar{q}_{i+1}^n - (c-2)(c-1)^2c(1+c)\bar{q}_{i-1}^{n+1} \\
&\quad - c(1+c)^2(2+c)\bar{q}_{i-1}^n + (c-1)c(1+c)^2(2+c)\bar{q}_{i+1}^{n+1} \\
&\quad + (-8+26c^2-6c^4)\bar{q}_i^{n+1} + 2(4-5c^2+c^4)\bar{q}_i^n \\
&\quad + 2c(4-5c^2+c^4)q_{i-\frac{1}{2}}^{n+1} - 2c(4-5c^2+c^4)q_{i+\frac{1}{2}}^{n+1} \quad (47)
\end{aligned}$$