
Adversarial Robustness of Learning-based Static Malware Classifiers

Shoumik Saha¹ Wenxiao Wang¹ Yigitcan Kaya¹ Soheil Feizi¹

Abstract

Malware detection has long been a stage for an ongoing arms race between malware authors and anti-virus systems. Solutions that utilize machine learning (ML) gain traction as the scale of this arms race increases. This trend, however, makes performing attacks directly on ML an attractive prospect for adversaries. We study this arms race from both perspectives in the context of MalConv, a popular convolutional neural network-based malware classifier that operates on raw bytes of files. First, we show that MalConv is vulnerable to adversarial patch attacks: appending a byte-level patch to malware files bypasses detection 94.3% of the time. Moreover, we develop a universal adversarial patch (UAP) attack where a single patch can drop the detection rate in constant time of any malware file that contains it by 80%. These patches are effective even being relatively small with respect to the original file size—between 2% – 8%. As a countermeasure, we then perform window ablation that allows us to apply de-randomized smoothing, a modern certified defense to patch attacks in vision tasks, to raw files. The resulting ‘smoothed-MalConv’ can detect over 80% of malware that contains the universal patch and provides certified robustness up to 66%, outlining a promising step towards robust malware detection. To our knowledge, we are the first to apply universal adversarial patch attack and certified defense using ablations on byte level in the malware field.

1. Introduction

Machine learning has started to see more and more adaptation in malware detection as it also has in many other mission-critical applications. However, unlike other applications, malware detection is inherently adversarial in nature.

¹Department of Computer Science, University of Maryland, College Park, United States. Correspondence to: Shoumik Saha <smksaha@umd.edu>.

Defenders, such as anti-virus vendors, constantly develop new solutions, and adversaries find ways to evade them either by developing novel malware or, more commonly, by making minor but deliberate changes to existing malware (Graziano et al., 2015). In this arms race, because of their efficiency, vendors often prefer static analysis features that are extracted from programs without executing them.

Traditionally, ML models that use static features have required a manual feature engineering step due to the large size and complex nature of programs. More recently, however, researchers have proposed models that can consume whole programs simply as binary files to eliminate this step. Most notably, MalConv (Raff et al., 2018), which uses a convolutional neural network, has achieved state-of-the-art results and pioneered the efforts into applying deep learning advances in malware detection.

Albeit promising, the prospect of deep learning in malware detection opens up a new way for attackers to evade: crafting adversarial examples. Research has shown cases where models such as MalConv are severely vulnerable to minor file perturbations. For example, Suciu et al. have shown that appending carefully crafted bytes to malware files can have over 70% evasion rate against MalConv. Although such attacks have raised doubts about the feasibility of ML for malware detection, it is still unknown whether ML robustness methods against adversarial examples can be applied in this domain. Our work simulates the arms race and studies the problem from both perspectives to answer this question.

Universal Adversarial Patch (UAP) Attacks in Malware Detection.

First, as an adversary, we design a practical and effective attack against MalConv-type models. We develop an algorithm to craft *universal* adversarial patches to address a major shortcoming of prior attacks: being input-specific. In an input-specific attack, the adversary needs to recompute the patch, i.e., the appended bytes, every time they wish to perform the attack on a new sample. This leads to a significant overhead for an adversary considering how frequently anti-virus vendors update their systems to blocklist new samples. In our attack, on the other hand, the patch is computed ahead of time once and then can be used to make any malware sample evasive in constant time. Despite being more constrained, our universal attack achieves an evasion rate comparable to prior input-specific

attacks—98% vs 80%. To our knowledge, this is the first extension of universal patch attacks (Brown et al., 2017) to the byte-level malware detection domain.

Certifiably Robust Malware Detectors. Second, as a defender, we investigate viable solutions to patch attacks, input-specific or universal. Research has shown that most heuristic defenses to adversarial examples are eventually defeated by stronger attacks (Athalye et al., 2018). We believe this trend will likely be more pronounced in malware detection due to real incentives to bypass defenses. This guides us into designing a *certified* defense to provide robustness guarantees regardless of how the attack was created.

In particular, we adapt de-randomized smoothing (Levine & Feizi, 2020a), which was designed primarily for computer vision tasks, to malware detection. The differences between images and binary files as inputs make this adaptation challenging. To this end, we use window ablations as an analogue of band ablations in original de-randomized smoothing. Moreover, we augment the original MalConv to improve its performance and efficiency on ablated files. As a result, we obtain *smoothed-MalConv*: a certifiably robust model to patch attacks. We found that the ‘smoothed-MalConv’ model can not only achieve nearly similar standard accuracy to the ‘original MalConv’ model but also higher robustness. For $10K$ window size, it can get 99.42% standard accuracy and 62.32% certified accuracy. Moreover, only 19.35% and 59.02% adversarial malware generated by UAP and input-specific AP respectively could evade this model. Overall, these results suggest that certified defenses are feasible and promising in malware detection.

To summarize, we make the following contributions:

- We develop a universal variant of a prior input-specific attack that poses a greater threat by granting an adversary the ability to reuse the same patch on multiple malware samples to evade detection (Section 4).
- We show the first adaptation of de-randomized smoothing to malware detection to achieve certified robustness to any patch attack (Section 5).
- We systematically evaluate our attack and defense in tandem to identify defensive trade-offs, limitations and promising directions for future work (Section 6).

2. Related Work

Malware classification. There have been several studies of how malware executables can be classified using machine learning. As early as 2001 (Schultz et al., 2001) proposed a data mining technique for malware detection using three different types of static features. (Nataraj et al., 2011) demonstrated malware family classification technique using the conversion of binary file to an image. Subsequently, CNN-based techniques for malware detection became pop-

ular among security researchers (Kalash et al., 2018) (Yan et al., 2018). Eventually, (Raff et al., 2018) proposed a static classifier, named MalConv, that takes raw byte sequence and detects malware using a convolution neural network. This model is considered as one of the state-of-the-art model and hence we used this as our base model.

Evasion Techniques. Other studies seek to showcase evasion techniques present in the MalConv classifier, such as (Kolosnjaji et al., 2018) into the utilization of a gradient descent attack on the MalConv model. The paper seeks to add small noise at the end of malware binaries to change the model prediction. Though Kolosnjaji reported success in evasion with modifying as little as 1% of the original input bytes, the strategy was computationally heavy. It was improved by (Kreuk et al., 2018) where they implemented the fast gradient sign method (FGSM), taken from (Goodfellow et al., 2015). This work was more improved by taking the vulnerabilities of the model by (Suciu et al., 2019).

Though input-specific patch attack for malware has been heavily explored, universal patch attack is still unexplored. Recently, (Castro et al., 2021) proposed a universal adversarial patch (UAP) attack on malware but their work was on feature-space. When they applied transformation of UAP from feature-space to problem space, they found it less effective for windows malware binaries. In our paper, we address these limitations of existing attack by applying UAP attack on byte-level for windows malware.

De-randomized Smoothing. The computer vision world has had their own problems and solutions to adversarial classification evasion of image based classifiers. Certified robustness against adversarial attacks for image classification was introduced by (Levine & Feizi, 2020a) (Levine & Feizi, 2020b). Recently, (Dosovitskiy et al., 2021) improved this defense strategy by using a vision transformer. Though these defense approaches are being heavily used in image classification based models, it is still untouched by the security community. We leveraged the concept of derandomized smoothing by band ablation and adapted this to our MalConv model. To our knowledge, we are the first to use such defense strategy in malware classification.

3. Background and Notation

In this paper, we used MalConv model by Raff et.al. (Raff et al., 2018) for malware vs benign binary file detection, depicted in figure 1¹. We denote the set of all bytes as $X \subseteq [0, N-1]$, where $N = 256$. A binary file is a sequence of k bytes $x = (x_1, x_2, x_3, \dots, x_k)$, where $x_i \in X$ for all $1 \leq i \leq k$. Note that the length k varies for different files, thus k is not fixed. However, the input vector fed into the network has to be of a fixed dimension. So, we extract the

¹Taken from (Kolosnjaji et al., 2018)

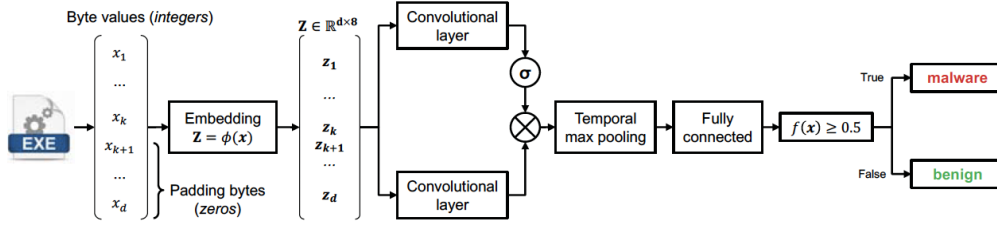


Figure 1. Architecture of MalConv model

first D bytes from x , or pad zeros at the end of x if $k < D$, to fix the input length to D . Each byte x_i is then passed to an embedding layer with embedding matrix $Z \in \mathbb{R}^{D \times 8}$, which generates an embedding vector $z_i = \phi(x_i)$ of 8 elements. This vector is then passed through two convolution layers, using ReLU and sigmoid activation functions respectively. These activation outputs are combined through a gating which performs an element-wise multiplication to mitigate the vanishing gradient problem. The output is then fed into a temporal max pooling layer, followed by a fully connected layer. Finally, a softmax layer calculates the probability of x being a malware or not. In short, MalConv is a CNN-based network preceded by an embedding layer, and let us represent the whole model as $F_\theta : X \rightarrow [0, 1]$ with a set of parameters θ that it learns through training. If the output of $F_\theta(x)$ is greater than 0.5 then the prediction is considered as 1 or malicious, and vice versa.

4. Vulnerability of MalConv to Patch Appending Attacks

4.1. Threat Model

In the cat-and-mouse game between the AV systems and malware authors, the latter try to evade the classifier by generating adversarial malware samples, while the former re-train the model on the newly generated adversarial samples to make the classifier robust. In this paper, we assume that the attacker has full knowledge of the neural network, including the architecture and model parameters, but cannot modify them. Such white-box manner is a realistic and conservative assumption since – ‘security through obscurity’ is not a good approach and it is possible to transfer an attack from a substitute model to a target model even in the black-box setting (Papernot et al., 2016). Having the model, the attacker can modify the input sample in test time and evade the model. So, the goal of the attacker is to generate a patch δ that creates the adversarial malware $x' = x + \delta$, for which $F_\theta(x') < 0.5$, i.e., the classifier predicts it as a benign file. According to our assumption, the attacker knows the classifier model F and its parameters θ here, and can modify the original malware file x .

Though there are multiple attack strategies to evade a machine-learning based malware classifier, there are some limitations in case of binary files. Any change to a byte value in binary file is not possible due to its structural interdependence among adjacent bytes. The Portable Executable (PE) standard (pef, 2022) has a fixed structure for these files, containing a header with file metadata and pointers to the sections of file, followed by sections that contain the actual code and data. For any arbitrary change in such malware file, the file can lose its semantics, i.e. malicious functionality, in the worst case, the file can get corrupted.

Recent works (Kolosnjaji et al., 2018) (Kreuk et al., 2018) (Suciu et al., 2019) suggest append-based patch attack strategies to address this limitation. In such attacks, a patch δ , i.e. sequence of bytes, is appended at the end of the malware binary files since they are not within the defined boundaries of the PE files. Thus, the addition of patches does not have any impact on the semantics of malware but is enough to evade the classifier model. So, the attacker can generate such patches and evade the model when he has full access to the model. In this paper, we have followed the same threat model and implemented the patch-append attack for both the cases – input-specific and universal.

4.2. Input-specific Patch Attack

There are multiple ways to perform append attack on malware files. The first append attack on MalConv model was presented by (Kolosnjaji et al., 2018). In their work, they demonstrated random append and gradient append, and showed gradient append performs significantly better than the former one. However, in gradient append strategy the convergence time grows linearly with the number of appended bytes. So, we used the FGSM (Fast Gradient Sign Method) that was first proposed by (Goodfellow et al., 2015). Such FGSM attack has been adopted for malware perturbation by (Kreuk et al., 2018). However, we follow an advanced approach that was proposed by (Suciu et al., 2019) demonstrated in Algorithm 1.

In this attack, we start by appending random bytes of $numBytes$ size at the end of original malware sample x_0 .

```

function EmbeddingMapping ( $e_x$ )
     $e \leftarrow \text{ARRAY}(256)$ 
    for  $byte$  in  $0 \dots 255$  do
         $e[byte] \leftarrow \text{GetEmbeddings}[byte]$ 
    end for
    for  $i$  in  $0 \dots |e_x|$  do
         $x^*[i] \leftarrow \text{argmin}_{b \in 0 \dots 255} (||e_x[i] - e[b]||_2)$ 
    end for
    return  $x^*$ 
end function
    
```

Algorithm 1 The FGSM Append attack

```

function FGMAPPEND( $x_0, numBytes, \epsilon$ )
     $x_0 \leftarrow \text{PadRandom}(x_0, numBytes)$ 
     $e \leftarrow \text{GetEmbeddings}(x_0)$ 
     $e_p \leftarrow \text{GradientAttack}(e, \epsilon)$ 
    for  $i$  in  $|x_0| \dots |x_0| + numBytes - 1$  do
         $e[i] \leftarrow e_p[i]$ 
    end for
     $x^* \leftarrow \text{EmbeddingMapping}(e)$ 
    return  $x^*$ 
end function

function GradientAttack ( $e, \epsilon$ )
     $e_u \leftarrow e - \epsilon * \text{sign}(\nabla_l(e))$ 
    return  $e_u$ 
end function
    
```

Since back-propagation of gradient is not possible on embedding layer, we calculate the embedding representation e for x_0 and run the FGSM on e . This method updates the each value of e by a pre-specified amount ϵ depending on the sign of the gradient ∇_l . In this paper, we used L_∞ as our distance metric. For the non-differentiability of embedding layer, we mapped the updated embedding value to the byte value using L_2 distance metric. We experimented with nearest neighbor and inverse multiplication of embedding matrix, and found that different approach does not affect the evasion rate significantly. We have discussed the performance in 6.3.1.

4.3. Universal (Input-agnostic) Patch Attack

Besides input-specific patch attack, we implemented a universal attack strategy that is more-realistic. For this attack, our goal was to generate a universal patch $x_{universal}$ of size $numBytes$ that can be appended at the end of any malware sample x , generating x' that results into $F_\theta(x') < 0.5$. The detailed algorithm is shown in 2.

For this attack, we started with generating random patch-embedding e_{init} and appended them at the end of the embedding of multiple malware binaries from X set. Then the perturbation for the embedding is generated just like 4.2.

Algorithm 2 The Universal FGSM Append attack

```

function UniversalPatch( $X, numBytes, \epsilon$ )
     $e_{init} \leftarrow \text{Random}[1, numBytes]$ 
    for  $i$  in  $0 \dots |X|$  do
         $e \leftarrow \text{PERTURB EMBEDDING}(x_i, e_{init}, \epsilon)$ 
         $e_{list}.append(e)$ 
    end for
     $e_{universal} \leftarrow \text{avg}(e_{list})$ 
     $x_{universal} \leftarrow \text{EmbeddingMapping}(e_{universal})$ 
    return  $x_{universal}$ 
end function

function PerturbEmbedding( $x_0, e_0, \epsilon$ )
     $e_x \leftarrow \text{GetEmbeddings}(x_0)$ 
     $e \leftarrow \text{Append}(e_x, e_0)$ 
     $e_p \leftarrow \text{GradientAttack}(e, \epsilon)$ 
    return  $e_p[|x_0| : |x_0| + |e_0|]$ 
end function

function GradientAttack( $e, \epsilon$ )
     $e_u \leftarrow e - \epsilon * \text{sign}(\nabla_l(e))$ 
    return  $e_u$ 
end function
    
```

Instead of directly mapping the bytes from the embedding, we collect the perturbed embedding for all malware files and take the average which can be denoted as the embedding representation of the universal patch. Then the mapping of this embedding representation to byte level gives the universal patch that can be used later for evasion. We tested our generated universal patch on new diverse unseen malware and the performance details can be found in 6.3.2.

5. Enabling De-randomized Smoothing for Byte Inputs

Defensive Assumptions. we assume that the AV defenders do not know the exact attack strategy of the attackers. Though the patch is appended at the end of the file, the defenders assume that the patch can be anywhere in the file. The intuition of taking such a conservative assumption is – if a classifier model is robust against any patch append attack, it should be robust against patches that are only appended at the end of the file too. So, the goal of the defender is to – create a model G_θ that can detect any adversarial malware x' that was generated by adding the patch δ anywhere of it.

For certified defense against the adversarial patch attack, smoothed vision models have long been used in the vision domain. However, such defense method is still untouched by malware community. Since the malware detection problem cannot be directly mapped to typical vision problems, we had to adapt the smoothing strategy in some ways.

Unlike images, our input samples are one-dimensional sequence of bytes, which makes them incompatible with com-

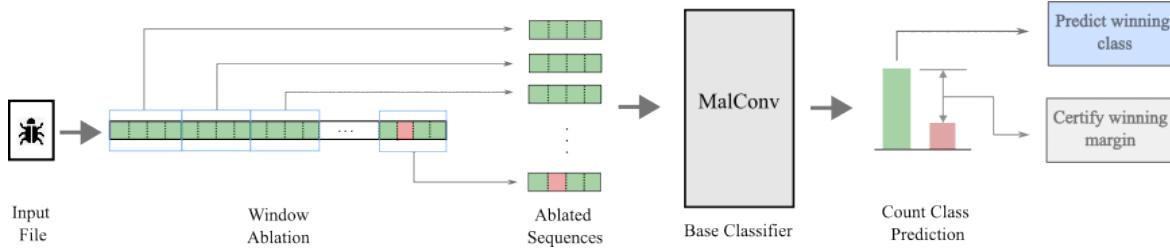


Figure 2. smoothed-MalConv Model

mon ablations, e.g., column, row, block ablations, etc., applied in vision. So, we came up with the ‘window ablation’ strategy where we divided the input sample into multiple contiguous sequences of the same size. If the input length of MalConv model is L , and the size of ‘window ablation’ is w , then there will be $\lceil \frac{L}{w} \rceil$ ablated sequences of length w resulting into the ablated sequence set $S(x)$ (we pick such w that L is divisible by it). So, even if an attacker perturbs a byte file with a patch of size p , it can intersect at most $\Delta = \lceil \frac{p}{w} \rceil + 1$ ablated sequences. Since a patch can only modify a limited number of ablated sequences, it cannot directly change the decision of the classifier model. This intuition motivated us to use such defense strategy for the malware classification model.

We train the MalConv model as the base classifier, changing its input dimension to w so that it is compatible with the ablated sequences of size w . Then the resulting ‘smoothed-MalConv’ model returns the most frequent predicted class over the ablated sequence set $S(x)$. Specifically, for an input file x , ablated sequence set $S(x)$, and MalConv model F_θ , the ‘smoothed-MalConv’ model G_θ can be defined as:

$$G_\theta(x) = \arg \max_c n_c(x)$$

where,

$$n_c(x) = \sum_{x' \in S(x)} I\{F_\theta(x') = c\}$$

denotes the number of ablated sequences that were predicted class c . The percentage of file that are correctly classified by the ‘smoothed-MalConv’ G_θ is the ‘standard accuracy’.

We can call this ‘smoothed-MalConv’ model certifiably robust on an ablated sequence set if the number of prediction for correct class exceeds the other one by a large enough margin. This large margin makes it impossible for an attacker to change the prediction of the smoothed classifier since a patch can only modify $\Delta = \lceil \frac{p}{w} \rceil + 1$ ablated sequences. Mathematically, the ‘smoothed-MalConv’ model G_θ is certifiably robust on input x for predicting class c if:

$$n_c(x) > \max_{c' \neq c} n_{c'}(x) + 2\Delta$$

Since our problem is a binary classification problem, this

can be rewritten as for predicting a malware file as malware:

$$n_m(x) > n_b(x) + 2\Delta \quad (1)$$

where, $n_m(x)$ and $n_b(x)$ are the number of ablated sequences predicted as malware and benign by the ‘smoothed-MalConv’ model, respectively. We represent an overview of our strategy in Figure 2.

We found that our ‘smoothed-MalConv’ performs quite well on detecting the adversarial malware that were generated by using both universal and input-specific adversarial patch. Performance details can be found in 6.4.

6. Evaluation

6.1. Dataset

Since there are many different families of malware, it is important to train on all of them. On the other hand, just getting binaries from Microsoft can be disastrous because the model may determine that a file is benign if the binaries were signed by Microsoft. This is due to the fact that many Windows executable contains strings indicating that they were signed by Microsoft. So, gathering large amount of diverse malicious and benign executable binaries was very important for this work.

For malware files, most released datasets list the hash and features they extracted from the files. However, in this work, our machine learning model ingests the binaries of files, so this is not useful. So, we collected malware binary executables from VirusShare, Microsoft Malware Classification Challenge (BIG 2015) (mic, 2015) and Dike Datasets (dik, 2022). It was even more difficult to gather benign files. For privacy reasons, many sources do not release the binary executable of benign files. The method chosen in this project was to crawl popular websites, e.g., SourceForge, CNET, Net.exe, etc., to download the Windows binaries.

As seen in Table 1 and 2, multiple sources were used to gather large amounts of binary files. In total, 535,137 malicious files and 15,568 benign files were collected. As shown by the order of magnitude difference, it is easier to collect malicious files than benign as they are a big area of study. But it is important to train a model with balanced

dataset to not skew it. Eventually, we created a balanced dataset of 13K samples with equal number of malware and benign binaries for the training and testing purpose.

Source	Number of Binaries
Virus Share	524,296
Microsoft Malware Classification Challenge (BIG 2015) (mic, 2015)	10,868
Dike Dataset (dik, 2022)	10,841
Total	535,137

Table 1. Dataset of the Malicious Files

Source	Number of Binaries
SourceForge	7,865
CNET	3,661
Net	2,534
Softonic	1,152
DikeDataset	1,082
Netwindows	185
Manually Obtained from Windows OS	89
Total	15,568

Table 2. Dataset of the Benign Files

6.2. Model Performance

We first created a static malware classifier based on MalConv (Raff et al., 2018). MalConv was chosen because it is a commonly used, state-of-the-art malware classifier. It takes binary executable file as input and outputs a decision, 0 or 1, for benign or malware, respectively.

We created multiple models based on randomly selected binaries from our data-set. Finally, we took the one that was trained on a set of 13,040 files, a balanced data-set of benign and malware binary files. We use this same model as the target model for attack and as the base classifier for defense strategy. Implementation details of training the model can be found in the appendix A.1.

Evaluation. We found the MalConv model to be highly accurate. After training, we evaluated the model on a test set of 1000 samples and got 97.9% test accuracy. The overall accuracy on the full dataset was 98.15%.

6.3. Attacks

6.3.1. ADVERSARIAL PATCH ATTACK

Our next step was to create an attack to evade the Malconv model. Based on existing work (Suciu et al., 2019), we applied the FGM Append attack demonstrated in Algorithm 1. This works by adding a small patch to a malware file

to evade the static classifier. We randomly collected 200 malwares (outside of Train-set) and applied the attack with different pad percentage. The FGSM was run for 10 iterations for each sample by setting the step size ϵ as 0.5.

Our results are shown in Table 3. At first, we generated adversarial patch just adding a patch of 1% of the file size, and modifying that. So, for a file size of 2MB, the patch size would be of $\sim 20KB$ only. Even with such a small patch, we achieved 94.3% evasion rate. We got even higher evasion rate of 98.4% when we increased the pad percentage to 5%.

Pad Percent	Total	Bytes Addable	Evaded	Evasion Rate
1%	200	123	116	94.3%
5%	200	123	120	98.4%

Table 3. Evasion Rate for Input-specific Adversarial Patch Attack

6.3.2. UNIVERSAL ADVERSARIAL PATCH ATTACK

Instead of creating a custom patch for a particular malware file everytime, a universal adversarial patch (UAP) can be used on multiple malware files in constant time. This allows an adversary to efficiently create multiple malicious files that can evade detection. To the best of our knowledge, this is the first time a universal adversarial patch attack is applied on the byte level. We implemented this through a similar process to the FGSM attack, but taking the average perturbation on multiple samples.

To carry out this attack, we took 200 malware files that were not seen by the model in training phase and divided them into two sets, one to generate the universal adversarial patch, and other to test. We generated our universal patch by running the Algorithm 2 on the first set. The patch length was set to 10k bytes or 4% of the original input files size (40KB in disk size). This generated universal patch was tested on the second set, and we made sure that the samples in this set are unseen to the both parties – model and attacker. After adding this universal patch at the end of these malwares, we fed them to the MalConv model for prediction. As shown in Table 4, we got 80% evasion accuracy on the second set. This shows that this attack is very viable and scalable in large scale.

	First Set	Second Set
Total Files	150	50
Bytes Addable	93	30
Evaded	79	24
Evasion Rate	84.95%	80%

Table 4. Evasion Rate for Universal Adversarial Patch Attack

6.3.3. LIMITATIONS OF ATTACK

Though both the input-specific and the universal adversarial patch attack are very successful in evading the MalConv model, we want to acknowledge some of the limitations of our attack. Firstly, here the attacker has to have the full-knowledge of the model, i.e. white-box attack. Without full-knowledge, it is not possible to run FGSM attack. For black-box setting, one work-around can be using a similar model as unknown-target model to generate the adversarials. However, it does not ensure the evasion since transferability is not guaranteed in adversarial machine learning. Secondly, if the file size already exceeds the input size of the MalConv model, then the append-based attacks do not work. Finally, if the UAP is made publicly-available, the AV systems can just update themselves against the patch.

6.4. Defense with De-randomized Smoothing

For ablation, we used ‘window ablation’ strategy to adapt the band smoothing from (Levine & Feizi, 2020a) (recall from 5). We experimented with different ‘window ablation’ sizes, e.g., 62.5K, 50K, 25K, and 10K. For each experiment, the input dimension and the number of base classifiers had to be changed to be compatible with the dimension of the binary file (details can be found in Appendix A.2).

We evaluated the standard accuracy and certified accuracy of our ‘smoothed-MalConv’ model for different sets of samples. Table 5 represents such five sets. Here, the ‘Clean Samples’ set consists of all malware and benign files from the training set (total 13K samples), and we got 99.59% standard accuracy in this set. The ‘Original Malware’ set contains only the malware from ‘Clean Sample’ set that has not been perturbed yet.

Moreover, to evaluate the robustness of our ‘smoothed-MalConv’ model, we generated three universal patches of different sizes (20K, 10K, 5K) attacking the ‘original-MalConv’ model. These adversarial samples are generated using the same strategy described in 4.3. Then we evaluated the ‘smoothed-MalConv’ model against these samples and found that the model can detect adversarial samples generated using UAP in 72% ~ 93% cases.


Intuitively, the adversarial attack is weaker when a smaller size is assumed for the adversarial patch and thus higher standard accuracy and certified accuracy of defenses may be obtained. This is confirmed in Table 5, where we see that in every row, both standard and certified accuracy increase when considering smaller adversarial patches for malware: All of the models have the highest accuracy for UAP = 5K. Notably, smoothed-MalConv with $w = 62.5K$ is expected to have 0% certified accuracy because theoretically, a patch can intersect with two out of a total of four ablated sequences and so n_m has to be greater than $2\Delta (= 4)$ in

order to contribute to certified accuracy, which is impossible in this case (see equation 1 for details). On the other hand, in columns of Table 5, the certified accuracy increases as we decrease the window size w . Such a trend of certified accuracy originates from the increased length of ablated sequences associated with reduced window size (see Appendix B for more insights).


Moreover, we evaluated the robustness of ‘smoothed-MalConv’ against input-specific attacks and found that it offers stronger robustness than ‘original-MalConv’ as well, as shown in Table 6. Notably, ‘smoothed-MalConv’ also offers clean accuracy that is comparable to and often higher than the original MalConv, indicating a much better solution balancing performance and robustness.

6.5. Data Visualization

Several data visualizations exist for examining at a deeper level how machine learning classifiers behave. Taking the MalConv model that was trained, we created two data visualizations using t-Distributed Stochastic Neighbor Embedding (t-SNE) for better insight.

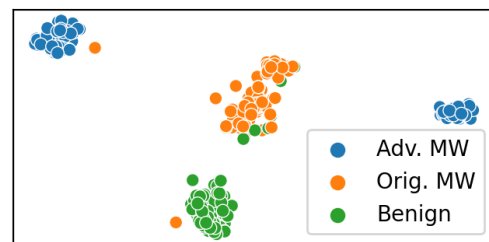

(a) Benign vs. Malware vs. Adversarial Malware

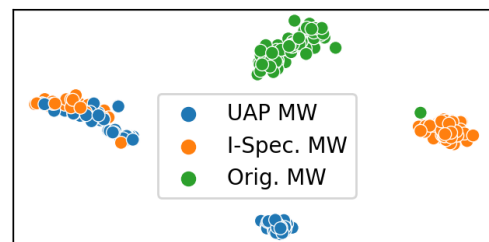

(b) Original Malware vs. Adversarial Malware (UAP) vs. Adversarial Malware (Input-specific)

Figure 3. t-SNE plotting on outputs from penultimate layer

t-SNE. t-SNE is a method of reducing the dimensions of a dataset, but it is a non-linear transformation, and is non deterministic. It can however, help model more complex interactions in the data.

At first, we randomly selected some benign, original malware and their adversarial version generated using input-specific patch. We fed these samples into our ‘original Mal-

Adversarial Robustness of Learning-based Static Malware Classifiers

Model	Standard Accuracy (Certified Accuracy)				
	Clean Samples (Patch Size = 20K)	Original Malware (Patch Size = 20K)	Adversarial Malware		
			UAP=20K	UAP=10K	UAP=5K
smoothed-ViT ($w = 50K$)	68.73% (28.26%)	54.4% (5.31%)	29.03% (5.38%)	33.33% (6.45%)	37.63% (6.45%)
smoothed-MalConv ($w = 62.5K$)	99.59% (0%)	99.62% (0%)	81.72% (0%)	89.25% (0%)	92.47% (0%)
smoothed-MalConv ($w = 50K$)	99.45% (36.04%)	99.29% (45.23%)	79.57% (5.38%)	89.25% (5.38%)	91.4% (5.38%)
smoothed-MalConv ($w = 25K$)	97.91% (49.03%)	97.61% (62.62%)	72.04% (35.48%)	86.02% (39.78%)	89.25% (40.86%)
smoothed-MalConv ($w = 10K$)	99.42% (62.32%)	99.45% (76.44%)	80.65% (44.09%)	86.02% (61.29%)	89.25% (65.59%)

Table 5. Standard and Certified Accuracy of Models

Model	Misclassification Rate on Clean Samples	Evasion Rate	
		Universal AP (20K)	Input-specific AP (1%)
original-MalConv	1.85%	83.74%	94.3%
smoothed-MalConv ($w = 62.5K$)	0.41%	18.28%	66.39%
smoothed-MalConv ($w = 50K$)	0.55%	20.43%	81.97%
smoothed-MalConv ($w = 25K$)	2.09%	27.96%	91.8%
smoothed-MalConv ($w = 10K$)	0.58%	19.35%	59.02%

Table 6. Comparison between original-MalConv and smoothed-MalConv

Conv’ model and extracted the output from the penultimate layer. Then these outputs were reduced to two-dimensional space using t-SNE. Clustering groups appear in the plotting of Figure 3a. Interestingly, the adversarial malware falls into two distinct groups whereas we expected to have one. This implies that – the generation of adversarial malware by FGSM append attack can go into two directions. This might help us in future to design more robust model that can identify such groups that are different from original malware and benign. Moreover, some benign files (green color in Figure 3a) can be noticed in the cluster of original malware which indicates the false-positive cases of the MalConv model.

We plotted another graph for original malware, adversarial malware generated by UAP and input-specific AP following the same setup (see Figure 3b). We expected to have 3 clusters in this case. Surprisingly, we discovered another cluster consisted of both type of adversarial malware (the leftmost cluster in Figure 3b). This indicates that some of the input-specific patch and universal patch generated malware has nearly similar representation, which might be the result of using FGSM for both of the attacks.

7. Conclusion

In this paper, we explore the effectiveness of modern machine learning-based static malware classifiers against patch based attacks. Building on previous research, we apply both input-specific patch attack and universal patch attack

against the MalConv malware classifier. We demonstrate that MalConv has had 97.9% success rate in detecting non-adversarial malware. Applying input-specific and a universal patch based attacks, has allowed 94.3% and 83.74% of adversarial malware to evade detection, respectively. To the best of our knowledge, this is the first time universal patch attacks have been implemented for malware evasion on byte level, as most prior research focuses on hand-crafted features in malware detection. The novel application of de-randomized smoothing to create a new robust model, named ‘smoothed-MalConv’ has allowed us to detect 72% ~ 93% of adversarial malware, a significant improvement an undefended model. This strategy is also effective against input-specific patch attacks, as well.

We would like to conclude by highlighting several areas and future directions our work identifies:

- Towards a more realistic threat model, patch attacks need to be transferable to detectors unknown to the adversary;
- Incorporating recent defenses from computer vision other than de-randomized smoothing into MalConv models;
- Additional detection and reasoning for the different adversarial malware clusters first seen in our data visualizations.

Malware detection is inherently is an arms-race and we believe our work will spark further research by developing an effective and practical attack; and by adapting a powerful certified defense to this domain, which lacks an established defense to prevent patch attacks.

References

- Microsoft Malware Classification Challenge (BIG 2015). <https://www.kaggle.com/c/malware-classification>, 2015.
- Dike Dataset. <https://github.com/iosifache/DikeDataset>, 2022.
- Microsoft PE format. <https://learn.microsoft.com/en-us/windows/win32/debug/pe-format>, 2022.
- Athalye, A., Carlini, N., and Wagner, D. A. Obfuscated gradients give a false sense of security: Circumventing defenses to adversarial examples. In Dy, J. G. and Krause, A. (eds.), *Proceedings of the 35th International Conference on Machine Learning, ICML 2018, Stockholm, Sweden, July 10-15, 2018*, volume 80 of *Proceedings of Machine Learning Research*, pp. 274–283. PMLR, 2018. URL <http://proceedings.mlr.press/v80/athalye18a.html>.
- Brown, T. B., Mané, D., Roy, A., Abadi, M., and Gilmer, J. Adversarial patch. *CoRR*, abs/1712.09665, 2017. URL <http://arxiv.org/abs/1712.09665>.
- Castro, R. L., Muñoz-González, L., Pendlebury, F., Rodosek, G. D., Pierazzi, F., and Cavallaro, L. Realizable universal adversarial perturbations for malware. *CoRR*, abs/2102.06747, 2021. URL <https://arxiv.org/abs/2102.06747>.
- Dosovitskiy, A., Beyer, L., Kolesnikov, A., Weissenborn, D., Zhai, X., Unterthiner, T., Dehghani, M., Minderer, M., Heigold, G., Gelly, S., Uszkoreit, J., and Houshy, N. An image is worth 16x16 words: Transformers for image recognition at scale. In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net, 2021. URL <https://openreview.net/forum?id=YicbFdNTTy>.
- Goodfellow, I. J., Shlens, J., and Szegedy, C. Explaining and harnessing adversarial examples. In Bengio, Y. and LeCun, Y. (eds.), *3rd International Conference on Learning Representations, ICLR 2015, San Diego, CA, USA, May 7-9, 2015, Conference Track Proceedings*, 2015. URL <http://arxiv.org/abs/1412.6572>.
- Graziano, M., Canali, D., Bilge, L., Lanzi, A., and Balzarotti, D. Needles in a haystack: Mining information from public dynamic analysis sandboxes for malware intelligence. In Jung, J. and Holz, T. (eds.), *24th USENIX Security Symposium, USENIX Security 15, Washington, D.C., USA, August 12-14, 2015*, pp. 1057–1072. USENIX Association, 2015. URL <https://www.usenix.org/conference/usenixsecurity15/technical-sessions/presentation/graziano>.
- Kalash, M., Rochan, M., Mohammed, N., Bruce, N. D. B., Wang, Y., and Iqbal, F. Malware classification with deep convolutional neural networks. In *9th IFIP International Conference on New Technologies, Mobility and Security, NTMS 2018, Paris, France, February 26-28, 2018*, pp. 1–5. IEEE, 2018. doi: 10.1109/NTMS.2018.8328749. URL <https://doi.org/10.1109/NTMS.2018.8328749>.
- Kolosnjaji, B., Demontis, A., Biggio, B., Maiorca, D., Giacinto, G., Eckert, C., and Roli, F. Adversarial malware binaries: Evading deep learning for malware detection in executables. In *26th European Signal Processing Conference, EUSIPCO 2018, Roma, Italy, September 3-7, 2018*, pp. 533–537. IEEE, 2018. doi: 10.23919/EUSIPCO.2018.8553214. URL <https://doi.org/10.23919/EUSIPCO.2018.8553214>.
- Kreuk, F., Barak, A., Aviv-Reuven, S., Baruch, M., Pinkas, B., and Keshet, J. Deceiving end-to-end deep learning malware detectors using adversarial examples. *CoRR*, abs/1802.04528, 2018. URL <http://arxiv.org/abs/1802.04528>.
- Levine, A. and Feizi, S. (de)randomized smoothing for certifiable defense against patch attacks. In Larochelle, H., Ranzato, M., Hadsell, R., Balcan, M., and Lin, H. (eds.), *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*, 2020a. URL <https://proceedings.neurips.cc/paper/2020/hash/47ce0875420b2dbacfc5535f94e68433-Abstract.html>.
- Levine, A. and Feizi, S. Robustness certificates for sparse adversarial attacks by randomized ablation. In *The Thirty-Fourth AAAI Conference on Artificial Intelligence, AAAI 2020, The Thirty-Second Innovative Applications of Artificial Intelligence Conference, IAAI 2020, The Tenth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2020, New York, NY, USA, February 7-12, 2020*, pp. 4585–4593. AAAI Press, 2020b. URL <https://ojs.aaai.org/index.php/AAAI/article/view/5888>.
- Nataraj, L., Karthikeyan, S., Jacob, G., and Manjunath, B. S. Malware images: Visualization and automatic classification. In *Proceedings of the 8th International Symposium on Visualization for Cyber Security, VizSec '11, New York, NY, USA, 2011*. Association for Computing Machinery. ISBN 9781450306799. doi: 10.

1145/2016904.2016908. URL <https://doi.org/10.1145/2016904.2016908>.

Papernot, N., McDaniel, P. D., and Goodfellow, I. J. Transferability in machine learning: from phenomena to black-box attacks using adversarial samples. *CoRR*, abs/1605.07277, 2016. URL <http://arxiv.org/abs/1605.07277>.

Raff, E., Barker, J., Sylvester, J., Brandon, R., Catanzaro, B., and Nicholas, C. K. Malware detection by eating a whole EXE. In *The Workshops of the The Thirty-Second AAAI Conference on Artificial Intelligence, New Orleans, Louisiana, USA, February 2-7, 2018*, volume WS-18 of *AAAI Technical Report*, pp. 268–276. AAAI Press, 2018. URL <https://aaai.org/ocs/index.php/WS/AAAIW18/paper/view/16422>.

Schultz, M. G., Eskin, E., Zadok, E., and Stolfo, S. J. Data mining methods for detection of new malicious executables. In *2001 IEEE Symposium on Security and Privacy, Oakland, California, USA May 14-16, 2001*, pp. 38–49. IEEE Computer Society, 2001. doi: 10.1109/SECPRI.2001.924286. URL <https://doi.org/10.1109/SECPRI.2001.924286>.

Suciu, O., Coull, S. E., and Johns, J. Exploring adversarial examples in malware detection. In *2019 IEEE Security and Privacy Workshops, SP Workshops 2019, San Francisco, CA, USA, May 19-23, 2019*, pp. 8–14. IEEE, 2019. doi: 10.1109/SPW.2019.00015. URL <https://doi.org/10.1109/SPW.2019.00015>.

Yan, J., Qi, Y., and Rao, Q. Detecting malware with an ensemble method based on deep neural network. *Secur. Commun. Networks*, 2018:7247095:1–7247095:16, 2018. doi: 10.1155/2018/7247095. URL <https://doi.org/10.1155/2018/7247095>.

A. Experimental Setup

A.1. MalConv Model


We followed the same implementation as original paper (Raff et al., 2018) where the vocab size in embedding layer is 256, the window size and number of filters in convolution layers are 500 and 128, respectively. We changed the input length of the model to 250K from 200K so that it can cover more files. We used the ‘Adam’ optimizer and ‘binary-cross entropy’ loss function for our model implementation, and trained it for 50 epochs with 512 batch size. We saved the best model with respect to the validation accuracy.

A.2. ‘smoothed-MalConv’ Model


We used the ‘original MalConv’ as the base classifier, and changed its input dimension from 250K to w , i.e., the ablation size. For example, when $w = 50K$, there are 5 ablated sequences in the ablation set $S(x)$ and we trained 5 MalConv models of input dimension w for each ablated sequence. The labels for the ablated sequences are the same as the original label of the file.

We did not change the architecture and any parameters, e.g., vocab size, window size, number of filters, etc., of the ‘original MalConv’ model. While training, we used Adam optimizer and ‘binary-cross entropy (without reduction)’ as the loss function. We trained ‘smoothed-MalConv’ for four different ablation sizes. All the models were trained for 10 epochs with a batch size of 512.


B. De-randomized Smoothing Defense

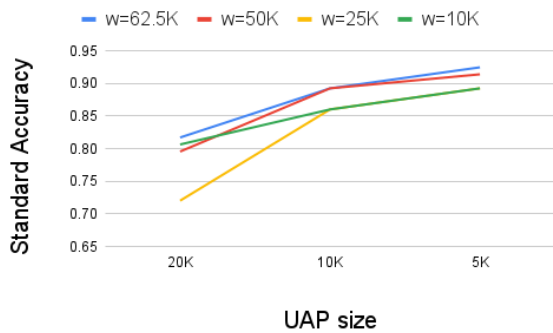


(a) Standard Accuracy vs UAP size

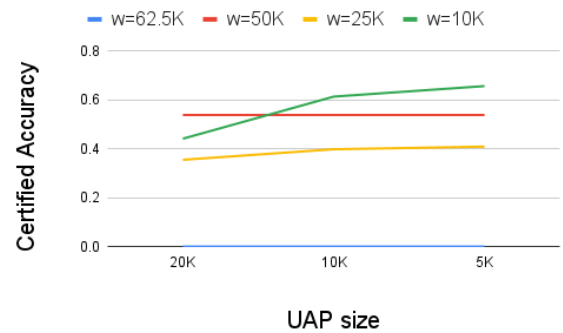

(b) Certified Accuracy vs UAP size

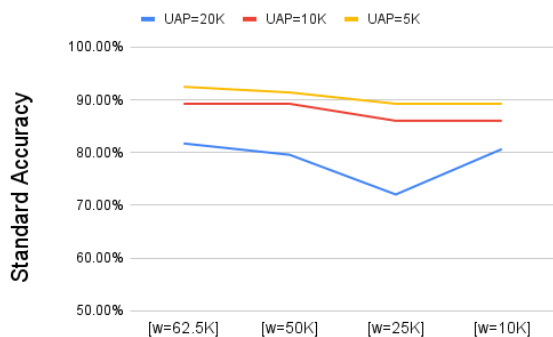

(c) Standard Accuracy vs Window size

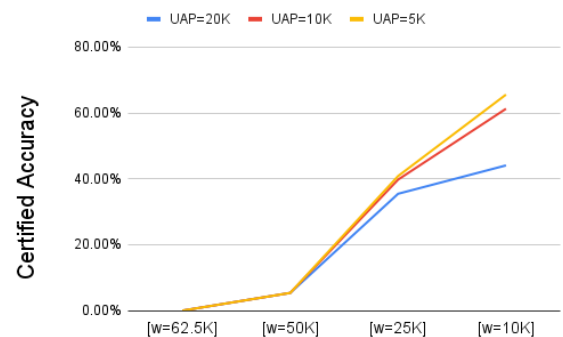

(d) Certified Accuracy vs Window size

Figure 4. Line Charts for Standard and Certified Accuracy of ‘smoothed-MalConv’ model