

Role of a fractal shape of the inclusions on acoustic attenuation in a nanocomposite

H. Luo,¹ Y. Ren,² A. Gravouil,¹ V. M. Giordano,³ Q. Zhou,² H. Wang,² and A. Tanguy^{1,4, a)}

¹⁾ *Univ Lyon, INSA-Lyon, CNRS UMR5259, LaMCoS, F-69621, France*

²⁾ *State Key Laboratory of Solidification Processing, Center of Advanced Lubrication and Seal Materials, Northwestern Polytechnical University, Xi'an, Shaanxi 710072, PR China*

³⁾ *Institut Lumière Matière, UMR 5306 Université Lyon 1-CNRS, F-69622 Villeurbanne Cedex, France*

⁴⁾ *ONERA, University Paris-Saclay, Chemin de la Hunière, BP 80100, 92123, Palaiseau, France.*

(Dated: 8 January 2022)

Nanophononic materials are promising to control the transport of sound in the GHz range and heat in the THz range. Here we are interested in the influence of a dendritic shape of inclusion on acoustic attenuation. We investigate a Finite Element numerical simulation of the transient propagation of an acoustic wave-packet in 2D nanophononic materials with circular or dendritic inclusions periodically distributed in matrix. By measuring the penetration length, diffusivity, and instantaneous wave velocity, we find that the multi-branching tree-like form of dendrites provides a continuous source of phonon-interface scattering leading to an increasing acoustic attenuation. When the wavelength is far less than the inter-inclusion distance, we report a strong attenuation process in the dendritic case which can be fitted by a compressed exponential function with $\beta > 1$.

I. INTRODUCTION

Heterogeneous architected materials are of particular interest in engineering applications¹. These are man-made structural materials which have been developed for obtaining ad hoc properties, that cannot be generally found in nature. They are obtained by engineering at different scales the mixing of different materials, either in a random spacial distribution (composite materials) either with the artificial repetition of regular patterns (metamaterials). Depending on their application, the lengthscale of such patterns can span from the nanometer to the macroscopic range, being smaller than, or comparable to, the wavelength of the phenomena that the material is meant to affect.

This concept has indeed been largely exploited for efficiently manipulating long-wavelength acoustic phonons, which assure sound propagation at low frequency, through the introduction in materials of periodic interfaces on a macroscopic scale (phononic crystal, PC)^{2–5}. In recent years, they have attracted increasing attention among the scientific community due to their extraordinary acoustic and elastic wave propagation performances obtained by designing the phase gradient at the sub-wavelength scale, such as negative refraction, waveguiding, cloaking, and band gaps^{6–9}.

Thanks to both engineering and theoretical progresses, they have been introduced also in thermal science, with a microstructure in the nanometer scale. Thermal transport is intimately related to the sound propagation (acoustic transfer) in materials because in insulators

and semi-conductors the main heat carriers are acoustic phonons¹⁰. Specifically, at room temperature heat is mainly carried by phonons with THz frequencies and nanometric wavelengths. As such, a periodic nanostructure has proved to be promising for affecting phonon dispersions and their ability in transporting heat¹¹. It is important to remind here that phonons participate to thermal transport through two different contributions: a propagative one, which depends on phonon mean-free path, heat capacity, velocity and vibrational density of states¹², and a diffusive one, involving the phonon diffusivity rather than the mean-free path and velocity^{13–15}, this latter dominating at higher energies and smaller wavelengths. The propagative contribution can be reduced through the presence of interfaces, which scatter or eventually trap phonons. Depending on the relative importance of the diffusive contribution, in fact, the reduction but also the improvement of thermal conductivity have been reported in different nanostructured systems^{16–18}. Numerous atomistic simulations of out-of-equilibrium phonon transport have also been reported in different systems^{19–27}. Recent works have looked at the phonon dynamics to get a better insight on transport properties and found exotic behaviors such as an energy localization between pores²⁸, asymmetric transport (rectification)²⁹ or the filtering of high frequency phonons³⁰.

It is clear thus, that, depending on the lengthscale at play, the design of the phononic crystals structure contributes directly to the performance of filtering, hindering, and guiding the propagation of acoustic waves (phonons), responsible for the sound propagation when their wavelength is macroscopic, and for thermal transport at room temperature when is nanometric^{23,30–33}.

Many theoretical studies have tried to shed light onto

^{a)} Electronic mail: anne.tanguy@insa-lyon.fr.

the key parameters of the phononic crystals that determine the effect of the interfaces on acoustic and thermal transport. It is worth mentioning that researches on mechanical and geometrical properties of the nano-interfaces are at the core of the design of the structured materials, involving, for example, the shape and dimensions of the inclusion, the contrast of properties between the materials on the two sides of the interfaces. Recently, we have shown that circular interfaces in a 2D nanophononic material affect differently phonons of different wavelengths and it is necessary to look at all phonons relevant for heat transport at a certain temperature, and their perturbed dynamics, for being able to understand thermal conductivity in such nanocomposites^{26,27}. In that work we could highlight that the rigidity contrast between the two phases is a determinant parameter controlling the strength of the scattering which affects the phonons with a wavelength comparable with the nanostructure lengthscale, significantly anticipating the propagative-to-diffusive crossover in an amorphous matrix. A better understanding of the mechanisms at play and the role of the different parameters could be acquired with a more complete and systematic parametric study on the combined effect of rigidity contrast, interface density, nanostructure lengthscale and phonon wavelength. Our results allowed us to identify different transfer regimes (propagative, diffusive, localized or mixed regimes) in an elastic nanophononic 2D crystal and to show that softer inclusions are more efficient for energy attenuation, but rigid inclusions are also able to pin the vibrational energy at specific frequencies³⁴. In addition, the existence of an optimal radius of circular inclusion clearly shows that, instead of monotonously increasing the volume fraction until the percolation effect is dominant, other geometrical parameters of the interface are relevant, such as shape, asymmetry, inclusions inter-distance and interface-to-volume ratio. Finally, when the size of the nanostructure becomes comparable to the wavelength of the excitation, various complex behaviours may occur, that affect the acoustic attenuation with a non monotonous frequency dependence. Among such phenomena are the acoustic resonances of the inclusions, multiple reflections between the inclusions, or the interfacial modes.

In contrast to most work focusing on the periodic circular in 2D (spherical in 3D) interfaces, there are only few investigations conducted with geometrical variations. Firstly, the specific non-aligned arrangement of circular holes (where holes can be considered as the limit of soft inclusion) is reported to have possibly stronger phonon attenuation than the perfectly periodic arrangement. Similarly, the emerging of the gradient-index PCs is meant to control independently the size of each unit hole³⁵. Then, recent experimental studies suggested that the non-circular holes might be more efficient in the thermal conductivity reduction and acoustic attenuation compared to conventional circular ones^{36,37}. For example, pacman-shaped holes showed a 40% reduction of

thermal conductivity compared to circular ones at room temperature, due to the high surface-to-volume ratio and possible additional resonances³⁷. It has been also proposed to optimize the inclusion shape in phononic structures using the homogenized model of strongly heterogeneous elastic composites³⁸, however, this model is limited to simple shapes and topological isomorphism. Topology optimization of metamaterials seems to be a promising alternative^{39,40} but is still limited to the current level of nanotechnology manufacturing.

In this work, we propose to investigate the impact of a complex inclusion shape on acoustic propagation and attenuation at nanometric wavelengths. To this purpose, we have chosen to work on a realistic nanocomposite, as can be naturally obtained using vitrification of some metallic glasses. Specifically, we will work on a $\text{Ti}_{45}\text{Zr}_{25}\text{Nb}_6\text{Cu}_5\text{Be}_{17}\text{Sn}_2$ bulk metallic glass (BMG), which, once produced by casting techniques, exhibits dendrite-phase Titanium precipitates at the micrometric scale, as shown in Fig.1. Bulk metallic glasses are promising structural materials because of their excellent properties such as high yield strength, excellent corrosion resistance, and low stiffness^{41–44}. But at the same time, BMGs lack ductility and always fail in an apparently brittle manner, which seriously limits their applications^{45–48}. Impressively, a larger dendrite-phase dimension offers higher ductility but decreases the yield strength of the composites. It has been proposed that the dendrite inclusions actually suppress the catastrophic failure due to the propagation of shear bands and thus enhance the global plasticity^{49,50}. Also, the alloy compositional design could be employed to modulate the mechanical properties of the BMG, indicating a potential of tuning, for example, the stiffness ratio between the matrix and the dendrite⁵¹. The multi-branches, tree-like geometry of these inclusions is of particular interest for understanding the role of a complex geometry on acoustic attenuation. Compared to the simple shapes, its fractal property determines a remarkably high interface-to-volume ratio, leading to potentially good sound attenuation performance. It is thus an ideal sample for our study.

To have a deep understanding of the role of the dendritic shape inclusion on acoustic attenuation and dynamic properties of the phononic crystal, we have performed finite element simulations of out-of-equilibrium acoustic wave-packet propagation in 2D nanocomposites periodically distributed circular and dendritic inclusions. This has allowed us to establish a direct comparison between simple and complex geometry.

The paper is organized as follows: in the second part, we give a brief introduction on the in-situ formed dendrite phase and we describe how we extract a cluster of dendritic structure from a SEM image; in the third part, we describe how the finite element calculations are performed; in the fourth part, we compare the acoustic attenuation properties in two media containing softer or stiffer inclusions with dendritic and circular shape; finally, we discuss the results and we conclude in the last

part.

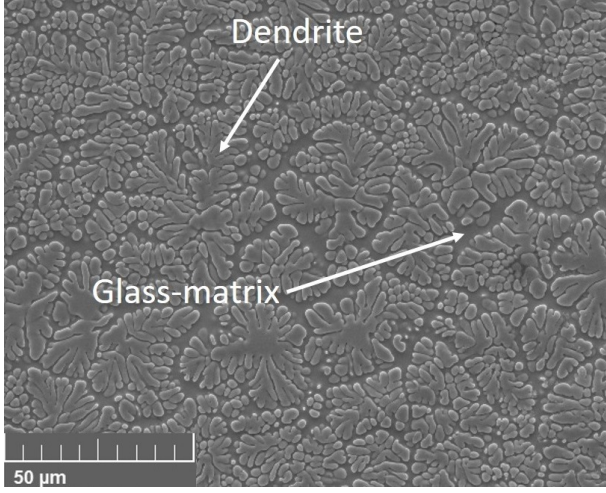


FIG. 1. Cross sectional SEM image of the as-cast $\text{Ti}_{45}\text{Zr}_{25}\text{Nb}_6\text{Cu}_5\text{Be}_{17}\text{Sn}_2$, the dendrite-phase (light gray) distributes homogeneously in the glass-matrix (dark gray).

II. THE DENDRITIC SHAPE OF THE INCLUSIONS

In this section, we will present the preparation of the Ti-based metallic glass containing dense dendrite-phase^{41,51}. Based on the SEM images of the samples, instead of looking at the whole dendrite-phase, we use a representative pattern periodically distributed in our model phononic crystal. As for the mechanical properties of the model, we have chosen to use the same properties as in Ref.³⁴, referring thus to a well known system. This choice is motivated by the possibility to compare wave-packet propagation results previously obtained on circular inclusions with the ones on dendritic inclusions and thus get a direct understanding of the impact of a fractal-like interface shape.

A. Material composition and preparing process

Ingots with nominal composition $\text{Ti}_{45}\text{Zr}_{25}\text{Nb}_6\text{Cu}_5\text{Be}_{17}\text{Sn}_2$ are prepared by arc-melting the mixture of high purity elements ($>99.9\text{wt}\%$) under a Ti-gettered argon atmosphere. The ingots were re-melted at least five times to ensure the homogeneity. Plate samples ($5 \times 20 \times 60$, mm) are prepared by casting into a water-cooled copper mold. The dendrite phase (light gray regions) was found to distribute uniformly within the featureless glass matrix (dark gray regions). Volume fractions of the dendrite phase are analyzed by the Image-Pro Plus software and resulting in a volume fraction $66 \pm 2\%$. The dendrites have an average size (measured as the diameter of the circular approximation

to its shape) of about 30 microns, with a typical single-branch diameter of 3 microns. The size and volume fraction are sensitive to the cooling rate and the alloy composition⁷. Some mechanical properties are given in the Appendix and more details on sample preparation and materials properties can be found in Ref.^{41,51}.

In the following, the exact size of the inclusions will not matter much. We will keep only their shape, and their volume fraction. Thanks to the scalability of our numerical calculations, lengths will be expressed in units of L (the average distance between the inclusions) and frequency in units of $\omega_0 = 2\pi c_L/L$ with c_L the longitudinal wave velocity. The inclusions with a reported diameter of $30 \mu\text{m}$ are not supposed to affect the thermal transport at room temperature, but only acoustic wave propagation at GHz frequencies. But, playing with the exact value of L , it will be possible to consider also the effect of the inclusion shape on thermal transport: for example by choosing $L \approx \text{nm}$, effect on thermal transport at room temperature can be investigated.

B. Reconstruction of the dendritic shape inclusion

In this work, we focus on a cluster of dendritic structures as shown in Fig. 2(1) which is extracted from Fig. 1. It is interesting to focus on this representative zone: its global shape seems to be comparable to a circular inclusion, while its internal tree-like structure may induce different acoustic features. To this aim, a non-dimensional analysis is expected to be carried out by scaling the above cluster of dendrite and the circular inclusion to a quasi-equivalent dimension. As shown in Fig. 2, this cluster of dendrite is encapsulated inside a square block. The square block containing a dendritic inclusion is then used as elementary brick in the finite element simulation.

Referring to the labels in Fig. 2, the imaging procedure from the SEM image to a finite element mesh is: (1) The region of interest (ROI) is selected and extracted from the original SEM image. (2) Using Matlab toolbox Image Laberler, a pixel-level labeling is manually done in which pixels belonging to either the dendritic inclusion or to the matrix are labeled accordingly. Of course there are human factors in the steps of determining the two areas, but we have found that the manual method provides a better result than the tested automatic imaging methods like Canny edge detector⁵², level sets⁵³, region growing⁵⁴, watershed⁵⁵, etc. (3) The binary labeling information is then transformed into a binary image in which redundant parts are removed. The ROI is the white zone and the matrix is the black zone. (4) Contour detection gives accurate interfaces between the dendritic cluster and the matrix, and the width of the interfaces is one pixel. (5) The interfaces are segmented into separate zones, and each zone consists of a closed curve. Here, we have 17 independent zones. (6) To form the final geometry, we sequentially import pixels coordinates of the 17 zones into COMSOL Multiphysics to create interpolation

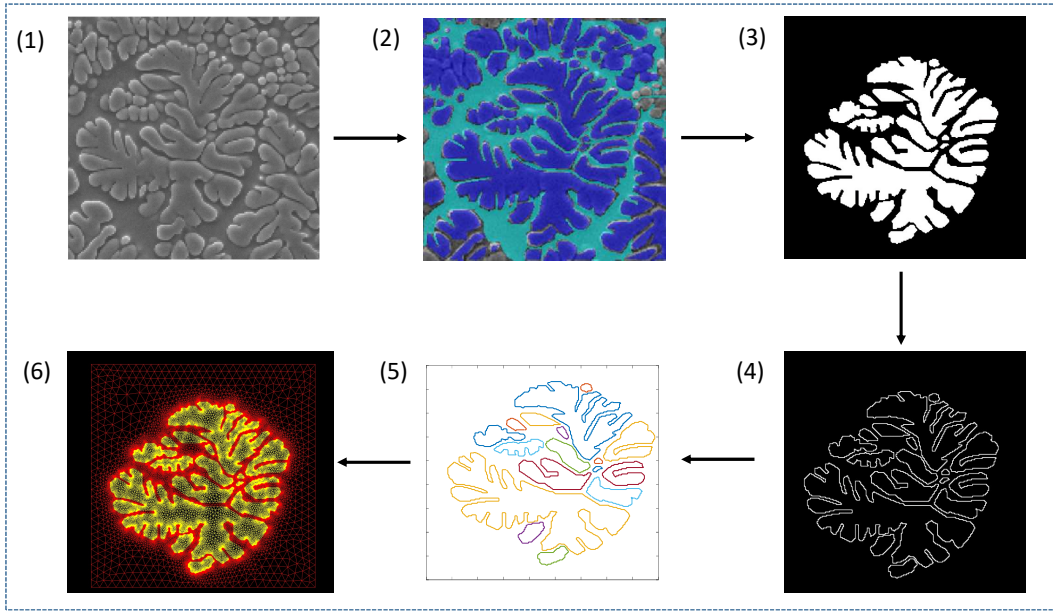


FIG. 2. Flowchart from SEM to the finite element model: (1) Region of interest extracted from SEM image; (2) Pixel-level labeling using Matlab toolbox Image Labeler; (3) Binary image; (4) Contour detection; (5) Independent zone detection; (6) Mesh generation.

curves. Each closed curve creates a part of the dendritic inclusion inside which mechanical properties are homogeneous. The surrounding zone forms the matrix whose mechanical properties are different from the inclusion. Finally, P-1 triangle elements are employed to generate the displayed elementary mesh including both the inclusion and the matrix. It is essential that the number of nodes on the four boundaries of the square are defined *a priori* as the same and the nodes are equally spaced, for the reason of compatibility, given that we will copy and arrange this elementary mesh in the horizontal direction and implement the periodic boundary condition on the upper and lower boundaries as shown in Fig. 3.

C. Volume fraction of the inclusion

In this work, we prepared two models: one with dendritic inclusions, another with circular inclusions used for comparison. Since we are interested in the role of inclusion shape, we must ensure the best possible equivalence of the circular and dendritic inclusions, apart from the interface shape. As discussed previously, all the parameters involved in the material constitutive laws (the elastic moduli here) are scale-invariant, resulting in the same invariance for the whole model. We thus give all lengths in terms of the trivial length L , the distance between the inclusions. Equivalently, the frequency unit is chosen as $\omega_0 = 2\pi c_L/L$ which is used to define the unit time $t_0 = L/c_L$ in the equation of motion. The relative size of the inclusions is then chosen in order to reproduce the data already obtained in Ref.³⁴ for circular inclusions.

As in Ref.³⁴, the apparent diameter of the inclusion is thus chosen here as $5/6 L$. It corresponds to the exact diameter of the circular inclusions, and to the longest axis of the dendritic inclusion. Therefore, the outer contour length is comparable between the two types of inclusions, which can be considered as the primary interface. However, the volume fraction for the dendritic inclusion (shown in Fig.2) and in 2D corresponding to a surface fraction is then measured as 28,35%, while for the circular inclusion it is 54,54%. The latter, which is close to twice the inclusion area of the former, intuitively allows for a more efficient scattering according to the results in Ref.³⁴. The geometrical and material parameters used are summarized in the Tab.I, and materials parameters are in Tab.II.

In the following, we will analyze the role of inclusion shape on acoustic attenuation in periodically arranged nanocomposites. As we are primarily interested to thermal transport, it is possible to scale the dendritic diameter to the nanometric lengthscale, pertinent for thermal transport at room temperature. For $L = 6 \text{ nm}$ for example, as in Ref.³⁴, the reference frequency will be $\omega_0 = 8.34 \text{ THz}$, while for $L = 30 \text{ }\mu\text{m}$, $\omega_0 = 1.67 \text{ GHz}$.

TABLE I. List of inclusion (i) and matrix (m) volume fraction and largest axis for circular and dendritic inclusions

	Circular	Dendritic
$\Phi_i(\%)$	54.54	28.35
$\Phi_m(\%)$	45.46	71.65
Largest axis	$\frac{5}{6}L$	$\frac{5}{6}L$

III. NUMERICAL TOOLS

We used finite element numerical calculations to study the vibrational properties of a 2D semi-infinite elastic system with dendritic and circular inclusions positioned along a cubic lattice. The computational model consists of 9 squares, aligned in the horizontal direction. There is no initial inclusion-free block in this model. The size of each square is defined as L , thus determining the distance between inclusions as $L/6$. The wave-packet is generated imposing a displacement on the left side of the first square around $t = 0$:

$$U(\omega, t) = U_0 \exp\left(-\frac{(t - 3t_0)^2}{2t_0^2}\right) \sin(\omega t) \quad (1)$$

where U_0 is a constant value, ω is the frequency of this quasi-monochromatic excitation, and $t_0 = \frac{3\pi}{\omega}$ is the half period of the excitation. A displacement parallel to the boundary corresponds to a transverse excitation, while the one perpendicular to the boundary to a longitudinal excitation. For the sake of simplicity, we will consider here only longitudinal excitations.

As shown in Fig. 3, periodic boundary conditions (PBCs) are implemented along the vertical direction at the top and bottom of the sample. Perfect Matched Layers (PMLs) are applied on the right side to limit as much as possible waves reflection. The technical details about the boundary conditions and the time integration scheme can be found in appendix in Ref. ³⁴.

Like in our previous works performed on a medium with periodic circular inclusions⁵⁶, the matrix material is linearly elastic with isotropic homogeneous elastic behavior characterized by a typical Young's modulus $E_m = 92.25$ GPa, the mass density $\rho = 2303$ kg/m³ and the Poisson ratio $\nu = 0.347$ ⁵⁷. For the inclusions, the Poisson's ratio is supposed to be the same, while the Young's modulus E_i is taken as another control variable and defined as $E_i = E_m \times \frac{E_i}{E_m}$, this latter being the stiffness ratio 0.2 or 10. Table II summarizes the values of the parameters used in this work:

TABLE II. List of Parameters and Reference dimensions

E_m (GPa)	ν_m	E_i/E_m	ν_i
92.25 ⁵⁶	0.347 ⁵⁶	0.2 or 10	0.347
ρ (kg/m ³)	c_L (m/s)	ω_0 (rad/s)	ω/ω_0
2303 ⁵⁶	7966	8.34×10^{12}	0.3-4.8

IV. ACOUSTIC TRANSPORT IN AN ISOTROPIC HOMOGENEOUS MATERIAL WITH DENDRITIC INCLUSIONS

A set of transient simulations of longitudinal wave-packet propagation is done using FEM for both the medium with dendritic and circular inclusions. From the results, we analyze the envelope of the kinetic energy in

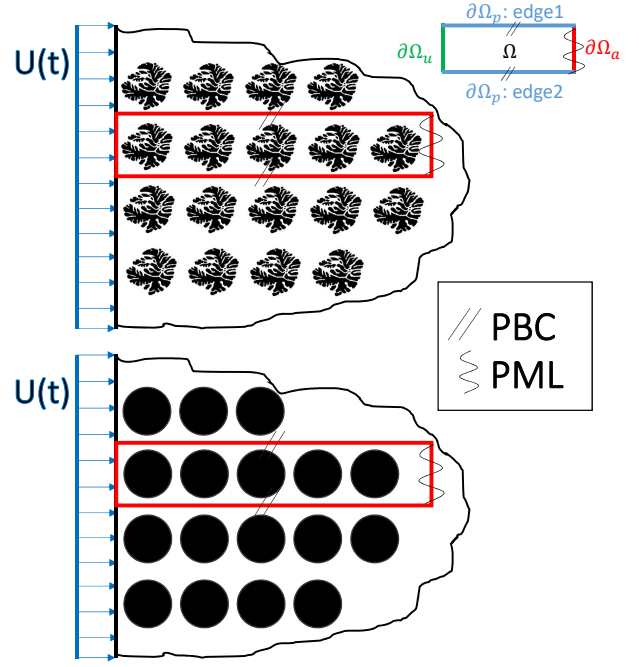


FIG. 3. 2D simulation model of a solid with dendritic (top panel) and circular (bottom panel) inclusions: this semi-infinite solid can be represented by only modeling only the part inside the red rectangle with Periodic Boundary Conditions (PBC) and Perfect Matched Layers (PML) as drawn; Black patterns represent the inclusions. (Ω represents simulation domain, $\partial\Omega$ indicates boundary conditions)

order to identify the attenuation regime. In addition, the penetration length and diffusivity are calculated to compare the attenuation ability for the two types of inclusions. Finally, long-wavelength and instantaneous sound speeds are estimated for some representative cases. In the following, the kinetic energy E_k is normalized by the maximum value at $x = 0$.

A. Envelope of the kinetic energy

As said before, the wave-packet is created by imposing a displacement on the left side of the sample. Its propagation is then followed along the sample, in the x direction. Due to the presence of interfaces, and related spatial inhomogeneities, the wave-packet wave-vector \mathbf{k} does not remain constant, the wave-packet being scattered by the inclusions. To understand how such scattering affects the energy transfer, we measure the envelope of the kinetic energy induced in the system by the propagation of the wave-packet, summed over the y -direction. The energy envelope is defined for each excitation frequency ω as

$$P_\omega(x) = \max_t E_k(x, t) \quad (2)$$

where $E_k(x, t)$ is the instantaneous kinetic energy supported by the frame located in x with width $\Delta x = L/60$.

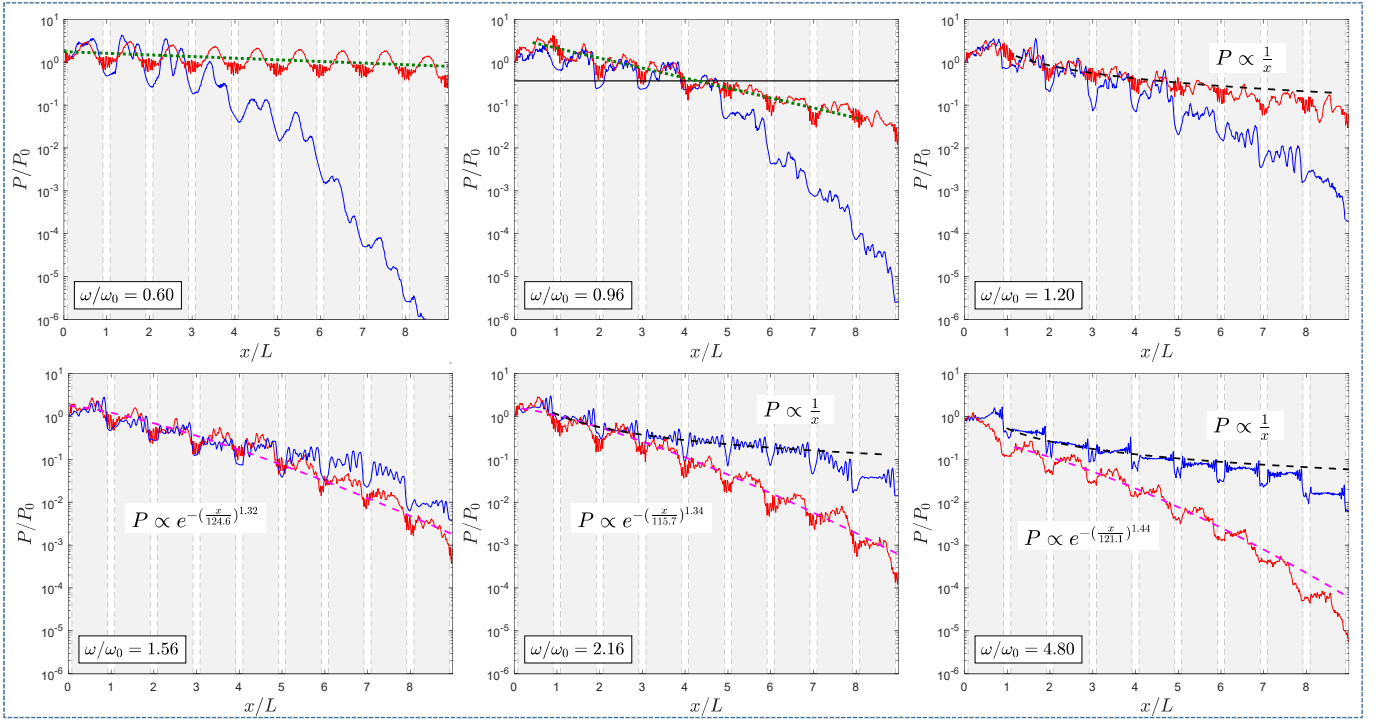


FIG. 4. Comparisons of envelopes between circular (blue) and dendritic (red) inclusions with $\frac{E_i}{E_m} = 0.2$ for different normalized frequencies ω/ω_0 (where $\omega_0 = 2\pi c_L/L$) on a semi-log scale: total simulation time 8400 dt with $dt = \Delta l/c_L$ (Δl is linked to mesh size). For the case $\omega/\omega_0=0.60$ and 0.96 , green dotted line represents an exponential decay. For the case $\omega/\omega_0=1.20$, 1.56 , 2.16 and 4.80 , the black dashed and violet dashed lines represent $1/x$ and compressed exponential fit, respectively. For the case $\omega/\omega_0 = 0.96$, as an example, we report the level $P = P_0/e$, with P_0 the starting energy value as a black solid line: its intersection with the envelop determines the penetration length.

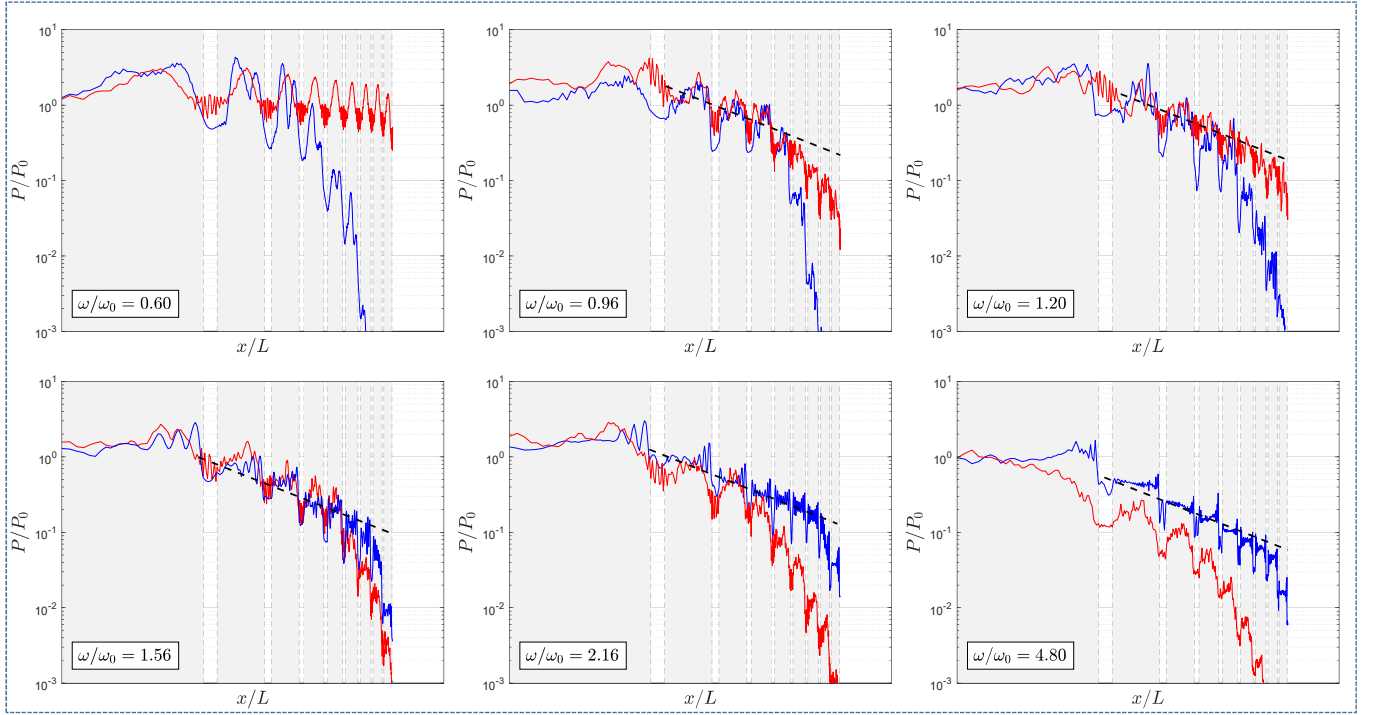


FIG. 5. Fig.4 on a log-log scale. Blue lines are for the circular inclusions and red lines for the dendritic inclusions. In this representation the diffusive A/x behavior, with A a fitting parameter, corresponds to a linear decrease, as evidenced by the black dashed lines.

In Fig.4, we present the envelopes of the kinetic energy as a function of position on a semi-log scale and for different normalized frequencies ω/ω_0 with $E_i/E_m = 0.2$. Surprisingly, for low frequencies, up to $\frac{\omega}{\omega_0} = 1.2$ included, the circular inclusions strongly attenuate the wave-packet, which is almost unaffected by the presence of the dendritic inclusions. The strong effect of circular inclusions has been previously understood as the consequence of a localization of the energy due to a resonance of the inclusions that keeps the acoustic energy³⁴. However, the irregularly shaped dendritic inclusion does not lead to such resonance phenomena. As such, we can conclude that for low frequencies, long wavelengths, the high interface density of the dendritic inclusion is not dominant in determining the wave packet attenuation. The situation is reversed above $\frac{\omega}{\omega_0} = 1.56$. From this frequency, the dendritic inclusions become more efficient in attenuating the wave-packet and such attenuation strongly increases with increasing frequency, *i.e.* decreasing wavelength. In the circular case, the attenuation is almost constant for frequencies above $\frac{\omega}{\omega_0} = 2.16$, suggesting a saturation of the attenuation effect of circular inclusions in the matrix. We can understand the change of attenuation efficiency regime as due to the major importance of the tree-like interface in dendritic inclusions at wavelengths comparable with the dendritic structure lengthscale, *i.e.* of order of $\approx L/10$.

We can also identify the different regimes directly from the envelopes of the kinetic energy. Indeed, in case of a weak scattering (propagative regime) a global exponential attenuation similar to a Beer-Lambert law can be observed^{34,58,59}

$$P_\omega(x) \propto \exp(-x/\Lambda(\omega)) \quad (3)$$

while for strong scattering, for example due to the larger rigidity contrasts as in this work ($E_i/E_m = 0.2$ or 10), the algebraic attenuation of the envelope

$$P_\omega(x) \propto 1/x \quad (4)$$

is the signature of a diffusive process (diffusive regime)^{34,59}. Since Fig.4 is given on a semi-log scale, the propagative regime which follows an exponential decay gives a straight line with a negative slope. In Fig.4, as exemplified by the green dotted line for $\omega/\omega_0 = 0.60$ and 0.96 in the case of dendritic inclusions, an evident exponential decay can be recognized at low frequencies. At higher frequencies, we find $1/x$ behavior for both the case of dendritic ($\omega/\omega_0 = 1.20$) and circular inclusions ($\omega/\omega_0 = 2.16$ and 4.80), which can be then verified on the log-log plot where the $1/x$ behavior corresponds to a straight line with a fixed slope, as shown in Fig.5. Interestingly, for dendritic case with $\omega/\omega_0 = 1.56, 2.16$ and 4.80 , the envelope follows neither the B-L fit nor the diffusive fit. If we use a compressed exponential function, such as $P \propto \exp(-(x/\Lambda)^\beta)$ with $\beta > 1$, the best fit value of β is 1.32, 1.34 and 1.44 respectively. Such a compressed exponential behavior marks a strong difference from the case of circular inclusions, where the

diffusive regime is well followed, with a reduction of the oscillations amplitude, as better visible in Fig.5. In the case of dendritic inclusions, instead the novel compressed exponential regime exemplifies in fact the succession of two regimes: if at the beginning the diffusive law seems to be followed, this leaves space very rapidly to a much stronger attenuation. In both regimes oscillations are present, similarly to the circular inclusions case, with a possibly larger amplitude at high frequency, indicating that the energy is pinned within the inclusions.

In order to get insight into the appearance of this new attenuation regime in the dendritic sample, we report in Fig.6, snapshots of the displacement field for low frequency ($\omega/\omega_0 = 0.6$), medium frequency ($\omega/\omega_0 = 1.2$) and high frequency ($\omega/\omega_0 = 4.8$) at half time (4200 dt) and at the final time (8400 dt) for both samples. For $\omega/\omega_0 = 0.6$, the energy is localized and pinned to the first inclusions in the case of circular inclusion but spreads rapidly in the dendritic ones without huge dispersion meaning that the wavefront propagates ahead followed by an energy tail. At the medium frequency $\omega/\omega_0 = 1.2$, the energy is dispersed in space and the attenuation length in the two samples is quite comparable. At the high frequency $\omega/\omega_0 = 4.8$, the energy is scattered violently at the inclusion-matrix interfaces. In the case of circular inclusions, energy is only scattered few times when crossing the circular interface. In addition, due to the large curvature of the circle compared with the short wavelength, there is little but existing energy which keeps spreading ahead along the x direction. On the contrary, for dendritic inclusion, energy is totally scattered due to the random orientations of the normals at the interface and high interface density.

To conclude, different regimes can be identified: (1) exponential attenuation is observed mainly in the low frequency range, which relates directly to the propagative contribution; (2) diffusive regime is observed at higher frequencies, which can be identified through the $P \propto 1/x$ behavior and is related directly to the diffusive contribution; (3) localized (mixed diffusive-localized) regime can be found at some specific frequencies, for example $\omega/\omega_0 = 0.6$ for circular inclusions, which most effectively prevent the energy transport; (4) compressed exponential attenuation regime is found in the high frequency range for dendritic inclusions, where the initially diffusive regime seems to be replaced by a stronger attenuation, leading to a global compressed exponential behavior. This results from the combined effect of periodicity and complex interface shape of the dendritic structure.

B. Penetration length & diffusivity

In the previous section, by comparing the kinetic energy envelopes, we have given a first picture of the attenuation ability in the solids with two types of soft inclusions. Now, we will quantify this attenuation by calculating the penetration length and the diffusivity as a function of the

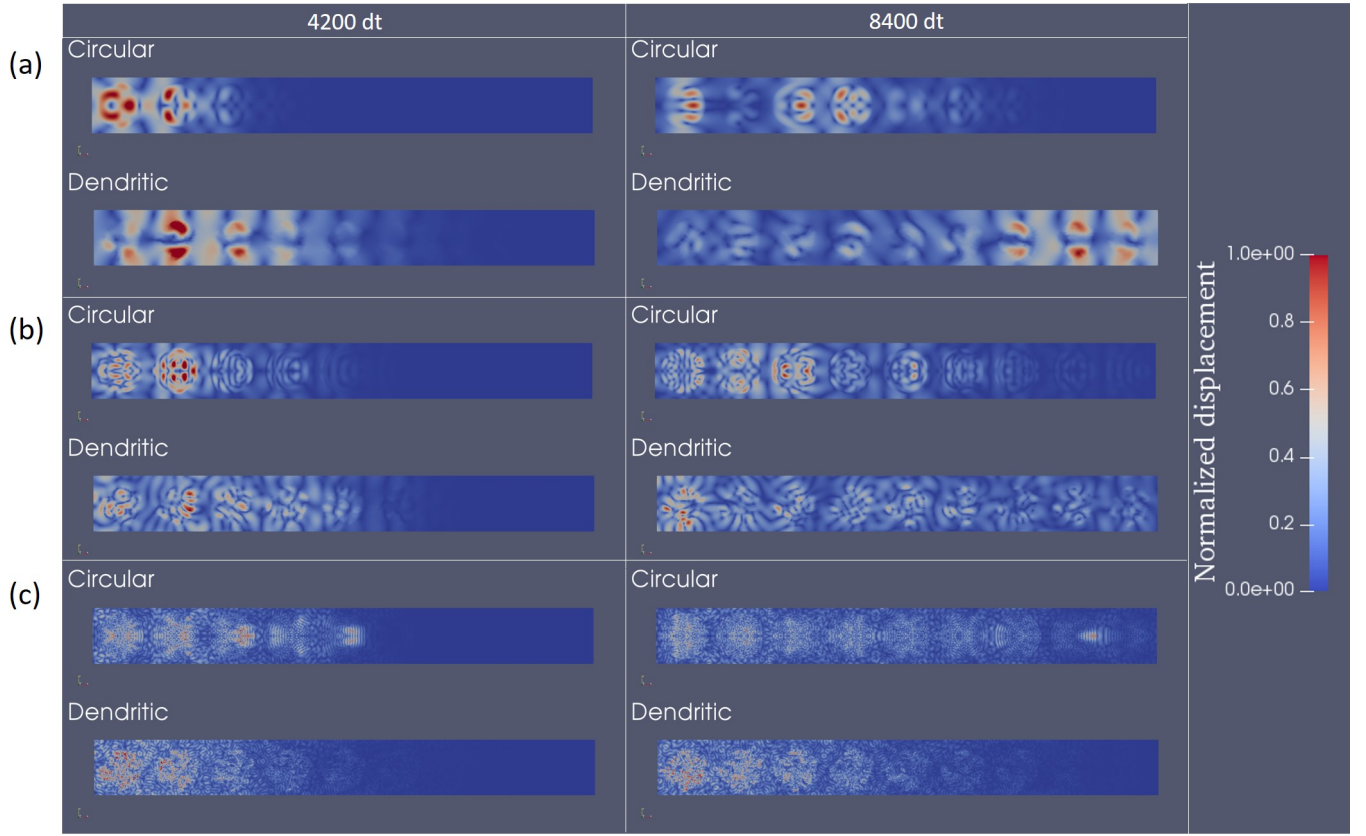


FIG. 6. Snapshots of 3 case at $4200 \times dt$ and $8400 \times dt$ with $\frac{E_i}{E_m} = 0.2$ for circular and dendritic inclusion: (a) $\omega/\omega_0 = 0.6$ (b) $\omega/\omega_0 = 1.2$ (c) $\omega/\omega_0 = 4.8$. (see Supplementary Materials for the corresponding videos).

frequency in two extreme cases of rigidity contrast, being $\frac{E_i}{E_m} = 0.2$ and 10.0 .

First, we look at the long-time penetration length, defined as the traveled length above which the energy per unit length remains always smaller than the maximum excitation energy per unit length divided by e . An example is reported in Fig.4 for $\omega/\omega_0 = 0.96$, where the abscissa of the intersection between the envelope and the A/e , with A the maximum excitation energy (black solid line) determines the attenuation length.

The results of the normalized penetration length l_p/L are shown in Fig.7 for both dendritic (red triangles) and circular inclusions (blue circles). In both cases of $\frac{E_i}{E_m}$, at low frequencies, the dendritic inclusions do not exhibit their high-interface-density advantage. Still, as wavelength decreases, dendrite shape begins showing a better performance to attenuate energy transfer with the reduced crossover frequency $\frac{\omega_c}{\omega_0}$ ranging between 1 and 1.5 depending on the stiffness ratio. Generally, for $\omega > \omega_c$, values of the penetration length is systematically shorter in the medium with dendritic inclusions, which indicate a high potential for such samples for reducing the propagative contribution to thermal transport. Interestingly, except for the soft inclusions case at the highest frequency ($\omega/\omega_0 = 4.8$), almost all the penetration lengths are greater than the characteristic length L . Finally, it

is worth noticing that for $E_i/E_m = 10$, a local minimum appears in the penetration length for both types of inclusions, being around $\omega/\omega_0=1$ in the circular case and $\omega/\omega_0=0.8$ in the dendritic case. This effect has already been reported and ascribed to the collective resonance of the nanoparticles in the low frequency range, and related to the effective acoustic impedance of the composite, its frequency position being proportional to $\sqrt{E_i/E_m}$ ³⁴. The slight dependence of this position on the inclusion shape is related to the effective stiffness of the medium. Indeed, the ratio of the two positions results 1.25, which is very close to the ratio between the square roots of the effective stiffnesses (E_{eff}) of the two media, that we calculate in the next section and can be found in Tab.III. This suggests the existence of a mixing law of the effective mechanical properties for the bi-phase composites.

In order to investigate the effect on the diffusive contribution to thermal transport, we first identified the situation where the diffusive regime can be identified from the time evolution of the wave-packet average position $\langle x \rangle(t)$. To this aim, we have calculated this positions as:

$$\langle x \rangle(t) = \frac{\sum_i x_i E_k(i, t)}{\sum_i E_k(i, t)} \quad (5)$$

where x_i is the position of the i^{th} frame with width Δx

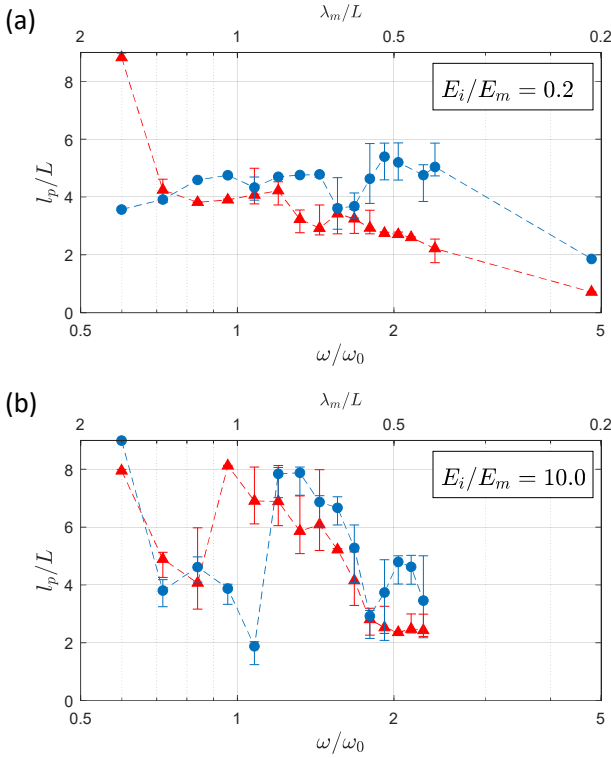


FIG. 7. Normalized penetration length of longitudinal wavepackets in samples with circular (blue circles) and dendritic (red triangles) inclusions for $E_i/E_m = 0.2$ (panel a) and 10.0 (panel b). The corresponding wavelength scale is reported on the top axis.

in the x-direction, and $E_k(i, t)$ is the instantaneous total kinetic energy supported by that frame. In the case of a diffusive process, the squared deviation $\sigma^2(t)$ is proportional to the time t , with a slope related to the one-dimensional diffusivity

$$\sigma^2(t) = 2D(\omega)t. \quad (6)$$

where D is the diffusivity and the spreading σ reads

$$\begin{aligned} \sigma(x, t) &= \sqrt{\langle (x - \langle x \rangle)^2 \rangle} \\ &= \sqrt{\frac{\sum_i (E_k(i, t) \times x_i^2)}{\sum_i E_k(i, t)} - \langle x \rangle^2} \end{aligned} \quad (7)$$

As an example, σ^2 of random longitudinal wavepackets normalized by L^2 as a function of time step is shown in Fig.8 for four frequencies. In the high frequency range, in both samples we clearly find a $\sigma^2 \propto t$ relation, indicating the diffusive transport of energy, from which the diffusivity D can be fitted. It is worth underlining that in the sample with dendritic inclusions we find a diffusive time evolution of the wave-packet even at frequencies for which the anomalous stronger-than-diffusive attenuation appears. Concerning the sample with circular inclusions, interestingly we observe the presence of a short plateau

for $\omega/\omega_0 = 0.96$, which can be understood as the signature of localization. Indeed, in the localized regime, the wave-packet is pinned so that $\langle x \rangle = cste$ as well as σ^2 , giving thus a plateau.

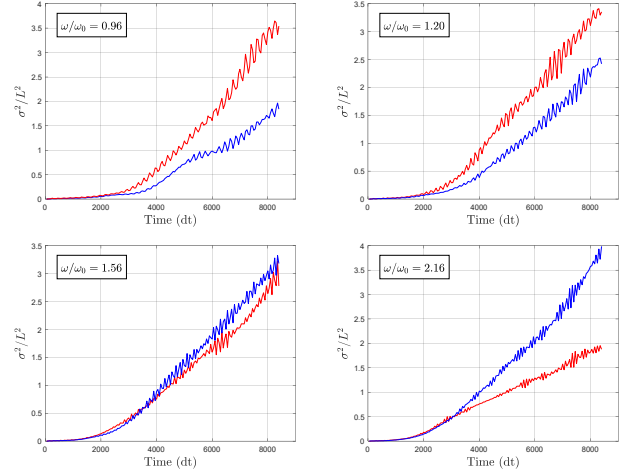


FIG. 8. Comparison of σ^2/L^2 of random longitudinal wavepackets in samples with circular (blue) and dendritic (red) inclusions with $E_i/E_m = 0.2$ for different normalized ω/ω_0

Results of diffusivity are shown in Fig.9. We can draw similar conclusions as for the penetration length, that is, at high frequencies, the dendritic shape of the inclusions lead to a lower diffusivity than in the circular case. If this conclusion seems to be universal, independently on the stiffness ratio, it is interesting to note that for $E_i/E_m = 10$ the diffusive contribution is reduced by the dendritic shape of the inclusions at all wavelengths. If now we compare the diffusivity between $E_i/E_m = 0.2$ and $E_i/E_m = 10$, we remark that the overall diffusivity in the soft inclusions case is lower than that of the hard inclusions case, which is coherent with the conclusions in Ref.34.

C. Sound velocity

In composites nano-phononic materials, the wave propagation velocity will be mainly influenced by two factors: the effective rigidity of the medium and the properties of the interfaces. In the following, we will investigate two types of wave speed : 1) effective wave speed at low frequencies and 2) the instantaneous wave speed. The latter is especially useful when it is difficult to get a stationary speed (independent of time), due to the strong elastic heterogeneity of the medium.

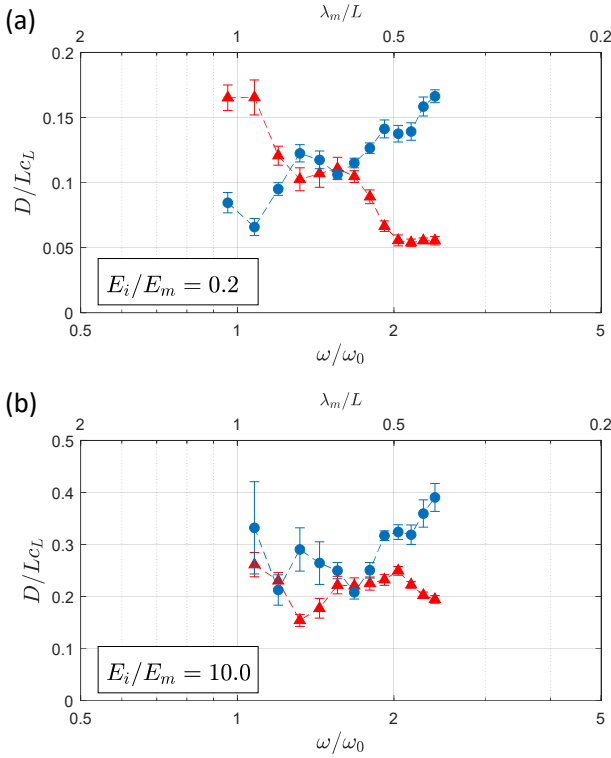


FIG. 9. Normalized diffusivity of random longitudinal wavepackets in samples with circular (blue circles) and dendritic (red triangles) inclusions for $E_i/E_m = 0.2$ (panel a) and 10.0 (panel b). The corresponding wavelength scale is reported on the top axis.

Long-wavelength speed

Long-wavelength speed for longitudinal waves can be calculated as:

$$c_{L,eff} = \sqrt{\frac{E_{eff}(1-\nu)}{\rho(1+\nu)(1-2\nu)}} \quad (8)$$

where E_{eff} is the effective Young's modulus of the composite estimated by the Reuss model, which states that the elastic modulus of a composite can be expressed as:

$$E_{eff} = \frac{1}{\Phi_i \times \frac{1}{E_i} + \Phi_m \times \frac{1}{E_m}} \quad (9)$$

where E_i (E_m) is the Young's modulus of the inclusion (matrix) and Φ_i (Φ_m) is the volume fraction of the inclusion (matrix).

We summarize the material properties, the effective Young's modulus and the effective longitudinal wave speeds in the Tab.III. From the estimated wave speeds, it is clear that the long-wavelength wave speed increases compared to the homogeneous solid with $E_i/E_m = 1$ in the case $E_i/E_m > 1$ and decreases in the case $E_i/E_m < 1$ whatever the shape of inclusion is. We find that, both for a more rigid or a softer inclusion, the long wavelength

TABLE III. Material properties, the effective Young's modulus and the effective longitudinal wave speed for composites with circular and dendritic inclusion with Poisson coefficient $\nu = 0.347$ and density $\rho = 2303 \text{ kg/m}^3$.

	Circular			Dendritic		
E_m (GPa)	92.25					
E_i/E_m	0.2	1.0	10	0.2	1.0	10
E_i (GPa)	18.45	92.25	922.5	18.45	92.25	922.5
Φ_m (%)	45.46			71.65		
Φ_i (%)	54.54			28.35		
E_{eff} (GPa)	28.99	92.25	181.19	43.23	92.25	123.85
$c_{L,eff}$ (m/s)	4466.1	7966.1	11164.3	5453.2	7966.1	9230.3

speed is more strongly affected for a larger volume fraction, *i.e.* in the case of the circular inclusions. The speed at such wavelengths is thus essentially determined by the elastic moduli of the phases and the volume fraction of the secondary phase, independently on the inclusion shape.

This calculation does not reflect however the diversity of behaviors that we have seen in the previous sections, and specifically the fact that the dendritic shape can strongly affect both propagation and energy diffusion at some wavelengths and the wave-packet can be trapped between inclusions. Such differences will affect the wave-packet speed at wavelengths comparable with the nanostructure, *i.e.* when the wave-packet is actually perturbed by the presence of the inclusions in its propagation behavior. For this reason, we address in the following the instantaneous speed.

Instantaneous wave speed at high frequencies

When the wavelength approaches the nanostructure lengthscale (size and inter-distance between scatterers), the phonon-interface scattering becomes more important and wave speed begins to deviate from the long-wavelength value. As the wave-packet moves in a highly heterogeneous medium, its velocity is not homogeneous in space nor in time, the wave-packet being scattered in different directions, backward included. Therefore, we need to calculate the *instantaneous speed* defined as:

$$c_{ins} = \frac{\partial \langle x \rangle (t)}{\partial t} \quad (10)$$

where $\langle x \rangle$ has been defined in Eq.5 and needs to be smoothed, because the energy oscillates back and forth in the medium, due to the multiple reflections from the interfaces. This can be clearly seen in the Appendix B, Fig.11. The real, non-smoothed, instantaneous speed will necessarily sharply fluctuate and even assume negative values for backreflections. By smoothing $\langle x \rangle$, Eq.10 will instead give us the average speed of energy transport in a relatively short time. In this work, we use the Bezier interpolation as detailed in appendix B.

We select four frequencies from low to high: $\omega/\omega_0 = 0.6, 0.96, 1.56$ and 4.8 with $E_i/E_m = 0.2$. The corresponding instantaneous wave speeds are calculated and shown in Fig.10. Note the initial increase due to the establishment of the wave packet inside the sample, at earlier times for higher frequencies. Only the part after this initial increase must be considered in the following. First, for $\omega/\omega_0 = 0.6$ and dendritic inclusions, c_{ins} exhibits a plateau showing a quasi-constant instantaneous speed $\approx 0.45c_L = 3580$ m/s. This speed is always lower than the estimated long-wavelength value reported in Tab.III which is 5453 m/s for $E_i/E_m = 0.2$, indicating a slight attenuation of energy transport. Conversely, this plateau does not exist for the circular inclusions case because it is already in the diffusive-localized regime where energy is pinned in the first inclusions. The instantaneous velocity in the circular inclusions case is always lower than the one in the dendritic inclusions case, meaning that energy moves more slowly in the medium with circular inclusions at all time. This is in agreement with the smaller penetration length found at this frequency in the circular inclusions sample than in the dendritic one, as shown in Fig.7(a). For $\omega/\omega_0 = 0.96$, the instantaneous speeds in the two samples are quite similar to each other, which, once again, is in good agreement with our findings on the penetration length. $\omega/\omega_0 = 0.96$ can be considered as a separation point, because at the following two frequencies $\omega/\omega_0 = 1.56$ and 4.8 , the instantaneous speed in the circular inclusions samples is systematically larger than in the dendritic case, meaning that at high frequency the dendritic sample is more efficient in slowing down and reducing energy transport.

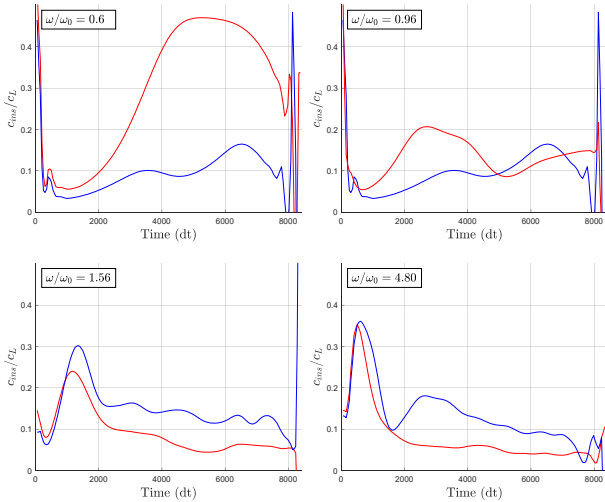


FIG. 10. Instantaneous wave speed c_{ins} normalized to c_L in samples with dendritic (red) and circular (blue) inclusions and stiffness ratio $E_i/E_m = 0.2$. See the text for the details on the calculation.

To conclude, the analysis of the instantaneous speed gives a more obvious picture on the crossover of the attenuation performance from the circular inclusions case

at low frequencies to the dendritic inclusions case at high frequencies for $E_i/E_m = 0.2$, especially when the wave-vector no longer exists. Interestingly, this velocity is not stationary in the frequency range studied here.

V. DISCUSSION AND CONCLUSIONS

To conclude, we have shown the effect of a complex shape in the periodic pattern of a 2D nano-phononic crystal. We have compared the sound attenuation performance between two shapes of inclusions: circular and dendritic. Our results show that the multi-branching tree-like form of dendrites enhances phonon-interface scattering and phonon attenuation specifically for wavelengths comparable with the dendritic structure length-scale regardless the rigidity ratio. Unlike the circular inclusion which has only one characteristic length, the sub-interfaces inside the dendritic inclusion provide a continuous source of scattering leading to an increasing sound attenuation. This leads to a stronger reduction of both the penetration length and the apparent diffusivity in samples with dendritic inclusions when the wavelength becomes smaller than the first characteristic length even for far smaller volume fractions of inclusions. Moreover, the instantaneous wave speed is also globally affected, being much reduced at high frequencies by the dendritic fine structure.

It is important to note that the better performance of materials with dendritic vs circular inclusions does not hold at low frequencies, where the larger volume fraction which characterizes the equivalent circular inclusions gives the major contribution to attenuation, besides resonance effects at specific frequencies. If on one side this could suggest to use dendritic inclusions with larger volume fraction for an optimized nanocomposite, it is worth reminding that the increase in the average inclusion size will translate into an increase of the affected wavelengths, and thus a decrease of the corresponding frequencies. A compromise between the frequency range that ones aims at affecting, and the extent of the attenuation needs thus to be found.

Concerning the effect of the stiffness ratio between inclusions and matrix, for soft inclusions, the propagative contribution is reduced also at low frequencies, while for hard inclusions, it is the diffusive which is reduced at all frequencies. As such, being usually the propagative contribution dominant for thermal transport, we expect soft dendritic inclusions to represent the optimized nanostructure for affecting thermal transport. To go further on in this study and calculate the thermal conductivity, one should calculate the corresponding vibrational densities of states. It is probably affected as well by the dispersion at the atomic scale in the THz range. It was shown recently that an effective elasto-viscous law must be considered in this case, in place of the elastic materials behavior used in this work^{60,61}.

Finally, it is important to note that the wave dynam-

ics in nanocomposites with a complex geometrical shape such as the dendritic one is much more complex than a simple transition from ballistic to diffusive energy transfer. Indeed, when we have shown that above a critical frequency ω_c , the nanocomposite with circular inclusions gives rise to a clear diffusive attenuation combined with a reduction of oscillations, while in the same frequency range the attenuation appears to be only initially diffusive and then much stronger for the dendritic inclusions, while presenting similar oscillations. This is different from the anomalous diffusion of acoustic waves reported in 2D periodic media, characterized by the occurrence of heavy-tailed distribution (as opposed to $1/x$ decay), interpreted as a consequence of the hybridization of the ballistic and diffusive transport^{29,62}. In fact, it can be fitted by a compressed exponential function with $\beta > 1$. Therefore, this is truly another type of attenuation process due to the combined effect of periodicity and complex interface shape, giving a stronger attenuation than normal diffusion. The stretched (compressed) exponential character of this attenuation could be related for example to the superposition of Beer-Lambert laws with competing mean-free paths due to different attenuation scales⁶³.

All these results indicate that the use of a complex sub-structure of the interfaces in a phononic material can allow to realize novel optimized materials for acoustic attenuation, leading to applications as high-frequency acoustic filters or thermal insulation, depending on the lengthscale of the micro(nano)-structure. Indeed, all our findings, reported in normalized units, can be easily scaled at larger or smaller frequencies depending on a smaller or larger nanostructure. As such, our work is more general and gives insights on the universal effect of a complex shape onto acoustic attenuation at all length-scales.

ACKNOWLEDGMENTS

H.L. is financed by the french ministry of research. V.M.G. acknowledges funding from Lyon Idex Breakthrough (IPPON) and the ANR (ANR-20-CE05-0046) for research on phonons propagation in nanocomposites. Y.R. acknowledges NPU Short-term Overseas Visit & Study and Innovative Experimental Project for Postgraduates.

Appendix A: Mechanical properties of the material

Appendix B: Bezier interpretation

Before calculating the instantaneous speed, we need to pre-treat the data of $\langle x \rangle$. Since when waves pass through a deeply heterogeneous medium, $\langle x \rangle(t)$ oscillates sharply, the calculated wave speed can be unreal and meaningless, as illustrated by the yellow dashed

Alloy	σ_y (MPa)	ϵ_y (%)	σ_u (MPa)
Ti ₄₅ Zr ₂₅ Nb ₆ Cu ₅ Be ₁₇ Sn ₂	913	1.44	1521
ϵ_u (%)	E (GPa)	G (GPa)	ν
10.12	85.23 \pm 0.22	31.23 \pm 0.13	0.365 \pm 0.005

TABLE IV. Mechanical and intrinsic properties of the Ti₄₅Zr₂₅Nb₆Cu₅Be₁₇Sn₂ BMG composites. Yielding strength (σ_y), yielding strain (ϵ_y), ultimate tensile strength (σ_u), tensile strain till necking (ϵ_u), Young's modulus (E), shear modulus (G) and Poisson's ratio (ν)⁵¹.

Phase component	E (GPa)	H (GPa)
Dendrite-phase	86.4 \pm 4.1	3.78 \pm 0.39
Glass-matrix	113.8 \pm 2.5	6.13 \pm 0.41

TABLE V. Young's modulus (E) and Hardness (H) of the dendrite-phase and glass-matrix in the Ti₄₅Zr₂₅Nb₆Cu₅Be₁₇Sn₂ BMG composites measured by the nanoindentation.⁴¹.

line shown in the right panel of Fig.11. Two smoothing methods are considered here: the first one is **Nearest neighbor smooth** (kernel smoother) defined as:

$$S_i = \frac{\sum_{j=i-n}^{i+n} P_j}{2n} \quad (\text{B1})$$

where P_j is the energy envelope at j and n is the number of the nearest neighbors. And the second method is Bezier interpolation smoothing. **Bezier curves** can be defined for any degree n :

$$B(t) = \sum_{i=0}^m C_m^i (1-t)^{m-i} t^i P_i, t \in [0, 1] \quad (\text{B2})$$

where C_m^i equals to the binomial coefficient and $m+1$ equals to the length of the array P . It is reported that Bezier based smooth curve gives smaller fluctuations and curvatures than other regular smoothing methods in Ref.⁶⁴, meaning that it can effectively reduce the oscillations of the first derivative of the $\langle x \rangle$.

We used both methods for smoothing $\langle x \rangle(t)$ for dendritic inclusions with $\frac{E_i}{E_m} = 0.2$ and $\frac{\omega}{\omega_0} = 0.6$ in which case a wave front can still be identified as shown in Fig.6 thus a well-defined sound speed should be given by a quasi-constant instantaneous speed. The smoothed data of $\langle x \rangle(t)$ are shown in the left panel of Fig.11 by using the two smoothing methods. The Bezier curve is clearly much closer to the real data.. In the right panel, derivative of every $\langle x \rangle(t)$ shows that Bezier interpolation gives the most stable result of wave speed while the result from the unsmoothed data is useless with such a huge oscillation and the Nearest Neighbors smoother result is still quite noisy. In addition, a plateau is observed for $t \in [8, 13]$ in the case of Bezier curve, which gives a quasi-constant value of the wave speed (around 3500 m/s) confirming the prediction of the existence of a well-defined wave-vector. However, the very beginning and

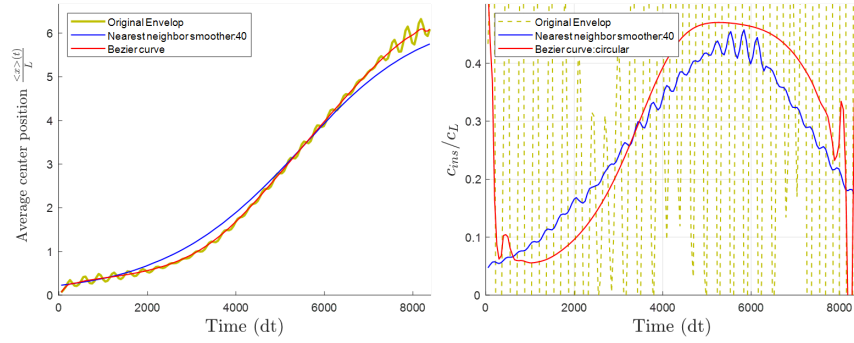


FIG. 11. Average position (left) and instantaneous speed (right) for dendritic inclusion with $E_i/E_m = 0.2$ and $\frac{\omega}{\omega_0} = 0.6$ for longitudinal waves. Yellow lines: unsmoothed data; Blue lines: Nearest neighbors smoother; Red lines: Bezier interpolation.

end of the Bezier curve should be ignored, because the Bezier curve must begin and end at given points, *i.e.* end-point interpolation property, causing a much sharper oscillation than with Nearest neighbor smoother at the two ends. Except for those extreme points, the initial stage of acceleration before the plateau corresponds to the establishment step of the wave-packet whose duration depends inversely on the wave-packet frequency. Compared to the Nearest neighbor smoother, Bezier interpolation gives a clearer presentation and interpretation of the instantaneous speed. Therefore, in the following work, we have chosen the Bezier curve to smooth $\langle x \rangle$ to get the instantaneous wave speed.

- ¹O. Bouaziz, Y. Bréchet, and J. Embury, “Heterogeneous and architected materials: A possible strategy for design of structural materials,” *Advanced Engineering Materials* **10**, 24–36 (2008).
- ²E. N. Economou and A. Zdetsis, “Classical wave propagation in periodic structures,” *Physical Review B* **40**, 1334–1337 (1989).
- ³K. Maslov and V. K. Kinra, “Acoustic response of a periodic layer of nearly rigid spherical inclusions in an elastic solid,” *The Journal of the Acoustical Society of America* **106**, 3081–3088 (1999).
- ⁴D. P. Elford, *Band Gap Formation in Acoustically Resonant Phononic Crystals*, Ph.D. thesis, Loughborough University (2010).
- ⁵M. Verdier, D. Lacroix, S. Didenko, J.-F. Robillard, E. Lampin, T.-M. Bah, and K. Termentzidis, “Influence of amorphous layers on the thermal conductivity of phononic crystals,” *Physical Review B* **97**, 115435 (2018).
- ⁶Z. Liu, “Locally resonant sonic materials,” *Science* **289**, 1734–1736 (2000).
- ⁷A. Khelif, B. Aoubiza, S. Mohammadi, A. Adibi, and V. Laude, “Complete band gaps in two-dimensional phononic crystal slabs,” *Physical Review E* **74**, 046610 (2006).
- ⁸S. Zhang, L. Yin, and N. Fang, “Focusing ultrasound with an acoustic metamaterial network,” *Physical Review Letters* **102**, 194301 (2009).
- ⁹S. A. Cummer, J. Christensen, and A. Alù, “Controlling sound with acoustic metamaterials,” *Nature Reviews Materials* **1**, 1–13 (2016).
- ¹⁰J. W. Vandersande and C. Wood, “The thermal conductivity of insulators and semiconductors,” *Contemporary Physics* **27**, 117–144 (1986).
- ¹¹M. I. Hussein, C.-N. Tsai, and H. Honarvar, “Thermal conductivity reduction in a nanophononic metamaterial versus a nanophononic crystal: A review and comparative analysis,” *Advanced Functional Materials* **30**, 1906718 (2019).
- ¹²C. Kittel, *Introduction to Solid State Physics* (John Wiley & Sons Inc, 2004).
- ¹³J. M. Larkin and A. J. H. McGaughey, “Thermal conductivity accumulation in amorphous silica and amorphous silicon,” *Physical Review B* **89**, 144303 (2014).
- ¹⁴P. B. Allen and J. L. Feldman, “Thermal conductivity of glasses: Theory and application to amorphous si,” *Physical Review Letters* **64**, 2466–2466 (1990).
- ¹⁵P. B. Allen, J. L. Feldman, J. Fabian, and F. Wooten, “Diffusions, locons and propagons: Character of atomic vibrations in amorphous si,” *Philosophical Magazine B* **79**, 1715–1731 (1999).
- ¹⁶S. U. Choi and J. A. Eastman, “Enhancing thermal conductivity of fluids with nanoparticles,” Tech. Rep. (Argonne National Lab., IL (United States), 1995).
- ¹⁷N. Wang, H. Chen, H. He, W. Norimatsu, M. Kusunoki, and K. Koumoto, “Enhanced thermoelectric performance of nb-doped strontio 3 by nano-inclusion with low thermal conductivity,” *Scientific reports* **3**, 3449 (2013).
- ¹⁸K. Schlichting, N. Padture, and P. Klemens, “Thermal conductivity of dense and porous yttria-stabilized zirconia,” *Journal of materials science* **36**, 3003–3010 (2001).
- ¹⁹R. S. Prasher, X. J. Hu, Y. Chalopin, N. Mingo, K. Lofgreen, S. Volz, F. Cleri, and P. Keblinski, “Turning carbon nanotubes from exceptional heat conductors into insulators,” *Physical Review Letters* **102**, 105901 (2009).
- ²⁰K. Termentzidis, P. Chantrenne, and P. Keblinski, “Nonequilibrium molecular dynamics simulation of the in-plane thermal conductivity of superlattices with rough interfaces,” *Physical Review B* **79**, 214307 (2009).
- ²¹S. Merabia and K. Termentzidis, “Thermal conductance at the interface between crystals using equilibrium and nonequilibrium molecular dynamics,” *Physical Review B* **86**, 094303 (2012).
- ²²N. Zen, T. A. Puurtinen, T. J. Isotalo, S. Chaudhuri, and I. J. Maasilta, “Engineering thermal conductance using a two-dimensional phononic crystal,” *Nature Communications* **5**, 1–9 (2014).
- ²³A. France-Lanord, S. Merabia, T. Albaret, D. Lacroix, and K. Termentzidis, “Thermal properties of amorphous/crystalline silicon superlattices,” *Journal of Physics: Condensed Matter* **26**, 355801 (2014).
- ²⁴J. Moon and A. J. Minnich, “Sub-amorphous thermal conductivity in amorphous heterogeneous nanocomposites,” *RSC Advances* **6**, 105154–105160 (2016).
- ²⁵R. Anufriev and M. Nomura, “Reduction of thermal conductance by coherent phonon scattering in two-dimensional phononic crystals of different lattice types,” *Physical Review B* **93**, 045410 (2016).
- ²⁶A. Tlili, S. Pailhès, R. Debord, B. Ruta, S. Gravier, J.-J. Blandin, N. Blanchard, S. Gomès, A. Assy, A. Tanguy, and V. Giordano, “Thermal transport properties in amorphous/nanocrystalline

- metallic composites: A microscopic insight,” *Acta Materialia* **136**, 425–435 (2017).
- ²⁷A. Tlili, V. M. Giordano, Y. M. Beltukov, P. Desmarchelier, S. Merabia, and A. Tanguy, “Enhancement and anticipation of the ioffe-regel crossover in amorphous/nanocrystalline composites,” *Nanoscale* **11**, 21502–21512 (2019).
 - ²⁸J. Morthomas, W. Gonçalves, M. Perez, G. Foray, C. L. Martin, and P. Chantrenne, “A novel method to predict the thermal conductivity of nanoporous materials from atomistic simulations,” *Journal of Non-Crystalline Solids* **516**, 89–98 (2019).
 - ²⁹P. Desmarchelier, A. Tanguy, and K. Termentzidis, “Thermal rectification in asymmetric two-phase nanowires,” *Physical Review B* **103** (2021), 10.1103/physrevb.103.014202.
 - ³⁰T. Damart, V. M. Giordano, and A. Tanguy, “Nanocrystalline inclusions as a low-pass filter for thermal transport in a-si,” *Physical Review B* **92**, 094201 (2015).
 - ³¹Y. Tanaka, Y. Tomoyasu, and S. ichiro Tamura, “Band structure of acoustic waves in phononic lattices: Two-dimensional composites with large acoustic mismatch,” *Physical Review B* **62**, 7387–7392 (2000).
 - ³²R. Anufriev, A. Ramiere, J. Maire, and M. Nomura, “Heat guiding and focusing using ballistic phonon transport in phononic nanostructures,” *Nature Communications* **8**, 15505 (2017).
 - ³³R. Meyer, “Vibrational band structure of nanoscale phononic crystals,” *physica status solidi (a)* **213**, 2927–2935 (2016).
 - ³⁴H. Luo, A. Gravouil, V. Giordano, and A. Tanguy, “Thermal transport in a 2d nanophononic solid: Role of bi-phasic materials properties on acoustic attenuation and thermal diffusivity,” *Nanomaterials* **9**, 1471 (2019).
 - ³⁵S.-C. S. Lin, T. J. Huang, J.-H. Sun, and T.-T. Wu, “Gradient-index phononic crystals,” *Physical Review B* **79** (2009), 10.1103/physrevb.79.094302.
 - ³⁶M. Schmotz, J. Maier, E. Scheer, and P. Leiderer, “A thermal diode using phonon rectification,” *New Journal of Physics* **13**, 113027 (2011).
 - ³⁷S. Gluchko, R. Anufriev, R. Yanagisawa, S. Volz, and M. Nomura, “On the reduction and rectification of thermal conduction using phononic crystals with pacman-shaped holes,” *Applied Physics Letters* **114**, 023102 (2019).
 - ³⁸J. Vondřejc, E. Rohan, and J. Heczeko, “Shape optimization of phononic band gap structures using the homogenization approach,” *International Journal of Solids and Structures* **113–114**, 147–168 (2017).
 - ³⁹L. Lu, T. Yamamoto, M. Otomori, T. Yamada, K. Izui, and S. Nishiwaki, “Topology optimization of an acoustic metamaterial with negative bulk modulus using local resonance,” *Finite Elements in Analysis and Design* **72**, 1–12 (2013).
 - ⁴⁰J. W. Lee and Y. Y. Kim, “Topology optimization of muffler internal partitions for improving acoustical attenuation performance,” *International Journal for Numerical Methods in Engineering* **80**, 455–477 (2009).
 - ⁴¹H. Zhai, H. Wang, and F. Liu, “A strategy for designing bulk metallic glass composites with excellent work-hardening and large tensile ductility,” *Journal of Alloys and Compounds* **685**, 322–330 (2016).
 - ⁴²W. L. Johnson, “Bulk glass-forming metallic alloys: Science and technology,” *MRS Bulletin* **24**, 42–56 (1999).
 - ⁴³J. Qiao, H. Jia, and P. K. Liaw, “Metallic glass matrix composites,” *Materials Science and Engineering: R: Reports* **100**, 1–69 (2016).
 - ⁴⁴A. Inoue and A. Takeuchi, “Recent development and application products of bulk glassy alloys,” *Acta Materialia* **59**, 2243–2267 (2011).
 - ⁴⁵J. Qiao, B. Sun, J. Gu, M. Song, J. Pelletier, J. Qiao, Y. Yao, and Y. Yang, “Abnormal internal friction in the in-situ ti60zr15v10cu5be10 metallic glass matrix composite,” *Journal of Alloys and Compounds* **724**, 921–931 (2017).
 - ⁴⁶C. A. Schuh, T. C. Huftnagel, and U. Ramamurty, “Mechanical behavior of amorphous alloys,” *Acta Materialia* **55**, 4067–4109 (2007).
 - ⁴⁷J. Schroers, “Processing of bulk metallic glass,” *Advanced Materials* **22**, 1566–1597 (2009).
 - ⁴⁸J. Qiao, Y. Yao, J. Pelletier, and L. Keer, “Understanding of micro-alloying on plasticity in cu 46 zr 47-x al 7 dy x ($0 \leq x \leq 8$) bulk metallic glasses under compression: Based on mechanical relaxations and theoretical analysis,” *International Journal of Plasticity* **82**, 62–75 (2016).
 - ⁴⁹C. C. Hays, C. P. Kim, and W. L. Johnson, “Microstructure controlled shear band pattern formation and enhanced plasticity of bulk metallic glasses containing in situ formed ductile phase dendrite dispersions,” *Physical Review Letters* **84**, 2901–2904 (2000).
 - ⁵⁰J. M. Gentile, D. D. Stauffer, D. C. Hofmann, and J. R. Trelewicz, “Shear localization and its dependence on microstructural length scales in metallic glass composites,” *Materialia* **9**, 100598 (2020).
 - ⁵¹Y. Xu, Q. Zhou, Y. Du, Y. Ren, H. Zhai, Q. Li, J. Chen, and H. Wang, “Modulating mechanical properties of ti-based bulk metallic glass composites by tailoring dendrite composition with sn addition,” *Journal of Alloys and Compounds* **745**, 16–25 (2018).
 - ⁵²J. Canny, “A computational approach to edge detection,” *IEEE Transactions on Pattern Analysis and Machine Intelligence* **PAMI-8**, 679–698 (1986).
 - ⁵³S. O. Ronald Fedkiw, *Level Set Methods and Dynamic Implicit Surfaces* (Springer New York, 2002).
 - ⁵⁴N. R. Pal and S. K. Pal, “A review on image segmentation techniques,” *Pattern Recognition* **26**, 1277–1294 (1993).
 - ⁵⁵J. Cousty, G. Bertrand, L. Najman, and M. Couprie, “Watershed cuts: Thinnings, shortest path forests, and topological watersheds,” *IEEE Transactions on Pattern Analysis and Machine Intelligence* **32**, 925–939 (2009).
 - ⁵⁶C. Fusco, T. Albaret, and A. Tanguy, “Role of local order in the small-scale plasticity of model amorphous materials,” *Physical Review E* **82**, 066116 (2010).
 - ⁵⁷Y. M. Beltukov, C. Fusco, D. A. Parshin, and A. Tanguy, “Boson peak and ioffe-regel criterion in amorphous siliconlike materials: The effect of bond directionality,” *Physical Review E* **93**, 023006 (2016).
 - ⁵⁸D. F. Swinehart, “The beer-lambert law,” *Journal of Chemical Education* **39**, 333 (1962).
 - ⁵⁹Y. Beltukov, D. Parshin, V. Giordano, and A. Tanguy, “Propagative and diffusive regimes of acoustic damping in bulk amorphous material,” *Physical Review E* **98**, 023005 (2018).
 - ⁶⁰H. Luo, A. Gravouil, V. M. Giordano, W. Schirmacher, and A. Tanguy, “Continuum constitutive laws to describe acoustic attenuation in glasses,” *Physical Review E* **102**, 033003 (2020).
 - ⁶¹H. Luo, V. M. Giordano, A. Gravouil, and A. Tanguy, “A continuum model reproducing the multiple frequency crossovers in acoustic attenuation in glasses,” **2105.02864v1**.
 - ⁶²S. Buonocore, M. Sen, and F. Semperlotti, “Occurrence of anomalous diffusion and non-local response in highly-scattering acoustic periodic media,” *New Journal of Physics* **21**, 033011 (2019).
 - ⁶³Wikipedia contributors, “Stretched exponential function — Wikipedia, the free encyclopedia,” https://en.wikipedia.org/w/index.php?title=Stretched_exponential_function&oldid=1015099818 (2021), [Online; accessed 6-May-2021].
 - ⁶⁴F. Zhou, B. Song, and G. Tian, “B\{e\} zier curve based smooth path planning for mobile robot,” *Journal of Information & Computational Science* **8**, 2441–2450 (2011).